CE&UKCA EMC Test Report

Project No.	:	2407C221
Equipment	:	LCD Monitor
Brand Name	:	N/A
Model Name	:	24G42E
Series Model	:	**24G4******(*=0-9,A-Z,a-z,+,-,/,\ or blank)
Applicant	:	TPV Electronics (Fujian) Co., Ltd.
Address	:	Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China
Date of Receipt	:	Aug. 06, 2024
Date of Test	:	Aug. 06, 2024 ~ Aug. 13, 2024
Issued Date	:	Aug. 21, 2024
Report Version	:	R00
Test Sample	:	Engineering Sample No.: DG20240806197
Standard(s)	:	Please refer to Page 2.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by : Derek Tong

Derek Tong

Approved by : Kang Zhang

Kang Zhang

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Standard(s) : EN 55032:2015
EN 55032:2015+A11:2020
EN 55032:2015+A1:2020
CISPR 32:2015+AMD1:2019
AS/NZS CISPR 32:2015+AMD1:2020
EN 61000-3-2:2014
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013
EN 61000-3-3:2013+A1:2019
EN 61000-3-3:2013+A2:2021
EN 55035:2017/CISPR 35:2016
EN 55035:2017+A11:2020

BS EN 55032:2015
BS EN 55032:2015+A11:2020
BS EN 55032:2015+A1:2020
BS EN 61000-3-2:2014
BS EN IEC 61000-3-2:2019+A1:2021
BS EN 61000-3-3:2013
BS EN 61000-3-3:2013+A1:2019
BS EN 61000-3-3:2013+A2:2021
BS EN 55035:2017
BS EN 55035:2017+A11:2020

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.
Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents Page

REPORT ISSUED HISTORY 8

1 . SUMMARY OF TEST RESULTS 9

1.1 TEST FACILITY 11

1.2 MEASUREMENT UNCERTAINTY 11

1.3 TEST ENVIRONMENT CONDITIONS 13

2 . GENERAL INFORMATION 14

2.1 GENERAL DESCRIPTION OF EUT 14

2.2 DESCRIPTION OF TEST MODES 15

2.3 EUT OPERATING CONDITIONS 17

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 17

2.5 DESCRIPTION OF SUPPORT UNITS 17

3 . EMC EMISSION TEST- EN 55032:2015 18

3.1 RADIATED EMISSIONS UP TO 1 GHZ 18

3.1.1 LIMITS 18

3.1.2 MEASUREMENT INSTRUMENTS LIST 18

3.1.3 TEST PROCEDURE 19

3.1.4 DEVIATION FROM TEST STANDARD 19

3.1.5 TEST SETUP 19

3.1.6 MEASUREMENT DISTANCE 20

3.1.7 TEST RESULTS 21

3.2 RADIATED EMISSIONS ABOVE 1 GHZ 23

3.2.1 LIMITS 23

3.2.2 MEASUREMENT INSTRUMENTS LIST 23

3.2.3 TEST PROCEDURE 24

3.2.4 DEVIATION FROM TEST STANDARD 24

3.2.5 TEST SETUP 24

3.2.6 MEASUREMENT DISTANCE 25

3.2.7 TEST RESULTS 26

3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS 28

3.3.1 LIMITS 28

3.3.2 MEASUREMENT INSTRUMENTS LIST 28

3.3.3 TEST PROCEDURE 28

3.3.4 DEVIATION FROM TEST STANDARD 29

3.3.5 TEST SETUP 29

3.3.6 TEST RESULTS 30

4 . EMC EMISSION TEST- EN 55032:2015+A11:2020 32

4.1 RADIATED EMISSIONS UP TO 1 GHZ 32

4.1.1 LIMITS 32

4.1.2 MEASUREMENT INSTRUMENTS LIST 32

Table of Contents Page

4.1.3 TEST PROCEDURE 33
4.1.4 DEVIATION FROM TEST STANDARD 33
4.1.5 TEST SETUP 33
4.1.6 MEASUREMENT DISTANCE 34
4.1.7 TEST RESULTS 35
4.2 RADIATED EMISSIONS ABOVE 1 GHZ 45
4.2.1 LIMITS 45
4.2.2 MEASUREMENT INSTRUMENTS LIST 45
4.2.3 TEST PROCEDURE 46
4.2.4 DEVIATION FROM TEST STANDARD 46
4.2.5 TEST SETUP 46
4.2.6 MEASUREMENT DISTANCE 47
4.2.7 TEST RESULTS 48
4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS 58
4.3.1 LIMITS 58
4.3.2 MEASUREMENT INSTRUMENTS LIST 58
4.3.3 TEST PROCEDURE 58
4.3.4 DEVIATION FROM TEST STANDARD 58
4.3.5 TEST SETUP 59
4.3.6 TEST RESULTS 60
4.4 HARMONIC CURRENT EMISSIONS TEST 68
4.4.1 LIMITS 68
4.4.2 MEASUREMENT INSTRUMENTS LIST 68
4.4.3 TEST PROCEDURE 68
4.4.4 DEVIATION FROM TEST STANDARD 68
4.4.5 TEST SETUP 69
4.4.6 TEST RESULTS 70
4.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST 73
4.5.1 LIMITS 73
4.5.2 MEASUREMENT INSTRUMENTS LIST 73
4.5.3 TEST PROCEDURE 73
4.5.4 DEVIATION FROM TEST STANDARD 73
4.5.5 TEST SETUP 74
4.5.6 TEST RESULTS 75
5 . EMC IMMUNITY TEST 76
5.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA 76
5.2 GENERAL PERFORMANCE CRITERIA 79
5.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION 80
5.3.1 PERFORMANCE CRITERIA 80
5.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION 81
5.4.1 PERFORMANCE CRITERIA 81
5.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD) 82

Table of Contents

	Page
5.5.1 TEST SPECIFICATION	82
5.5.2 MEASUREMENT INSTRUMENTS	82
5.5.3 TEST PROCEDURE	82
5.5.4 DEVIATION FROM TEST STANDARD	83
5.5.5 TEST SETUP	83
5.5.6 TEST RESULTS	84
5.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	87
5.6.1 TEST SPECIFICATION	87
5.6.2 MEASUREMENT INSTRUMENTS	87
5.6.3 TEST PROCEDURE	87
5.6.4 DEVIATION FROM TEST STANDARD	88
5.6.5 TEST SETUP	88
5.6.6 TEST RESULTS	90
5.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)	93
5.7.1 TEST SPECIFICATION	93
5.7.2 MEASUREMENT INSTRUMENTS	93
5.7.3 TEST PROCEDURE	93
5.7.4 DEVIATION FROM TEST STANDARD	93
5.7.5 TEST SETUP	94
5.7.6 TEST RESULTS	95
5.8 SURGE IMMUNITY TEST (SURGE)	96
5.8.1 TEST SPECIFICATION	96
5.8.2 MEASUREMENT INSTRUMENTS	96
5.8.3 TEST PROCEDURE	96
5.8.4 DEVIATION FROM TEST STANDARD	96
5.8.5 TEST SETUP	97
5.8.6 TEST RESULTS	98
5.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)	99
5.9.1 TEST SPECIFICATION	99
5.9.2 MEASUREMENT INSTRUMENTS	99
5.9.3 TEST PROCEDURE	99
5.9.4 DEVIATION FROM TEST STANDARD	100
5.9.5 TEST SETUP	100
5.9.6 TEST RESULTS	102
5.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)	104
5.10.1 TEST SPECIFICATION	104
5.10.2 MEASUREMENT INSTRUMENTS	104
5.10.3 TEST PROCEDURE	104
5.10.4 DEVIATION FROM TEST STANDARD	104
5.10.5 TEST SETUP	105
5.10.6 TEST RESULTS	106
5.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY	

Table of Contents Page

TEST (DIPS) 107
5.11.1 TEST SPECIFICATION 107
5.11.2 MEASUREMENT INSTRUMENTS 107
5.11.3 TEST PROCEDURE 107
5.11.4 DEVIATION FROM TEST STANDARD 107
5.11.5 TEST SETUP 107
5.11.6 TEST RESULTS 108
6 . EUT TEST PHOTO 109

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-EMC-1-2407C221	R00	Original report.	Aug. 21, 2024	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission			
Standard(s)	Test Item		Result
EN 55032:2015 EN 55032:2015+A11:2020 EN 55032:2015+A1:2020 CISPR 32:2015+AMD1:2019 AS/NZS CISPR 32:2015+AMD1:2020 BS EN 55032:2015 BS EN 55032:2015+A11:2020 BS EN 55032:2015+A1:2020	Radiated emissions up to 1 GHz		PASS
	Radiated emissions above 1 GHz		PASS
	Radiated emissions from FM receivers		N/A
	Conducted emissions AC mains power port		PASS
	Asymmetric mode conducted emissions	AAN	N/A
		Current Probe	N/A
		CP+CVP	N/A
	Conducted differential voltage emissions		N/A

Standard(s)	Test Item	Result
EN 61000-3-2:2014 EN IEC 61000-3-2:2019+A1:2021 BS EN 61000-3-2:2014 BS EN IEC 61000-3-2:2019+A1:2021	Harmonic current	PASS
EN 61000-3-3:2013 EN 61000-3-3:2013+A1:2019 EN 61000-3-3:2013+A2:2021 BS EN 61000-3-3:2013 BS EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A2:2021	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017 BS EN 55035:2017+A11:2020	IEC 61000-4-2:2008 EN 61000-4-2:2009	ESD	PASS
	IEC 61000-4-3:2020 EN IEC 61000-4-3:2020	RS	PASS
	IEC 61000-4-4:2012 EN 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+AMD1:2017 EN 61000-4-5:2014+A1:2017	Surge	PASS
	IEC 61000-4-6:2013 EN 61000-4-6:2014+AC:2015	CS	PASS
	IEC 61000-4-8:2009 EN 61000-4-8:2010	PFMF	PASS
	IEC 61000-4-11:2020 EN IEC 61000-4-11:2020	Dips	PASS

Standard(s)	Section	Test Item	Result
EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017 BS EN 55035:2017+A11:2020	4.2.7	BIN-R	N/A
	4.2.7	BIN-I	N/A

NOTE:
(1) “N/A” denotes test is not applicable to this device.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong, People's Republic of China.

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement **y** ± ***U***, where expanded uncertainty ***U*** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95**%.

A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	*U*,(dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.48
		30MHz ~ 200MHz	H	4.50
		200MHz ~ 1,000MHz	V	4.60
		200MHz ~ 1,000MHz	H	4.84

B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	*U*,(dB)
DG-CB08 (3m)	CISPR	1GHz ~ 6GHz	4.24

C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	*U*,(dB)
DG-C01	CISPR	150kHz ~ 30MHz	2.98

D. Harmonic current / Voltage fluctuations (Flicker) measurement:

Test Site	Method	Item	*U* (%)
DG-C01	EN 61000-3-2 EN 61000-3-3	Current	0.757
		Voltage	0.592

E. Immunity Measurement:

Test Site	Method	Item	*U*
DG-SR02	IEC 61000-4-2	Rise time tr	7.00%
		Peak current Ip	6.50%
		Current at 30 ns	6.60%
		Current at 60 ns	6.80%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.2dB
		On-ear acoustic & Acoustic measurements on loudspeakers	2.24dB
DG-SR05	IEC 61000-4-4	Peak voltage (VP)	3.8%
		Rise time (tr)	4.4%
		Pulse width(tw)	4.2%
		Pulse Freq.(kHz)	0.7%
		Burst Duration(ms)	1.5%
		Burst Period(ms)	1.4%
DG-SR05	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	4.0%
		Open circuit front time (1.2/50us)	6.2%
		Open circuit time of half value (1.2/50us)	4.7%
DG-CB06	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.28dB
		On-ear acoustic & Acoustic measurements on loudspeakers	1.36dB
DG-SR05	IEC 61000-4-8	Magnetic Field Strength	1.91%
DG-SR01	IEC 61000-4-11	DIP Amplitude	3.6%
		DIP Time Event	4.0%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By	Test Date
Radiated emissions up to 1 GHz	23°C	47%	Amous Shen	Aug. 10, 2024
Radiated emissions above 1 GHz	23°C	47%	Amous Shen	Aug. 10, 2024
Conducted emissions AC mains power port	24°C	54%	Riki Ran	Aug. 13, 2024
Harmonic current	24°C	54%	Riki Ran	Aug. 13, 2024
Voltage fluctuations (Flicker)	24°C	54%	Riki Ran	Aug. 13, 2024

Test Item	Temperature	Humidity	Pressure	Tested By	Test Date
ESD	29°C	49%	1005hPa	Jerry Lu	Aug. 12, 2024
RS	22°C	52%	/	Ternence Li	Aug. 08, 2024 Aug. 09, 2024
EFT	29°C	64%	/	Ellery Liang	Aug. 09, 2024
Surge	29°C	64%	/	Ellery Liang	Aug. 09, 2024
CS	27°C	55%	/	Penn Li	Aug. 09, 2024
PFMF	29°C	64%	/	Ellery Liang	Aug. 09, 2024
Dips	27°C	55%	/	Dawn He	Aug. 09, 2024

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	LCD Monitor
Brand Name	N/A
Model Name	24G42E
Series Model	**24G4******(*=0-9,A-Z,a-z,+,-,/,\ or blank)
Model Difference(s)	Only differ in model name due to marketing purpose.
Identification No. of EUT(S/N)	N/A
Dimensions and mass	540mm*424.32mm*193.87mm
Component unit of EUT	☒Single unit ☐Multiple unit
Sample Status	☒Engineering sample ☐Final shipment prototype
Power Source	AC Mains.
Power Rating	100-240V ~, 50/60Hz, 1.5A
Connecting I/O Port(s)	1* AC port 1* DP port 1* HDMI port 1* Earphone port
Classification of EUT	Class B
Highest Internal Frequency(Fx)	415.6MHz

Cable Type	Shielded Type	Ferrite Core	Length(m)	Note
AC Power Cord	Non-shielded	NO	1.8/1.5/1.2	1.8m is worst case Detachable
HDMI	Shielded	NO	1.8/1.5/1.2	-
DP	Shielded	NO	1.8/1.5/1.2	-

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Power cable 1.8m, 1.5m and 1.2m length, worst case is Power cable 1.8m with HDMI+DP length testing and recording in test report.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	HDMI 1920*1080/180Hz PC 1.8m
Mode 2	HDMI 1920*1080/60Hz PC 1.8m
Mode 3	DP 1920*1080/180Hz PC 1.8m
Mode 4	HDMI 1080P DVD 1.8m
Mode 5	HDMI 1280*1024/75HZ PC 1.8m
Mode 6	HDMI 800*600/75HZ PC 1.8m
Mode 7	HDMI 1920*1080/180Hz PC 1.5m
Mode 8	HDMI 1920*1080/60Hz PC 1.5m
Mode 9	DP 1920*1080/180Hz PC 1.5m
Mode 10	HDMI 1920*1080/180Hz PC 1.2m
Mode 11	HDMI 1920*1080/60Hz PC 1.2m
Mode 12	DP 1920*1080/180Hz PC 1.2m
Mode 13	HDMI 1920*1080/180Hz PC 1.8m (without earphone)

Radiated emissions up to 1 GHz Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/180Hz PC 1.8m
Mode 3	DP 1920*1080/180Hz PC 1.8m
Mode 4	HDMI 1080P DVD 1.8m
Mode 13	HDMI 1920*1080/180Hz PC 1.8m (without earphone)

Radiated emissions Above 1 GHz Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/180Hz PC 1.8m
Mode 3	DP 1920*1080/180Hz PC 1.8m
Mode 4	HDMI 1080P DVD 1.8m
Mode 13	HDMI 1920*1080/180Hz PC 1.8m (without earphone)

Conducted emissions AC mains power port Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/180Hz PC 1.8m
Mode 3	DP 1920*1080/180Hz PC 1.8m
Mode 4	HDMI 1080P DVD 1.8m

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/180Hz PC 1.8m

Immunity Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/180Hz PC 1.8m
Mode 2	HDMI 1920*1080/60Hz PC 1.8m
Mode 3	DP 1920*1080/180Hz PC 1.8m
Mode 4	HDMI 1080P DVD 1.8m
Mode 7	HDMI 1920*1080/180Hz PC 1.5m
Mode 8	HDMI 1920*1080/60Hz PC 1.5m
Mode 9	DP 1920*1080/180Hz PC 1.5m
Mode 10	HDMI 1920*1080/180Hz PC 1.2m
Mode 11	HDMI 1920*1080/60Hz PC 1.2m
Mode 12	DP 1920*1080/180Hz PC 1.2m

Note:

1. For EMI: the standard of EN 55032:2015+A11:2020 tested all the modes, and the EN 55032:2015 tested the worst case and recorded in the test report.
2. For Radiated emissions: Evaluated the mode 1-13. According to the client's requirement, choose mode 1, mode 3, mode 4, mode 13 and recorded in test report.
3. For Conducted emissions: Evaluated mode 1-12. According to the client's requirement, choose mode 1, mode 3, mode 4 and recorded in test report.
4. RS: The Front, Rear, Left and Right were evaluated. The worst placement direction is Front and recorded in this report.
5. The audio output function of CS/RS was recorded the worst case.

2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:
1. EUT connected to PC via HDMI&DP Cable.
2. Mouse and Keyboard connected to PC via USB Cable.
3. EUT connected to Earphone via Earphone Cable.

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

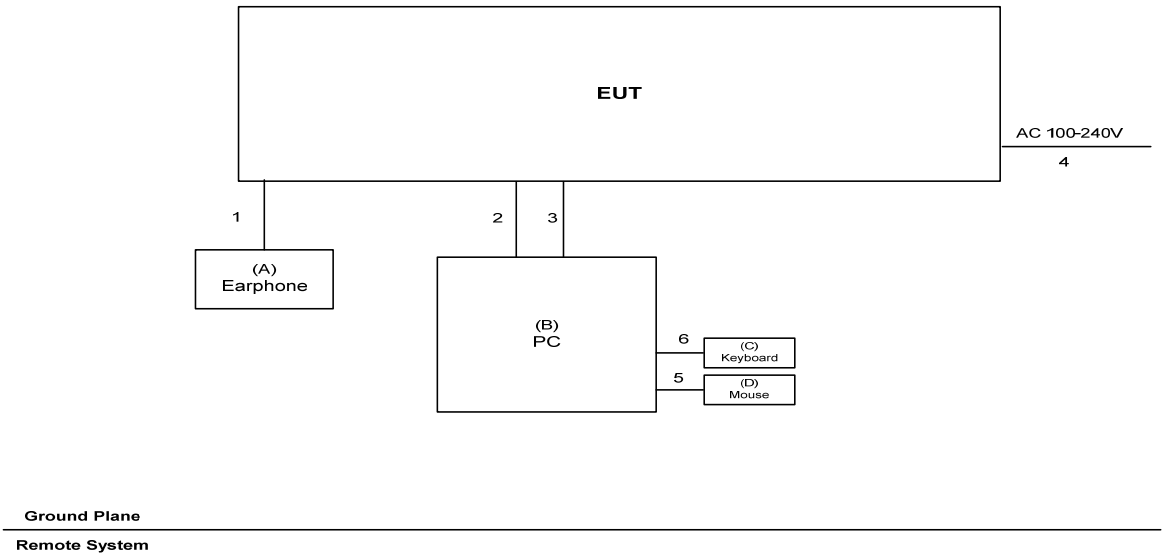

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Earphone	Apple	N/A	N/A
B	PC	DELL	8920-D16N8S	GZS91L2
C	Keyboard	DELL	KB212-B	CN0HTXH97158125004DXA01
D	Mouse	DELL	MS111-P	CN011D3V71581279OLOT

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Earphone Cable	NO	NO	1.2m
2	HDMI Cable	YES	NO	1.8/1.5/1.2m
3	DP Cable	YES	NO	1.8/1.5/1.2m
4	AC Cable	NO	NO	1.8/1.5/1.2m
5	USB Cable	YES	NO	1.5m
6	USB Cable	YES	NO	1.5m

3. EMC EMISSION TEST- EN 55032:2015

3.1 RADIATED EMISSIONS UP TO 1 GHZ

3.1.1 LIMITS

Class B equipment up to 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

(1) The limit for radiated test was performed according to as following: EN 55032
(2) The tighter limit applies at the band edges.
(3) Emission level (dBuV/m)=20log Emission level (uV/m).
(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jun. 01, 2025
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	May 31, 2025
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	May 31, 2025
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 10, 2024
6	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Nov. 10, 2024
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	1461	Nov. 28, 2024
8	Attenuator	EMCI	EMCI-N-6-06	AT-06010	Nov. 28, 2024
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF780208159	N/A
12	Cable	RW	LMR400-NMNM-10M	N/A	Dec. 03, 2024
13	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
14	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024
15	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
16	Cable	RW	LMR400-NMNM-8M	N/A	Dec. 03, 2024
17	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024

Remark: “N/A” denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

3.1.3 TEST PROCEDURE

a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform.
e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

UP TO 1 GHZ

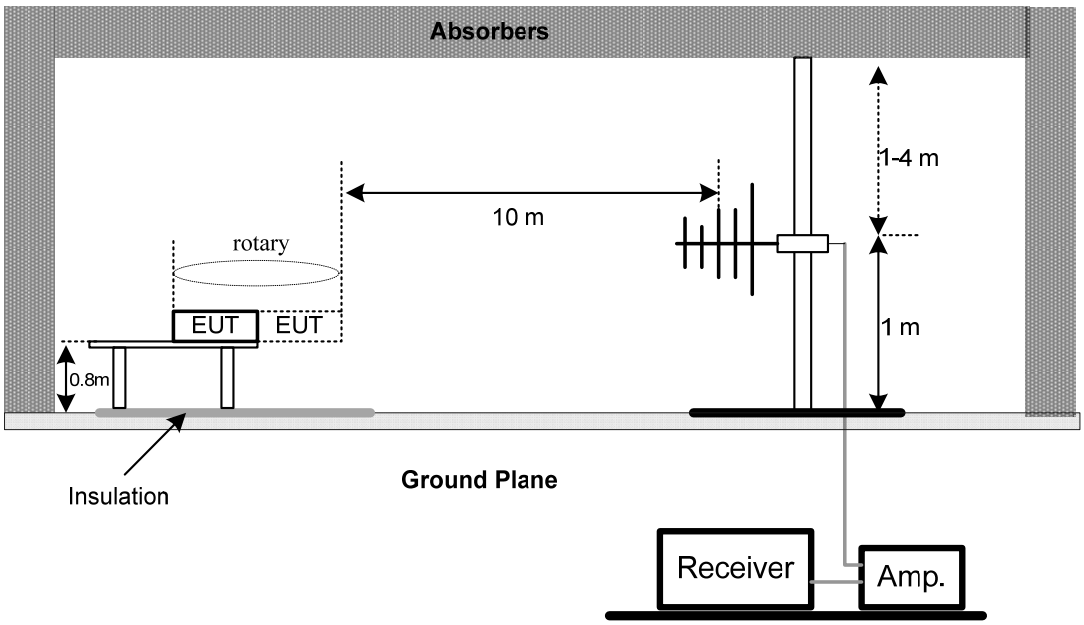

3.1.6 MEASUREMENT DISTANCE

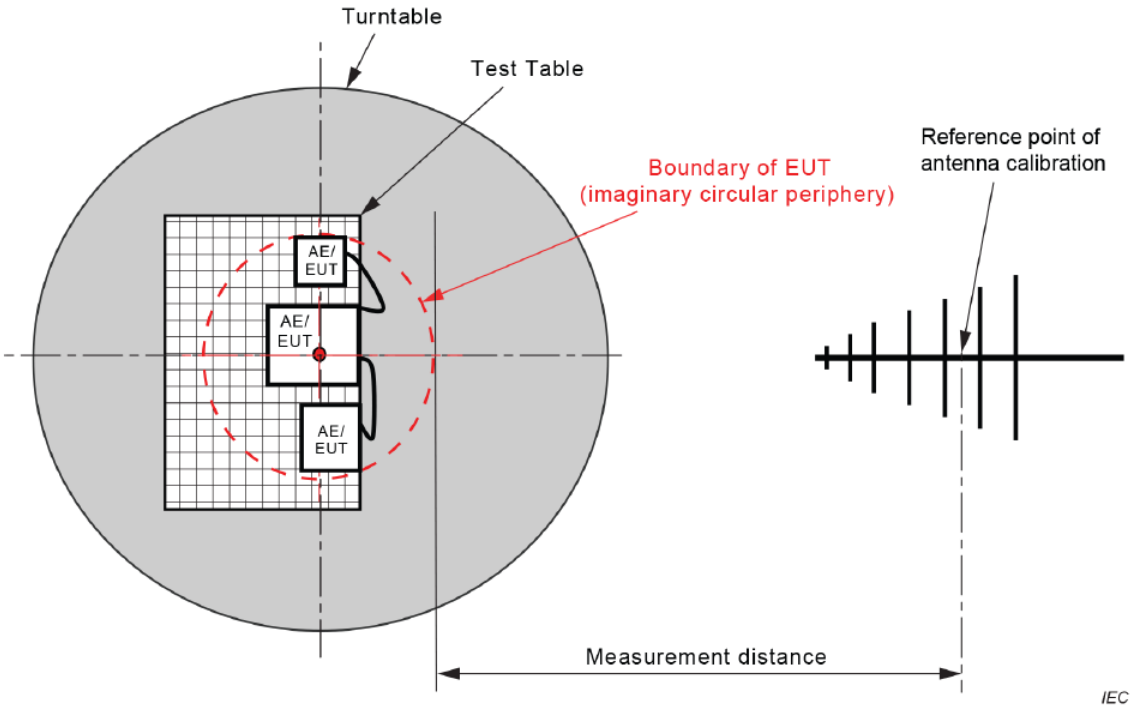

Figure C.1 – Measurement distance

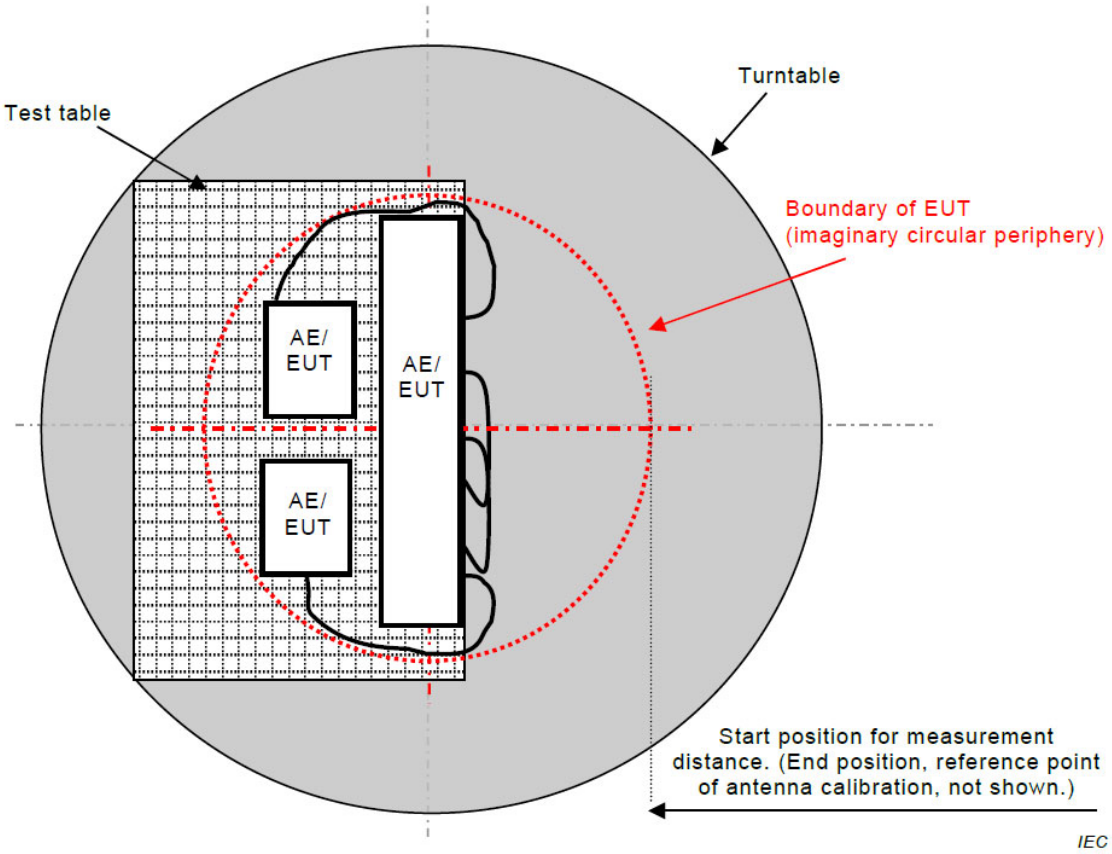

Figure C.2 – Boundary of EUT, Local AE and associated cabling

3.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

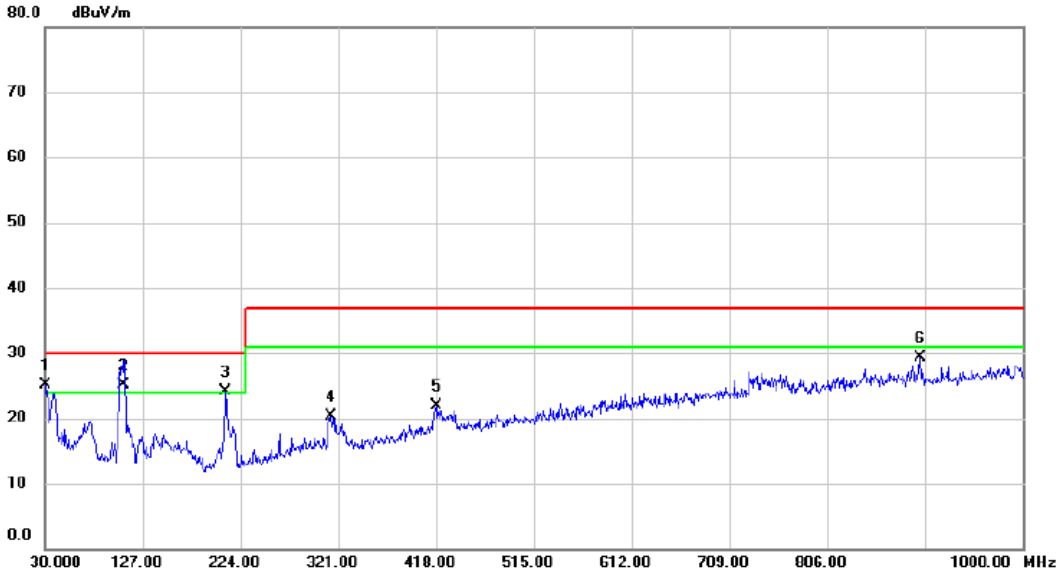

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	30.9700	44.92	-19.84	25.08	30.00	-4.92	QP	
2	*	108.5700	46.14	-20.95	25.19	30.00	-4.81	QP	
3	!	209.4500	44.04	-19.89	24.15	30.00	-5.85	QP	
4		313.2400	35.70	-15.41	20.29	37.00	-16.71	QP	
5		418.0000	34.46	-12.51	21.95	37.00	-15.05	QP	
6		898.1500	36.29	-6.99	29.30	37.00	-7.70	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

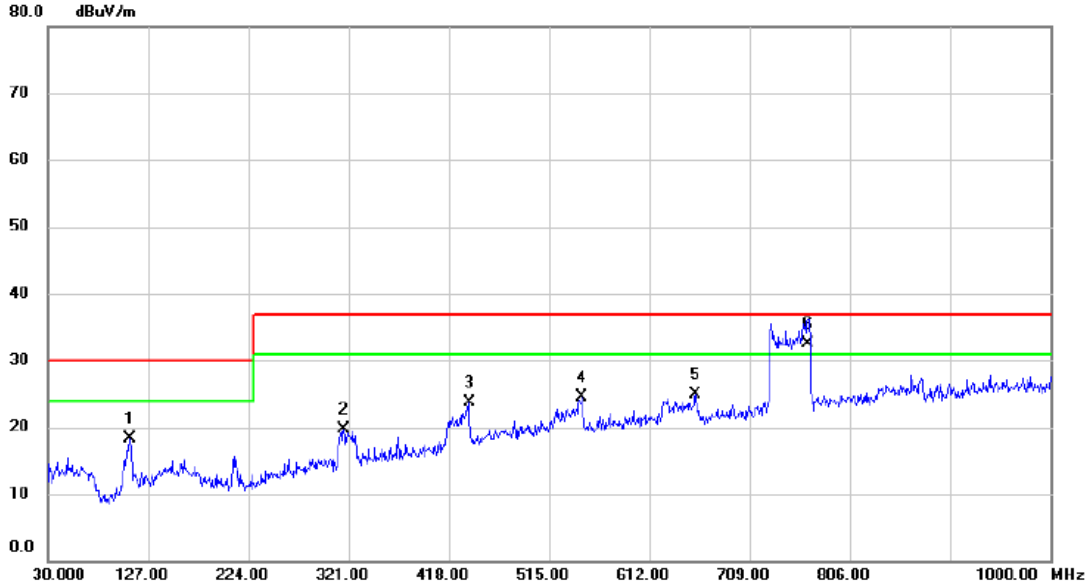

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		109.5400	39.20	-20.86	18.34	30.00	-11.66	QP	
2		316.1500	34.99	-15.23	19.76	37.00	-17.24	QP	
3		437.4000	35.91	-12.17	23.74	37.00	-13.26	QP	
4		547.0100	35.01	-10.49	24.52	37.00	-12.48	QP	
5		656.6200	33.80	-8.94	24.86	37.00	-12.14	QP	
6	*	765.2600	40.00	-7.59	32.41	37.00	-4.59	QP	

3.2 RADIATED EMISSIONS ABOVE 1 GHZ

3.2.1 LIMITS

Class B equipment above 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000				54
1000 - 3000			Peak / 1 MHz	70
3000 - 6000				74

Notes:

(1) The limit for radiated test was performed according to as following: EN 55032

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F_x)	Highest measured frequency
$F_x \leq 108$ MHz	1 GHz
$108 < F_x \leq 500$ MHz	2 GHz
$500 < F_x \leq 1000$ MHz	5 GHz
$F_x > 1$ GHz	5 x F_x up to a maximum of 6 GHz

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	Jul. 07, 2025
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981003	Nov. 17, 2024
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	RW	RWLP50-4.0A-N MRASM-12M	N/A	Jul. 28, 2025
8	Cable	RW	RWLP50-4.0A-N MRASM-1M	N/A	Jul. 28, 2025
9	Cable	RW	RWLP50-4.0A-N MRASM-4M	N/A	Jul. 28, 2025

Remark: “N/A” denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

3.2.3 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform.
e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation

3.2.5 TEST SETUP

ABOVE 1 GHZ

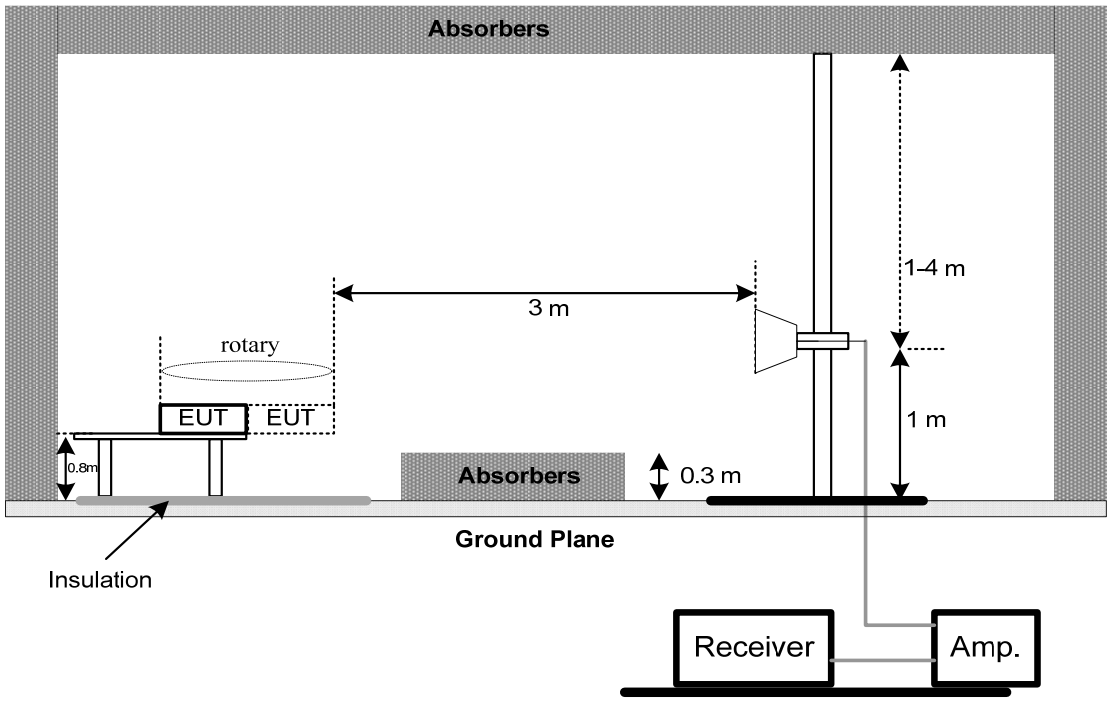

3.2.6 MEASUREMENT DISTANCE

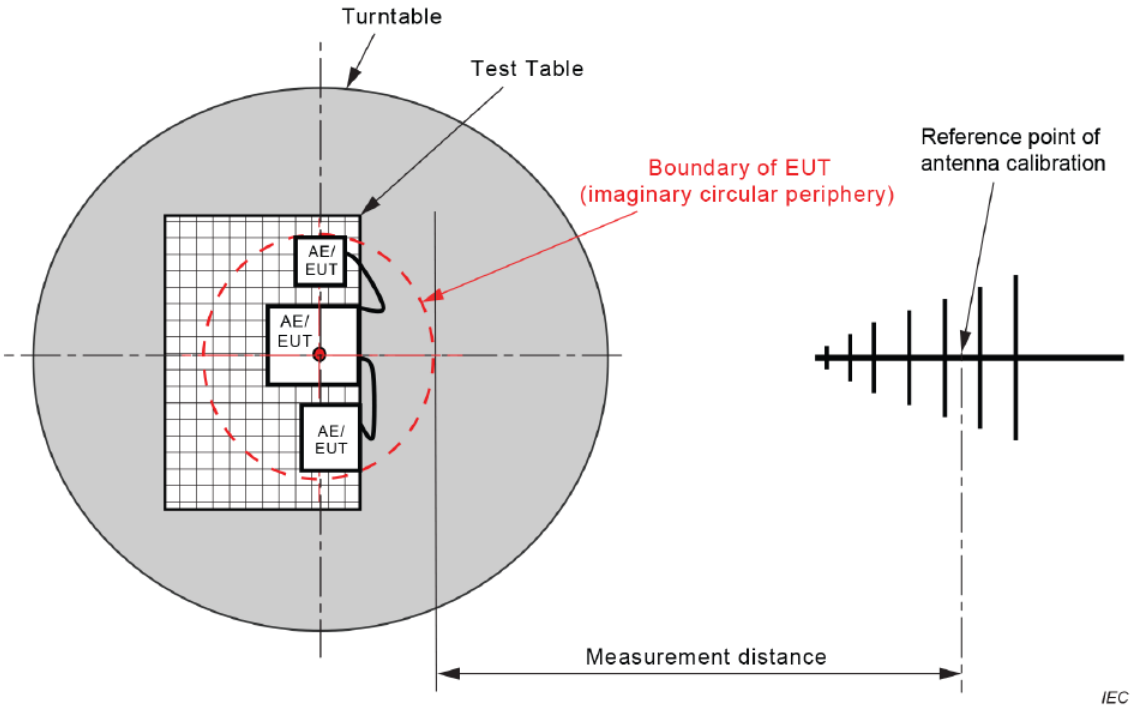

Figure C.1 – Measurement distance

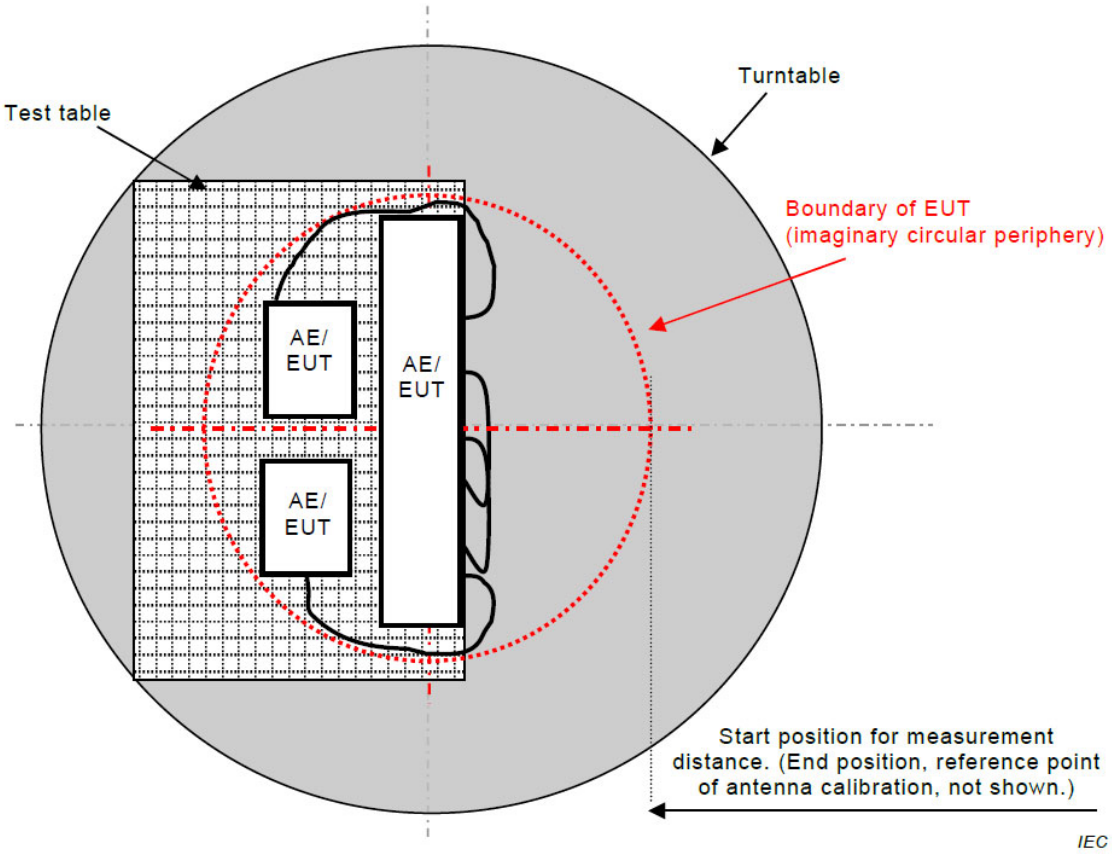

Figure C.2 – Boundary of EUT, Local AE and associated cabling

3.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

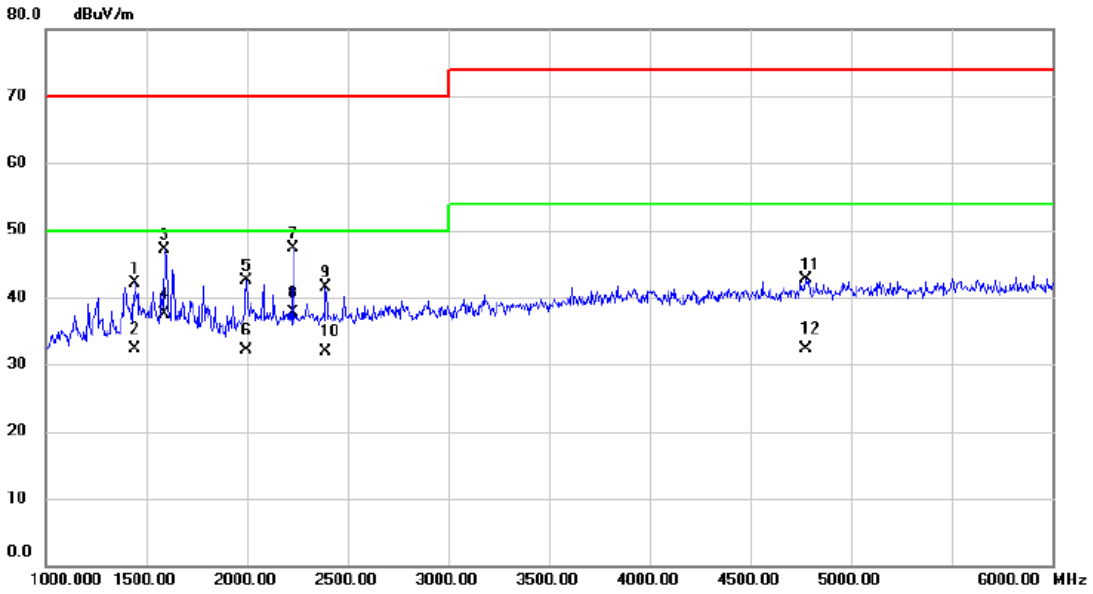

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1442.500	45.79	-3.78	42.01	70.00	-27.99	peak	
2		1442.500	36.02	-3.78	32.24	50.00	-17.76	AVG	
3		1592.500	50.15	-2.95	47.20	70.00	-22.80	peak	
4		1592.500	40.37	-2.95	37.42	50.00	-12.58	AVG	
5		1997.500	42.57	-0.15	42.42	70.00	-27.58	peak	
6		1997.500	32.26	-0.15	32.11	50.00	-17.89	AVG	
7		2227.500	47.01	0.20	47.21	70.00	-22.79	peak	
8	*	2227.500	37.45	0.20	37.65	50.00	-12.35	AVG	
9		2392.500	40.99	0.45	41.44	70.00	-28.56	peak	
10		2392.500	31.44	0.45	31.89	50.00	-18.11	AVG	
11		4777.500	37.28	5.34	42.62	74.00	-31.38	peak	
12		4777.500	27.03	5.34	32.37	54.00	-21.63	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

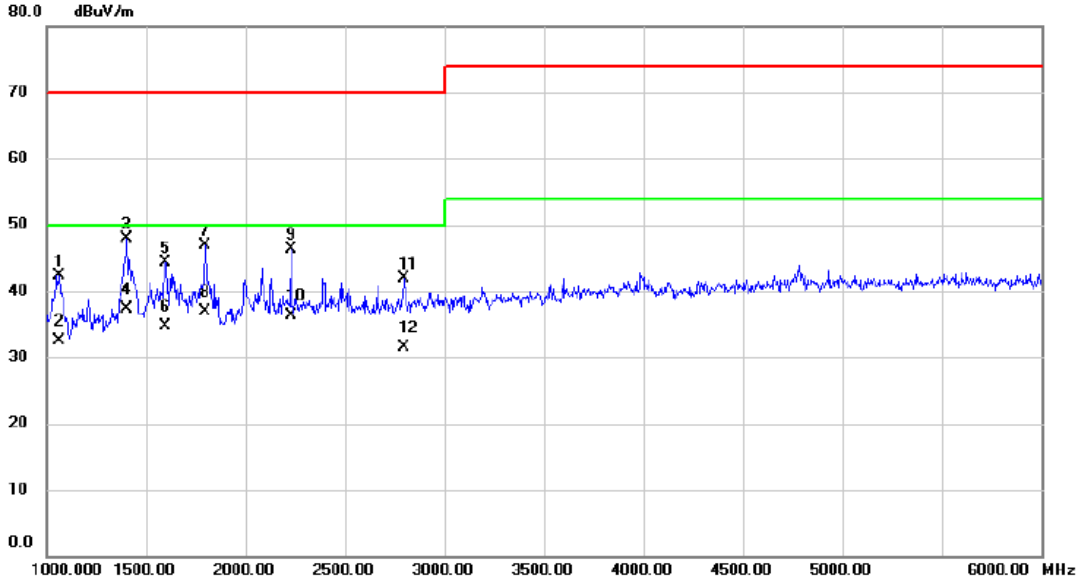

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1062.500	47.28	-5.01	42.27	70.00	-27.73	peak	
2		1062.500	37.59	-5.01	32.58	50.00	-17.42	AVG	
3		1405.000	51.71	-3.90	47.81	70.00	-22.19	peak	
4	*	1405.000	41.23	-3.90	37.33	50.00	-12.67	AVG	
5		1597.500	47.28	-2.91	44.37	70.00	-25.63	peak	
6		1597.500	37.56	-2.91	34.65	50.00	-15.35	AVG	
7		1797.500	48.40	-1.54	46.86	70.00	-23.14	peak	
8		1797.500	38.41	-1.54	36.87	50.00	-13.13	AVG	
9		2227.500	46.05	0.20	46.25	70.00	-23.75	peak	
10		2227.500	36.01	0.20	36.21	50.00	-13.79	AVG	
11		2795.000	40.47	1.38	41.85	70.00	-28.15	peak	
12		2795.000	30.09	1.38	31.47	50.00	-18.53	AVG	

3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidt	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:
(1) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value – Limit Value

3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100526	May 31, 2025
2	EMI Test Receiver	R&S	ESR3	103027	Jun. 01, 2025
3	Cable	N/A	SFT205-NMNM-12M-001	12M	Nov. 27, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Dec. 22, 2024

Remark: “N/A” denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

3.3.3 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

d. LISN at least 80 cm from nearest part of EUT chassis.

e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.4 DEVIATION FROM TEST STANDARD

No deviation

3.3.5 TEST SETUP

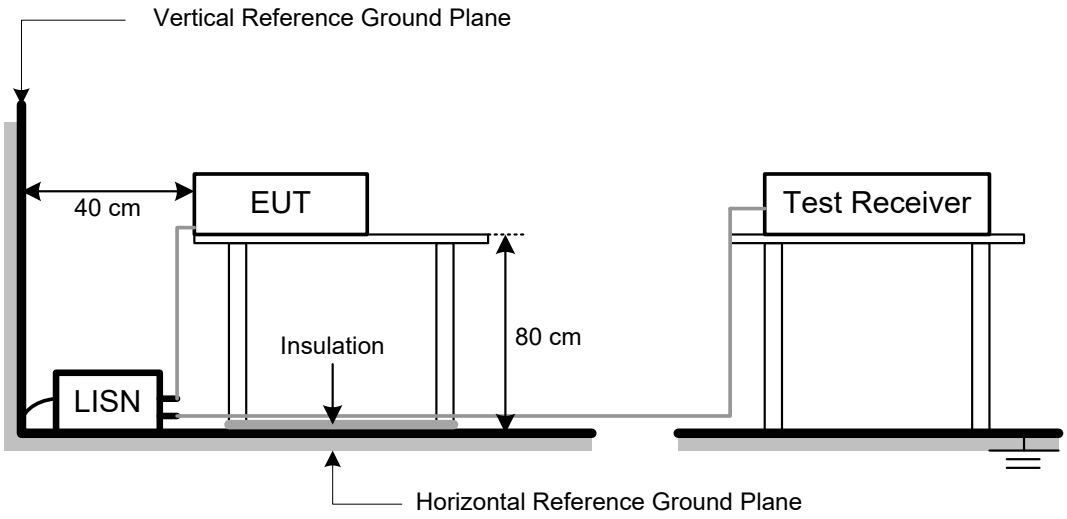

3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

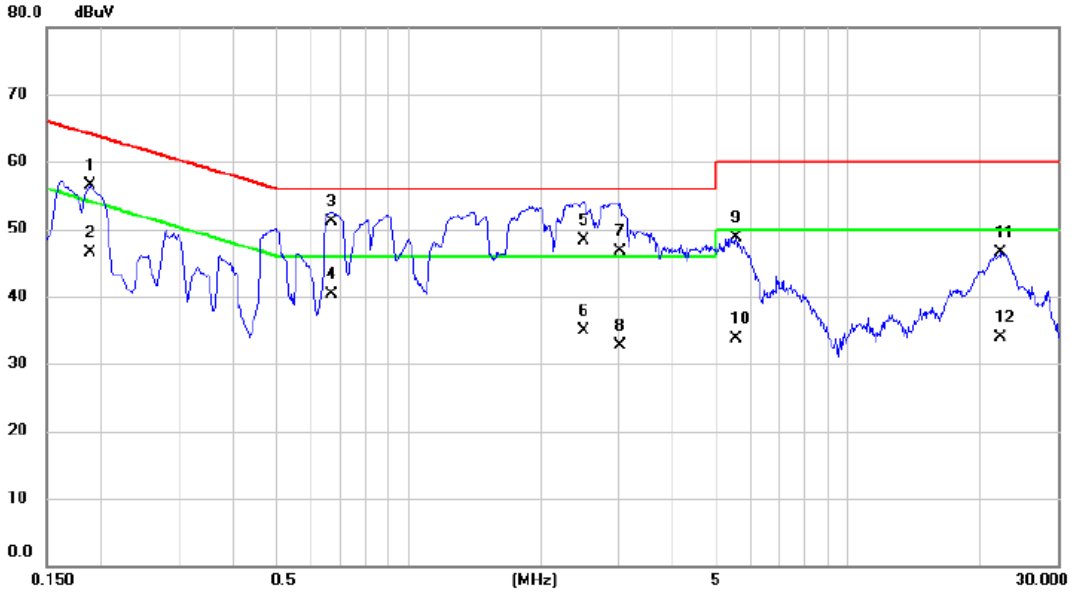

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1883	46.82	9.65	56.47	64.11	-7.64	QP	
2		0.1883	36.85	9.65	46.50	54.11	-7.61	AVG	
3	*	0.6675	41.40	9.72	51.12	56.00	-4.88	QP	
4		0.6675	30.51	9.72	40.23	46.00	-5.77	AVG	
5		2.4968	38.50	9.79	48.29	56.00	-7.71	QP	
6		2.4968	25.14	9.79	34.93	46.00	-11.07	AVG	
7		3.0300	36.80	9.81	46.61	56.00	-9.39	QP	
8		3.0300	22.92	9.81	32.73	46.00	-13.27	AVG	
9		5.5590	38.68	9.97	48.65	60.00	-11.35	QP	
10		5.5590	23.76	9.97	33.73	50.00	-16.27	AVG	
11		22.2608	35.77	10.81	46.58	60.00	-13.42	QP	
12		22.2608	23.16	10.81	33.97	50.00	-16.03	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

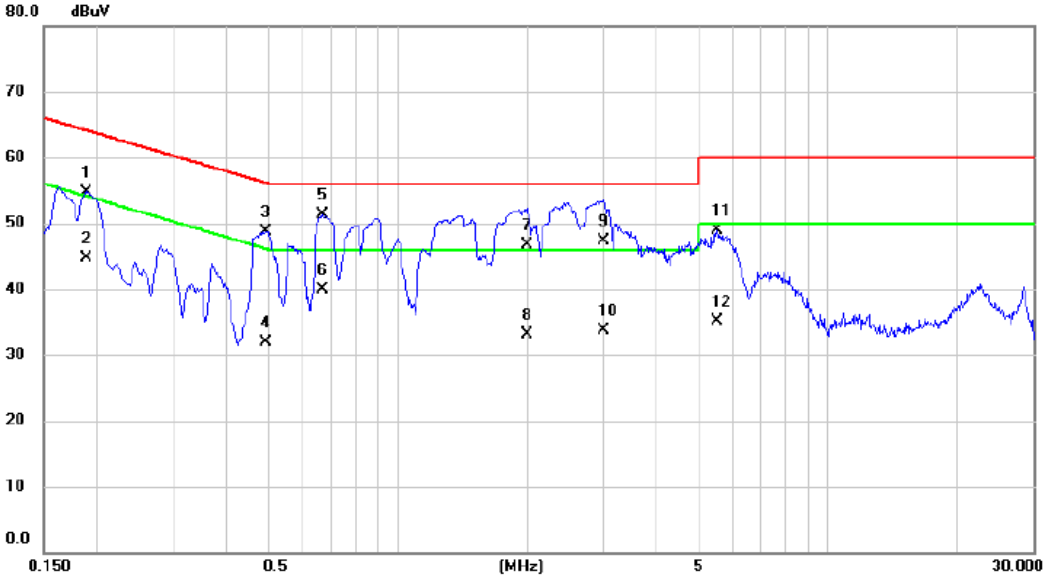

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1883	45.16	9.64	54.80	64.11	-9.31	QP	
2		0.1883	34.99	9.64	44.63	54.11	-9.48	AVG	
3		0.4920	39.09	9.70	48.79	56.13	-7.34	QP	
4		0.4920	22.21	9.70	31.91	46.13	-14.22	AVG	
5	*	0.6675	41.53	9.71	51.24	56.00	-4.76	QP	
6		0.6675	30.27	9.71	39.98	46.00	-6.02	AVG	
7		1.9950	36.90	9.77	46.67	56.00	-9.33	QP	
8		1.9950	23.31	9.77	33.08	46.00	-12.92	AVG	
9		3.0053	37.50	9.81	47.31	56.00	-8.69	QP	
10		3.0053	23.85	9.81	33.66	46.00	-12.34	AVG	
11		5.5275	39.01	9.97	48.98	60.00	-11.02	QP	
12		5.5275	25.22	9.97	35.19	50.00	-14.81	AVG	

4. EMC EMISSION TEST- EN 55032:2015+A11:2020

4.1 RADIATED EMISSIONS UP TO 1 GHZ

4.1.1 LIMITS

Class B equipment up to 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

(1) The limit for radiated test was performed according to as following: EN 55032
(2) The tighter limit applies at the band edges.
(3) Emission level (dBuV/m)=20log Emission level (uV/m).
(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jun. 01, 2025
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	May 31, 2025
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	May 31, 2025
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 10, 2024
6	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Nov. 10, 2024
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	1461	Nov. 28, 2024
8	Attenuator	EMCI	EMCI-N-6-06	AT-06010	Nov. 28, 2024
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF780208159	N/A
12	Cable	RW	LMR400-NMNM-10M	N/A	Dec. 03, 2024
13	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
14	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024
15	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
16	Cable	RW	LMR400-NMNM-8M	N/A	Dec. 03, 2024
17	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024

Remark: “N/A” denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

4.1.3 TEST PROCEDURE

a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform.
e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

UP TO 1 GHZ

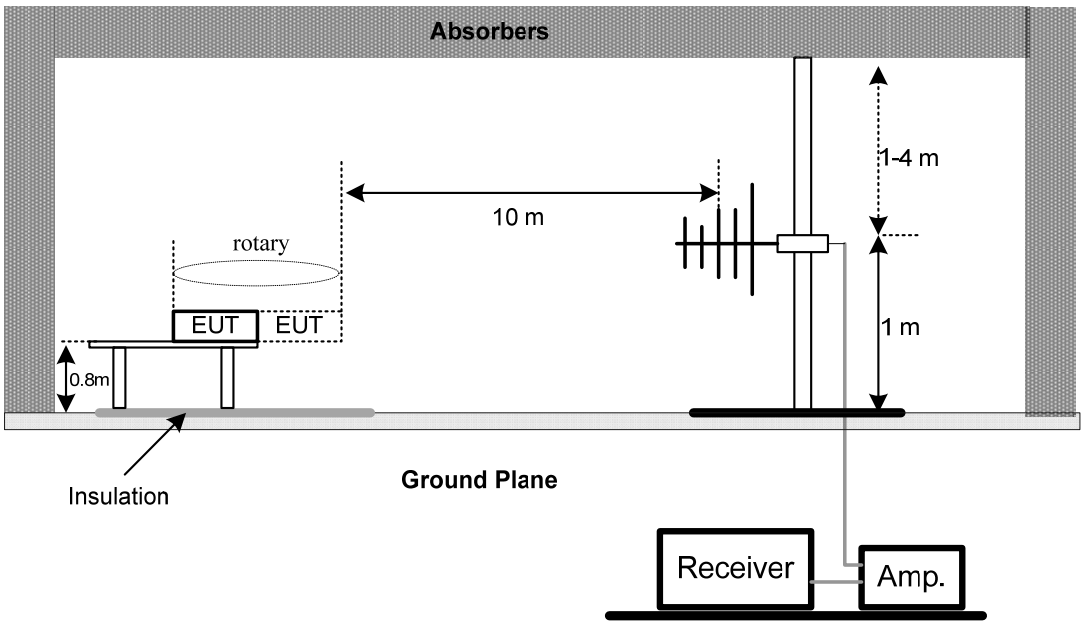

4.1.6 MEASUREMENT DISTANCE

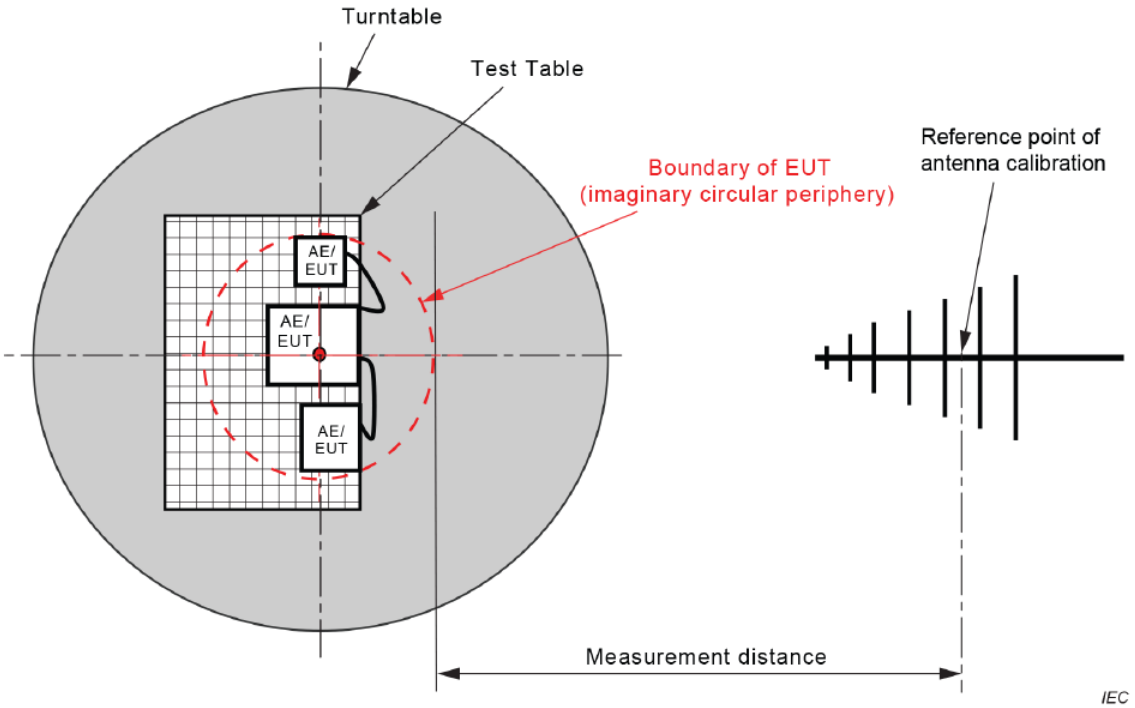

Figure C.1 – Measurement distance

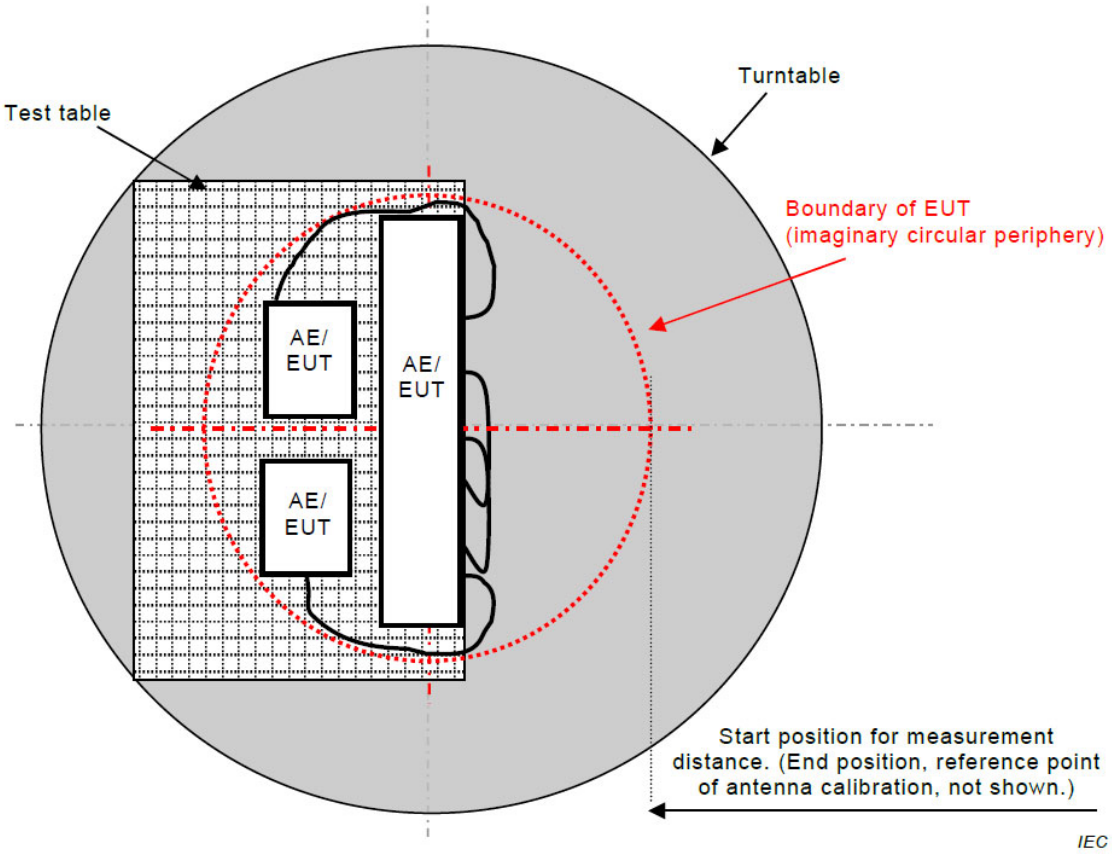

Figure C.2 – Boundary of EUT, Local AE and associated cabling

4.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

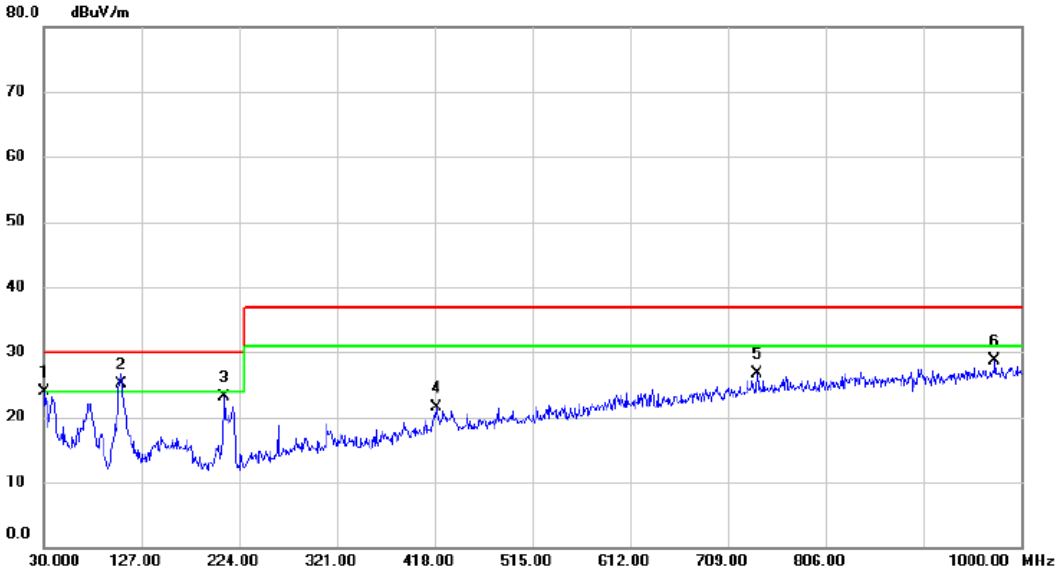

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		30.9700	43.71	-19.84	23.87	30.00	-6.13	QP	
2	*	106.6300	46.44	-21.28	25.16	30.00	-4.84	QP	
3		209.4500	43.07	-19.89	23.18	30.00	-6.82	QP	
4		419.9400	33.90	-12.48	21.42	37.00	-15.58	QP	
5		738.1000	34.80	-8.10	26.70	37.00	-10.30	QP	
6		973.8100	34.60	-5.87	28.73	37.00	-8.27	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

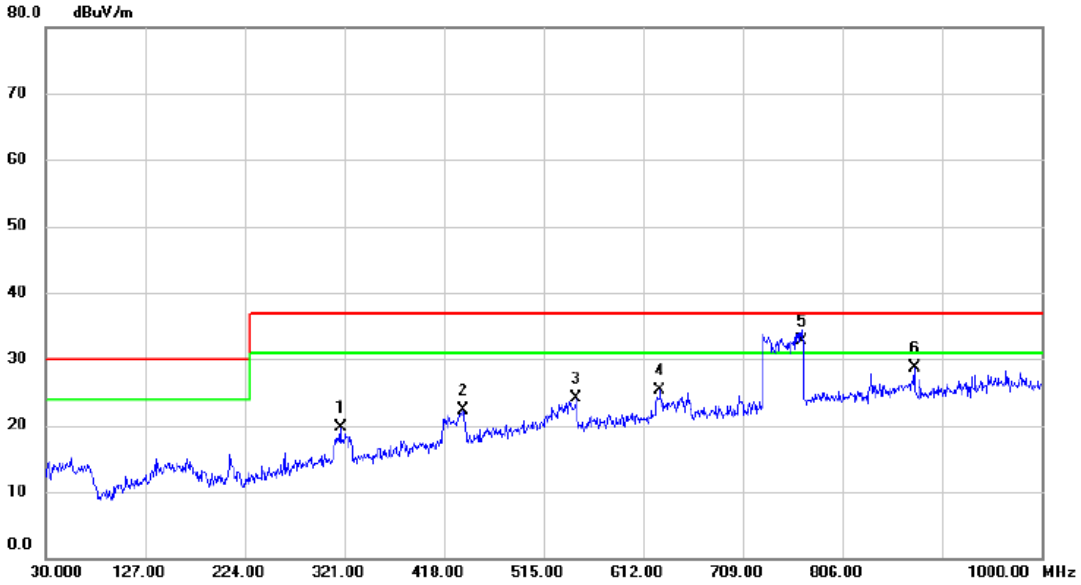

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		317.1200	34.83	-15.20	19.63	37.00	-17.37	QP	
2		436.4300	34.42	-12.21	22.21	37.00	-14.79	QP	
3		547.0100	34.67	-10.49	24.18	37.00	-12.82	QP	
4		628.4900	34.57	-9.20	25.37	37.00	-11.63	QP	
5	*	766.2300	40.34	-7.59	32.75	37.00	-4.25	QP	
6		875.8400	35.98	-7.25	28.73	37.00	-8.27	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 3		

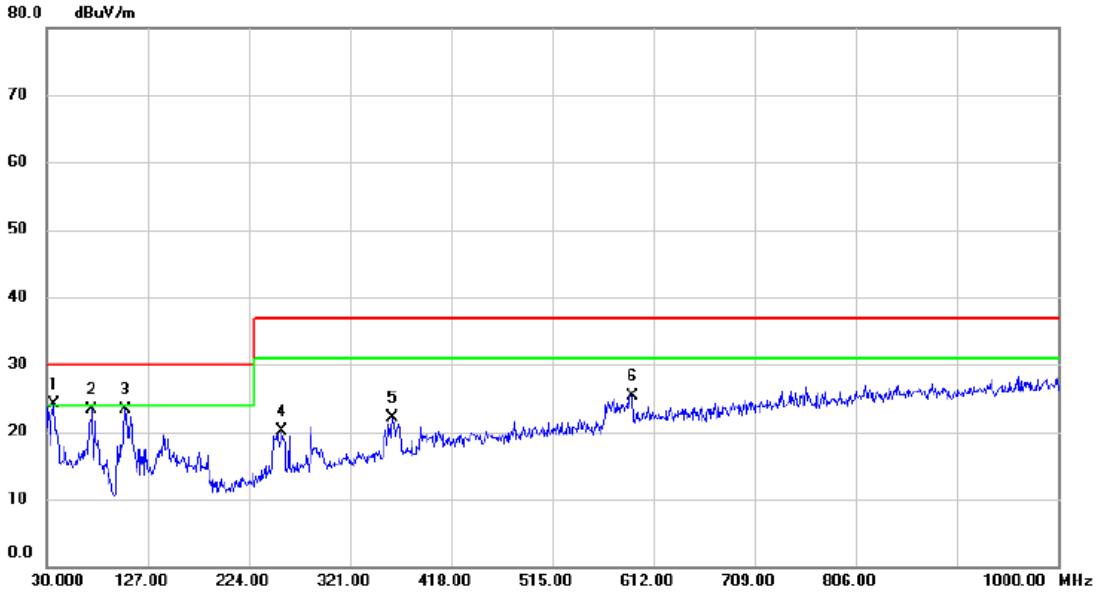

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	36.7900	42.86	-18.81	24.05	30.00	-5.95	QP	
2		73.6500	44.01	-20.72	23.29	30.00	-6.71	QP	
3		105.6600	44.75	-21.44	23.31	30.00	-6.69	QP	
4		256.0100	37.54	-17.50	20.04	37.00	-16.96	QP	
5		361.7400	36.33	-14.30	22.03	37.00	-14.97	QP	
6		591.6300	34.57	-9.22	25.35	37.00	-11.65	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 3		

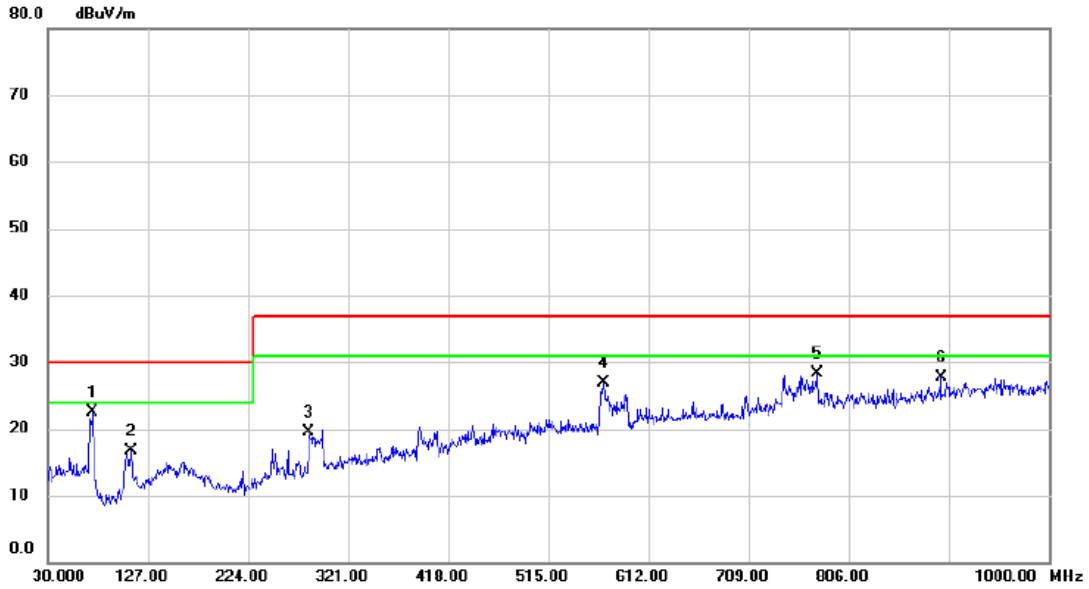

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	73.6500	43.47	-20.91	22.56	30.00	-7.44	QP	
2		110.5100	37.42	-20.77	16.65	30.00	-13.35	QP	
3		283.1700	35.63	-16.18	19.45	37.00	-17.55	QP	
4		568.3500	37.12	-10.12	27.00	37.00	-10.00	QP	
5		775.9300	35.82	-7.52	28.30	37.00	-8.70	QP	
6		895.2400	34.67	-6.91	27.76	37.00	-9.24	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 4		

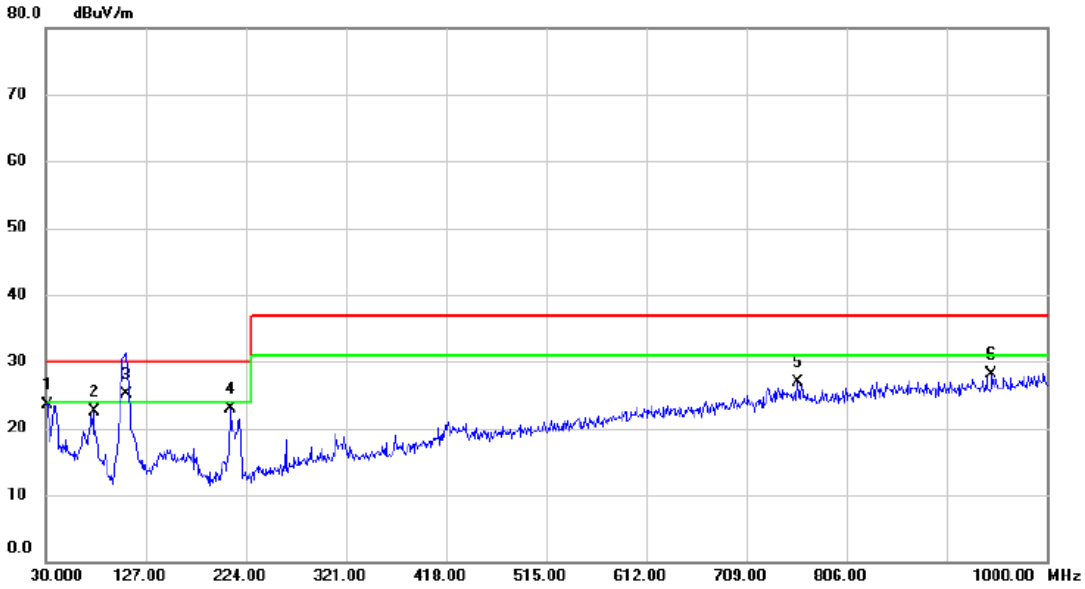

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		31.4550	43.33	-19.74	23.59	30.00	-6.41	QP	
2		76.5600	43.93	-21.40	22.53	30.00	-7.47	QP	
3	*	107.6000	46.24	-21.11	25.13	30.00	-4.87	QP	
4		209.4500	42.79	-19.89	22.90	30.00	-7.10	QP	
5		758.4700	34.79	-7.94	26.85	37.00	-10.15	QP	
6		946.6500	34.55	-6.36	28.19	37.00	-8.81	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 4		

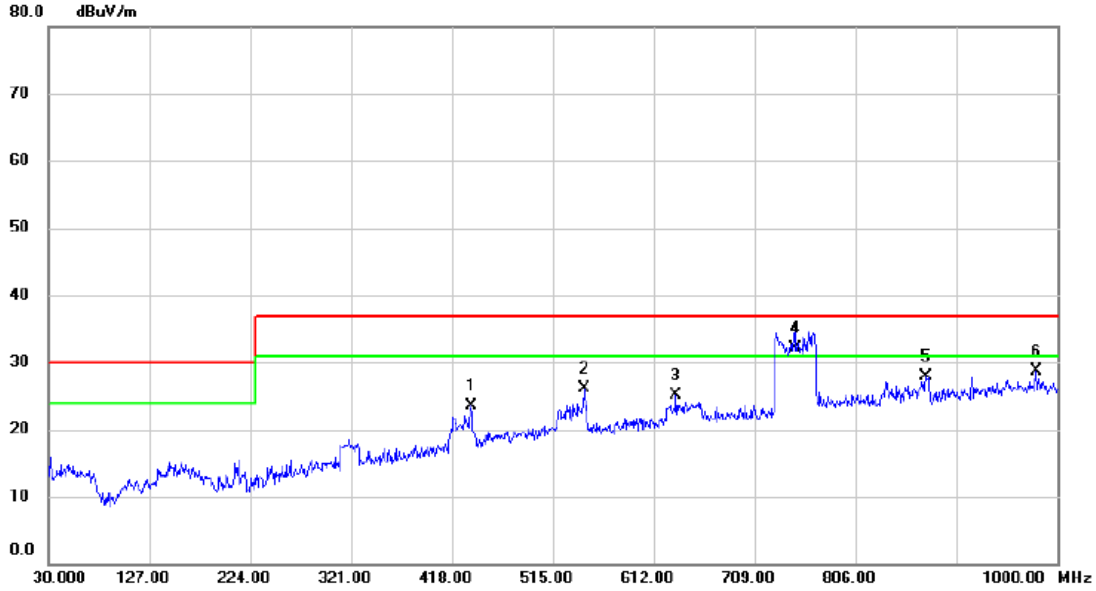

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		436.4300	35.65	-12.21	23.44	37.00	-13.56	QP	
2		545.5550	36.65	-10.49	26.16	37.00	-10.84	QP	
3		633.3400	34.33	-9.14	25.19	37.00	-11.81	QP	
4	*	747.8000	39.91	-7.75	32.16	37.00	-4.84	QP	
5		873.9000	35.15	-7.29	27.86	37.00	-9.14	QP	
6		980.1150	34.47	-5.85	28.62	37.00	-8.38	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 13		

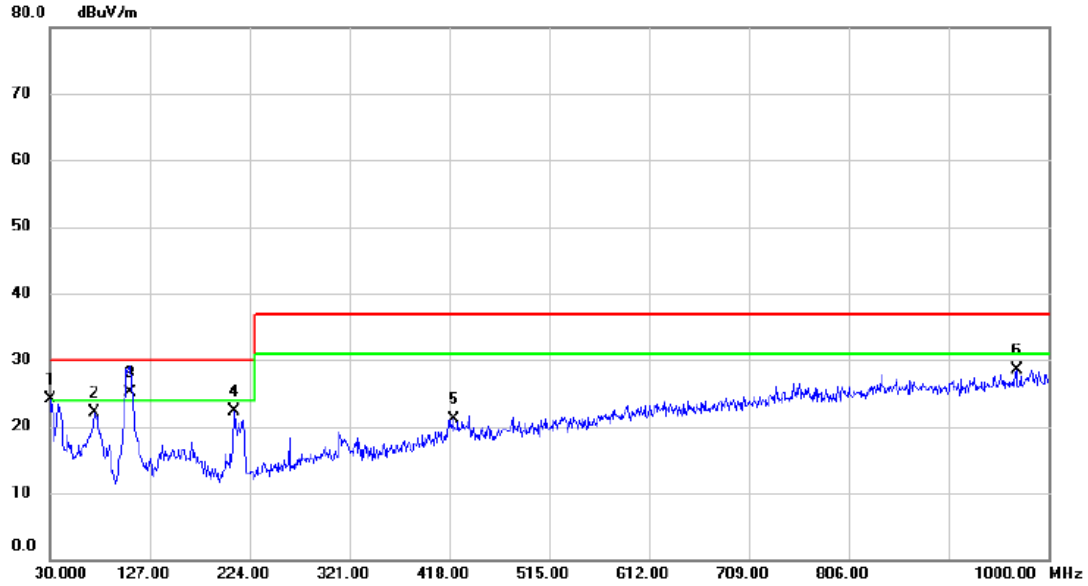

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	30.9700	44.01	-19.84	24.17	30.00	-5.83	QP	
2		73.6500	42.77	-20.72	22.05	30.00	-7.95	QP	
3	*	108.5700	46.11	-20.95	25.16	30.00	-4.84	QP	
4		208.4800	42.17	-19.90	22.27	30.00	-7.73	QP	
5		421.8800	33.53	-12.43	21.10	37.00	-15.90	QP	
6		968.9600	34.50	-5.95	28.55	37.00	-8.45	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 13		

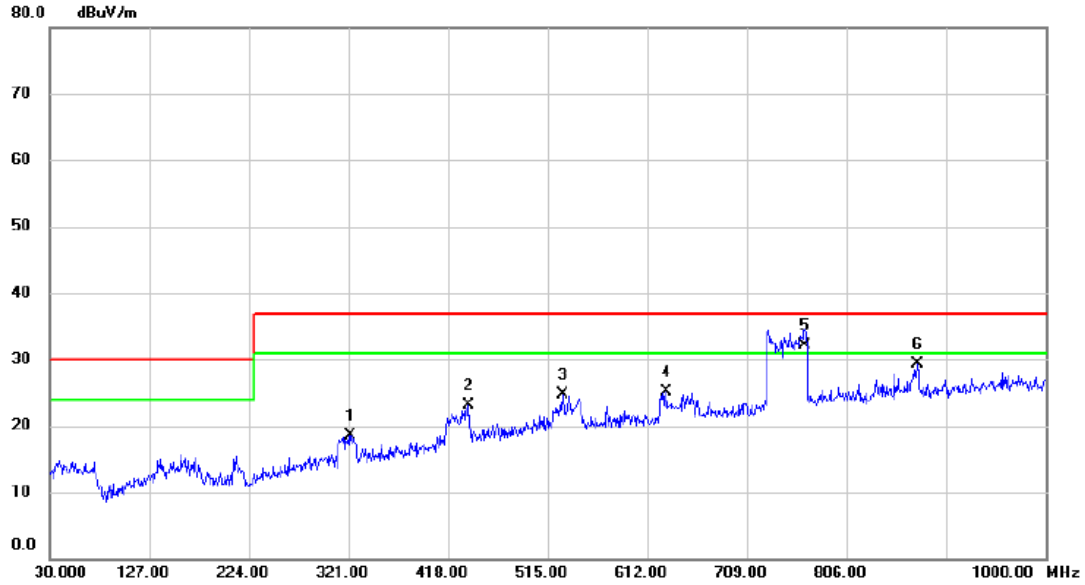

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		323.4250	33.61	-15.03	18.58	37.00	-18.42	QP	
2		438.3700	35.28	-12.15	23.13	37.00	-13.87	QP	
3		529.5500	35.39	-10.66	24.73	37.00	-12.27	QP	
4		630.4300	34.32	-9.18	25.14	37.00	-11.86	QP	
5	*	765.2600	39.75	-7.59	32.16	37.00	-4.84	QP	
6		874.8700	36.63	-7.27	29.36	37.00	-7.64	QP	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

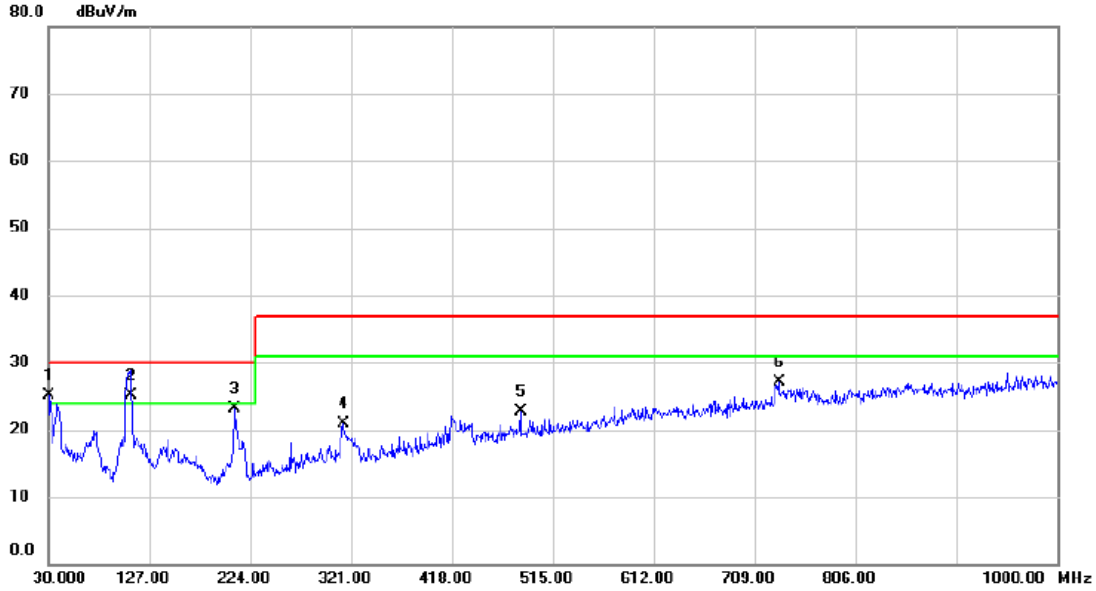

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	30.9700	44.86	-19.84	25.02	30.00	-4.98	QP	
2	*	109.5400	45.96	-20.77	25.19	30.00	-4.81	QP	
3		208.4800	43.03	-19.90	23.13	30.00	-6.87	QP	
4		314.2100	36.27	-15.38	20.89	37.00	-16.11	QP	
5		483.9600	34.07	-11.41	22.66	37.00	-14.34	QP	
6		732.2800	35.21	-8.14	27.07	37.00	-9.93	QP	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

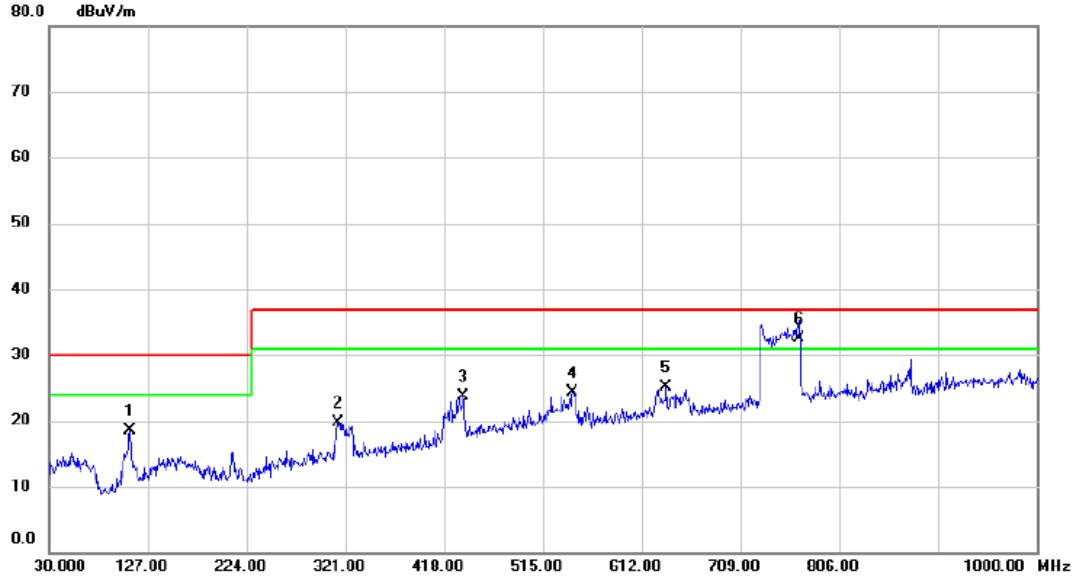

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		109.5400	39.45	-20.86	18.59	30.00	-11.41	QP	
2		313.2400	35.06	-15.33	19.73	37.00	-17.27	QP	
3		436.4300	35.96	-12.21	23.75	37.00	-13.25	QP	
4		544.1000	34.88	-10.51	24.37	37.00	-12.63	QP	
5		636.2500	34.19	-9.11	25.08	37.00	-11.92	QP	
6	*	766.2300	40.05	-7.59	32.46	37.00	-4.54	QP	

4.2 RADIATED EMISSIONS ABOVE 1 GHZ

4.2.1 LIMITS

Class B equipment above 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000				54
1000 - 3000			Peak / 1 MHz	70
3000 - 6000				74

Notes:

(1) The limit for radiated test was performed according to as following: EN 55032

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F_x)	Highest measured frequency
$F_x \leq 108$ MHz	1 GHz
$108 < F_x \leq 500$ MHz	2 GHz
$500 < F_x \leq 1000$ MHz	5 GHz
$F_x > 1$ GHz	5 x F_x up to a maximum of 6 GHz

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	Jul. 07, 2025
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981003	Nov. 17, 2024
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	RW	RWLP50-4.0A-N MRASM-12M	N/A	Jul. 28, 2025
8	Cable	RW	RWLP50-4.0A-N MRASM-1M	N/A	Jul. 28, 2025
9	Cable	RW	RWLP50-4.0A-N MRASM-4M	N/A	Jul. 28, 2025

Remark: “N/A” denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform.
e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD

The limit of the EN 55032:2015+A1:2020&AS/NZS CISPR 32:2015+AMD1:2020&CISPR 32:2015 +AMD1:2019 standard deviates from the requirements, but the limit of the EN 55032:2015+A11:2020 standard is more stringent and can be covered, so the test data meets the EN 55032:2015+A1:2020 &AS/NZS CISPR 32:2015+AMD1:2020&CISPR 32:2015+AMD1:2019 standard.

4.2.5 TEST SETUP

ABOVE 1 GHZ

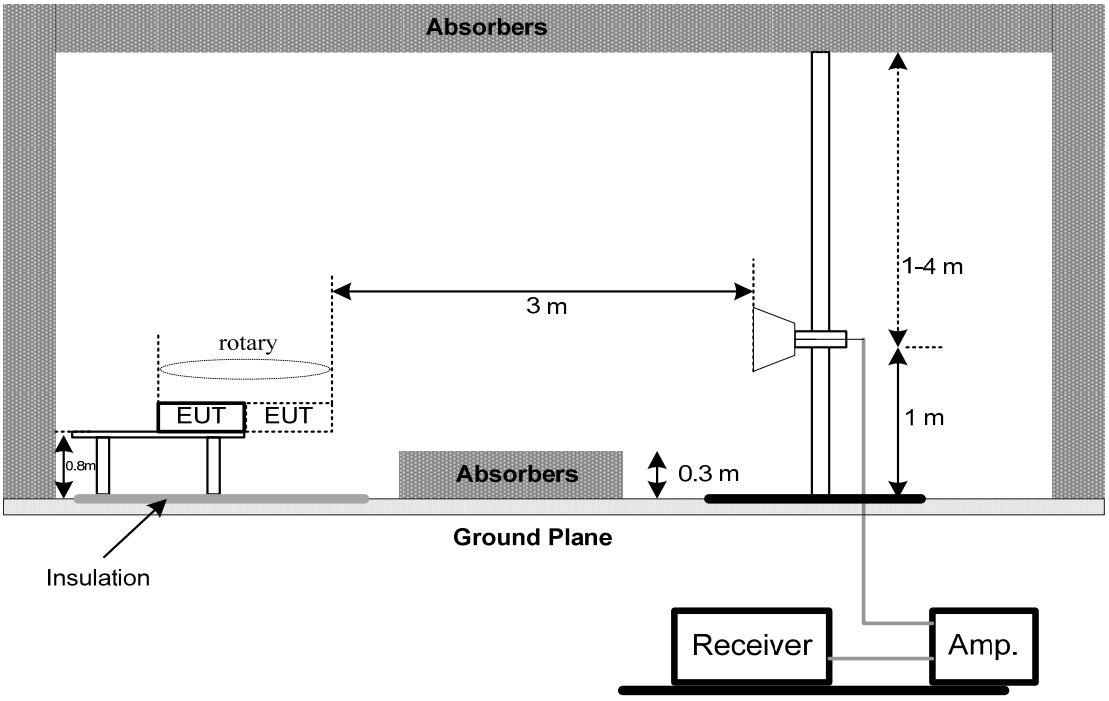

4.2.6 MEASUREMENT DISTANCE

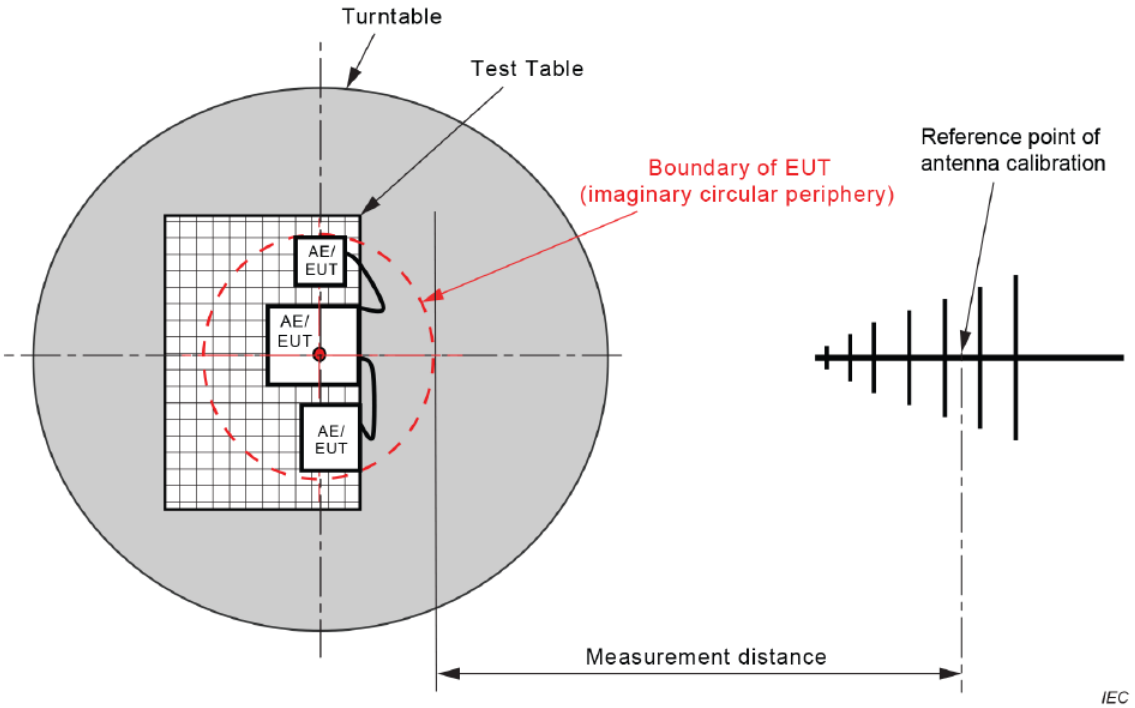

Figure C.1 – Measurement distance

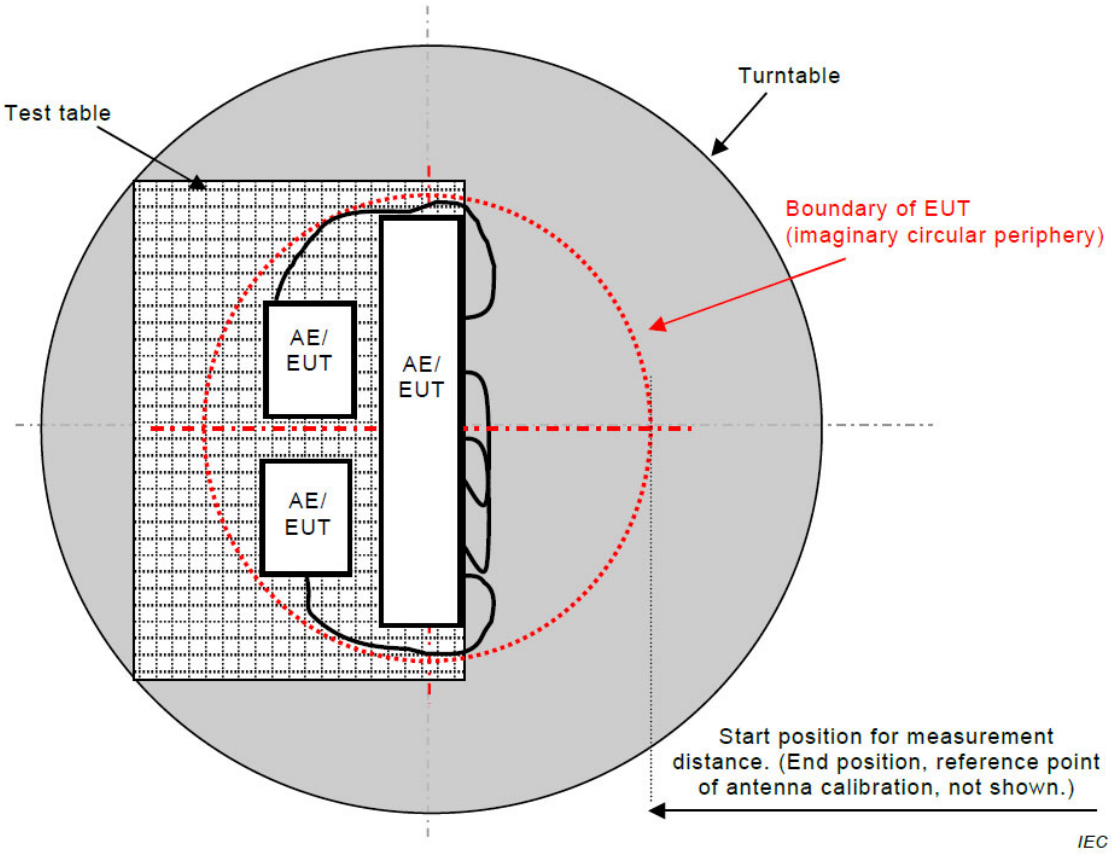

Figure C.2 – Boundary of EUT, Local AE and associated cabling

4.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

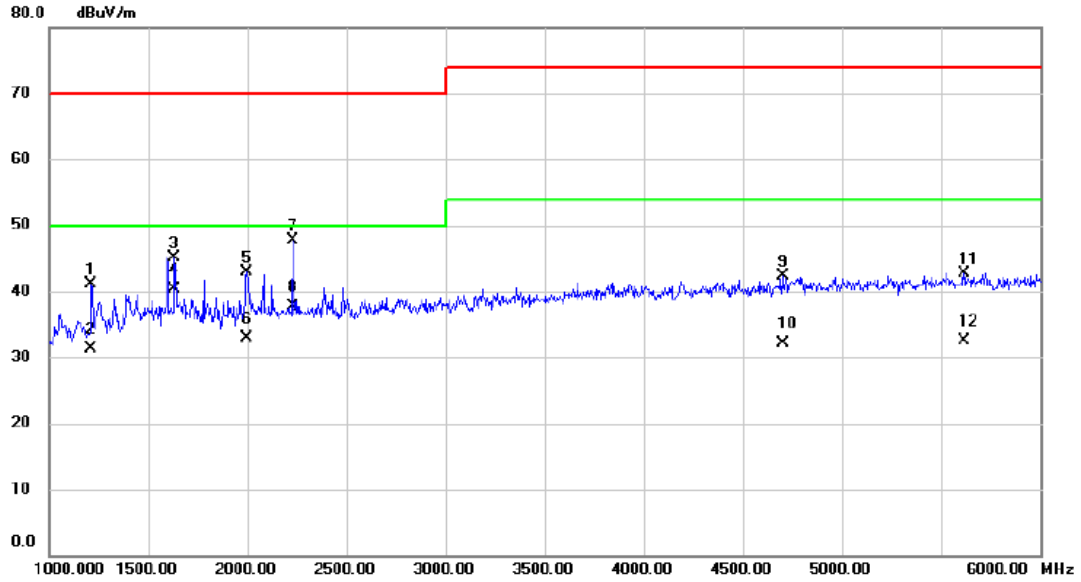

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1212.500	45.73	-4.53	41.20	70.00	-28.80	peak	
2		1212.500	35.81	-4.53	31.28	50.00	-18.72	AVG	
3		1632.500	47.85	-2.67	45.18	70.00	-24.82	peak	
4	*	1632.500	42.95	-2.67	40.28	50.00	-9.72	AVG	
5		1997.500	43.06	-0.15	42.91	70.00	-27.09	peak	
6		1997.500	33.04	-0.15	32.89	50.00	-17.11	AVG	
7		2227.500	47.56	0.20	47.76	70.00	-22.24	peak	
8		2227.500	37.47	0.20	37.67	50.00	-12.33	AVG	
9		4705.000	36.97	5.24	42.21	74.00	-31.79	peak	
10		4705.000	26.87	5.24	32.11	54.00	-21.89	AVG	
11		5615.000	36.06	6.72	42.78	74.00	-31.22	peak	
12		5615.000	25.74	6.72	32.46	54.00	-21.54	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

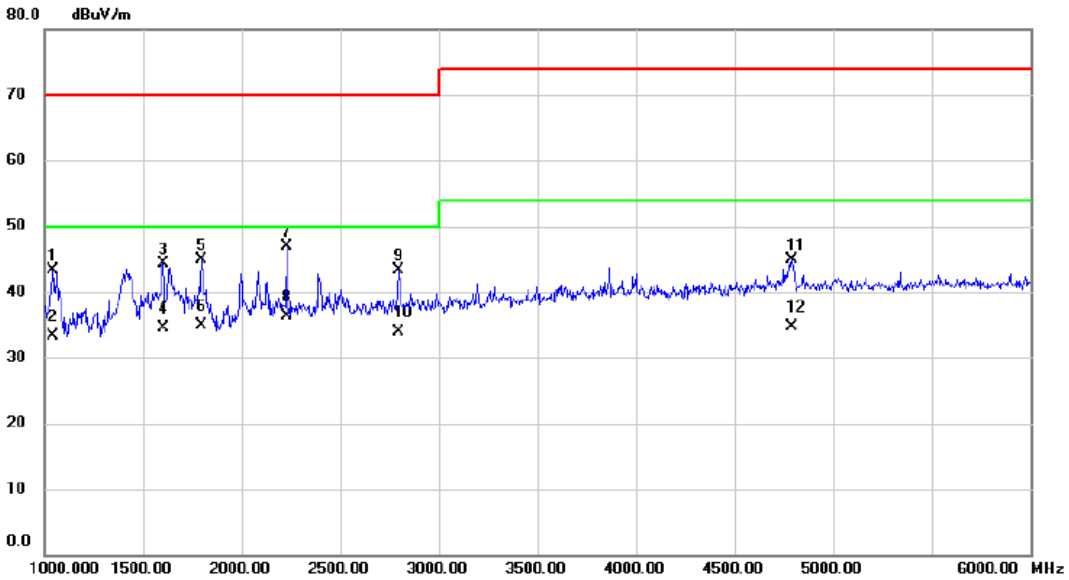

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1040.000	48.39	-5.08	43.31	70.00	-26.69	peak	
2		1040.000	38.39	-5.08	33.31	50.00	-16.69	AVG	
3		1600.000	47.22	-2.90	44.32	70.00	-25.68	peak	
4		1600.000	37.46	-2.90	34.56	50.00	-15.44	AVG	
5		1797.500	46.35	-1.54	44.81	70.00	-25.19	peak	
6		1797.500	36.43	-1.54	34.89	50.00	-15.11	AVG	
7		2227.500	46.64	0.20	46.84	70.00	-23.16	peak	
8	*	2227.500	36.01	0.20	36.21	50.00	-13.79	AVG	
9		2797.500	41.89	1.39	43.28	70.00	-26.72	peak	
10		2797.500	32.49	1.39	33.88	50.00	-16.12	AVG	
11		4792.500	39.52	5.37	44.89	74.00	-29.11	peak	
12		4792.500	29.39	5.37	34.76	54.00	-19.24	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 3		

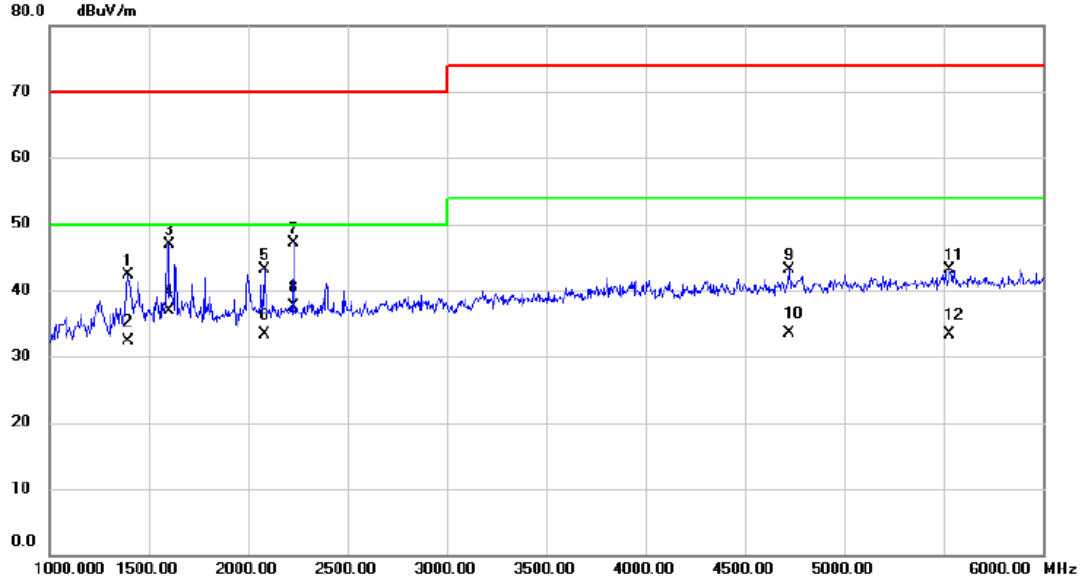

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1397.500	46.27	-3.93	42.34	70.00	-27.66	peak	
2		1397.500	36.26	-3.93	32.33	50.00	-17.67	AVG	
3		1600.000	49.82	-2.90	46.92	70.00	-23.08	peak	
4		1600.000	39.89	-2.90	36.99	50.00	-13.01	AVG	
5		2080.000	43.13	-0.02	43.11	70.00	-26.89	peak	
6		2080.000	33.23	-0.02	33.21	50.00	-16.79	AVG	
7		2227.500	46.90	0.20	47.10	70.00	-22.90	peak	
8	*	2227.500	37.36	0.20	37.56	50.00	-12.44	AVG	
9		4720.000	37.80	5.26	43.06	74.00	-30.94	peak	
10		4720.000	28.22	5.26	33.48	54.00	-20.52	AVG	
11		5530.000	36.50	6.63	43.13	74.00	-30.87	peak	
12		5530.000	26.61	6.63	33.24	54.00	-20.76	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 3		

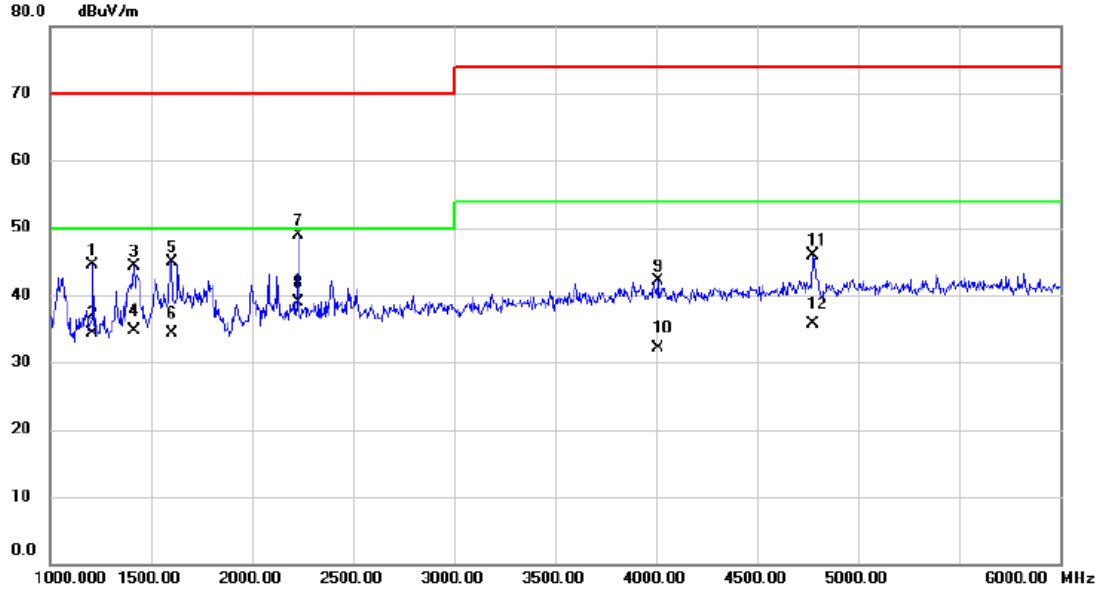

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1212.500	49.07	-4.53	44.54	70.00	-25.46	peak	
2		1212.500	38.86	-4.53	34.33	50.00	-15.67	AVG	
3		1415.000	48.27	-3.87	44.40	70.00	-25.60	peak	
4		1415.000	38.52	-3.87	34.65	50.00	-15.35	AVG	
5		1600.000	47.86	-2.90	44.96	70.00	-25.04	peak	
6		1600.000	37.11	-2.90	34.21	50.00	-15.79	AVG	
7		2227.500	48.63	0.20	48.83	70.00	-21.17	peak	
8	*	2227.500	38.75	0.20	38.95	50.00	-11.05	AVG	
9		4007.500	37.55	4.61	42.16	74.00	-31.84	peak	
10		4007.500	27.50	4.61	32.11	54.00	-21.89	AVG	
11		4777.500	40.59	5.34	45.93	74.00	-28.07	peak	
12		4777.500	30.45	5.34	35.79	54.00	-18.21	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 4		

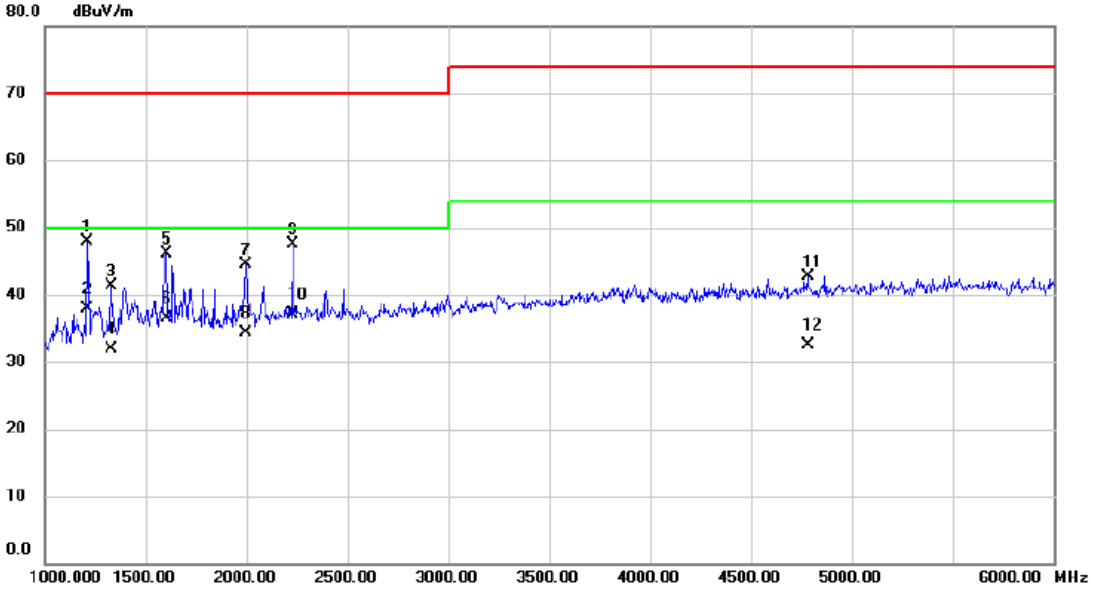

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1210.000	52.34	-4.52	47.82	70.00	-22.18	peak	
2	*	1210.000	42.38	-4.52	37.86	50.00	-12.14	AVG	
3		1327.500	45.42	-4.15	41.27	70.00	-28.73	peak	
4		1327.500	36.00	-4.15	31.85	50.00	-18.15	AVG	
5		1600.000	48.96	-2.90	46.06	70.00	-23.94	peak	
6		1600.000	39.44	-2.90	36.54	50.00	-13.46	AVG	
7		1997.500	44.60	-0.15	44.45	70.00	-25.55	peak	
8		1997.500	34.38	-0.15	34.23	50.00	-15.77	AVG	
9		2227.500	47.33	0.20	47.53	70.00	-22.47	peak	
10		2227.500	36.91	0.20	37.11	50.00	-12.89	AVG	
11		4780.000	37.45	5.35	42.80	74.00	-31.20	peak	
12		4780.000	27.11	5.35	32.46	54.00	-21.54	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 4		

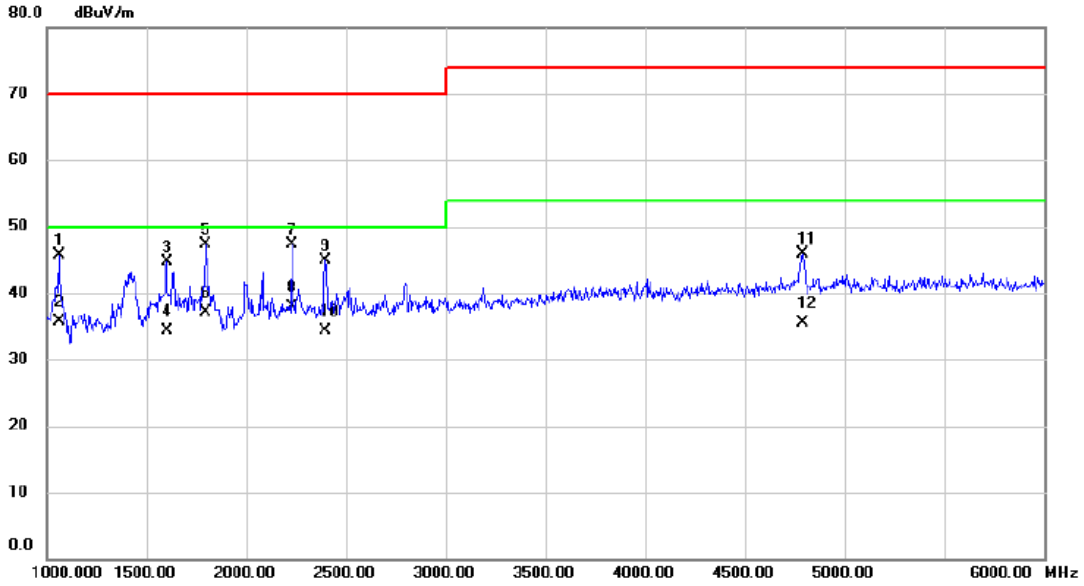

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1062.500	50.63	-5.01	45.62	70.00	-24.38	peak	
2		1062.500	40.65	-5.01	35.64	50.00	-14.36	AVG	
3		1600.000	47.53	-2.90	44.63	70.00	-25.37	peak	
4		1600.000	37.13	-2.90	34.23	50.00	-15.77	AVG	
5		1797.500	48.83	-1.54	47.29	70.00	-22.71	peak	
6		1797.500	38.65	-1.54	37.11	50.00	-12.89	AVG	
7		2227.500	47.01	0.20	47.21	70.00	-22.79	peak	
8	*	2227.500	37.78	0.20	37.98	50.00	-12.02	AVG	
9		2397.500	44.48	0.46	44.94	70.00	-25.06	peak	
10		2397.500	33.80	0.46	34.26	50.00	-15.74	AVG	
11		4792.500	40.58	5.37	45.95	74.00	-28.05	peak	
12		4792.500	30.18	5.37	35.55	54.00	-18.45	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 13		

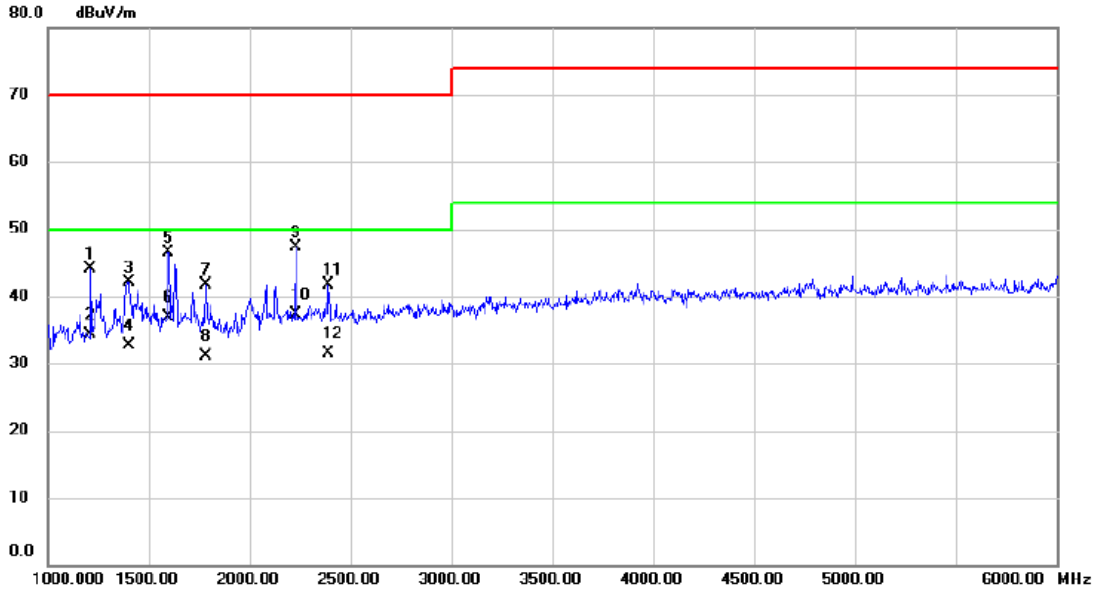

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1212.500	48.63	-4.53	44.10	70.00	-25.90	peak	
2		1212.500	38.74	-4.53	34.21	50.00	-15.79	AVG	
3		1400.000	46.09	-3.91	42.18	70.00	-27.82	peak	
4		1400.000	36.58	-3.91	32.67	50.00	-17.33	AVG	
5		1595.000	49.49	-2.93	46.56	70.00	-23.44	peak	
6		1595.000	39.91	-2.93	36.98	50.00	-13.02	AVG	
7		1782.500	43.26	-1.64	41.62	70.00	-28.38	peak	
8		1782.500	32.75	-1.64	31.11	50.00	-18.89	AVG	
9		2227.500	47.02	0.20	47.22	70.00	-22.78	peak	
10	*	2227.500	37.16	0.20	37.36	50.00	-12.64	AVG	
11		2390.000	41.25	0.44	41.69	70.00	-28.31	peak	
12		2390.000	31.10	0.44	31.54	50.00	-18.46	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 13		

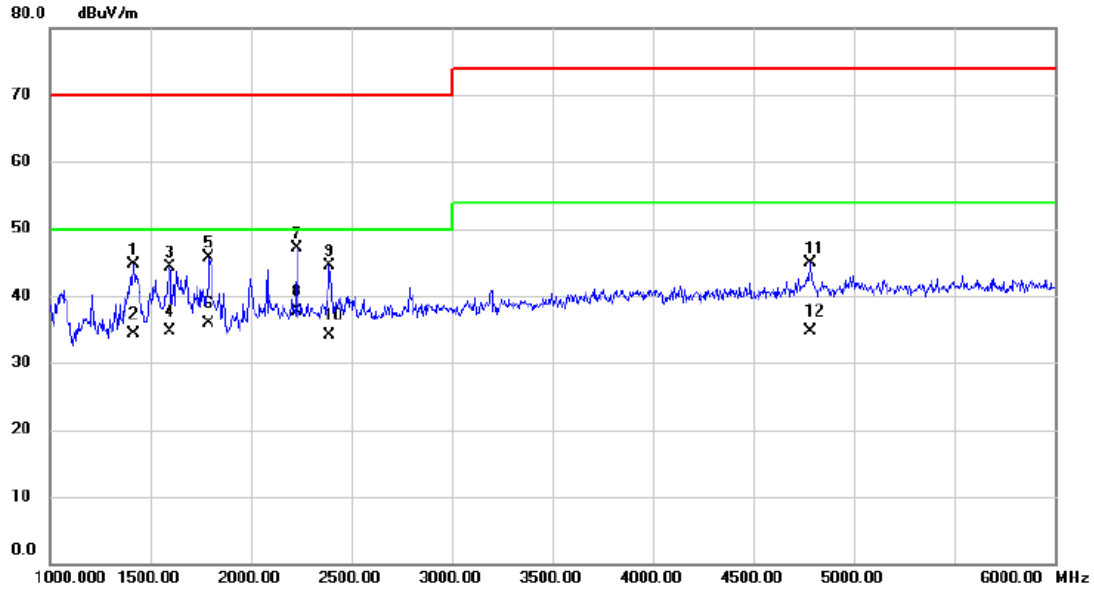

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1415.000	48.56	-3.87	44.69	70.00	-25.31	peak	
2		1415.000	38.08	-3.87	34.21	50.00	-15.79	AVG	
3		1595.000	47.20	-2.93	44.27	70.00	-25.73	peak	
4		1595.000	37.64	-2.93	34.71	50.00	-15.29	AVG	
5		1792.500	47.23	-1.57	45.66	70.00	-24.34	peak	
6		1792.500	37.44	-1.57	35.87	50.00	-14.13	AVG	
7		2227.500	46.84	0.20	47.04	70.00	-22.96	peak	
8	*	2227.500	37.46	0.20	37.66	50.00	-12.34	AVG	
9		2392.500	44.11	0.45	44.56	70.00	-25.44	peak	
10		2392.500	33.68	0.45	34.13	50.00	-15.87	AVG	
11		4782.500	39.62	5.35	44.97	74.00	-29.03	peak	
12		4782.500	29.29	5.35	34.64	54.00	-19.36	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

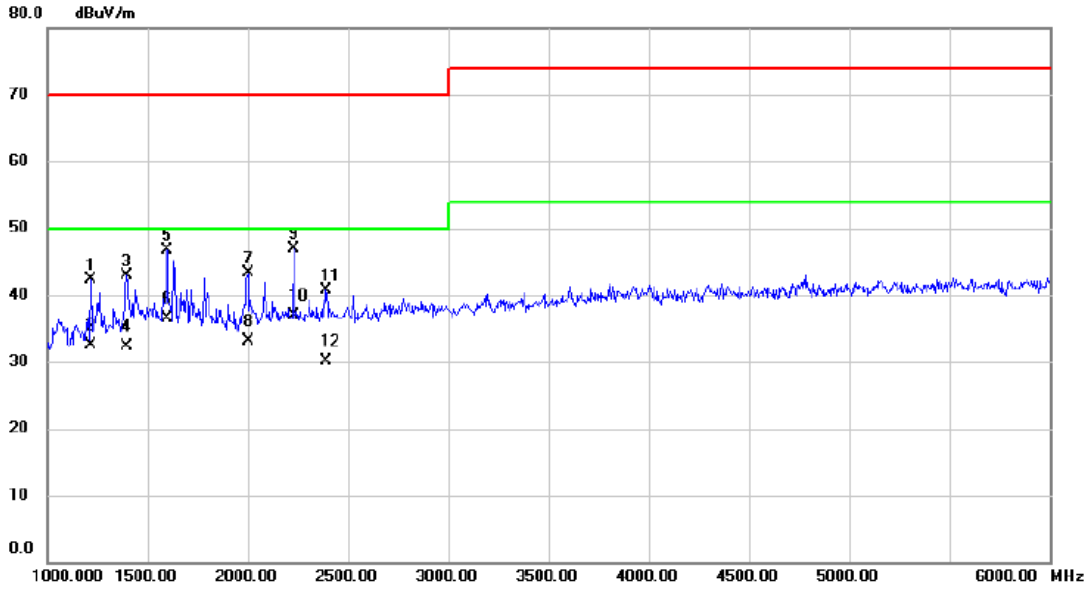

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1215.000	46.76	-4.51	42.25	70.00	-27.75	peak	
2		1215.000	36.96	-4.51	32.45	50.00	-17.55	AVG	
3		1397.500	46.77	-3.93	42.84	70.00	-27.16	peak	
4		1397.500	36.26	-3.93	32.33	50.00	-17.67	AVG	
5		1597.500	49.69	-2.91	46.78	70.00	-23.22	peak	
6		1597.500	39.45	-2.91	36.54	50.00	-13.46	AVG	
7		2000.000	43.39	-0.13	43.26	70.00	-26.74	peak	
8		2000.000	33.25	-0.13	33.12	50.00	-16.88	AVG	
9		2227.500	46.71	0.20	46.91	70.00	-23.09	peak	
10	*	2227.500	36.69	0.20	36.89	50.00	-13.11	AVG	
11		2390.000	40.17	0.44	40.61	70.00	-29.39	peak	
12		2390.000	29.67	0.44	30.11	50.00	-19.89	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

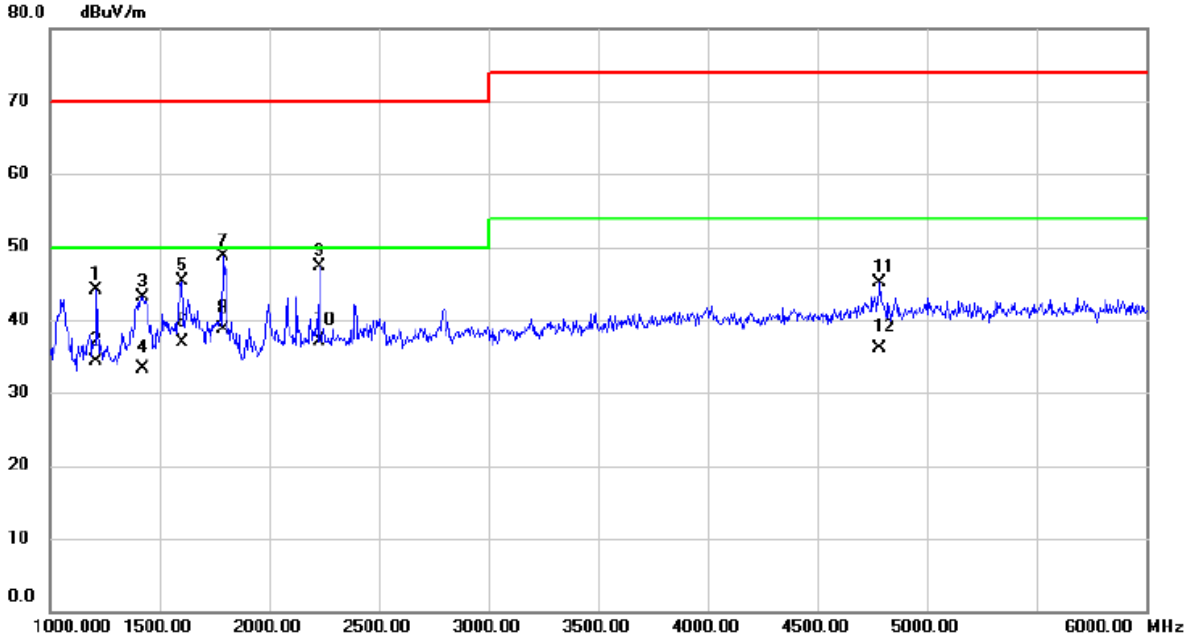

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1212.500	48.59	-4.53	44.06	70.00	-25.94	peak	
2		1212.500	38.74	-4.53	34.21	50.00	-15.79	AVG	
3		1420.000	47.04	-3.85	43.19	70.00	-26.81	peak	
4		1420.000	37.06	-3.85	33.21	50.00	-16.79	AVG	
5		1600.000	48.25	-2.90	45.35	70.00	-24.65	peak	
6		1600.000	39.88	-2.90	36.98	50.00	-13.02	AVG	
7		1792.500	50.27	-1.57	48.70	70.00	-21.30	peak	
8	*	1792.500	40.23	-1.57	38.66	50.00	-11.34	AVG	
9		2227.500	47.18	0.20	47.38	70.00	-22.62	peak	
10		2227.500	36.94	0.20	37.14	50.00	-12.86	AVG	
11		4785.000	39.68	5.37	45.05	74.00	-28.95	peak	
12		4785.000	30.76	5.37	36.13	54.00	-17.87	AVG	

4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

4.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:
(1) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value – Limit Value

4.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100526	May 31, 2025
2	EMI Test Receiver	R&S	ESR3	103027	Jun. 01, 2025
3	Cable	N/A	SFT205-NMNM-12M-001	12M	Nov. 27, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Dec. 22, 2024

Remark: “N/A” denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

4.3.3 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

d. LISN at least 80 cm from nearest part of EUT chassis.

e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

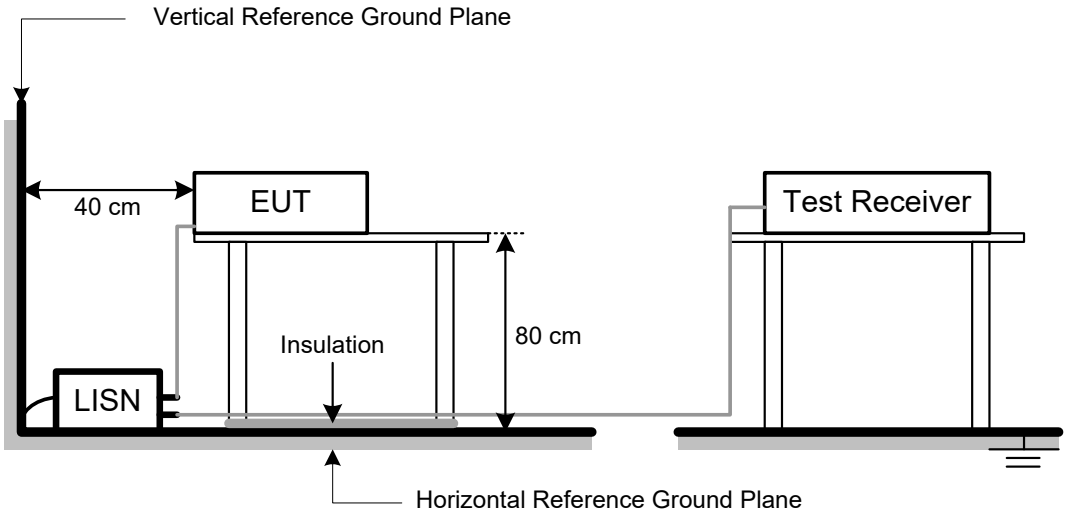

4.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

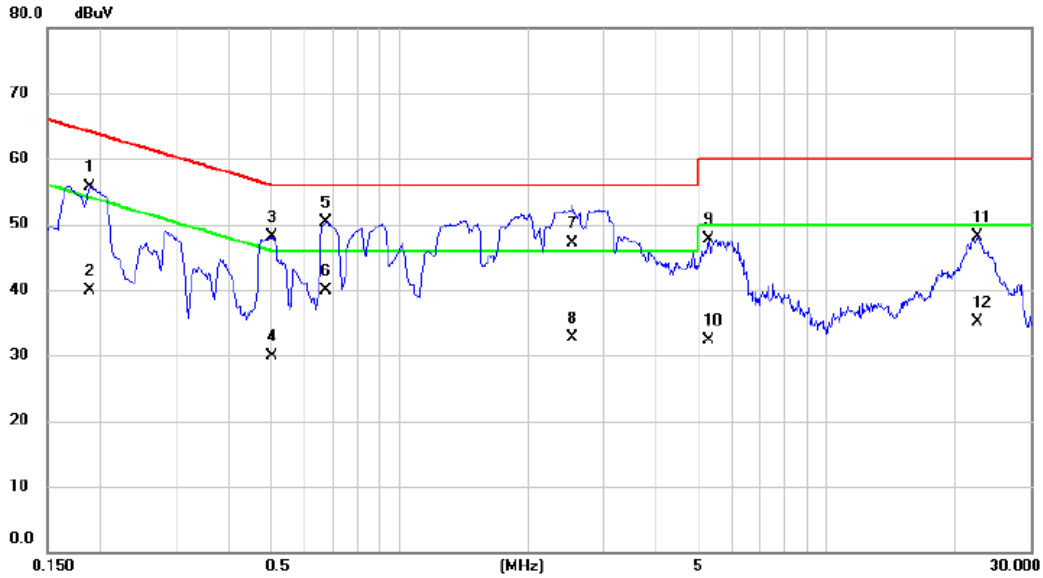

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1883	46.05	9.65	55.70	64.11	-8.41	QP	
2		0.1883	30.17	9.65	39.82	54.11	-14.29	AVG	
3		0.5055	38.37	9.71	48.08	56.00	-7.92	QP	
4		0.5055	20.19	9.71	29.90	46.00	-16.10	AVG	
5	*	0.6742	40.53	9.72	50.25	56.00	-5.75	QP	
6		0.6742	30.12	9.72	39.84	46.00	-6.16	AVG	
7		2.5395	37.30	9.79	47.09	56.00	-8.91	QP	
8		2.5395	22.95	9.79	32.74	46.00	-13.26	AVG	
9		5.2980	37.82	9.95	47.77	60.00	-12.23	QP	
10		5.2980	22.39	9.95	32.34	50.00	-17.66	AVG	
11		22.5240	37.29	10.81	48.10	60.00	-11.90	QP	
12		22.5240	24.32	10.81	35.13	50.00	-14.87	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

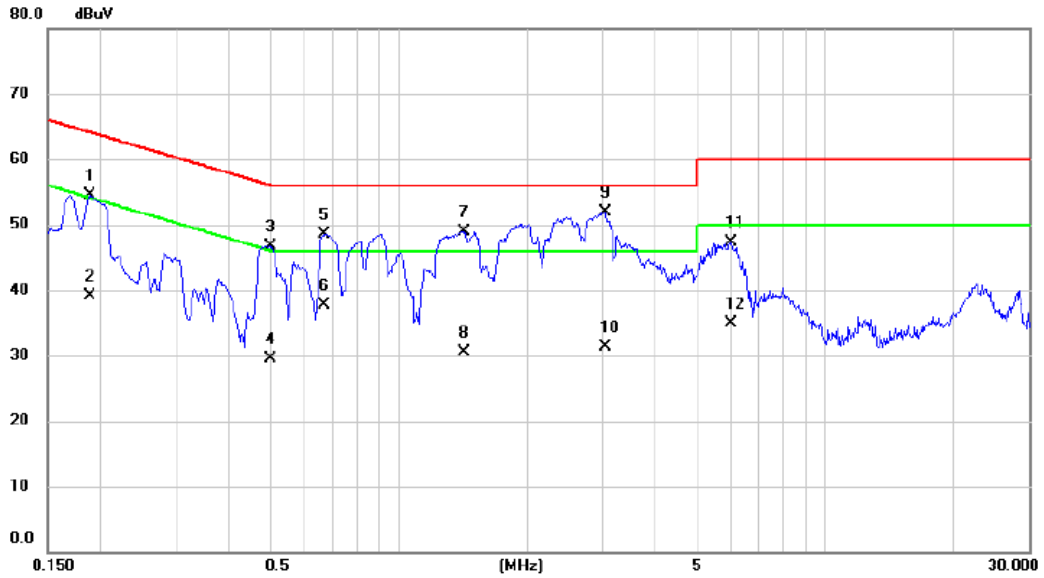

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1883	44.79	9.64	54.43	64.11	-9.68	QP	
2		0.1883	29.38	9.64	39.02	54.11	-15.09	AVG	
3		0.4987	37.06	9.70	46.76	56.02	-9.26	QP	
4		0.4987	19.90	9.70	29.60	46.02	-16.42	AVG	
5		0.6697	38.79	9.71	48.50	56.00	-7.50	QP	
6		0.6697	28.01	9.71	37.72	46.00	-8.28	AVG	
7		1.4190	39.20	9.74	48.94	56.00	-7.06	QP	
8		1.4190	20.68	9.74	30.42	46.00	-15.58	AVG	
9	*	3.0525	42.03	9.81	51.84	56.00	-4.16	QP	
10		3.0525	21.55	9.81	31.36	46.00	-14.64	AVG	
11		5.9933	37.23	10.00	47.23	60.00	-12.77	QP	
12		5.9933	24.85	10.00	34.85	50.00	-15.15	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 3		

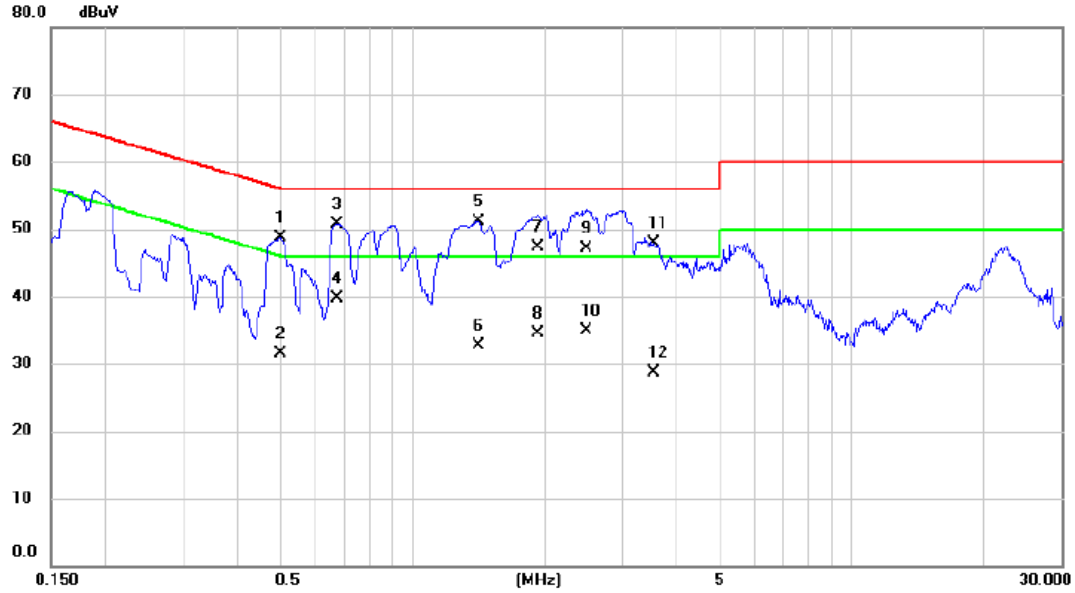

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4987	38.91	9.71	48.62	56.02	-7.40	QP	
2		0.4987	21.71	9.71	31.42	46.02	-14.60	AVG	
3		0.6720	41.05	9.72	50.77	56.00	-5.23	QP	
4		0.6720	30.08	9.72	39.80	46.00	-6.20	AVG	
5	*	1.4168	41.34	9.74	51.08	56.00	-4.92	QP	
6		1.4168	22.93	9.74	32.67	46.00	-13.33	AVG	
7		1.9320	37.60	9.77	47.37	56.00	-8.63	QP	
8		1.9320	24.76	9.77	34.53	46.00	-11.47	AVG	
9		2.4833	37.30	9.79	47.09	56.00	-8.91	QP	
10		2.4833	25.06	9.79	34.85	46.00	-11.15	AVG	
11		3.5295	37.95	9.86	47.81	56.00	-8.19	QP	
12		3.5295	18.75	9.86	28.61	46.00	-17.39	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 3		

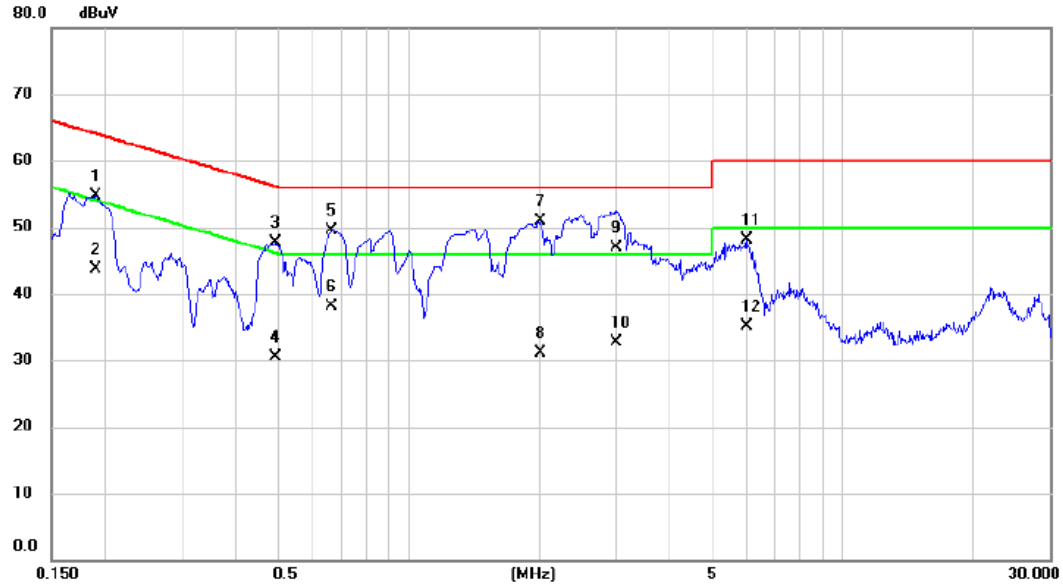

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1905	44.97	9.64	54.61	64.01	-9.40	QP	
2		0.1905	34.12	9.64	43.76	54.01	-10.25	AVG	
3		0.4942	37.93	9.70	47.63	56.10	-8.47	QP	
4		0.4942	20.85	9.70	30.55	46.10	-15.55	AVG	
5		0.6652	39.78	9.71	49.49	56.00	-6.51	QP	
6		0.6652	28.34	9.71	38.05	46.00	-7.95	AVG	
7	*	2.0108	41.05	9.77	50.82	56.00	-5.18	QP	
8		2.0108	21.36	9.77	31.13	46.00	-14.87	AVG	
9		3.0008	37.10	9.81	46.91	56.00	-9.09	QP	
10		3.0008	22.88	9.81	32.69	46.00	-13.31	AVG	
11		5.9933	38.19	10.00	48.19	60.00	-11.81	QP	
12		5.9933	25.04	10.00	35.04	50.00	-14.96	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 4		

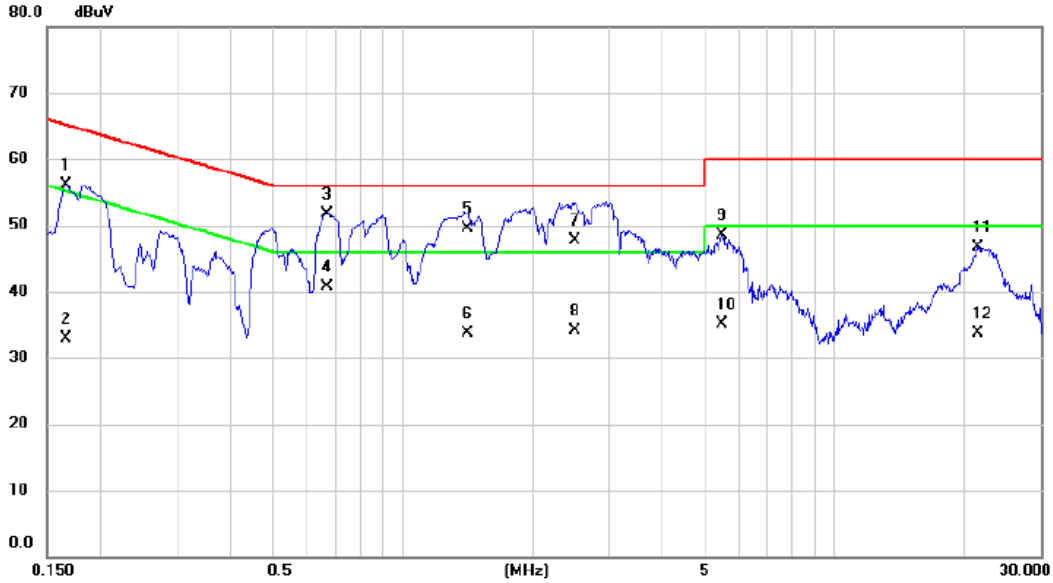

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1657	46.57	9.63	56.20	65.17	-8.97	QP	
2		0.1657	23.30	9.63	32.93	55.17	-22.24	AVG	
3	*	0.6674	42.01	9.72	51.73	56.00	-4.27	QP	
4		0.6674	30.91	9.72	40.63	46.00	-5.37	AVG	
5		1.4122	39.70	9.74	49.44	56.00	-6.56	QP	
6		1.4122	23.87	9.74	33.61	46.00	-12.39	AVG	
7		2.5080	37.90	9.79	47.69	56.00	-8.31	QP	
8		2.5080	24.27	9.79	34.06	46.00	-11.94	AVG	
9		5.4960	38.54	9.96	48.50	60.00	-11.50	QP	
10		5.4960	25.06	9.96	35.02	50.00	-14.98	AVG	
11		21.4732	35.98	10.80	46.78	60.00	-13.22	QP	
12		21.4732	22.91	10.80	33.71	50.00	-16.29	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 4		

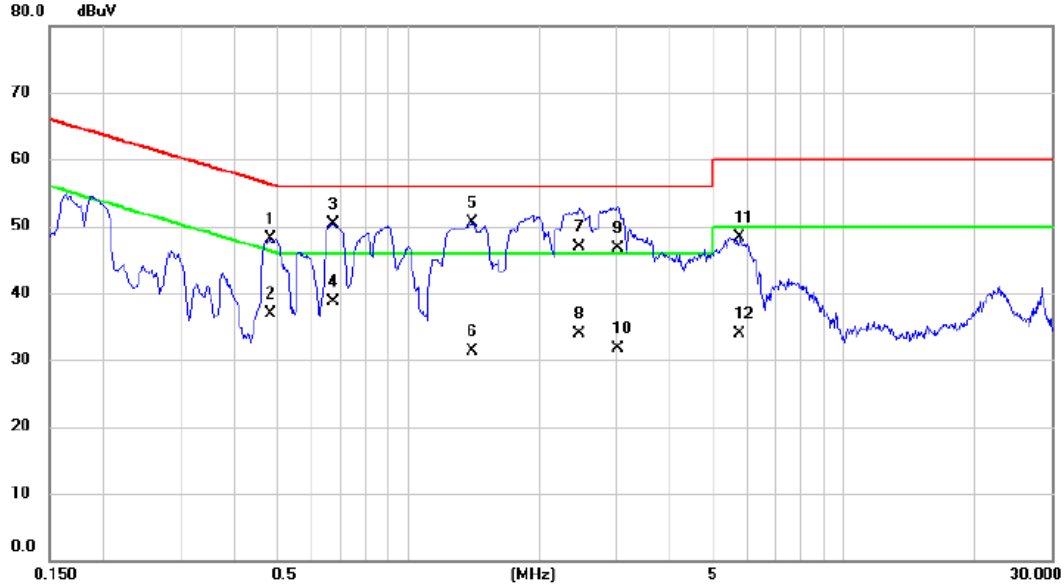

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4830	38.34	9.70	48.04	56.29	-8.25	QP	
2		0.4830	27.13	9.70	36.83	46.29	-9.46	AVG	
3		0.6720	40.60	9.71	50.31	56.00	-5.69	QP	
4		0.6720	29.00	9.71	38.71	46.00	-7.29	AVG	
5	*	1.4033	40.70	9.74	50.44	56.00	-5.56	QP	
6		1.4033	21.57	9.74	31.31	46.00	-14.69	AVG	
7		2.4698	37.20	9.79	46.99	56.00	-9.01	QP	
8		2.4698	24.17	9.79	33.96	46.00	-12.04	AVG	
9		3.0300	36.90	9.81	46.71	56.00	-9.29	QP	
10		3.0300	21.91	9.81	31.72	46.00	-14.28	AVG	
11		5.7795	38.41	9.98	48.39	60.00	-11.61	QP	
12		5.7795	23.88	9.98	33.86	50.00	-16.14	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 1		

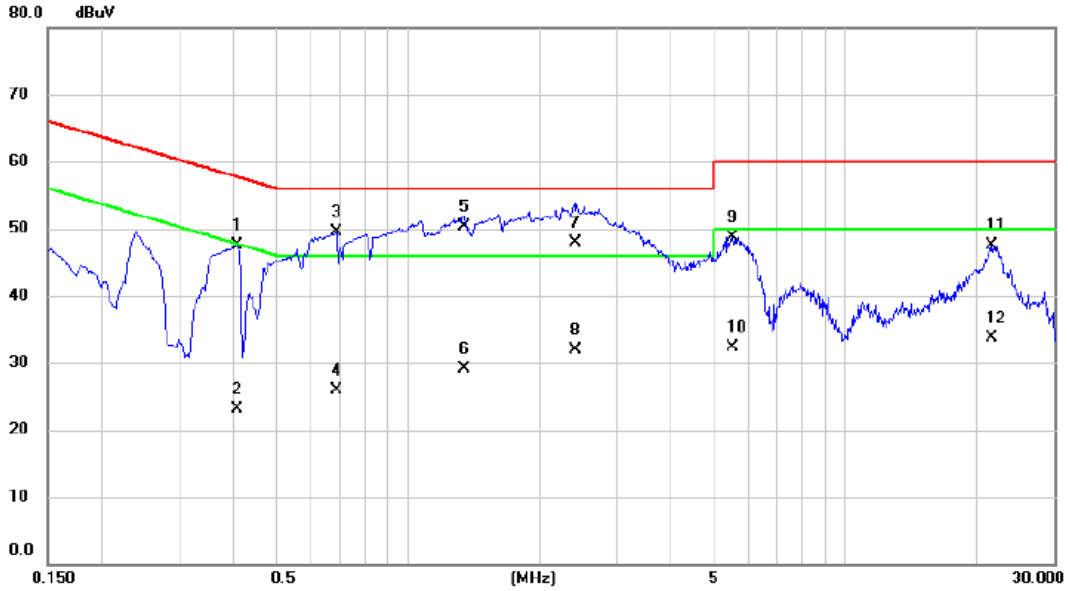

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4087	37.82	9.71	47.53	57.67	-10.14	QP	
2		0.4087	13.39	9.71	23.10	47.67	-24.57	AVG	
3		0.6855	39.77	9.72	49.49	56.00	-6.51	QP	
4		0.6855	16.15	9.72	25.87	46.00	-20.13	AVG	
5	*	1.3425	40.48	9.74	50.22	56.00	-5.78	QP	
6		1.3425	19.38	9.74	29.12	46.00	-16.88	AVG	
7		2.4157	38.20	9.79	47.99	56.00	-8.01	QP	
8		2.4157	22.17	9.79	31.96	46.00	-14.04	AVG	
9		5.5320	38.80	9.97	48.77	60.00	-11.23	QP	
10		5.5320	22.24	9.97	32.21	50.00	-17.79	AVG	
11		21.6600	36.79	10.80	47.59	60.00	-12.41	QP	
12		21.6600	22.96	10.80	33.76	50.00	-16.24	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 1		

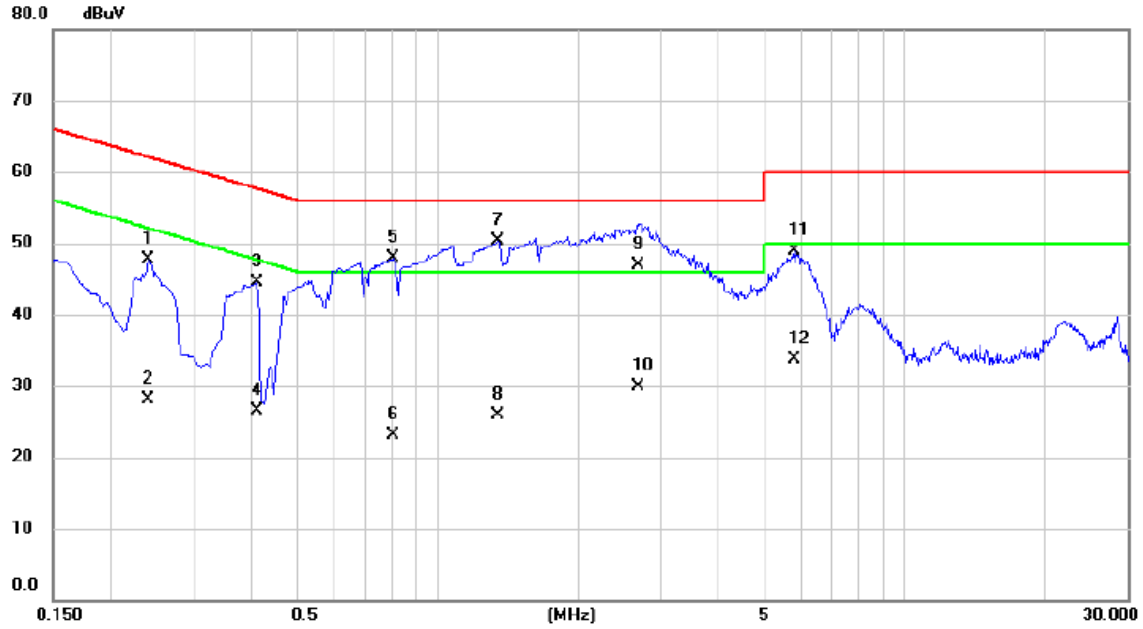

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2400	38.12	9.65	47.77	62.10	-14.33	QP	
2		0.2400	18.52	9.65	28.17	52.10	-23.93	AVG	
3		0.4110	34.81	9.70	44.51	57.63	-13.12	QP	
4		0.4110	16.80	9.70	26.50	47.63	-21.13	AVG	
5		0.8047	38.27	9.71	47.98	56.00	-8.02	QP	
6		0.8047	13.31	9.71	23.02	46.00	-22.98	AVG	
7	*	1.3493	40.54	9.74	50.28	56.00	-5.72	QP	
8		1.3493	16.15	9.74	25.89	46.00	-20.11	AVG	
9		2.6925	37.20	9.79	46.99	56.00	-9.01	QP	
10		2.6925	20.13	9.79	29.92	46.00	-16.08	AVG	
11		5.7908	38.91	9.98	48.89	60.00	-11.11	QP	
12		5.7908	23.82	9.98	33.80	50.00	-16.20	AVG	

4.4 HARMONIC CURRENT EMISSIONS TEST

4.4.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

4.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 01, 2025
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 01, 2025
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.
All calibration period of equipment list is one year.

4.4.3 TEST PROCEDURE

a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
b. The classification of EUT is according to of EN 61000-3-2. The EUT is classified as Class D.
c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

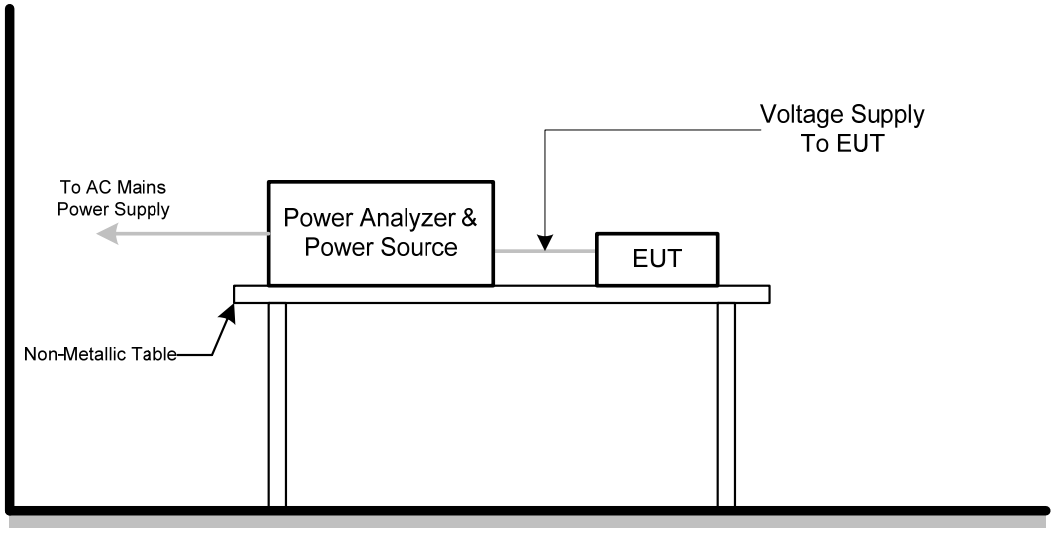

4.4.6 TEST RESULTS

Harmonics – Class-D	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Current & voltage waveforms

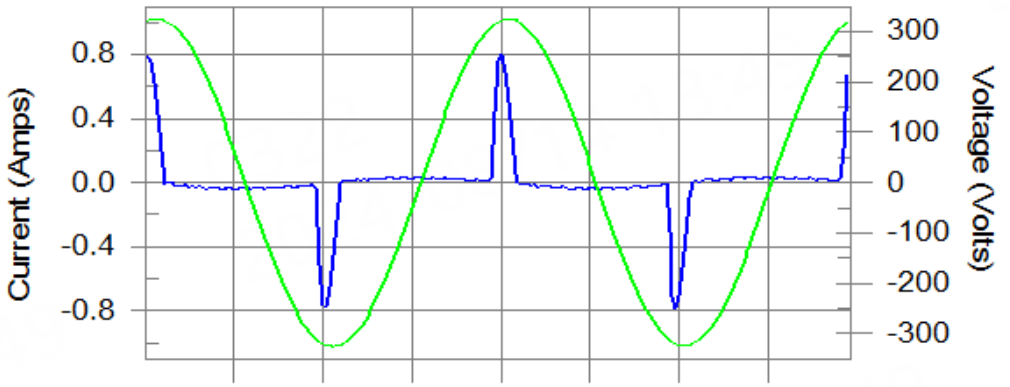

Harmonics and Class D limit line European Limits

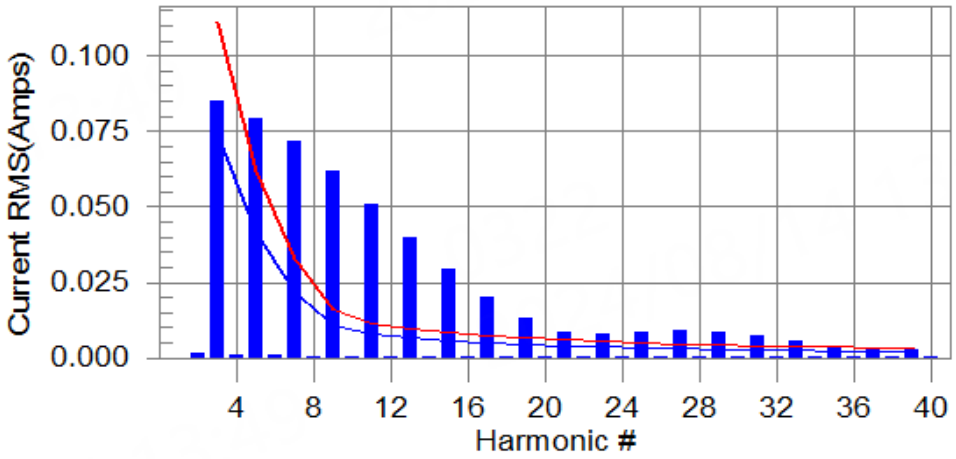

Test result: N/L Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

Current Test Result Summary (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Highest parameter values during test:

V_RMS (Volts):	230.02	Frequency(Hz):	50.00
I_Peak (Amps):	0.815	I_RMS (Amps):	0.208
I_Fund (Amps):	0.101	Crest Factor:	4.028
Power (Watts):	21.8	Power Factor:	0.462

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	0.000	N/A	0.002	0.000	N/A	N/L
3	0.085	0.074	N/A	0.094	0.111	N/A	N/L
4	0.001	0.000	N/A	0.001	0.000	N/A	N/L
5	0.079	0.041	N/A	0.086	0.062	N/A	N/L
6	0.001	0.000	N/A	0.001	0.000	N/A	N/L
7	0.071	0.022	N/A	0.077	0.033	N/A	N/L
8	0.001	0.000	N/A	0.001	0.000	N/A	N/L
9	0.062	0.011	N/A	0.066	0.016	N/A	N/L
10	0.000	0.000	N/A	0.001	0.000	N/A	N/L
11	0.051	0.008	N/A	0.054	0.011	N/A	N/L
12	0.000	0.000	N/A	0.001	0.000	N/A	N/L
13	0.040	0.007	N/A	0.042	0.010	N/A	N/L
14	0.000	0.000	N/A	0.001	0.000	N/A	N/L
15	0.030	0.006	N/A	0.031	0.008	N/A	N/L
16	0.000	0.000	N/A	0.001	0.000	N/A	N/L
17	0.020	0.005	N/A	0.021	0.008	N/A	N/L
18	0.000	0.000	N/A	0.001	0.000	N/A	N/L
19	0.013	0.004	N/A	0.014	0.007	N/A	N/L
20	0.000	0.000	N/A	0.001	0.000	N/A	N/L
21	0.009	0.004	N/A	0.009	0.006	N/A	N/L
22	0.000	0.000	N/A	0.000	0.000	N/A	N/L
23	0.008	0.004	N/A	0.009	0.005	N/A	N/L
24	0.000	0.000	N/A	0.000	0.000	N/A	N/L
25	0.009	0.003	N/A	0.010	0.005	N/A	N/L
26	0.000	0.000	N/A	0.000	0.000	N/A	N/L
27	0.009	0.003	N/A	0.010	0.005	N/A	N/L
28	0.000	0.000	N/A	0.000	0.000	N/A	N/L
29	0.008	0.003	N/A	0.009	0.004	N/A	N/L
30	0.000	0.000	N/A	0.000	0.000	N/A	N/L
31	0.007	0.003	N/A	0.007	0.004	N/A	N/L
32	0.000	0.000	N/A	0.000	0.000	N/A	N/L
33	0.005	0.003	N/A	0.006	0.004	N/A	N/L
34	0.000	0.000	N/A	0.000	0.000	N/A	N/L
35	0.004	0.002	N/A	0.004	0.004	N/A	N/L
36	0.000	0.000	N/A	0.000	0.000	N/A	N/L
37	0.003	0.002	N/A	0.003	0.003	N/A	N/L
38	0.000	0.000	N/A	0.000	0.000	N/A	N/L
39	0.003	0.002	N/A	0.003	0.003	N/A	N/L
40	0.000	0.000	N/A	0.000	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Highest parameter values during test:

Voltage (Vrms):	230.02	Frequency(Hz):	50.00
I_Peak (Amps):	0.815	I_RMS (Amps):	0.208
I_Fund (Amps):	0.101	Crest Factor:	4.028
Power (Watts):	21.8	Power Factor:	0.462

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.129	0.460	27.98	OK
3	0.534	2.070	25.80	OK
4	0.064	0.460	13.94	OK
5	0.045	0.920	4.90	OK
6	0.034	0.460	7.44	OK
7	0.065	0.690	9.48	OK
8	0.019	0.460	4.14	OK
9	0.041	0.460	8.99	OK
10	0.025	0.460	5.37	OK
11	0.043	0.230	18.56	OK
12	0.018	0.230	7.88	OK
13	0.026	0.230	11.32	OK
14	0.016	0.230	7.08	OK
15	0.031	0.230	13.49	OK
16	0.016	0.230	6.84	OK
17	0.020	0.230	8.48	OK
18	0.014	0.230	6.03	OK
19	0.020	0.230	8.65	OK
20	0.018	0.230	7.68	OK
21	0.016	0.230	6.75	OK
22	0.010	0.230	4.48	OK
23	0.012	0.230	5.25	OK
24	0.005	0.230	2.16	OK
25	0.016	0.230	7.05	OK
26	0.009	0.230	3.71	OK
27	0.013	0.230	5.82	OK
28	0.008	0.230	3.38	OK
29	0.014	0.230	6.18	OK
30	0.005	0.230	2.35	OK
31	0.010	0.230	4.42	OK
32	0.005	0.230	2.28	OK
33	0.015	0.230	6.53	OK
34	0.003	0.230	1.32	OK
35	0.010	0.230	4.50	OK
36	0.003	0.230	1.34	OK
37	0.005	0.230	2.09	OK
38	0.003	0.230	1.40	OK
39	0.008	0.230	3.69	OK
40	0.006	0.230	2.73	OK

4.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST

4.5.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	≤ 1.0, Tp= 10 min.	Short Term Flicker Indicator
Plt	≤ 0.65, Tp=2 hr.	Long Term Flicker Indicator
d	≤ 3.3%	Relative Steady-State V-Change
dmax	≤ 4%	Maximum Relative V-change
d (t)	≤ 500 ms	Relative V-change characteristic

4.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 01, 2025
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 01, 2025
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.
All calibration period of equipment list is one year.

4.5.3 TEST PROCEDURE

a. Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
b. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

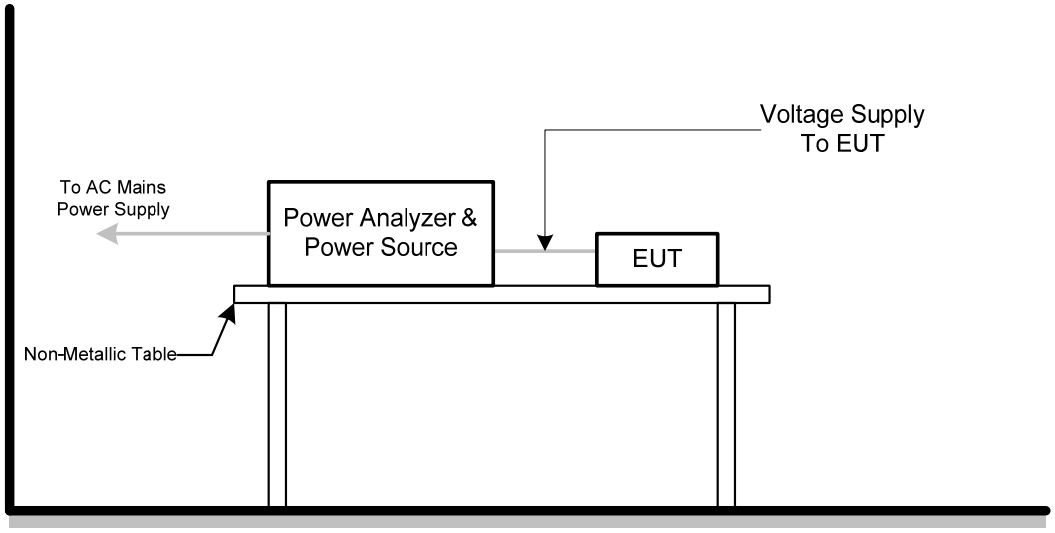

4.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Pst_1 and limit line **European Limits**

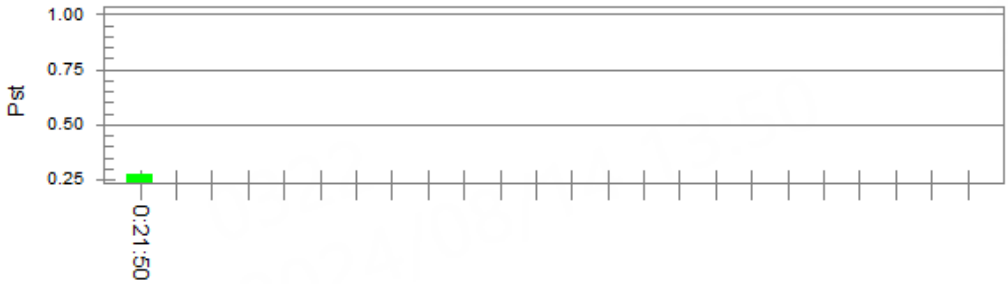

Plt and limit line

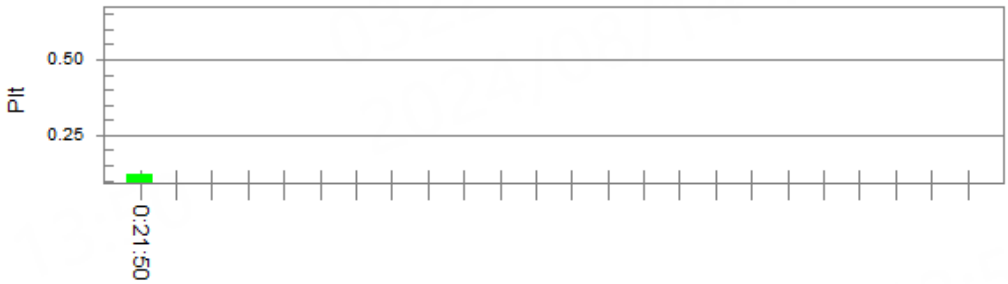

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.92			
Highest dt (%):		Test limit (%):		
T-max (mS):	0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.273	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.119	Test limit:	0.650	Pass

5. EMC IMMUNITY TEST

5.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports **(NOTE 2)**	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports **(NOTE 2)**	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	**Port Type: unshielded symmetrical** **Apply: lines to ground**		
	Primary protection is Intended ±1 kV and ±4 kV 10/700(5/320)Tr/Th μs	Analogue/digital data ports **(NOTE 1) & (NOTE 2)**	C
	Primary protection is not Intended ±1 kV 10/700(5/320) Tr/Th μs		C
	Port type: coaxial or shielded **Apply: shield to ground**		
	±0.5 kV 1.2/50(8/20) Tr/Th μs	Analogue/digital data ports **(NOTE 1) & (NOTE 2)**	B
	line to reference ground for each individual line: ±0.5 kV(peak) 1.2/50(8/20) Tr/Th μs	DC network power ports **(NOTE 2)**	B
	±1 kV(peak) 1.2/50(8/20) Tr/Th μs (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th μs (line to earth or ground)	AC mains power ports	B
Continuous induced RF disturbances IEC 61000-4-6 (CS)	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Analogue/digital data ports **(NOTE 2)**	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC network power ports **(NOTE 2)**	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage<5% 0.5 cycle Residual voltage<70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage<5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances,repetitive (BIN-R)	0.15 MHz to 0.5 MHz 107 dBuV 0.5 MHz to 10 MHz 107 dBuV to 36 dBuV 10 MHz to 30 MHz 36 dBuV to 30 dBuV	Analogue/digital data ports **(Applicable only to CPE xDSL ports)**	A
	0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports **(Apply period based on the AC mains frequency)**	A
Broadband impulse noise disturbances,isolated (BIN-I)	0.15 MHz to 30 MHz 110 dBuV	Analogue/digital data ports **(Applicable only to CPE xDSL ports)**	B
	0.24 ms 10 ms 300 ms	Analogue/digital data ports **(Apply all burst durations)**	B

Note.
1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

5.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standards, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended.The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended.The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

5.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION

5.3.1 PERFORMANCE CRITERIA

Performance criterion A

for continuous radiated and conducted disturbances tests:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA. Additionally, an increase in any degradation greater than
just perceptible by observation of the image shall not occur as a consequence of the
application of the test. Examples of such degradations are:

- superimposed patterning;
- positional disturbances due to synchronisation errors;
- geometric distortion;
- change of contrast or brightness;
- picture artefacts;
- freezing or disturbance of motion;
- image loss;
- video data or decoding errors.

Performance criterion A

for the power frequency magnetic field tests:

Alternative 1: A continuous magnetic field of 1 A/m:

The jitter (in mm) shall not exceed the value $\frac{(\text{character height in mm} + 0{,}3) \times 2{,}5}{33{,}3}$

Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA.

Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

5.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION

5.4.1 PERFORMANCE CRITERIA

Performance criterion A:

For devices that support telephony functions the limits of Table G.3 shall apply.
With respect to Table G.3:

- the interference ratio (electrical or acoustic) shall meet the limits in column 3; or,
- the acoustic level of the demodulated audio shall be less than the limits in column 4; or,
- the digitally coded level of demodulated audio shall be less than limits in column 5; or,
- the analogue level of the demodulated audio shall be less than the limits in column 6.

Table G.3 – Performance criterion A – Limits for devices supporting telephony

Type of immunity test	Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
			dB (SPL)	Digital dBm0	Analogue dBm
Conducted	0,15 to 30	-20 dB	55	-50	-50
	30 to 80	-10 dB	65	-40	-40
Radiated	80 to 1000	0 dB	75	-30	-30
For terminals connected to digital wired network ports (such as Ethernet, ISDN), measurements of the demodulated 1 kHz may be performed on a remote AE, ideally of the same design.					

For all other devices:
The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

Performance criterion B:

Use the general performance criterion B. See GENERAL PERFORMANCE CRITERIA.

Performance criterion C:

Use the general performance criterion C. See GENERAL PERFORMANCE CRITERIA.

5.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

5.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: ±2kV, ±4kV, ±8kV Contact Discharge: ±2kV, ±4kV
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

5.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Nov. 12, 2024

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

5.5.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

a. The test shall be performed with single discharges. On each pre-selected point at least 10single discharges (in the most sensitive polarity) shall be applied.
NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.
For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
NOTE 2 The points to which the discharges should be applied may be selected by means of an explor ation carried out at a repetition rate of 20 discharges per second, or more.
Vertical Coupling Plane (VCP):
The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.
The four faces of the EUT will be performed with electrostatic discharge.
Horizontal Coupling Plane (HCP):
The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.
The four faces of the EUT will be performed with electrostatic discharge.

b. For TABLE-TOP equipment:
The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP

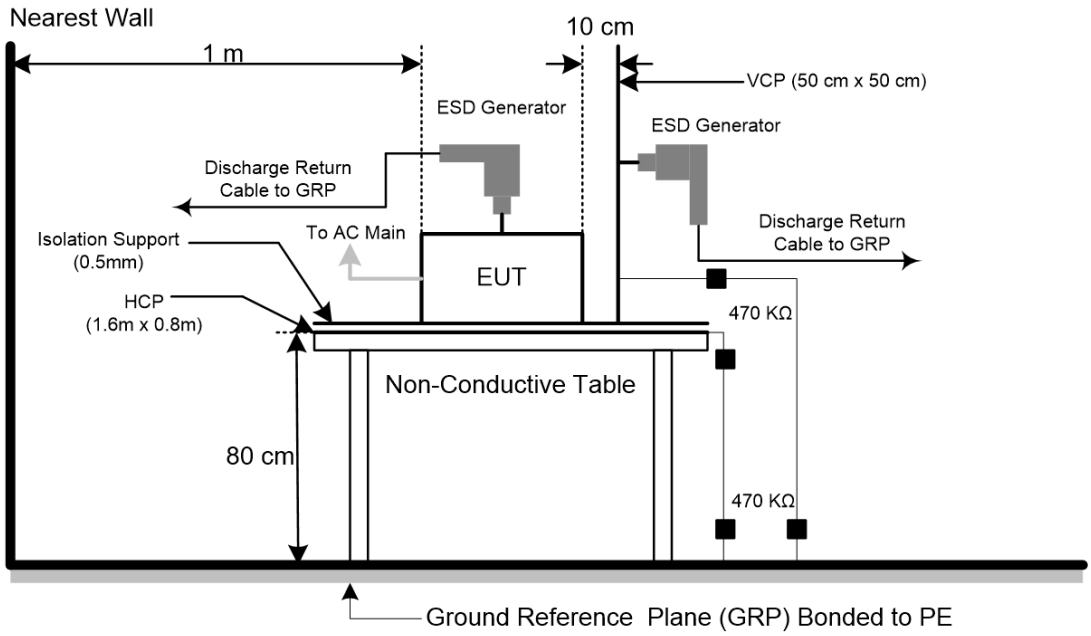

5.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-4, Mode 7-12

Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	B	B	-	-	A	A	B	B	-	-
2	A	A	A	A	B	B	-	-	-	-	-	-	-	-
3	A	A	A	A	B	B	-	-	-	-	-	-	-	-
4	A	A	A	A	B	B	-	-	-	-	-	-	-	-
Criteria	B						-		B				-	
Result	B						-		B				-	

Mode	HCP Contact Discharge						VCP Contact Discharge					
	2kV		4kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
Left side	A	A	A	A	-	-	A	A	A	A	-	-
Right side	A	A	A	A	-	-	A	A	A	A	-	-
Front side	A	A	A	A	-	-	A	A	A	A	-	-
Rear side	A	A	A	A	-	-	A	A	A	A	-	-
Criteria	B				-		B				-	
Result	A				-		A				-	

Note:

1) P/N denotes the Positive/Negative polarity of the output voltage.

2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

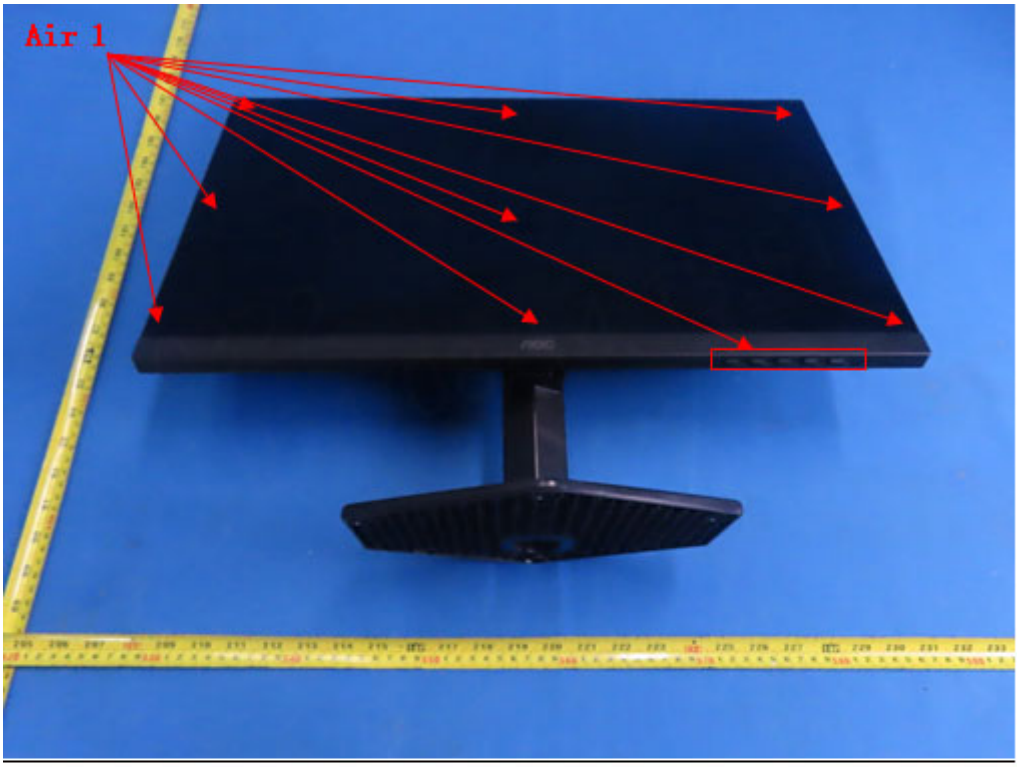

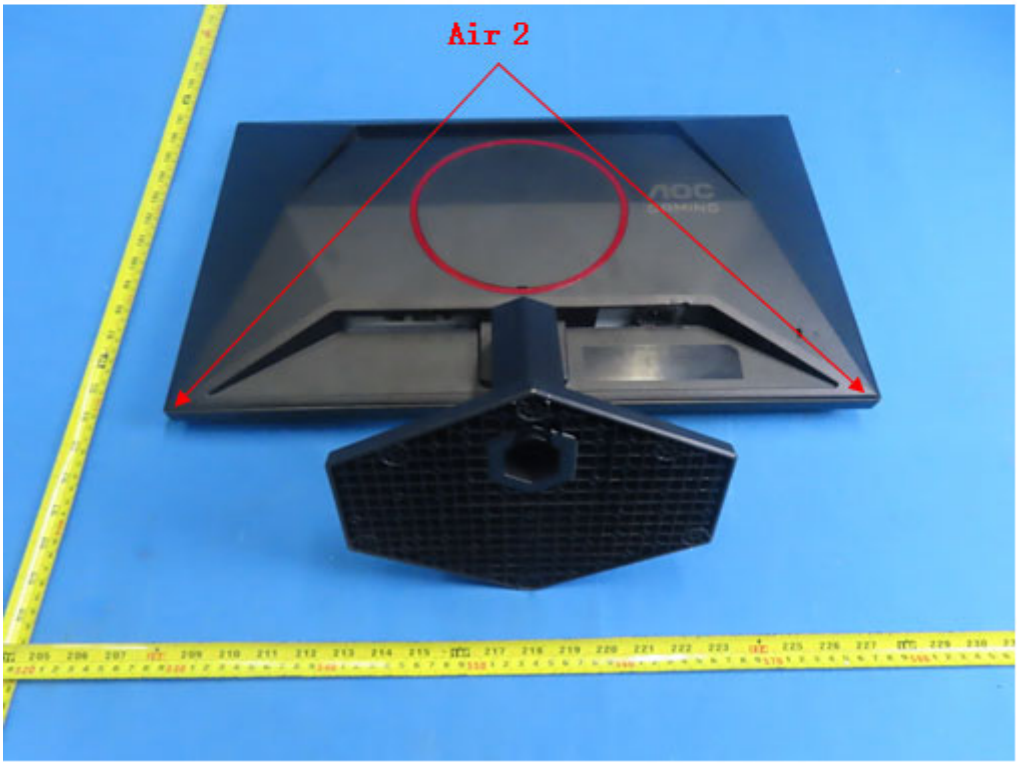

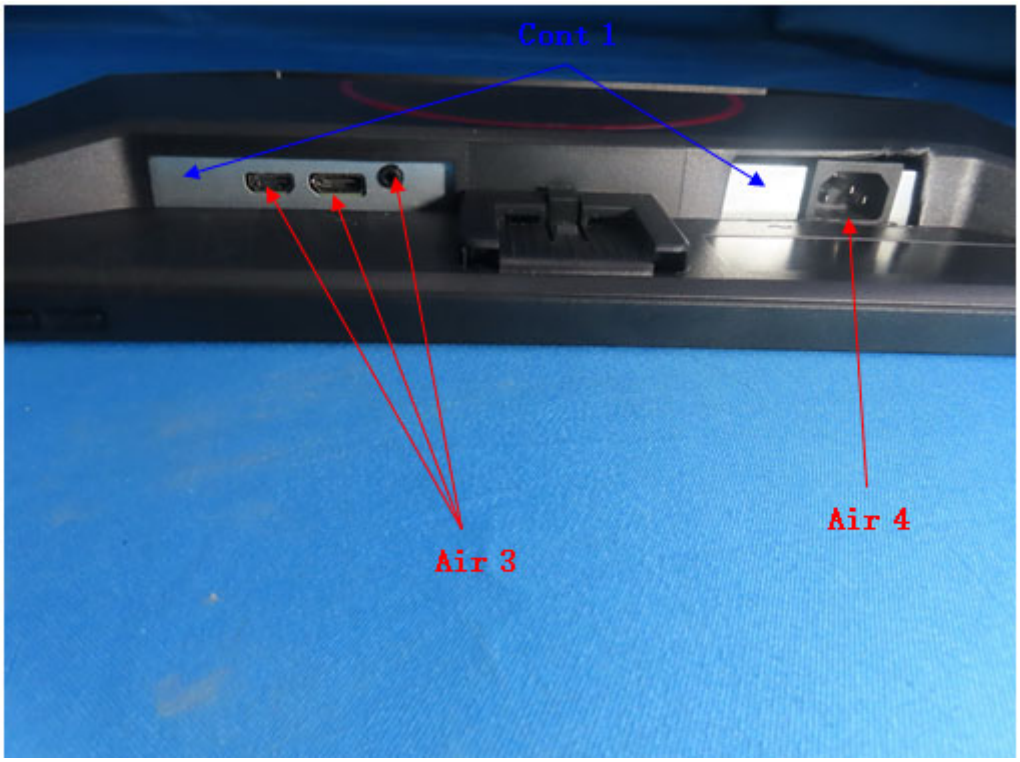
Cont 1
Air 3
Air 4

5.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

5.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz (±1 %)
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of the preceding frequency.
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

5.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3142B	26419	N/A
2	Amplifier	AR	50S1G4A	326720	Dec. 22, 2024
3	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	May 31, 2025
4	Power amplifier	MILMEGA	AS1860-50	1064834	Dec. 22, 2024
5	Microwave Log.-Per. Antenna	Schwarzbeck	STLP 9149	9149-277	N/A
6	Power amplifier	MILMEGA	80RF1000-250	1064833	Dec. 22, 2024
7	Measurement Software	Farad	(EZ-RS)V2.0.1.3	N/A	N/A
8	UPV Audio Analyzer	R&S	UPV	104259	Dec. 22, 2024

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.
All calibration period of equipment list is one year.

5.6.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.
The testing distance from antenna to the EUT was 3 meters.
For TABLE-TOP equipment:
The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

a. The field strength level was 3 V/m(unmodulated, r.m.s).
b. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. Where the frequency range is swept incrementally, the step size was 1% of the preceding frequency.
c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
d. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

For Display and display output functions:

a. The display quality evaluated by direct observation.
b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output.the diagonal screen size shall be at least 0,50 m.
c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

For Acoustic measurements:

a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of L_0.
(BTL lab uses the software to take Lo as the referecne value and make it return to zero.)
c. Change the input to the EUT so that the port under test is silent, or represents silence.This change shall not alter the terminating impedance at the EUT's input.
d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of L_1.
e. Ensure that non-linear processing does not impact the measurements.
f. Calculate the acoustic interference ratio using the following formula:
Acoustic interference ratio = $L_1 – L_0$.
(For step e-f, BTL lab proceeds the test with software and calculate Acoustic interference ratio = $L_1 – L_0$).

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 TEST SETUP

a) For Continuous induced RF disturbances

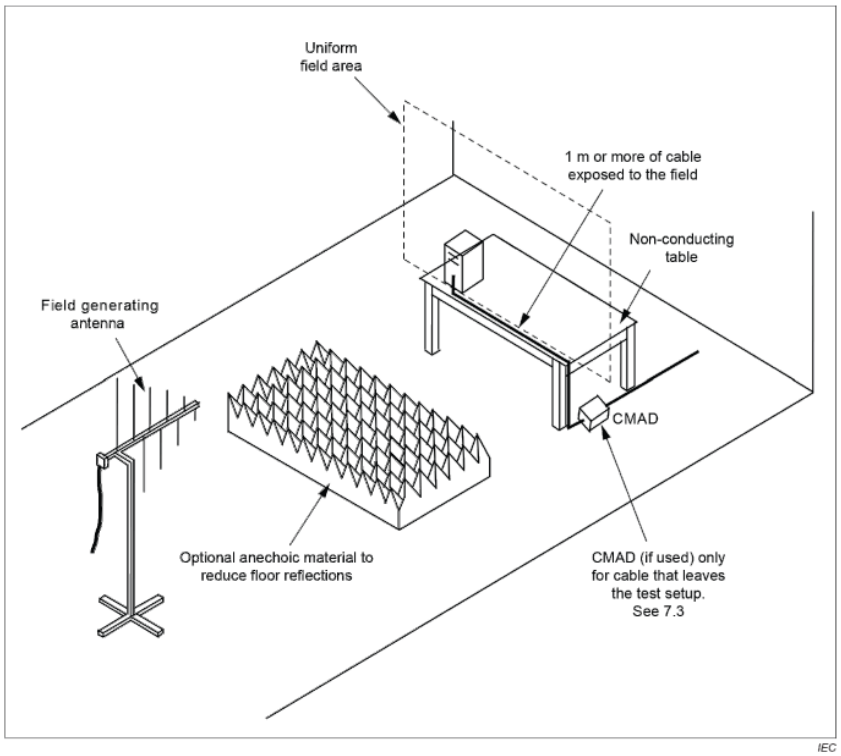

For Audio output function

(1) Audio output port

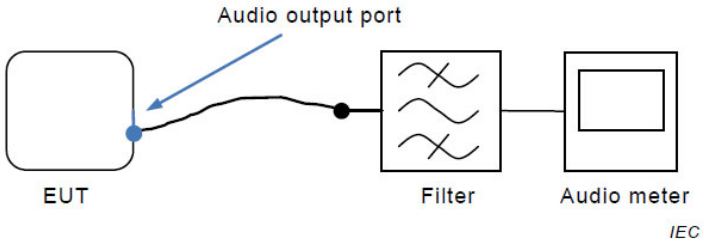

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

5.6.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-4, Mode 7-12

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		

For Audio output function

(1) For Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Vertical_Front

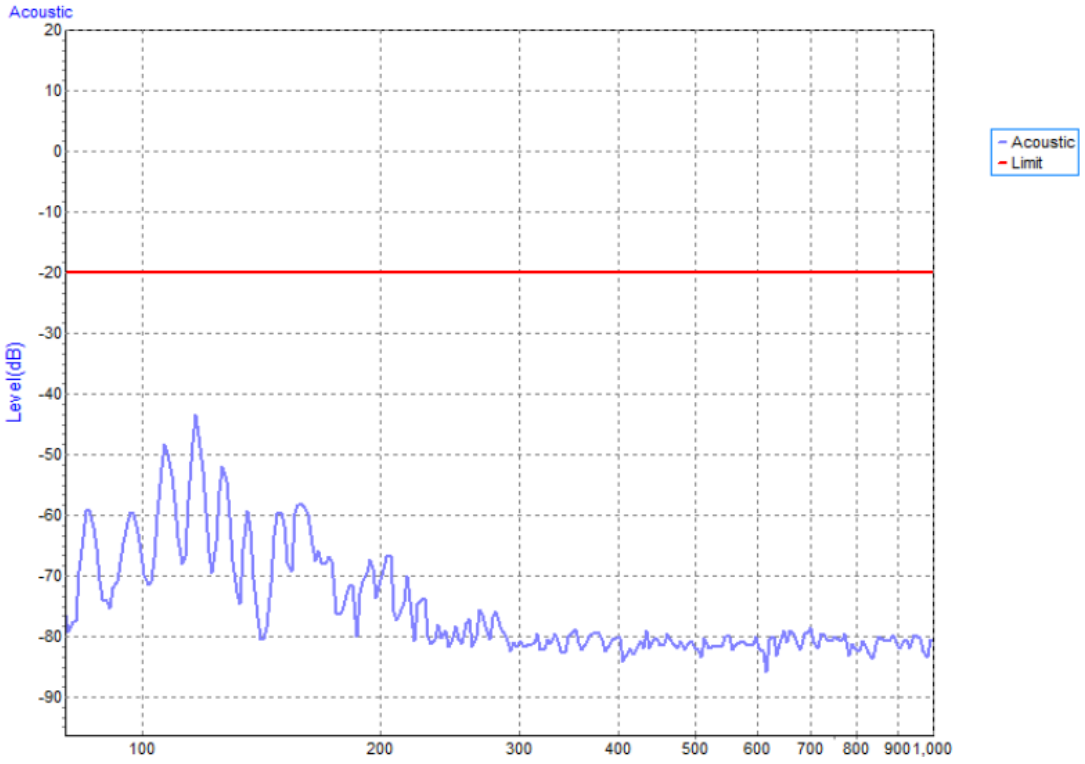

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Hoizontal_Front

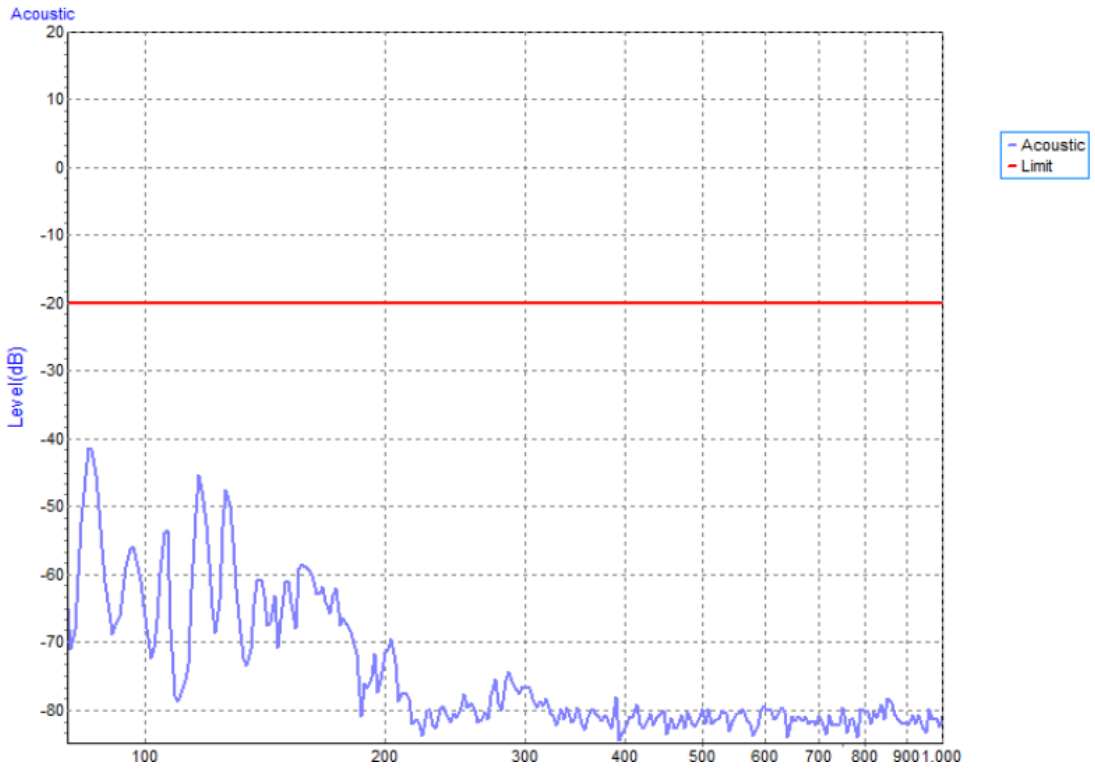

5.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

5.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC mains power ports: ±1 kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

5.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	May 31, 2025
2	Measurement Software	Prima	EFT_Series V1 .0.0.0.20180710	N/A	N/A

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.
All calibration period of equipment list is one year.

5.7.3 TEST PROCEDURE

For TABLE-TOP equipment:
The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m+/- 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

a. Both positive and negative polarity discharges were applied.

b. The duration time of each test sequential was 1 minute.

5.7.4 DEVIATION FROM TEST STANDARD

No deviation

5.7.5 TEST SETUP

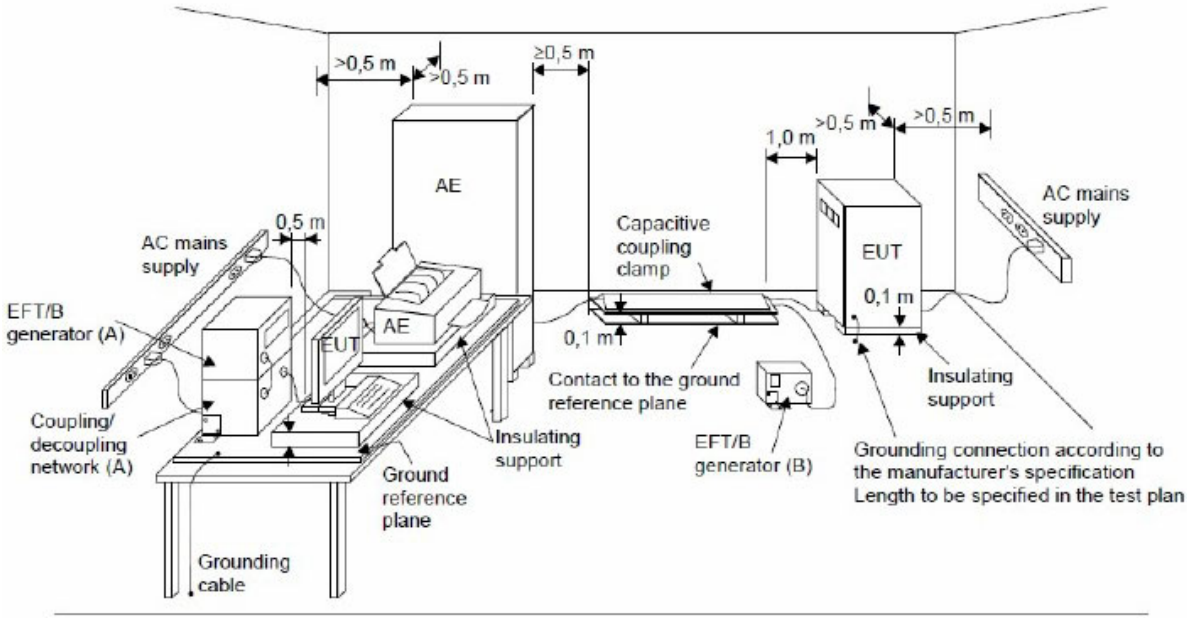

5.7.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-4, Mode 7-12

EUT Ports Tested		Polarity	Repetition Frequency	Test Level 1kV	Criterion	Result
AC Power Port	Line (L)	+	5 kHz	B	B	B
		-	5 kHz	B		
	Neutral (N)	+	5 kHz	B	B	B
		-	5 kHz	B		
	Ground (PE)	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+N	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+PE	+	5 kHz	B	B	B
		-	5 kHz	B		
	N+PE	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+N+PE	+	5 kHz	B	B	B
		-	5 kHz	B		

5.8 SURGE IMMUNITY TEST (SURGE)

5.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B(AC mains power ports)
Wave-Shape	1.2/50(8/20) Tr/Th μs combination wave
Test Voltage	AC mains power ports: ±0.5 kV, ±1 kV, ±2 kV
Generator Source Impedance	2 Ω of the low-voltage power supply network. 12 Ω (10Ω+2Ω) of the low-voltage power supply network and ground.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90°phase Five negative pulses line-to-neutral at 270°phase Five positive pulses line-to-earth at 90°phase Five negative pulses line-to-earth at 270°phase Five negative pulses neutral-to-earth at 90°phase Five positive pulses neutral-to-earth at 270°phase
Pulse Repetition Rate	1 time / min

5.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	May 31, 2025
2	Measurement Software	Prima	SUG_Series V1.0.0.7.20190827	N/A	N/A

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.
All calibration period of equipment list is one year.

5.8.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

5.8.4 DEVIATION FROM TEST STANDARD

No deviation

5.8.5 TEST SETUP

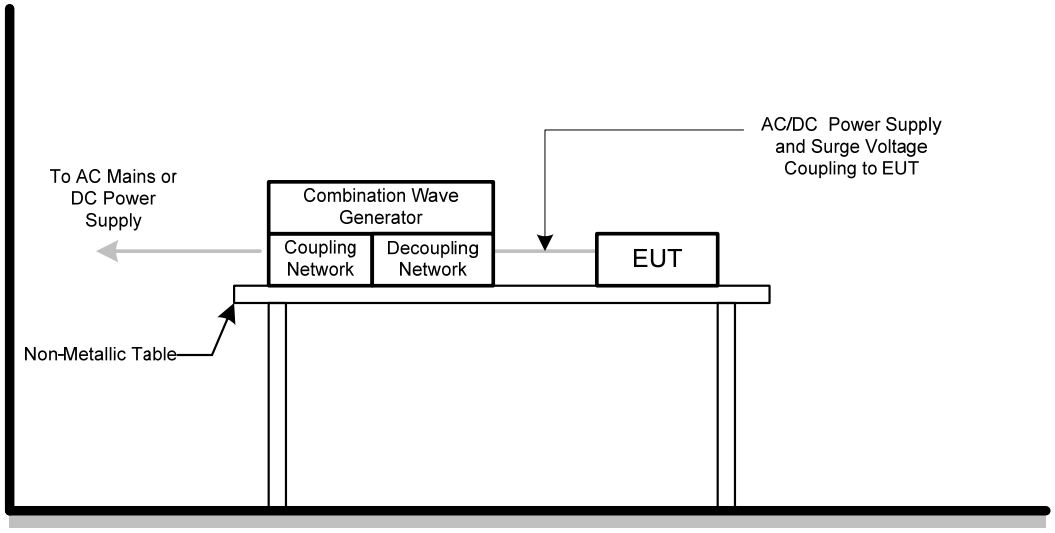

5.8.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-4, Mode 7-12

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thμs						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	-- kV	-- kV		
AC	L – N	+	90°	A	B	-	-	B	B
		-	270°	A	B	-	-		

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thμs						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	2kV	-- kV		
AC	L – PE	+	90°	A	A	B	-	B	B
		-	270°	A	A	B	-		
	N – PE	-	90°	A	A	B	-	B	B
		+	270°	A	A	B	-		

5.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

5.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of the preceding frequency value
Dwell Time	3 seconds

5.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TEST SYSTEM FOR CONDUCTED AND RADIATED IMMUNITY	TESEQ	NSG 4070B	37513	Jun. 01, 2025
2	Attenuator	Teseq	100-SA-FFN-06	163357	May 31, 2025
3	Measurement Software	Farad	EZ-CS (V2.0.1.4)	N/A	N/A
4	Power CDN	FCC	FCC-801-M2/M3 -16A	100270	Dec. 22, 2024
5	Coupling Decoupling Network	Teseq GmbH	CDN M016	35834	May 31, 2025
6	UPV Audio Analyzer	R&S	UPV	104259	Dec. 22, 2024

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.
All calibration period of equipment list is one year.

5.9.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.
The other condition as following manner:

a. The field strength level was 3 V (unmodulated, r.m.s.)
b. The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sinewave. Where the frequency range is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.
c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

For Display and display output functions:

a. The display quality evaluated by direct observation.
b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output.the diagonal screen size shall be at least 0,50 m.
c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

For Acoustic measurements:

a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of L_0. (BTL lab uses the software to take Lo as the referecne value and make it return to zero.)
c. Change the input to the EUT so that the port under test is silent, or represents silence.This change shall not alter the terminating impedance at the EUT's input.
d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of L_1.
e. Ensure that non-linear processing does not impact the measurements.
f. Calculate the acoustic interference ratio using the following formula:
Acoustic interference ratio = $L_1 – L_0$.
(For step e-f, BTL lab proceeds the test with software and calculate Acoustic interference ratio = $L_1 – L_0$).

5.9.4 DEVIATION FROM TEST STANDARD

No deviation

5.9.5 TEST SETUP

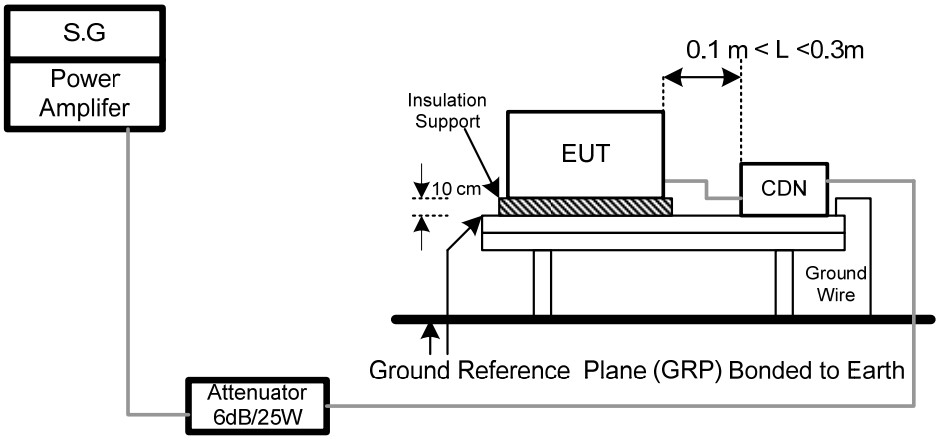

For Audio output function

(1) Audio output port

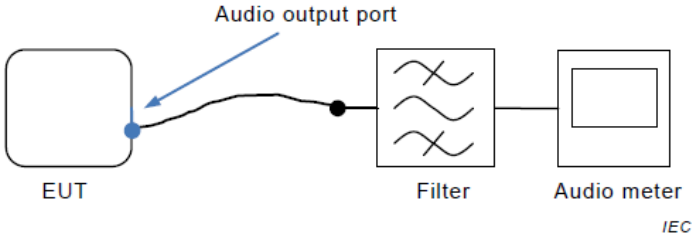

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

5.9.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-4, Mode 7-12

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			

For Audio output function

(1) For Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CDN M3

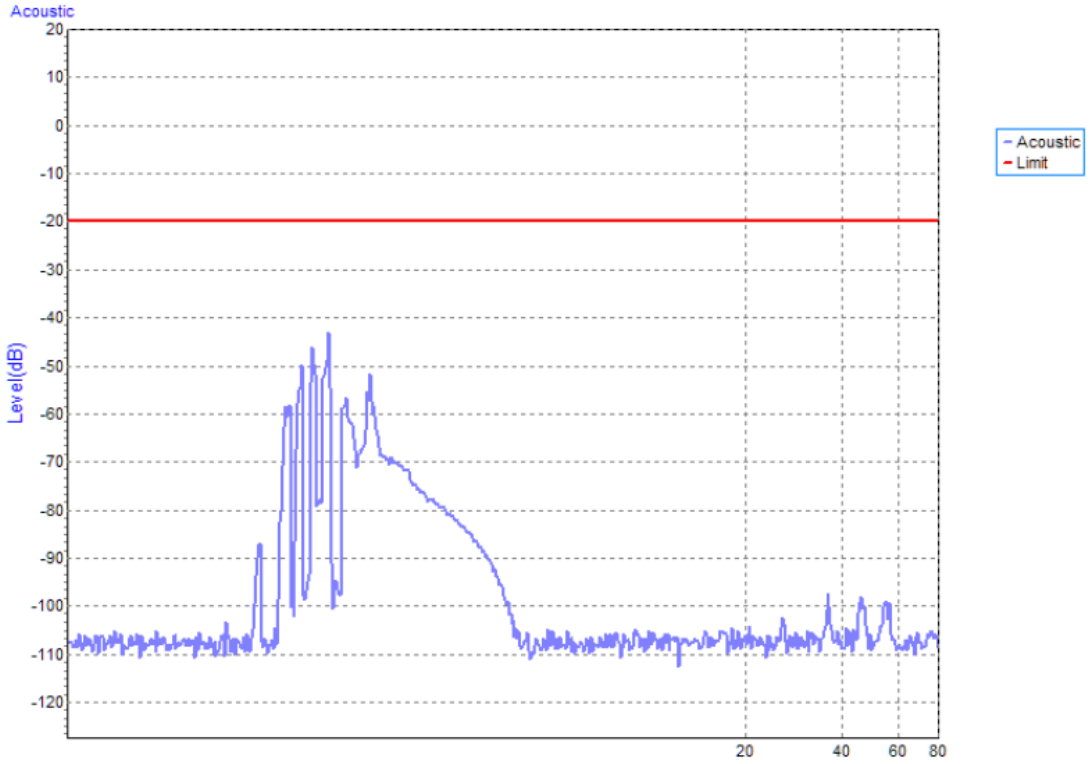

5.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

5.10.1TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

5.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	4032	Dec. 22, 2024
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	4024	Dec. 22, 2024

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

5.10.3 TEST PROCEDURE

For TABLE-TOP equipment:
The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.
The other condition as following manner:

a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

5.10.4 DEVIATION FROM TEST STANDARD

No deviation

5.10.5 TEST SETUP

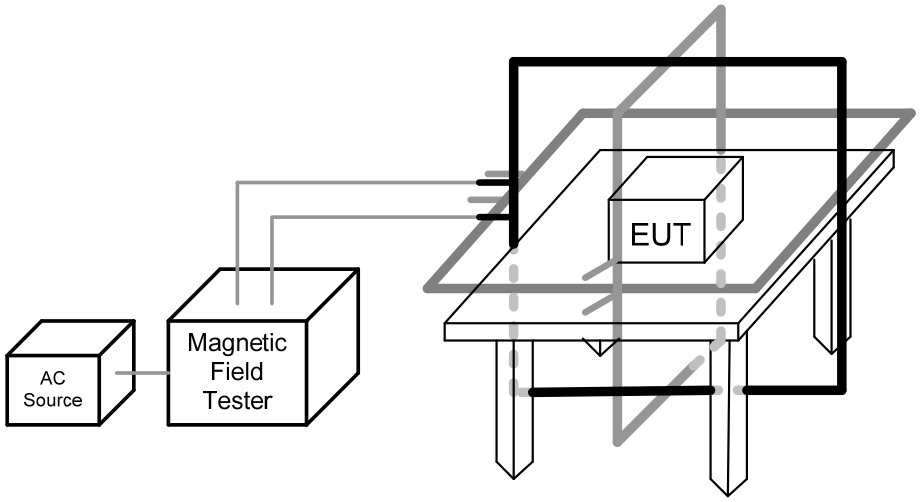

5.10.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-4, Mode 7-12

50Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

60Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

5.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

5.11.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

5.11.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	May 31, 2025

Remark: “N/A” denotes no model name, no serial No. or no calibration specified.
All calibration period of equipment list is one year.

5.11.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

5.11.4 DEVIATION FROM TEST STANDARD

No deviation

5.11.5 TEST SETUP

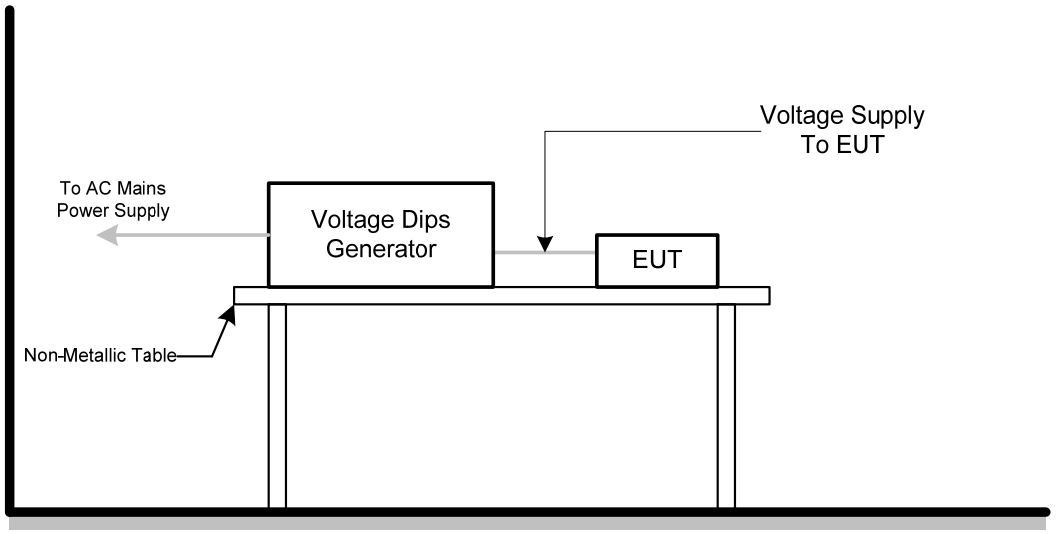

5.11.6 TEST RESULTS

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode	Mode 1-4, Mode 7-12

AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

6. EUT TEST PHOTO

EN 55032:2015

Radiated emissions up to 1 GHz

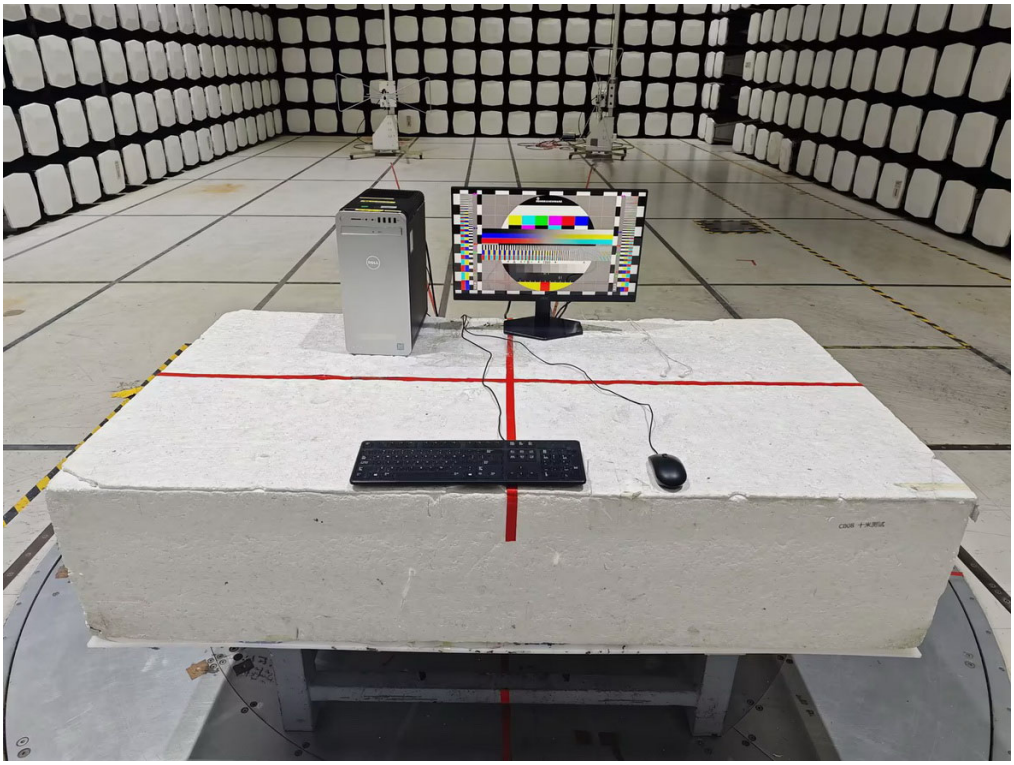

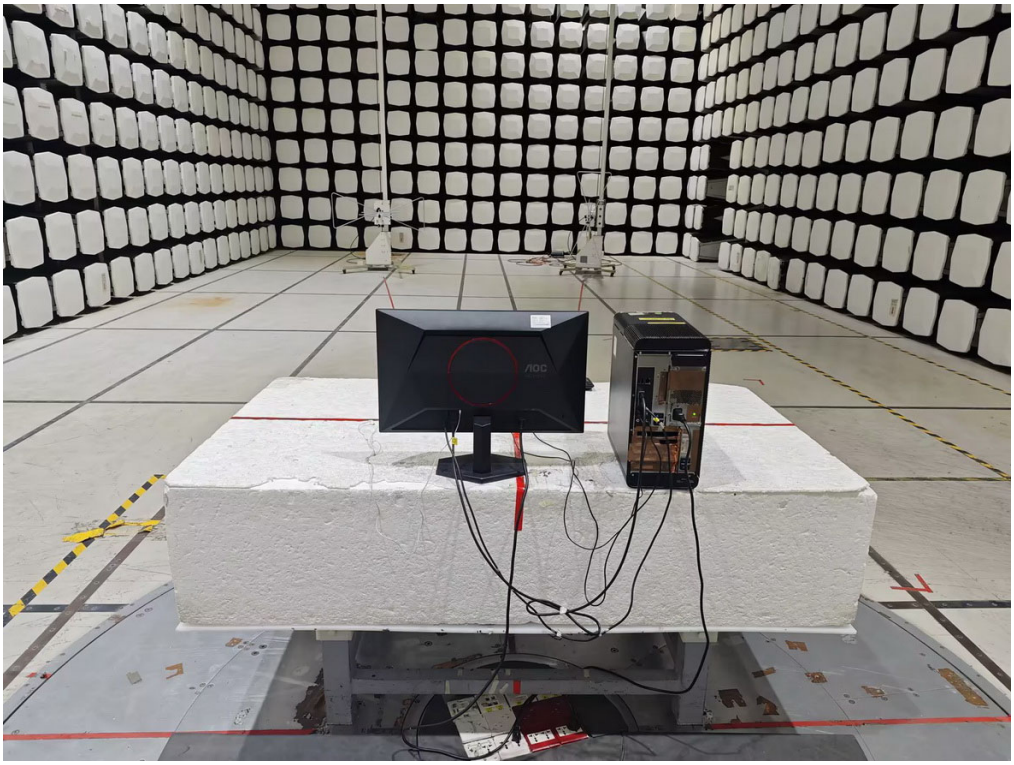

Radiated emissions above 1 GHz

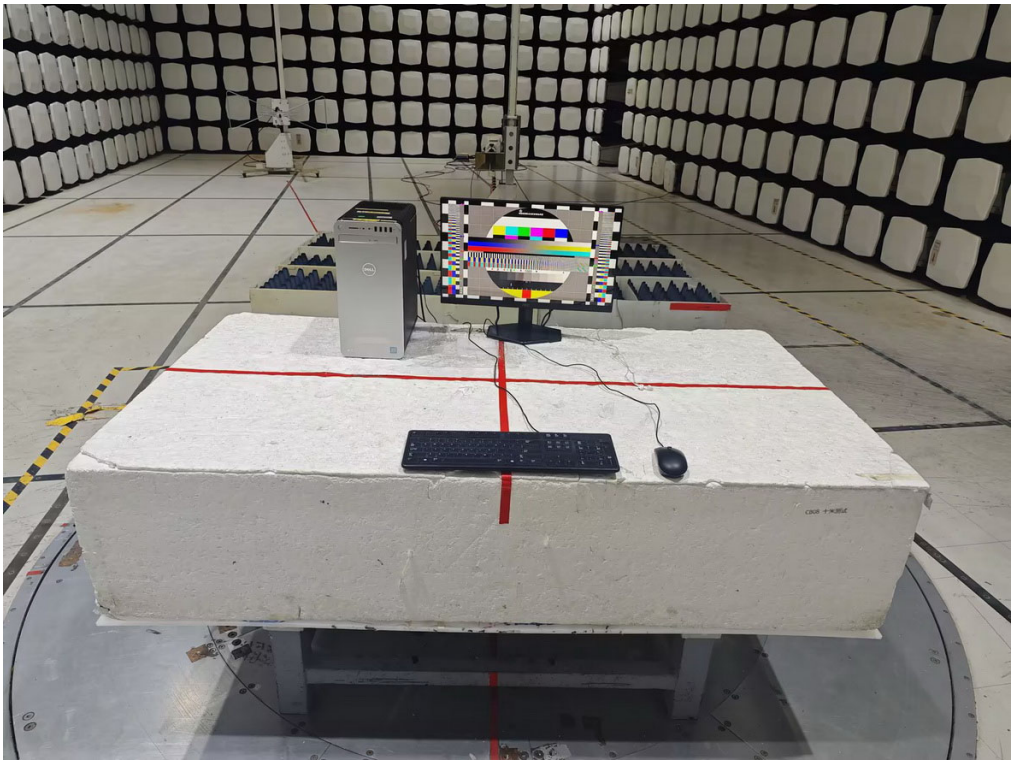

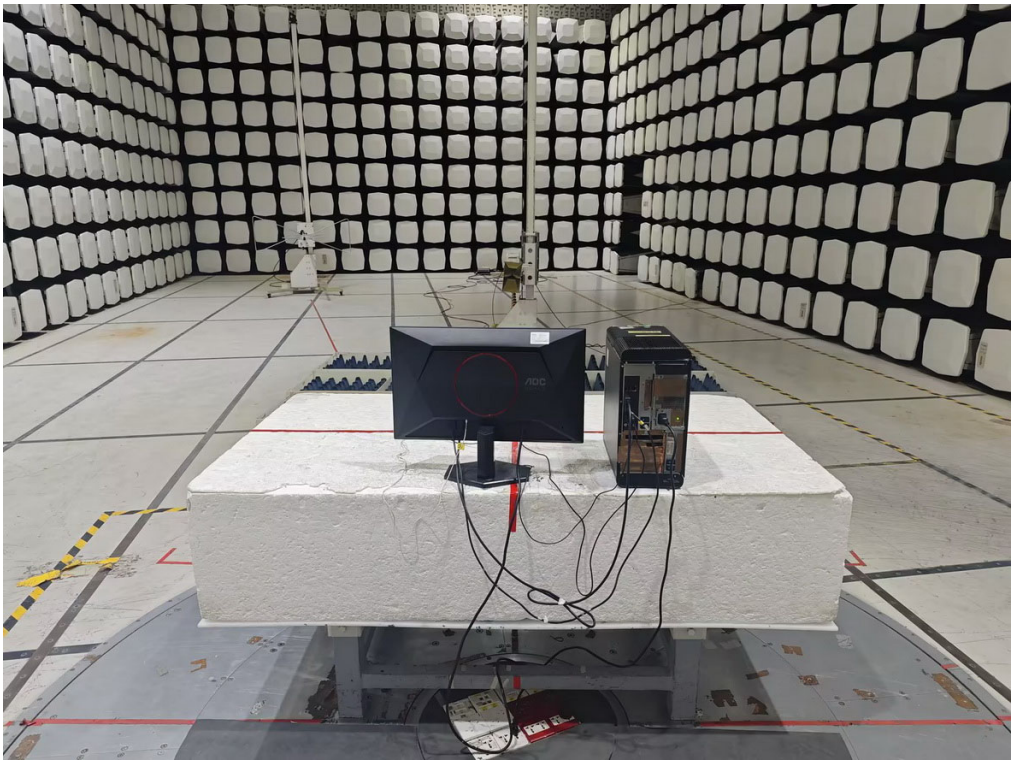

Conducted emissions AC mains power port

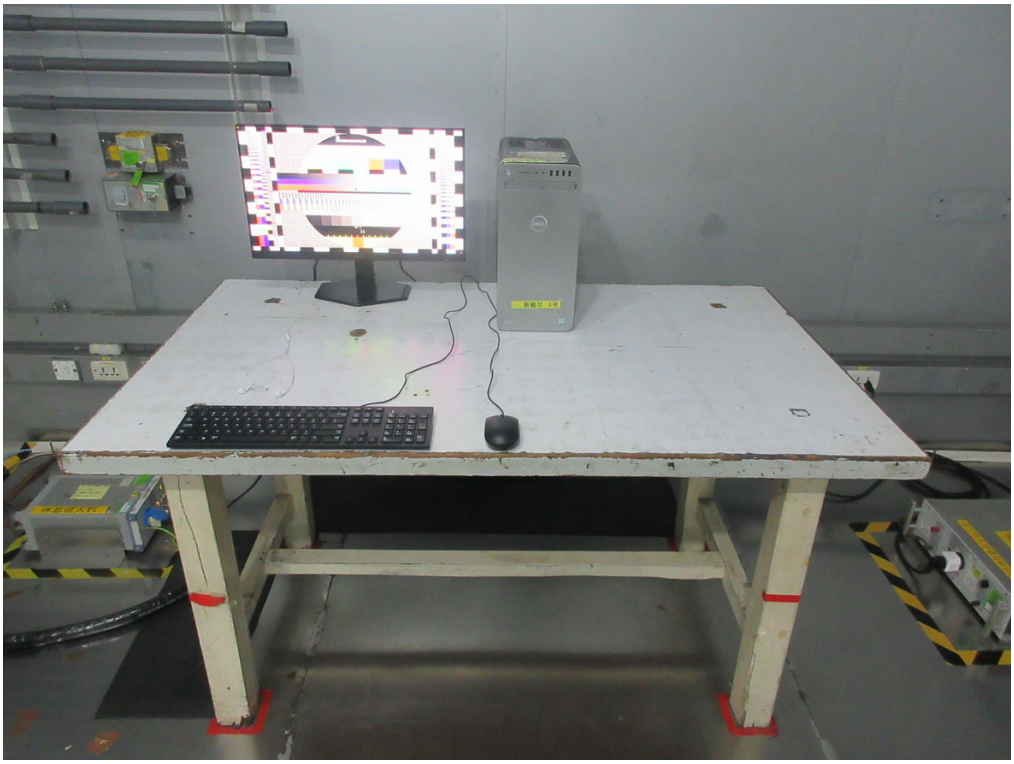

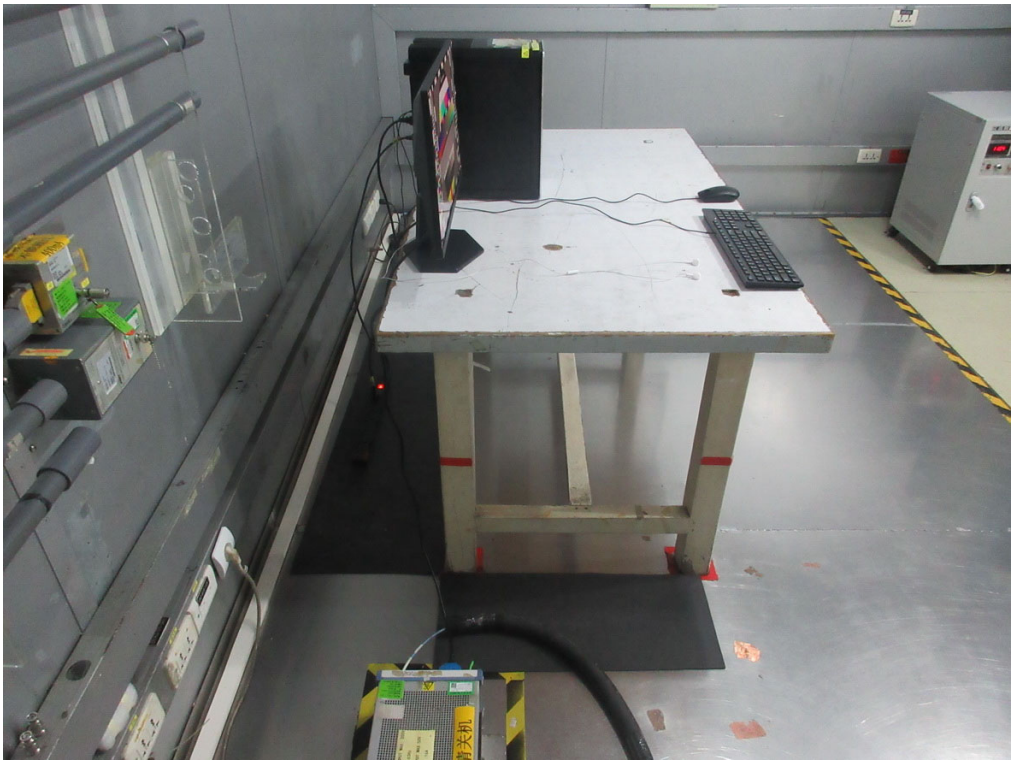

EN 55032:2015+A11:2020

Radiated emissions up to 1 GHz

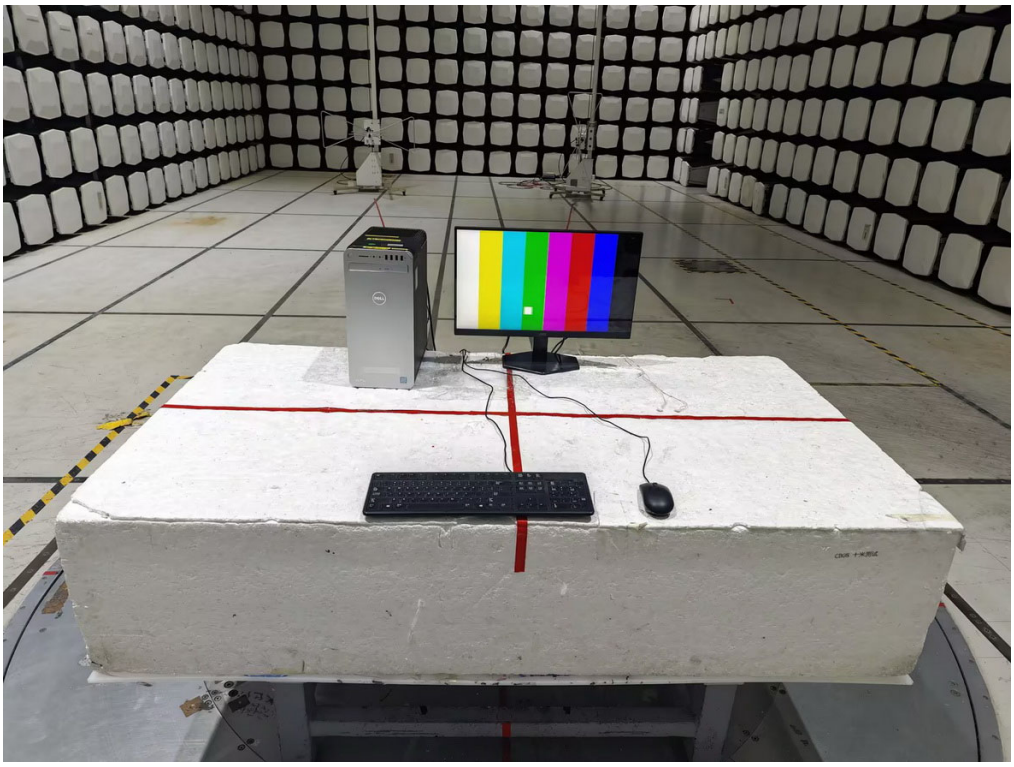

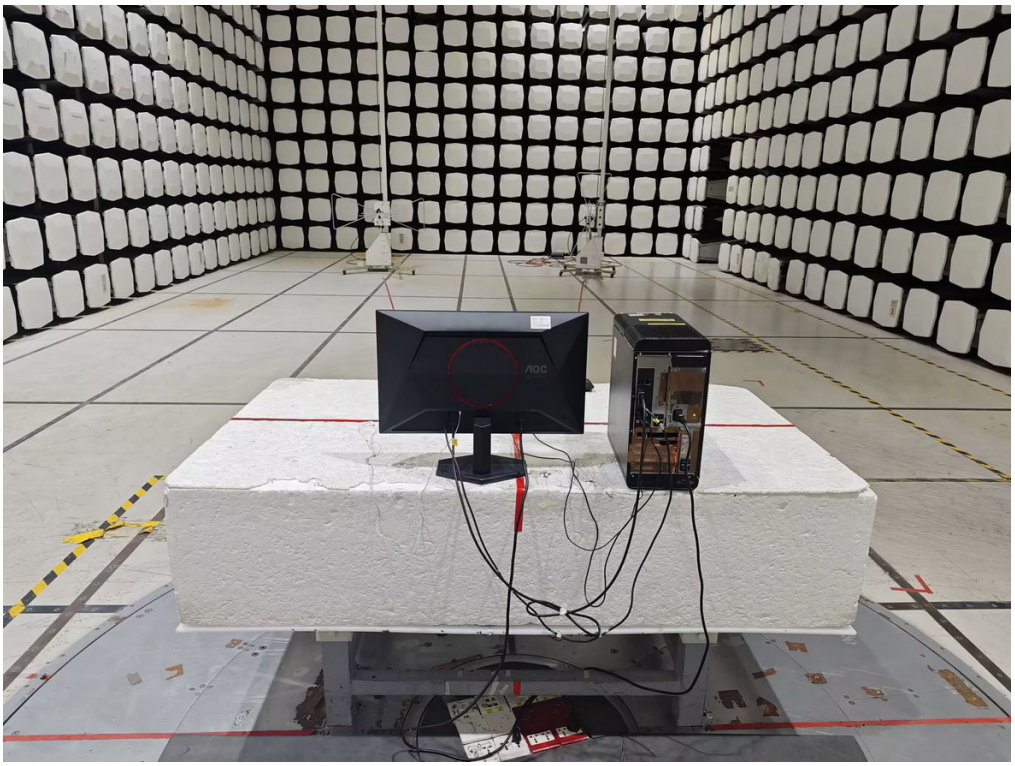

Radiated emissions above 1 GHz

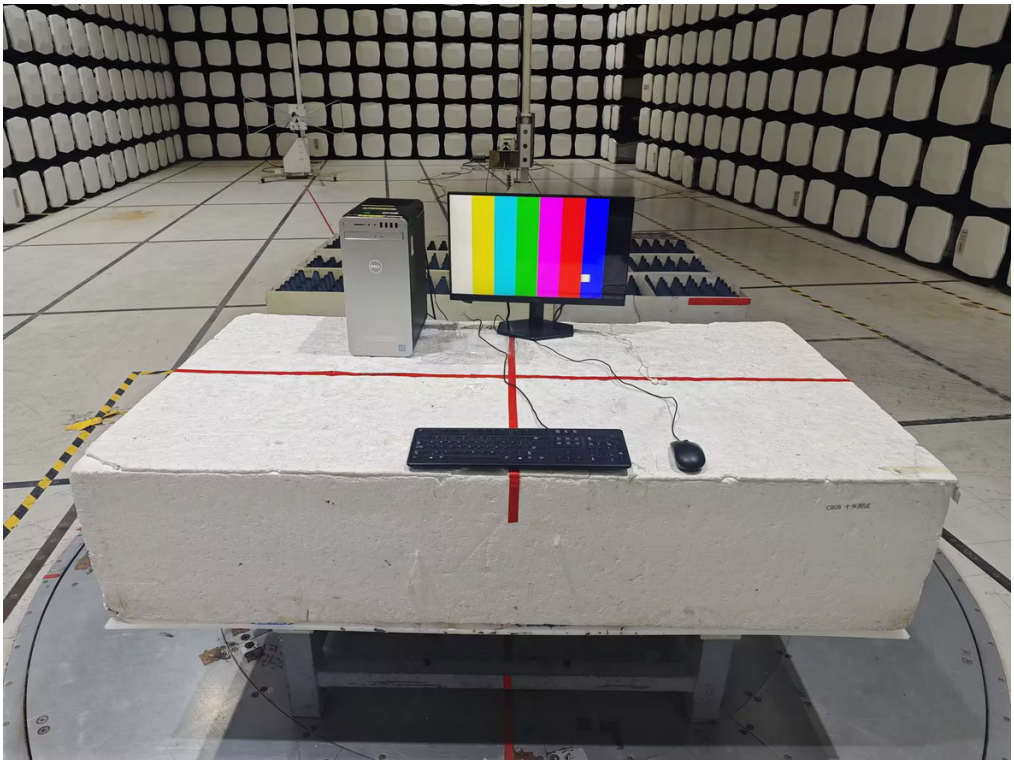

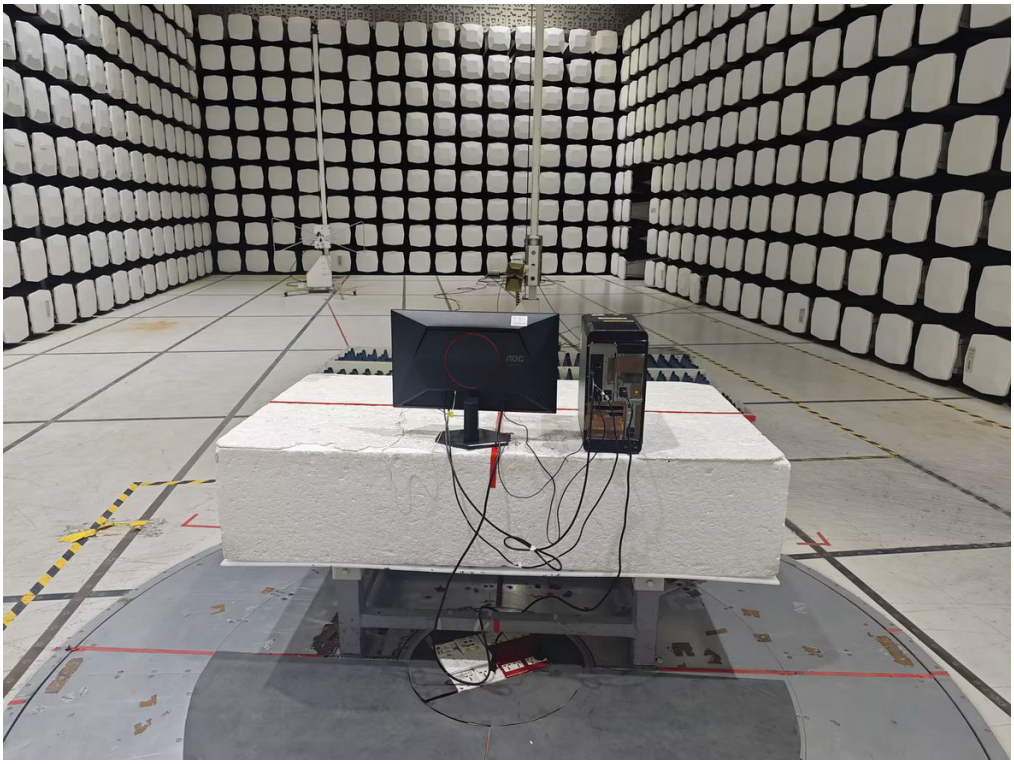

Conducted emissions AC mains power port

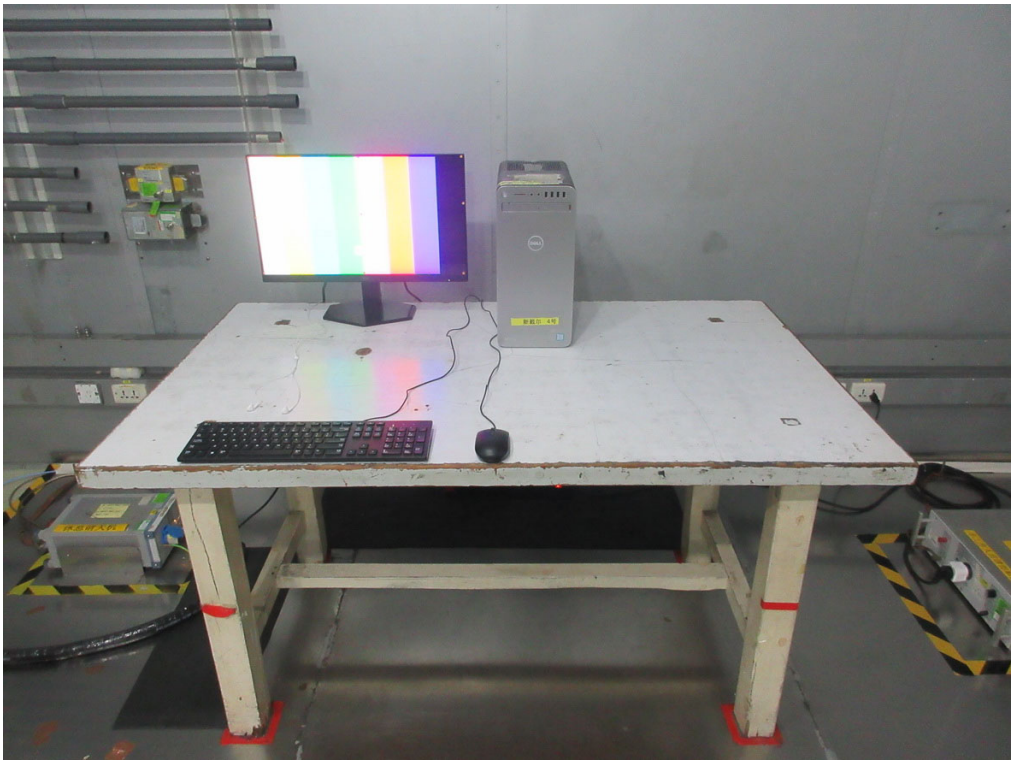

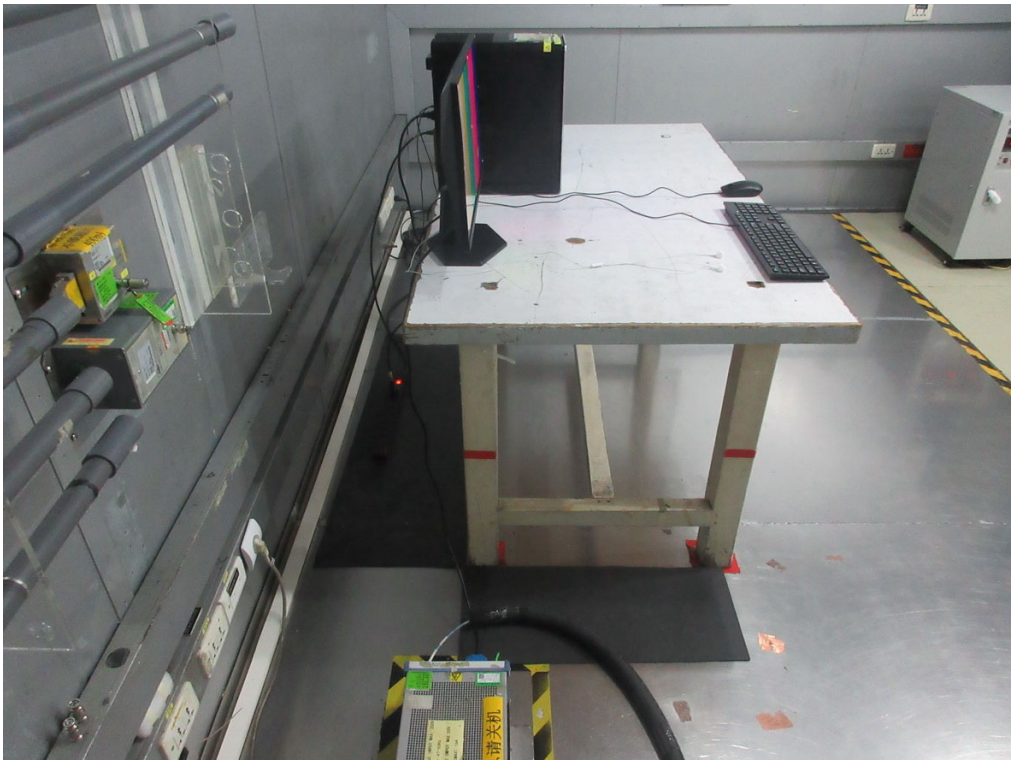

Harmonic current

Voltage fluctuations (Flicker)

Electrostatic discharge immunity

Radiated, radio-frequency, electromagnetic field immunity – Up to 1GHz

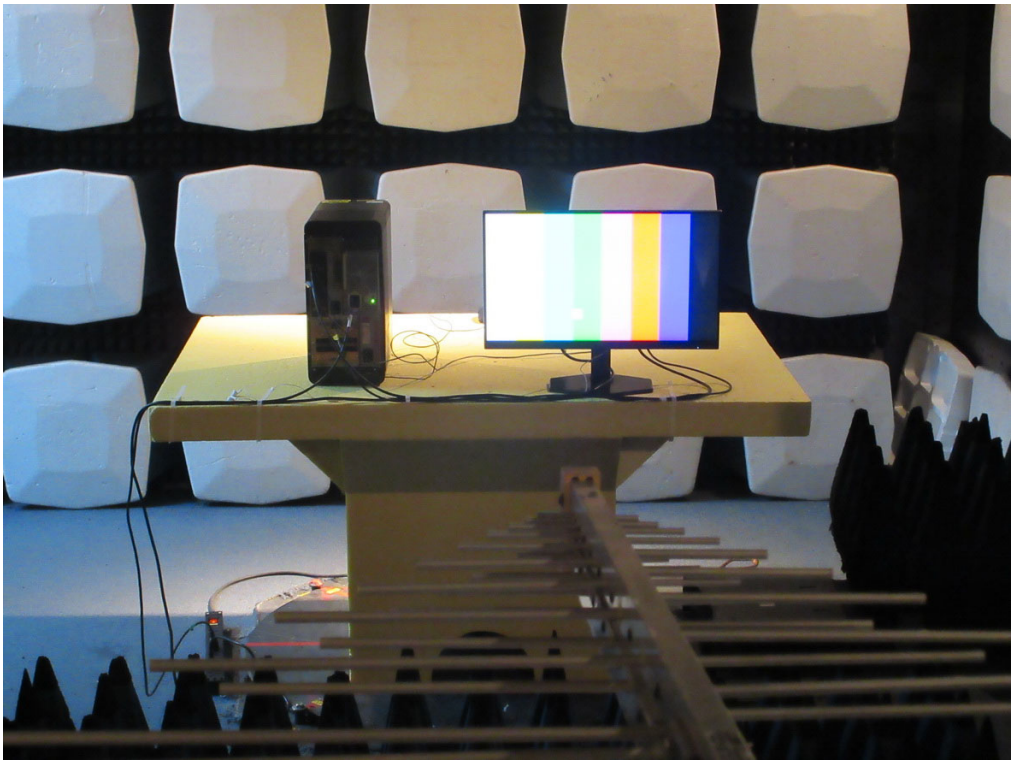

Radiated, radio-frequency, electromagnetic field immunity – Above 1GHz

Electrical fast transient/burst immunity - AC

Surge immunity - AC

Immunity to conducted disturbances, induced by radio-frequency fields - AC

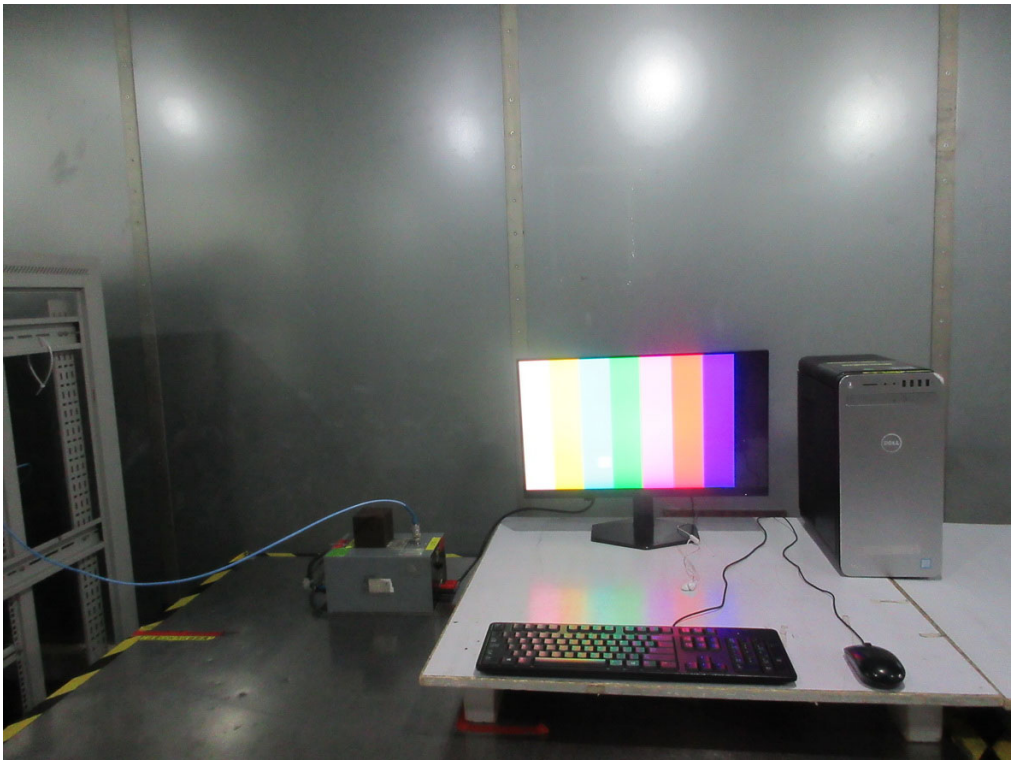

Power frequency magnetic field immunity

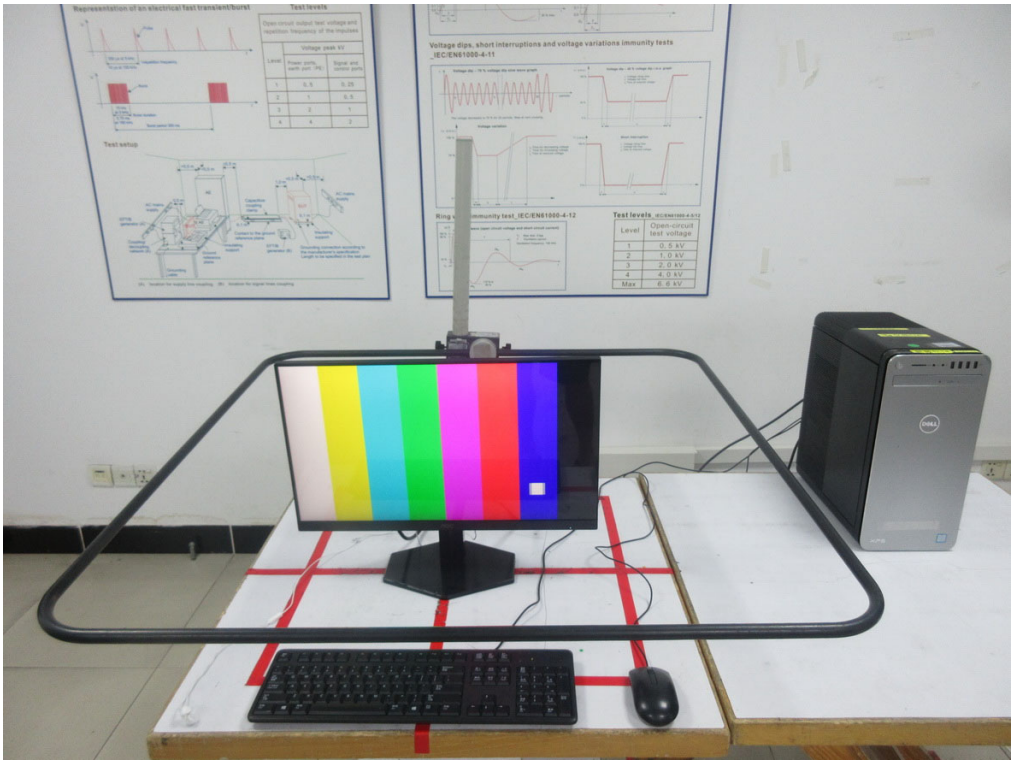

Voltage dips, short interruptions and voltage variations immunity

End of Test Report