



Find your product and get support




AOC
GAMING

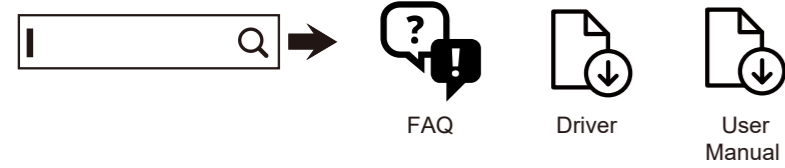

Quick Start
24G2SPU



www.aoc.com
©2021 AOC.All Rights Reserved

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE


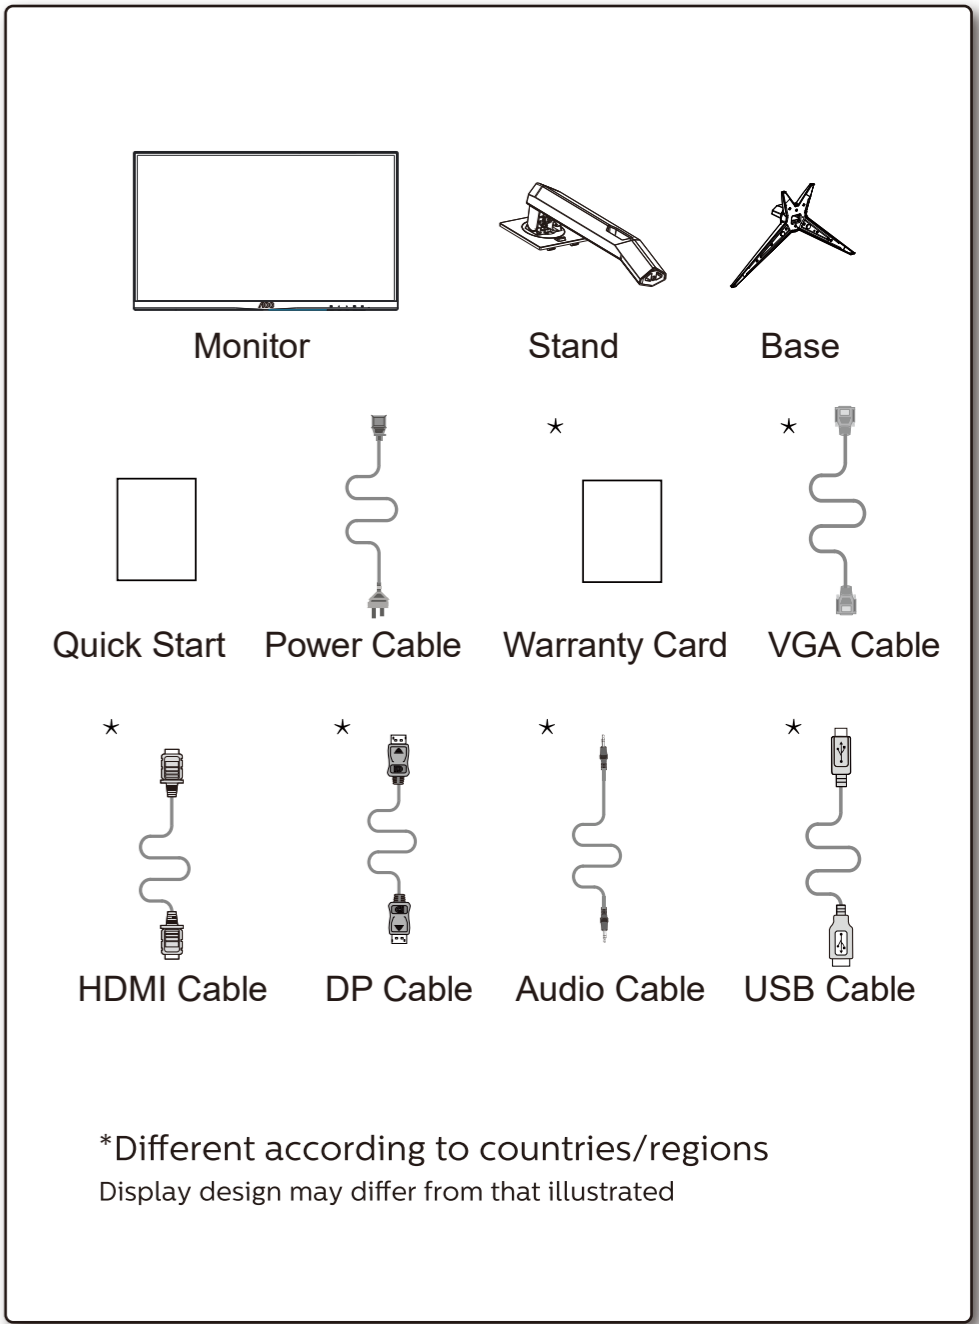


*Different according to countries/regions
Display design may differ from that illustrated


1

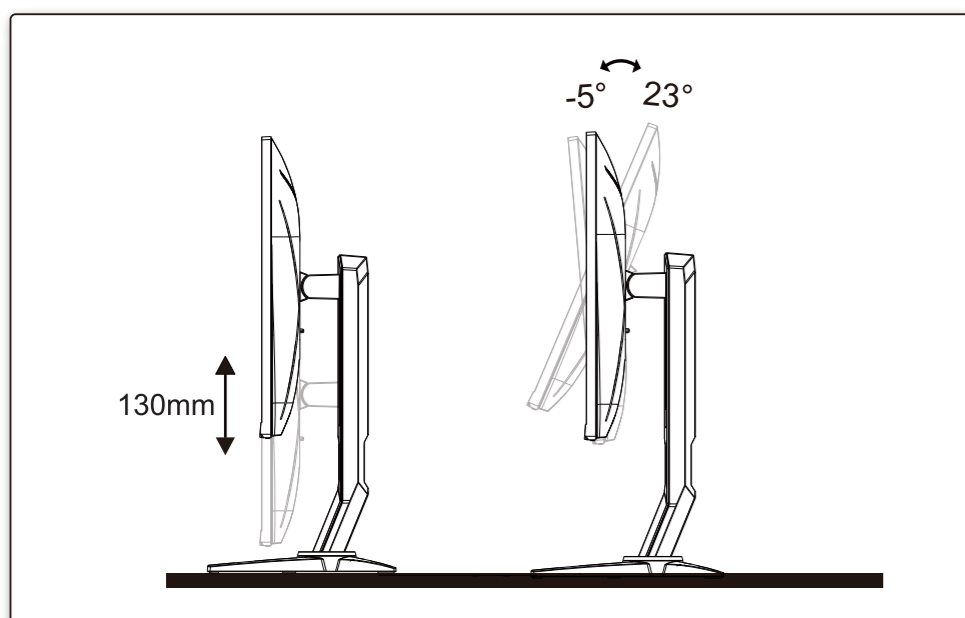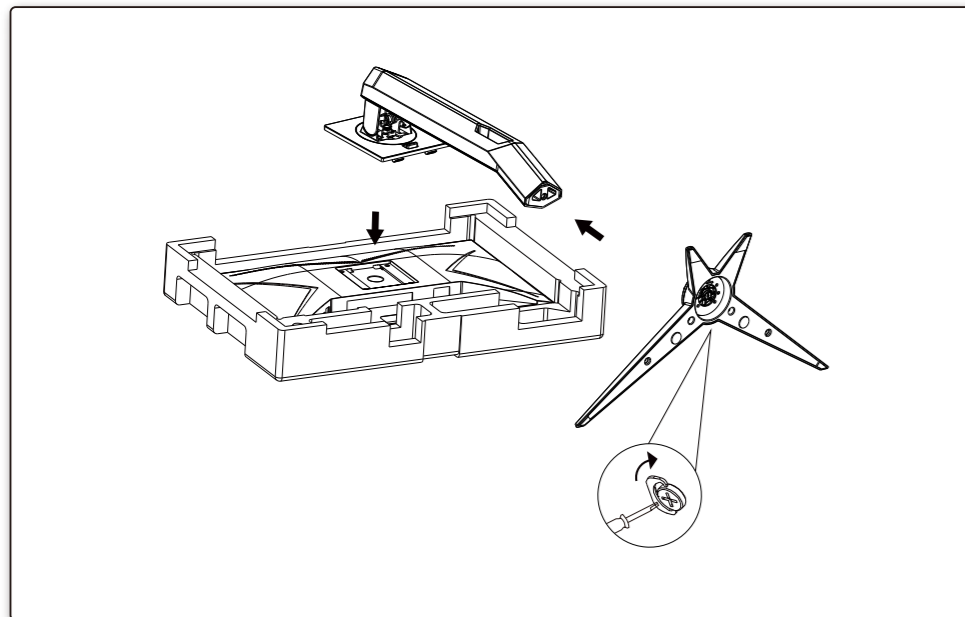

2

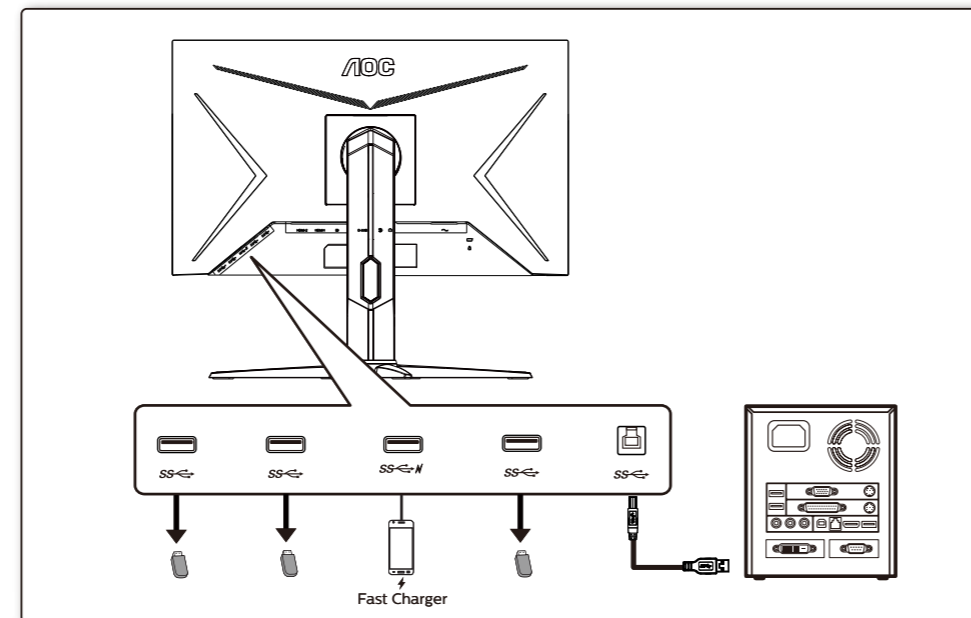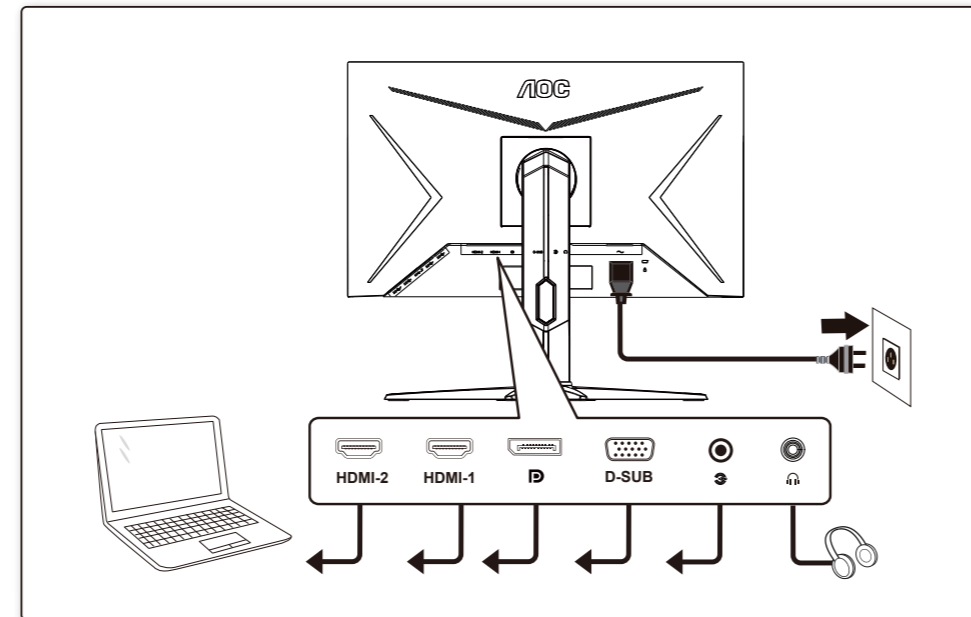

3

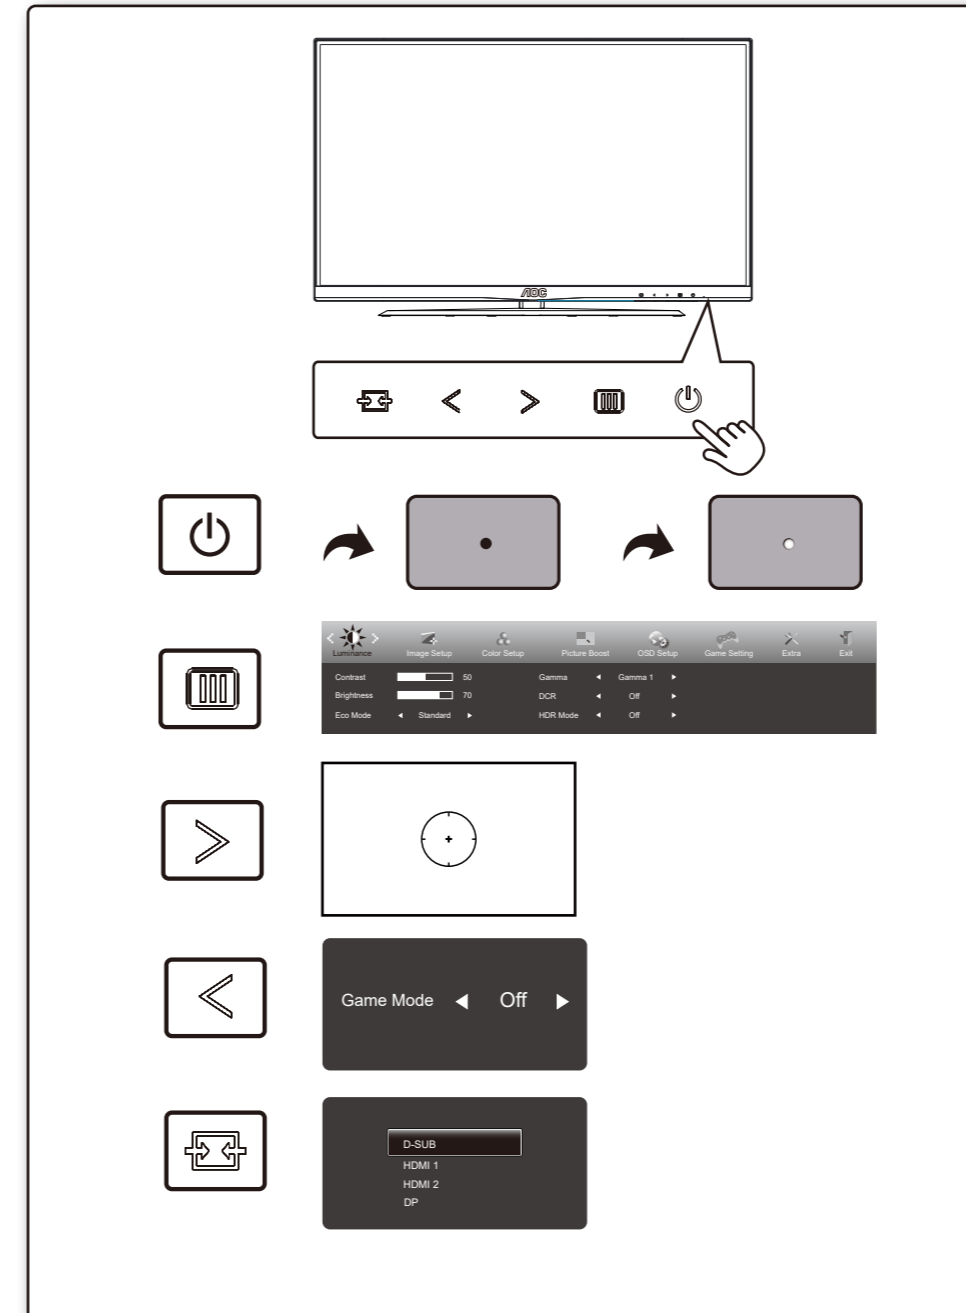

4

General Specification

Panel	Model name	24G2SPU/BK		
	Driving system	TFT Color LCD		
	Viewable Image Size	60.5cm diagonal(23.8" Wide Screen)		
	Pixel pitch	0.2745mm(H) x 0.2745mm(V)		
Others	Horizontal scan range	30k-160kHz(D-SUB/HDMI) 30k-200kHz(DP)		
	Horizontal scan Size(Maximum)	527.04 mm		
	Vertical scan range	48-60Hz(D-SUB) 48-144Hz(HDMI) 48-165Hz(DP)		
	Vertical Scan Size(Maximum)	296.46 mm		
	Max resolution	1920x1080@60Hz(D-SUB) 1920x1080@144Hz(HDMI) 1920x1080@165Hz(DP)		
	Plug & Play	VESA DDC2B/CI		
	Power Source	100-240V~, 50/60Hz, 1.5A		
	Power Consumption	Typical(default brightness and contrast)	25W	
		Max. (brightness = 100, contrast = 100)	≤ 78W	
		Standby mode	≤ 0.3W	
Dimensions(with stand)	539.1x(374.6~504.6)x227.4 mm(WxHxD)			
Net Weight	4.41kg			
Physical Characteristics	Connector Type	HDMIx2/DP/VGA/Earphone		
	Signal Cable Type	Detachable		
Environmental	Temperature	Operating	0°C~ 40°C	
		Non-Operating	-25°C~ 55°C	
	Humidity	Operating	10% ~ 85% (non-condensing)	
		Non-Operating	5% ~ 93% (non-condensing)	
Altitude	Operating	0~ 5000 m (0~ 16404ft)		
	Non-Operating	0~ 12192m (0~ 40000ft)		