



## CE&UKCA EMC Test Report

**Project No.** : 2402C148  
**Equipment** : LCD Monitor  
**Brand Name** : N/A  
**Test Model** : U27B3CF  
**Series Model** : \*\*U27B3\*\*\*\*\*(\*=0-9,A-Z,a-z,+, -, /, \ or blank)  
**Applicant** : TPV Electronics (Fujian) Co., Ltd.  
**Address** : Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China  
**Date of Receipt** : Feb. 29, 2024  
**Date of Test** : Feb. 29, 2024 ~ Mar. 10, 2024  
**Issued Date** : Apr. 03, 2024  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG2024022915  
**Standard(s)** : Please refer to Page 2.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

**Prepared by**

*Derek Tong*

Derek Tong

**Approved by**

*Kevin Li*

Kevin Li

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China

Tel: +86-769-8318-3000 Web: [www.newbtl.com](http://www.newbtl.com) Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

<b>Standard(s)</b>	:	EN 55032:2015 EN 55032:2015+A11:2020 EN 55032:2015+A1:2020 CISPR 32:2015+AMD1:2019 AS/NZS CISPR 32:2015+AMD1:2020 EN 61000-3-2:2014 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013 EN 61000-3-3:2013+A1:2019 EN 61000-3-3:2013+A2:2021 EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020
		BS EN 55032:2015 BS EN 55032:2015+A11:2020 BS EN 55032:2015+A1:2020 BS EN 61000-3-2:2014 BS EN IEC 61000-3-2:2019+A1:2021 BS EN 61000-3-3:2013 BS EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A2:2021 BS EN 55035:2017 BS EN 55035:2017+A11:2020

### Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>8</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>9</b>
1.1 TEST FACILITY	11
1.2 MEASUREMENT UNCERTAINTY	11
1.3 TEST ENVIRONMENT CONDITIONS	13
<b>2 . GENERAL INFORMATION</b>	<b>14</b>
2.1 GENERAL DESCRIPTION OF EUT	14
2.2 DESCRIPTION OF TEST MODES	15
2.3 EUT OPERATING CONDITIONS	17
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
2.5 DESCRIPTION OF SUPPORT UNITS	17
<b>3 . EMC EMISSION TEST- EN 55032:2015</b>	<b>19</b>
3.1 RADIATED EMISSIONS UP TO 1 GHZ	19
3.1.1 LIMITS	19
3.1.2 MEASUREMENT INSTRUMENTS LIST	19
3.1.3 TEST PROCEDURE	20
3.1.4 DEVIATION FROM TEST STANDARD	20
3.1.5 TEST SETUP	20
3.1.6 MEASUREMENT DISTANCE	21
3.1.7 TEST RESULTS	22
3.2 RADIATED EMISSIONS ABOVE 1 GHZ	24
3.2.1 LIMITS	24
3.2.2 MEASUREMENT INSTRUMENTS LIST	24
3.2.3 TEST PROCEDURE	25
3.2.4 DEVIATION FROM TEST STANDARD	25
3.2.5 TEST SETUP	25
3.2.6 MEASUREMENT DISTANCE	26
3.2.7 TEST RESULTS	27
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	29
3.3.1 LIMITS	29
3.3.2 MEASUREMENT INSTRUMENTS LIST	29
3.3.3 TEST PROCEDURE	29
3.3.4 DEVIATION FROM TEST STANDARD	30
3.3.5 TEST SETUP	30
3.3.6 TEST RESULTS	31
<b>4 . EMC EMISSION TEST- EN 55032:2015+A11:2020</b>	<b>33</b>
4.1 RADIATED EMISSIONS UP TO 1 GHZ	33
4.1.1 LIMITS	33
4.1.2 MEASUREMENT INSTRUMENTS LIST	33

**Table of Contents**

	<b>Page</b>
4.1.3 TEST PROCEDURE	34
4.1.4 DEVIATION FROM TEST STANDARD	34
4.1.5 TEST SETUP	34
4.1.6 MEASUREMENT DISTANCE	35
4.1.7 TEST RESULTS	36
<b>4.2 RADIATED EMISSIONS ABOVE 1 GHZ</b>	<b>46</b>
4.2.1 LIMITS	46
4.2.2 MEASUREMENT INSTRUMENTS LIST	46
4.2.3 TEST PROCEDURE	47
4.2.4 DEVIATION FROM TEST STANDARD	47
4.2.5 TEST SETUP	47
4.2.6 MEASUREMENT DISTANCE	48
4.2.7 TEST RESULTS	49
<b>4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS</b>	<b>59</b>
4.3.1 LIMITS	59
4.3.2 MEASUREMENT INSTRUMENTS LIST	59
4.3.3 TEST PROCEDURE	59
4.3.4 DEVIATION FROM TEST STANDARD	59
4.3.5 TEST SETUP	60
4.3.6 TEST RESULTS	61
<b>4.4 HARMONIC CURRENT EMISSIONS TEST</b>	<b>69</b>
4.4.1 LIMITS	69
4.4.2 MEASUREMENT INSTRUMENTS LIST	69
4.4.3 TEST PROCEDURE	69
4.4.4 DEVIATION FROM TEST STANDARD	69
4.4.5 TEST SETUP	69
4.4.6 TEST RESULTS	70
<b>4.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST</b>	<b>73</b>
4.5.1 LIMITS	73
4.5.2 MEASUREMENT INSTRUMENTS LIST	73
4.5.3 TEST PROCEDURE	73
4.5.4 DEVIATION FROM TEST STANDARD	73
4.5.5 TEST SETUP	74
4.5.6 TEST RESULTS	75
<b>5 . EMC IMMUNITY TEST</b>	<b>76</b>
5.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	76
5.2 GENERAL PERFORMANCE CRITERIA	79
5.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION	80
5.3.1 PERFORMANCE CRITERIA	80
5.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION	81
5.4.1 PERFORMANCE CRITERIA	81
5.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	82

**Table of Contents**

	<b>Page</b>
5.5.1 TEST SPECIFICATION	82
5.5.2 MEASUREMENT INSTRUMENTS	82
5.5.3 TEST PROCEDURE	82
5.5.4 DEVIATION FROM TEST STANDARD	83
5.5.5 TEST SETUP	83
5.5.6 TEST RESULTS	84
<b>5.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)</b>	<b>87</b>
5.6.1 TEST SPECIFICATION	87
5.6.2 MEASUREMENT INSTRUMENTS	87
5.6.3 TEST PROCEDURE	87
5.6.4 DEVIATION FROM TEST STANDARD	88
5.6.5 TEST SETUP	88
5.6.6 TEST RESULTS	90
<b>5.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)</b>	<b>95</b>
5.7.1 TEST SPECIFICATION	95
5.7.2 MEASUREMENT INSTRUMENTS	95
5.7.3 TEST PROCEDURE	95
5.7.4 DEVIATION FROM TEST STANDARD	95
5.7.5 TEST SETUP	96
5.7.6 TEST RESULTS	97
<b>5.8 SURGE IMMUNITY TEST (SURGE)</b>	<b>98</b>
5.8.1 TEST SPECIFICATION	98
5.8.2 MEASUREMENT INSTRUMENTS	98
5.8.3 TEST PROCEDURE	98
5.8.4 DEVIATION FROM TEST STANDARD	98
5.8.5 TEST SETUP	99
5.8.6 TEST RESULTS	100
<b>5.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)</b>	<b>101</b>
5.9.1 TEST SPECIFICATION	101
5.9.2 MEASUREMENT INSTRUMENTS	101
5.9.3 TEST PROCEDURE	101
5.9.4 DEVIATION FROM TEST STANDARD	102
5.9.5 TEST SETUP	102
5.9.6 TEST RESULTS	104
<b>5.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)</b>	<b>107</b>
5.10.1 TEST SPECIFICATION	107
5.10.2 MEASUREMENT INSTRUMENTS	107
5.10.3 TEST PROCEDURE	107
5.10.4 DEVIATION FROM TEST STANDARD	107
5.10.5 TEST SETUP	108
5.10.6 TEST RESULTS	109
<b>5.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY</b>	

**Table of Contents**

	<b>Page</b>
<b>TEST (DIPS)</b>	110
<b>5.11.1 TEST SPECIFICATION</b>	110
<b>5.11.2 MEASUREMENT INSTRUMENTS</b>	110
<b>5.11.3 TEST PROCEDURE</b>	110
<b>5.11.4 DEVIATION FROM TEST STANDARD</b>	110
<b>5.11.5 TEST SETUP</b>	110
<b>5.11.6 TEST RESULTS</b>	111
<b>6 . EUT TEST PHOTO</b>	<b>112</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-EMC-1-2402C148	R00	Original report.	Apr. 03, 2024	Valid

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission		
Standard(s)	Test Item	Result
EN 55032:2015 EN 55032:2015+A11:2020 EN 55032:2015+A1:2020 CISPR 32:2015+AMD1:2019 AS/NZS CISPR 32:2015+AMD1:2020 BS EN 55032:2015 BS EN 55032:2015+A11:2020 BS EN 55032:2015+A1:2020	Radiated emissions up to 1 GHz	PASS
	Radiated emissions above 1 GHz	PASS
	Radiated emissions from FM receivers	N/A
	Conducted emissions AC mains power port	PASS
	Asymmetric mode	AAN
	conducted emissions	N/A
	Current Probe	N/A
	CP+CVP	N/A
Conducted differential voltage emissions		N/A

Standard(s)	Test Item	Result
EN 61000-3-2:2014 EN IEC 61000-3-2:2019+A1:2021 BS EN 61000-3-2:2014 BS EN IEC 61000-3-2:2019+A1:2021	Harmonic current	PASS
EN 61000-3-3:2013 EN 61000-3-3:2013+A1:2019 EN 61000-3-3:2013+A2:2021 BS EN 61000-3-3:2013 BS EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A2:2021	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017 BS EN 55035:2017+A11:2020	IEC 61000-4-2:2008 EN 61000-4-2:2009	ESD	PASS
	IEC 61000-4-3:2020 EN IEC 61000-4-3:2020	RS	PASS
	IEC 61000-4-4:2012 EN 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+AMD1:2017 EN 61000-4-5:2014+A1:2017	Surge	PASS
	IEC 61000-4-6:2013 EN 61000-4-6:2014+AC:2015	CS	PASS
	IEC 61000-4-8:2009 EN 61000-4-8:2010	PFMF	PASS
	IEC 61000-4-11:2020 EN IEC 61000-4-11:2020	Dips	PASS

Standard(s)	Section	Test Item	Result
EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017 BS EN 55035:2017+A11:2020	4.2.7	BIN-R	N/A
	4.2.7	BIN-I	N/A

## NOTE:

(1) "N/A" denotes test is not applicable to this device.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For EFT&Surge&CS&PFMF items :Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

For other items: No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{cisp}}^{\text{r}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{\text{cisp}}^{\text{r}}$ (dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.48
		30MHz ~ 200MHz	H	4.50
		200MHz ~ 1,000MHz	V	4.60
		200MHz ~ 1,000MHz	H	4.84

B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	$U_{\text{cisp}}^{\text{r}}$ (dB)
DG-CB08 (3m)	CISPR	1GHz ~ 6GHz	4.24

C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	$U_{\text{cisp}}^{\text{r}}$ (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

D. Harmonic current / Voltage fluctuations (Flicker) measurement:

Test Site	Method	Item	$U_{\text{cisp}}^{\text{r}}$ (%)
DG-C01	EN 61000-3-2 EN 61000-3-3	Current	0.757
		Voltage	0.592

## E. Immunity Measurement:

Test Site	Method	Item	<i>U</i>
DG-SR02	IEC 61000-4-2	Rise time tr	7.00%
		Peak current Ip	6.50%
		Current at 30 ns	6.60%
		Current at 60 ns	6.80%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.20dB
		On-ear acoustic & Acoustic measurements on loudspeakers	2.24dB
SSL-SR01	IEC 61000-4-4	Peak voltage (VP)	3.7%
		Rise time (tr)	4.4%
		Pulse width(tw)	4.2%
		Pulse Freq.(kHz)	0.7%
		Burst Duration(ms)	1.4%
		Burst Period(ms)	1.4%
SSL-SR01	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	4.0%
		Open circuit front time (1.2/50us)	6.1%
		Open circuit time of half value (1.2/50us)	4.7%
SSL-CB02	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.28dB
		On-ear acoustic & Acoustic measurements on loudspeakers	1.28dB
SSL-SR01	IEC 61000-4-8	Magnetic Field Strength	1.91%
DG-SR01	IEC 61000-4-11	DIP Amplitude	3.6%
		DIP Time Event	4.0%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By	Test date
Radiated emissions up to 1 GHz	21°C	52%	Trey Chen	Mar. 10, 2024
Radiated emissions above 1 GHz	21°C	52%	Trey Chen	Mar. 10, 2024
Conducted emissions AC mains power port	22°C	54%	Parker Mai	Mar. 09, 2024
Harmonic current	20°C	56%	Jack Zhang	Mar. 09, 2024
Voltage fluctuations (Flicker)	20°C	56%	Jack Zhang	Mar. 09, 2024

Test Item	Temperature	Humidity	Pressure	Tested By	Test date
ESD	19°C	47%	1024hPa	Hunter Xu	Mar. 01, 2024
RS	16°C	52%	/	Hunter Xu	Mar. 02, 2024
EFT	20°C	52%	/	Leonard Li	Mar. 07, 2024
Surge	20°C	52%	/	Leonard Li	Mar. 07, 2024
CS	20°C	68%	/	Sam Li	Mar. 05, 2024
PFMF	20°C	52%	/	Leonard Li	Mar. 07, 2024
Dips	26°C	58%	/	Zinco Chen	Mar. 01, 2024

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	LCD Monitor
Brand Name	N/A
Test Model	U27B3CF
Series Model	**U27B3*****(*=0-9,A-Z,a-z,+,-,/,\ blank)
Model Difference(s)	Only differ in model name due to marketing purpose.
Identification No. of EUT(S/N)	A6562239Q01040018
Dimensions and mass	614mmx229.8mmx517.9mm-407.9mm
Component unit of EUT	<input checked="" type="checkbox"/> Single unit <input type="checkbox"/> Multiple unit
Sample Status	<input checked="" type="checkbox"/> Engineering sample <input type="checkbox"/> Final shipment prototype
Power Source	AC Mains.
Power Rating	100-240V ~ 50/60Hz, 1.5A
Connecting I/O Port(s)	1* AC port 2* HDMI port 1* Type-C port 2* USB port 1* Earphone port
Classification of EUT	Class B
Highest Internal Frequency(Fx)	594MHz

Cable Type	Shielded Type	Ferrite Core	Length(m)	Note
AC Power Cord	Non-shielded	NO	1.8/1.5/1.2	1.8m is worst case Detachable
HDMI	Shielded	NO	1.8/1.5/1.2	-
Type-C	Shielded	NO	1.8/1.5/1.2	-

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Power cable 1.8m, 1.5m and 1.2m length, worst case is Power cable 1.8m with HDMI+Type-C length testing and recorded in test report.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer+USB1 5V/3A+USB2 R/W 1.8m
Mode 2	HDMI 2 3840*2160/60Hz PC/Type-C Connecting a computer+USB1 R/W+USB2 R/W 1.8m
Mode 3	Type-C 3840*2160/60Hz PC/USB1 R/W+USB2 R/W 1.8m
Mode 4	HDMI 1 3840*2160/60Hz PC/Type-C 5V/3A 1.8m
Mode 5	HDMI 1 3840*2160/60Hz PC/Type-C 12V/3A 1.8m
Mode 6	HDMI 1 3840*2160/60Hz PC/Type-C 20V/3.25A 1.8m
Mode 7	HDMI 1 DVD 2160P 1.8m
Mode 8	HDMI 1 1920*1080/60Hz PC 1.8m
Mode 9	HDMI 1 800*600/60Hz PC 1.8m
Mode 10	HDMI 1 3840*2160/60Hz PC 1.5m
Mode 11	HDMI 2 3840*2160/60Hz PC 1.5m
Mode 12	Type-C 3840*2160/60Hz PC 1.5m
Mode 13	HDMI 1 3840*2160/60Hz PC 1.2m
Mode 14	HDMI 2 3840*2160/60Hz PC 1.2m
Mode 15	Type-C 3840*2160/60Hz PC 1.2m
Mode 16	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer +USB1 5V/3A+USB2 R/W 1.8m (Without Earphone)

Radiated emissions up to 1 GHz Test	
Final Test Mode	Description
Mode 1	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer+USB1 5V/3A+USB2 R/W 1.8m
Mode 3	Type-C 3840*2160/60Hz PC/USB1 R/W+USB2 R/W 1.8m
Mode 7	HDMI 1 DVD 2160P 1.8m
Mode 16	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer +USB1 5V/3A+USB2 R/W 1.8m (Without Earphone)

Radiated emissions Above 1 GHz Test	
Final Test Mode	Description
Mode 1	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer+USB1 5V/3A+USB2 R/W 1.8m
Mode 3	Type-C 3840*2160/60Hz PC/USB1 R/W+USB2 R/W 1.8m
Mode 7	HDMI 1 DVD 2160P 1.8m
Mode 16	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer +USB1 5V/3A+USB2 R/W 1.8m (Without Earphone)

Conducted emissions AC mains power port Test	
Final Test Mode	Description
Mode 1	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer+USB1 5V/3A+USB2 R/W 1.8m
Mode 3	Type-C 3840*2160/60Hz PC/USB1 R/W+USB2 R/W 1.8m
Mode 7	HDMI 1 DVD 2160P 1.8m

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 1	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer+USB1 5V/3A+USB2 R/W 1.8m

Immunity Test	
Final Test Mode	Description
Mode 1	HDMI 1 3840*2160/60Hz PC/Type-C Connecting a computer+USB1 5V/3A+USB2 R/W 1.8m
Mode 2	HDMI 2 3840*2160/60Hz PC/Type-C Connecting a computer+USB1 R/W+USB2 R/W 1.8m
Mode 3	Type-C 3840*2160/60Hz PC/USB1 R/W+USB2 R/W 1.8m
Mode 4	HDMI 1 3840*2160/60Hz PC/Type-C 5V/3A 1.8m
Mode 5	HDMI 1 3840*2160/60Hz PC/Type-C 12V/3A 1.8m
Mode 6	HDMI 1 3840*2160/60Hz PC/Type-C 20V/3.25A 1.8m
Mode 7	HDMI 1 DVD 2160P 1.8m
Mode 10	HDMI 1 3840*2160/60Hz PC 1.5m
Mode 11	HDMI 2 3840*2160/60Hz PC 1.5m
Mode 12	Type-C 3840*2160/60Hz PC 1.5m
Mode 13	HDMI 1 3840*2160/60Hz PC 1.2m
Mode 14	HDMI 2 3840*2160/60Hz PC 1.2m
Mode 15	Type-C 3840*2160/60Hz PC 1.2m

**Note:**


1. For EMI: the standard of EN 55032:2015+A11:2020 tested all the mode, and the EN 55032:2015 tested the worst case and recorded in the test report.
2. For radiated emission: evaluated the maximum resolution Mode 1-7. The worst case is Mode 1 and evaluated the middle and low resolution Mode 8 - 9. At last, evaluated 1.5m and 1.2m cable (Mode 10-15) and without earphone(Mode 16). According to the client's requirement, choose Mode 1, Mode 3, Mode 7, Mode 16 and recorded in test report.
3. For Conducted emissions: evaluated the maximum resolution Mode 1-7. The worst case is Mode 1 and evaluated the middle and low resolution Mode 8 - 9. At last, evaluated 1.5m and 1.2m cable (Mode 10-15). According to the client's requirement, choose Mode 1, Mode 3, Mode 7 and recorded in test report.
4. RS: The Front, Rear, Left and Right were evaluated. The worst placement direction is Front and recorded in this report.
5. The audio output function of CS/RS is recorded the worst mode.

## 2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. EUT connected to PC via HDMI&Type-C Cable.
2. EUT connected to Earphone via Earphone Cable.
3. EUT connected to USB3.0 Hard Disk(E&F) via USB Cable.
4. Mouse and Keyboard connected to PC via USB Cable.

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

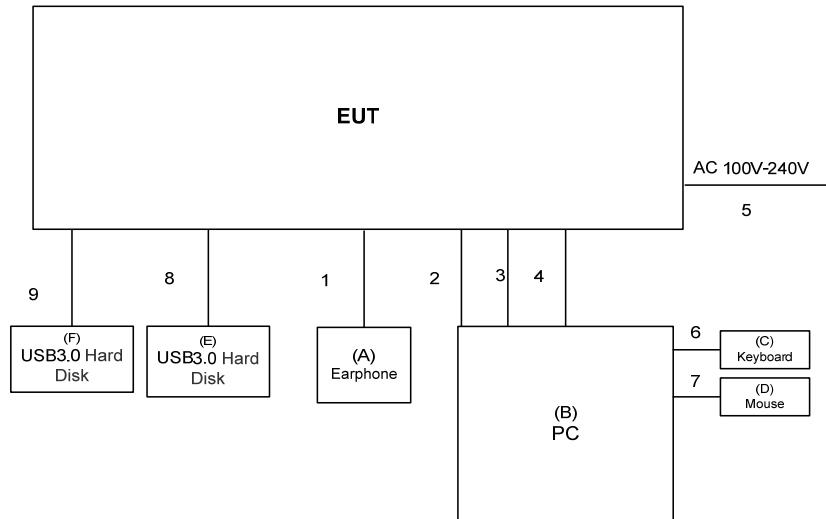

Ground Plane

Remote System

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For EFT&Surge&CS&PFMF items:

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Earphone	APPLE	N/A	N/A
B	PC	DELL	P5820 I9-10900X/16G/265G+1T	B07B2528E4FB
C	Keyboard	DELL	KB216T	N/A
D	Mouse	DELL	MS11611	N/A
E	USB3.0 Hard Disk	LACIE	Lacie S.A	NL33PVP7
F	USB3.0 Hard Disk	LACIE	Lacie S.A	NL33PVK0

For other items:

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Earphone	Apple	N/A	N/A
B	PC	DELL	8920-D16N8S	GZS91L2
C	Keyboard	DELL	KB212-B	CN0HTXH97158125004DXA01
D	Mouse	DELL	MS111-P	CN011D3V71581279OLOT
E	USB3.0 Hard Disk	LACIE	Lacie S.A	NL34BFER
F	USB3.0 Hard Disk	LACIE	Lacie S.A	NL34BJSM

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Earphone Cable	NO	NO	1.2m
2	HDMI Cable	YES	NO	1.8/1.5/1.2m
3	HDMI Cable	YES	NO	1.8/1.5/1.2m
4	Type-C Cable	YES	NO	1.8/1.5/1.2m
5	AC Cable	NO	NO	1.8/1.5/1.2m
6	USB Cable	YES	NO	1.8m
7	USB Cable	YES	NO	1.5m
8	USB Cable	YES	NO	1.2m
9	USB Cable	YES	NO	1.2m

### 3. EMC EMISSION TEST- EN 55032:2015

#### 3.1 RADIATED EMISSIONS UP TO 1 GHZ

##### 3.1.1 LIMITS

Class B equipment up to 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(µV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>u</sub>V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

#### 3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jun. 16, 2024
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	Jun. 16, 2024
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	Jun. 16, 2024
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 10, 2024
6	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Nov. 10, 2024
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	1461	Nov. 28, 2024
8	Attenuator	EMCI	EMCI-N-6-06	AT-06010	Nov. 28, 2024
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF780208159	N/A
12	Cable	RW	LMR400-NMNM-10M	N/A	Dec. 03, 2024
13	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
14	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024
15	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
16	Cable	RW	LMR400-NMNM-8M	N/A	Dec. 03, 2024
17	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


### 3.1.3 TEST PROCEDURE

- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

### 3.1.4 DEVIATION FROM TEST STANDARD

### No deviation

### 3.1.5 TEST SETUP

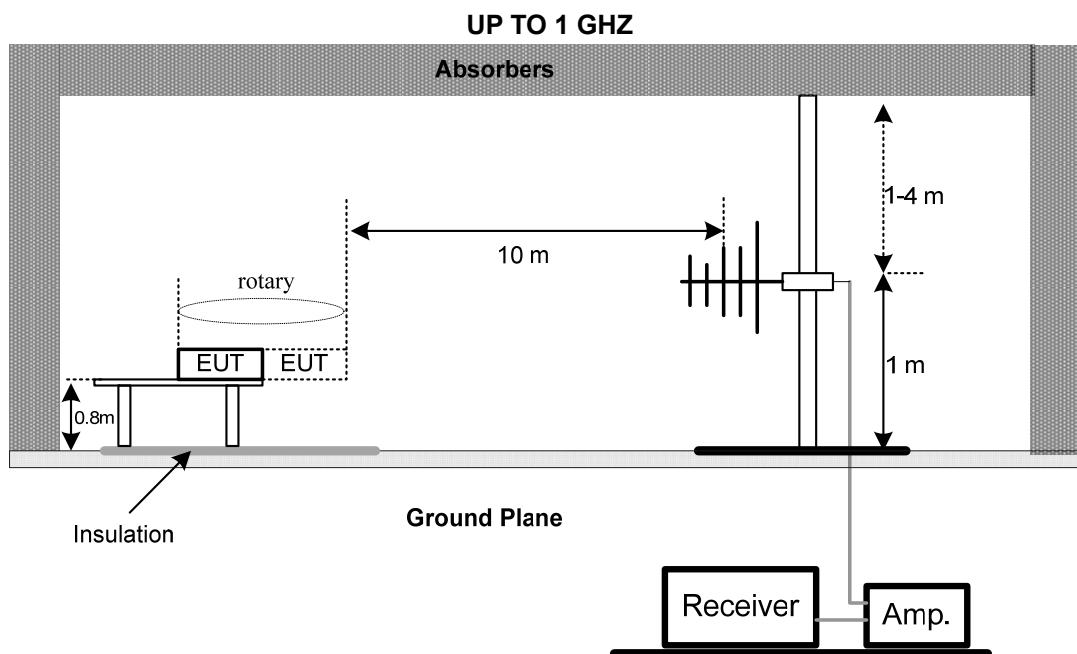

### 3.1.6 MEASUREMENT DISTANCE

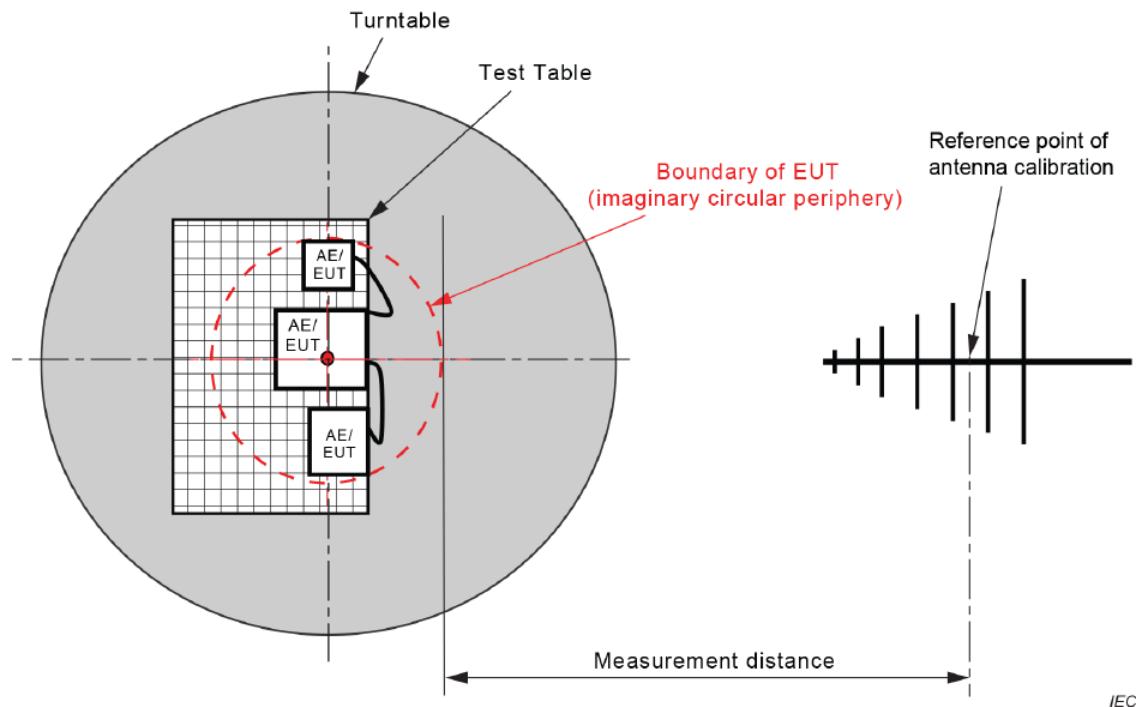


Figure C.1 – Measurement distance


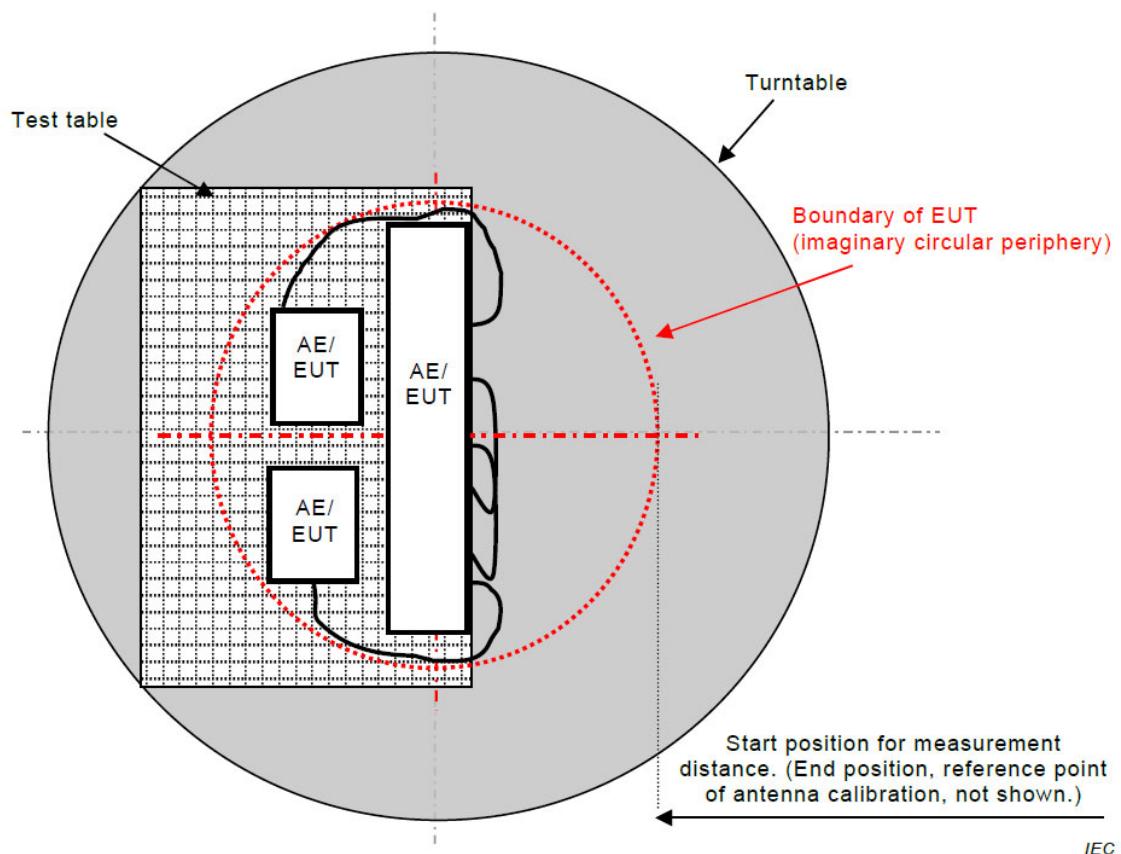


Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

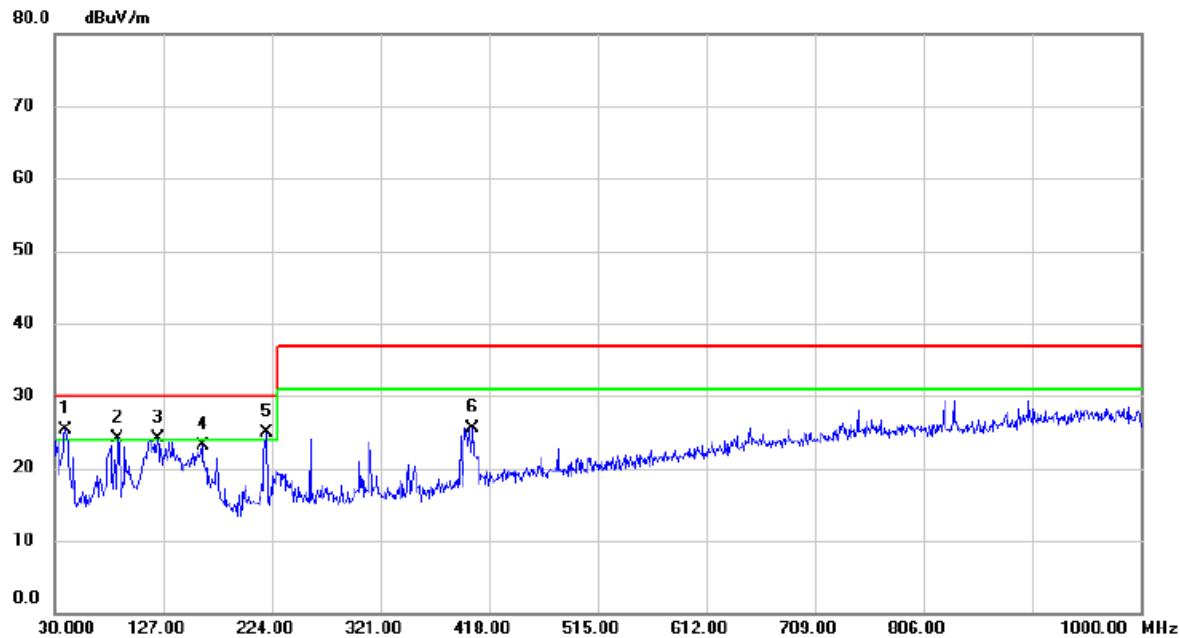

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	39.7000	43.41	-18.09	25.32	30.00	-4.68	QP	
2	!	86.2600	45.70	-21.54	24.16	30.00	-5.84	QP	
3	!	122.1500	42.46	-18.36	24.10	30.00	-5.90	QP	
4		161.9200	39.94	-16.80	23.14	30.00	-6.86	QP	
5	!	219.1500	44.34	-19.52	24.82	30.00	-5.18	QP	
6		403.4500	38.10	-12.59	25.51	37.00	-11.49	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

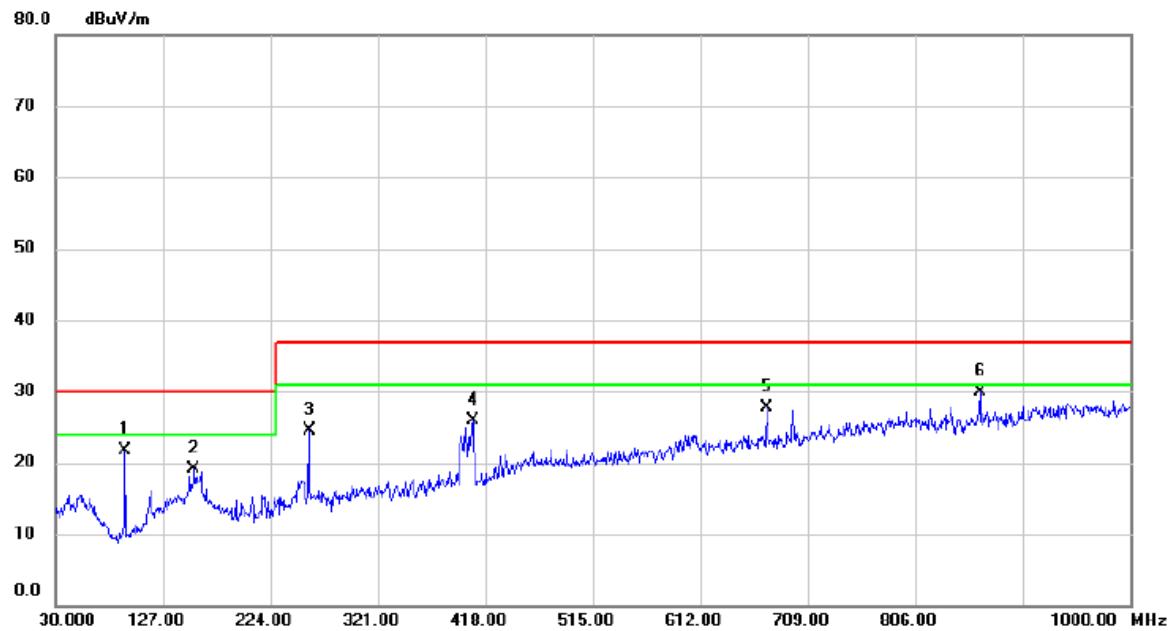

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		93.0500	44.07	-22.31	21.76	30.00	-8.24	QP	
2		155.1300	35.61	-16.45	19.16	30.00	-10.84	QP	
3		258.9200	41.23	-16.80	24.43	37.00	-12.57	QP	
4		406.3600	38.41	-12.57	25.84	37.00	-11.16	QP	
5		672.1400	35.69	-8.07	27.62	37.00	-9.38	QP	
6	*	864.2000	36.45	-6.56	29.89	37.00	-7.11	QP	

### 3.2 RADIATED EMISSIONS ABOVE 1 GHZ

#### 3.2.1 LIMITS

Class B equipment above 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(µV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000			Peak / 1 MHz	54
1000 - 3000			Average / 1 MHz	70
3000 - 6000			Peak / 1 MHz	74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>B</sub>V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F <sub>x</sub> )	Highest measured frequency
F <sub>x</sub> ≤ 108 MHz	1 GHz
108 < F <sub>x</sub> ≤ 500 MHz	2 GHz
500 < F <sub>x</sub> ≤ 1000 MHz	5 GHz
F <sub>x</sub> > 1 GHz	5 × F <sub>x</sub> up to a maximum of 6 GHz

#### 3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	Jun. 17, 2024
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981003	Nov. 17, 2024
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	RW	RWLP50-4.0A-N MRASM-12M	N/A	Jul. 30, 2024
8	Cable	RW	RWLP50-4.0A-N MRASM-1M	N/A	Jul. 30, 2024
9	Cable	RW	RWLP50-4.0A-N MRASM-4M	N/A	Jul. 30, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.

### 3.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.2.5 TEST SETUP

ABOVE 1 GHZ

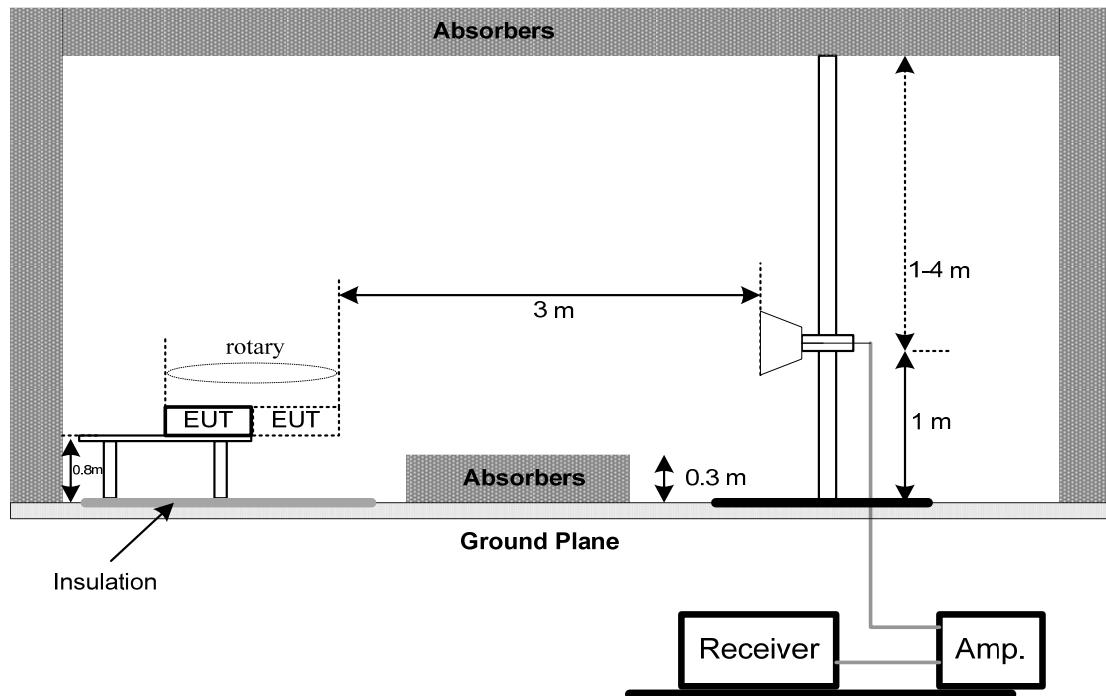

### 3.2.6 MEASUREMENT DISTANCE

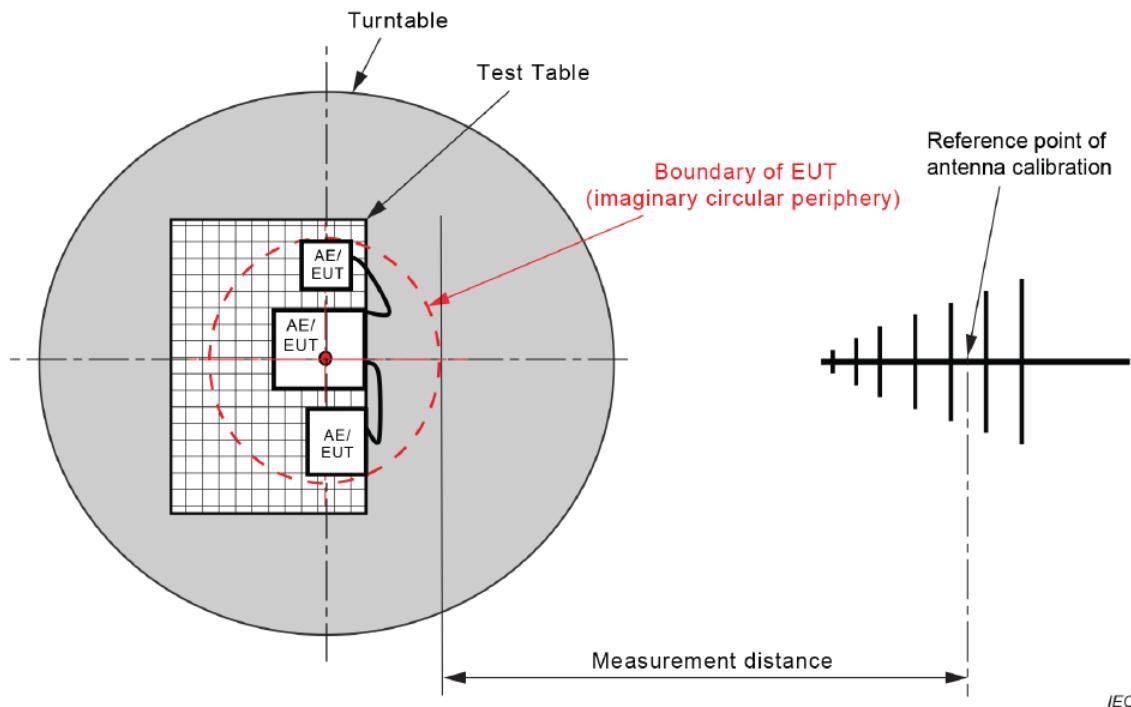


Figure C.1 – Measurement distance


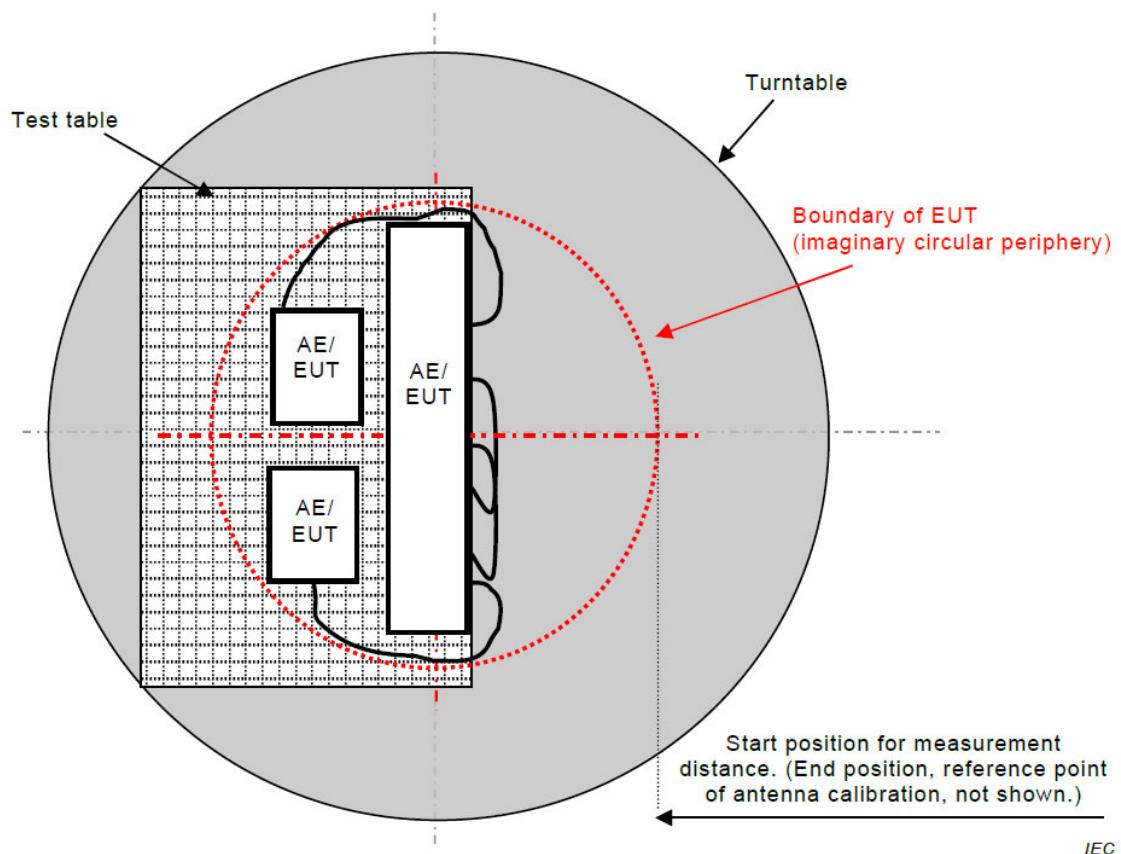


Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

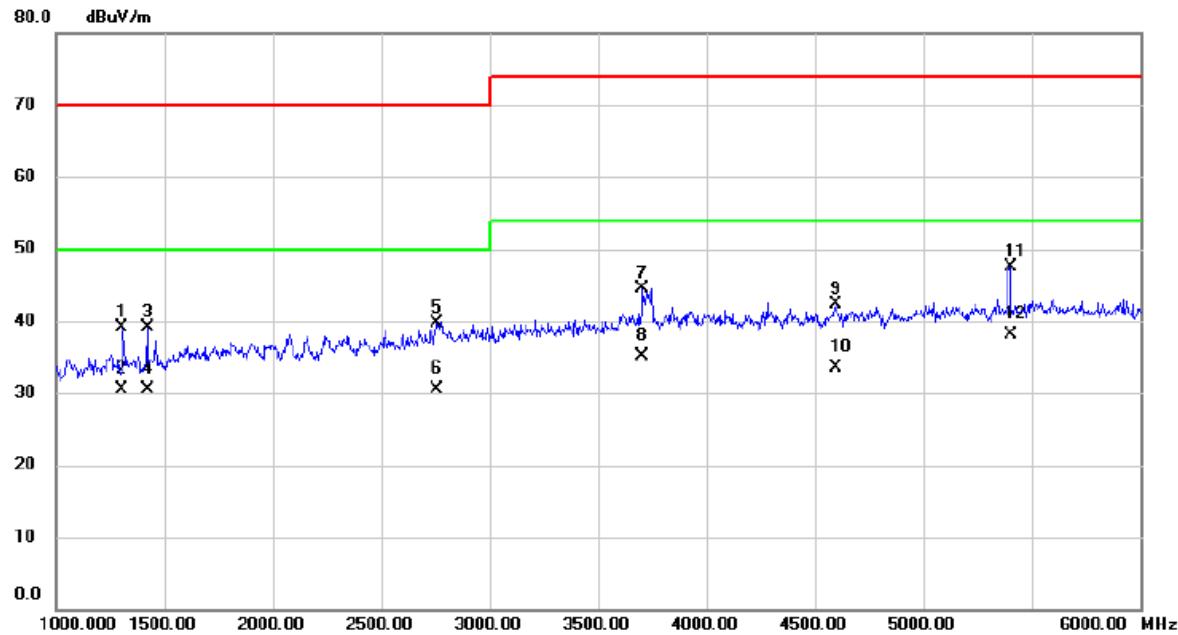

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1305.000	43.12	-4.10	39.02	70.00	-30.98	peak
2		1305.000	34.55	-4.10	30.45	50.00	-19.55	AVG
3		1420.000	42.86	-3.70	39.16	70.00	-30.84	peak
4		1420.000	34.15	-3.70	30.45	50.00	-19.55	AVG
5		2757.500	39.15	0.61	39.76	70.00	-30.24	peak
6		2757.500	29.84	0.61	30.45	50.00	-19.55	AVG
7		3705.000	41.21	3.34	44.55	74.00	-29.45	peak
8		3705.000	31.71	3.34	35.05	54.00	-18.95	AVG
9		4595.000	38.04	4.23	42.27	74.00	-31.73	peak
10		4595.000	29.22	4.23	33.45	54.00	-20.55	AVG
11		5400.000	41.58	5.95	47.53	74.00	-26.47	peak
12 *		5400.000	32.10	5.95	38.05	54.00	-15.95	AVG

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

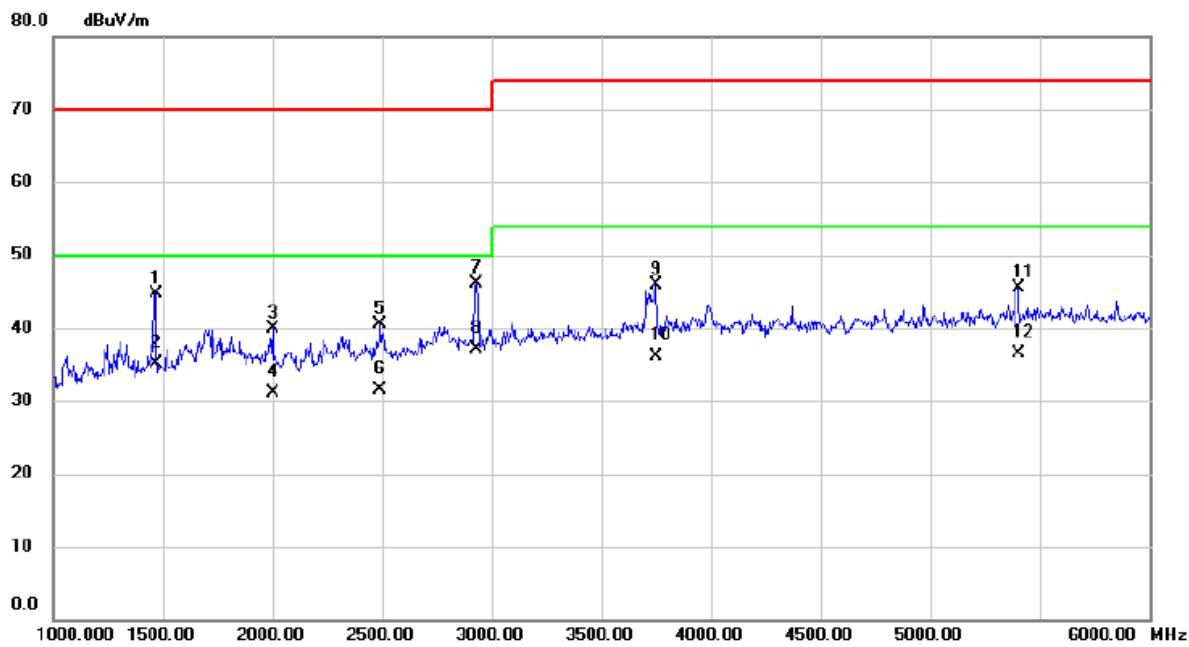

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		1467.500	48.21	-3.54	44.67	70.00	-25.33	peak	
2		1467.500	38.59	-3.54	35.05	50.00	-14.95	AVG	
3		2000.000	41.26	-1.26	40.00	70.00	-30.00	peak	
4		2000.000	32.31	-1.26	31.05	50.00	-18.95	AVG	
5		2492.500	40.81	-0.27	40.54	70.00	-29.46	peak	
6		2492.500	31.76	-0.27	31.49	50.00	-18.51	AVG	
7		2932.500	44.97	1.19	46.16	70.00	-23.84	peak	
8	*	2932.500	35.86	1.19	37.05	50.00	-12.95	AVG	
9		3750.000	42.46	3.46	45.92	74.00	-28.08	peak	
10		3750.000	32.59	3.46	36.05	54.00	-17.95	AVG	
11		5400.000	39.61	5.95	45.56	74.00	-28.44	peak	
12		5400.000	30.50	5.95	36.45	54.00	-17.55	AVG	

### 3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

#### 3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

#### 3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESR3	103027	Jun. 16, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	10274	Dec. 22, 2024
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 27, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


#### 3.3.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3.4 DEVIATION FROM TEST STANDARD


No deviation

### 3.3.5 TEST SETUP

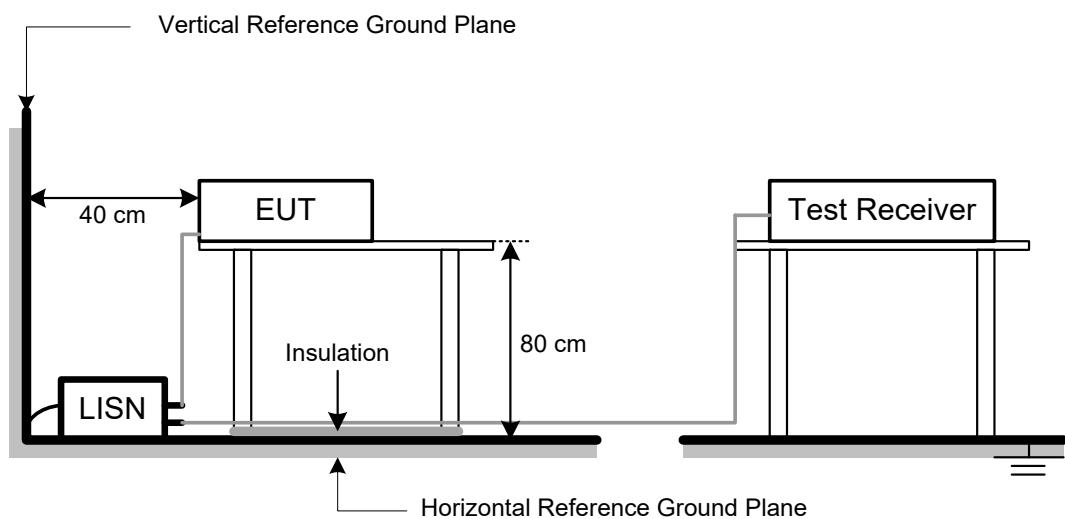


### 3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

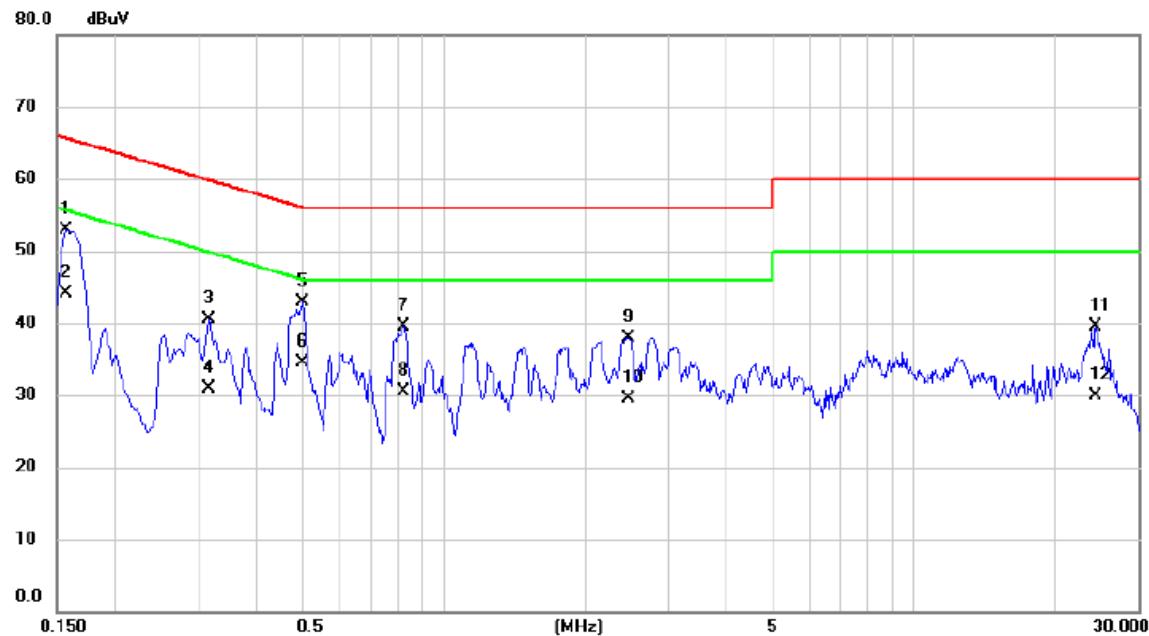

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
			Level	Factor	ment		dB	Detecto	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	
1		0.1568	43.10	9.74	52.84	65.63	-12.79	QP	
2		0.1568	34.30	9.74	44.04	55.63	-11.59	AVG	
3		0.3165	30.72	9.77	40.49	59.80	-19.31	QP	
4		0.3165	21.20	9.77	30.97	49.80	-18.83	AVG	
5		0.5010	33.10	9.79	42.89	56.00	-13.11	QP	
6	*	0.5010	24.80	9.79	34.59	46.00	-11.41	AVG	
7		0.8205	29.79	9.81	39.60	56.00	-16.40	QP	
8		0.8205	20.60	9.81	30.41	46.00	-15.59	AVG	
9		2.4653	28.08	9.88	37.96	56.00	-18.04	QP	
10		2.4653	19.70	9.88	29.58	46.00	-16.42	AVG	
11		24.3083	28.99	10.56	39.55	60.00	-20.45	QP	
12		24.3083	19.30	10.56	29.86	50.00	-20.14	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

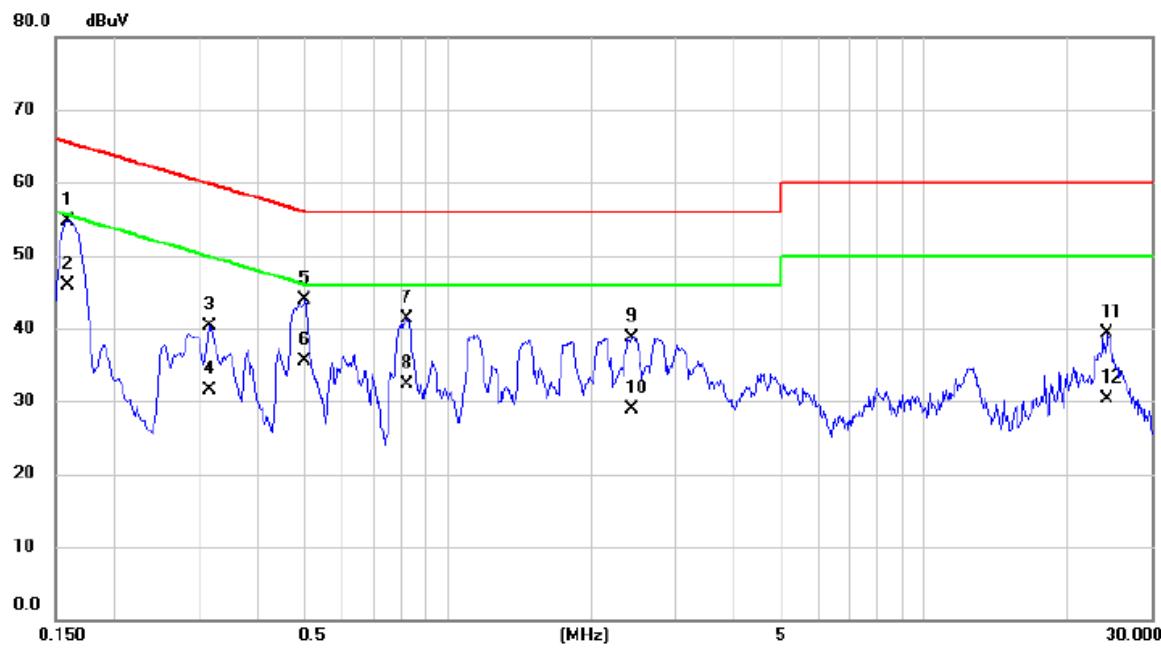

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	45.16	9.59	54.75	65.52	-10.77	QP	
2	*	0.1590	36.30	9.59	45.89	55.52	-9.63	AVG	
3		0.3165	30.61	9.63	40.24	59.80	-19.56	QP	
4		0.3165	21.80	9.63	31.43	49.80	-18.37	AVG	
5		0.5010	34.16	9.65	43.81	56.00	-12.19	QP	
6		0.5010	25.90	9.65	35.55	46.00	-10.45	AVG	
7		0.8227	31.68	9.67	41.35	56.00	-14.65	QP	
8		0.8227	22.70	9.67	32.37	46.00	-13.63	AVG	
9		2.4428	28.99	9.73	38.72	56.00	-17.28	QP	
10		2.4428	19.20	9.73	28.93	46.00	-17.07	AVG	
11		24.1553	28.86	10.42	39.28	60.00	-20.72	QP	
12		24.1553	19.90	10.42	30.32	50.00	-19.68	AVG	

## 4. EMC EMISSION TEST- EN 55032:2015+A11:2020

### 4.1 RADIATED EMISSIONS UP TO 1 GHZ

#### 4.1.1 LIMITS

Class B equipment up to 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(µV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>u</sub>V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jun. 16, 2024
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	Jun. 16, 2024
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	Jun. 16, 2024
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 10, 2024
6	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Nov. 10, 2024
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	1461	Nov. 28, 2024
8	Attenuator	EMCI	EMCI-N-6-06	AT-06010	Nov. 28, 2024
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF780208159	N/A
12	Cable	RW	LMR400-NMNM-10M	N/A	Dec. 03, 2024
13	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
14	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024
15	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
16	Cable	RW	LMR400-NMNM-8M	N/A	Dec. 03, 2024
17	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.

### 4.1.3 TEST PROCEDURE


**TEST PROCEDURE**

- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

#### 4.1.4 DEVIATION FROM TEST STANDARD

### No deviation

#### 4.1.5 TEST SETUP

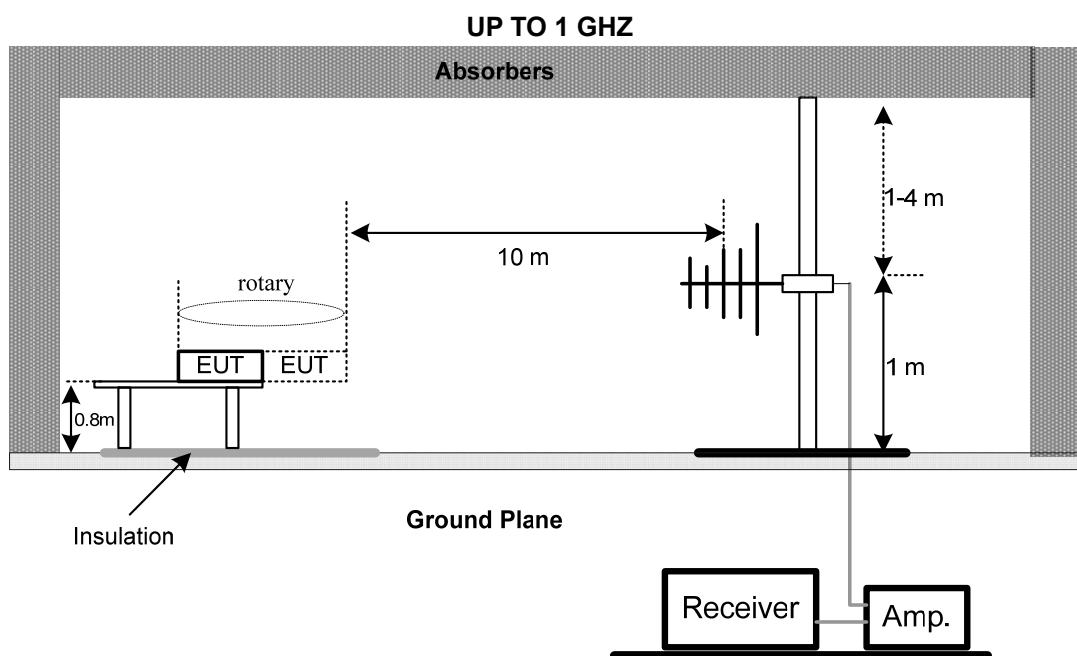

#### 4.1.6 MEASUREMENT DISTANCE

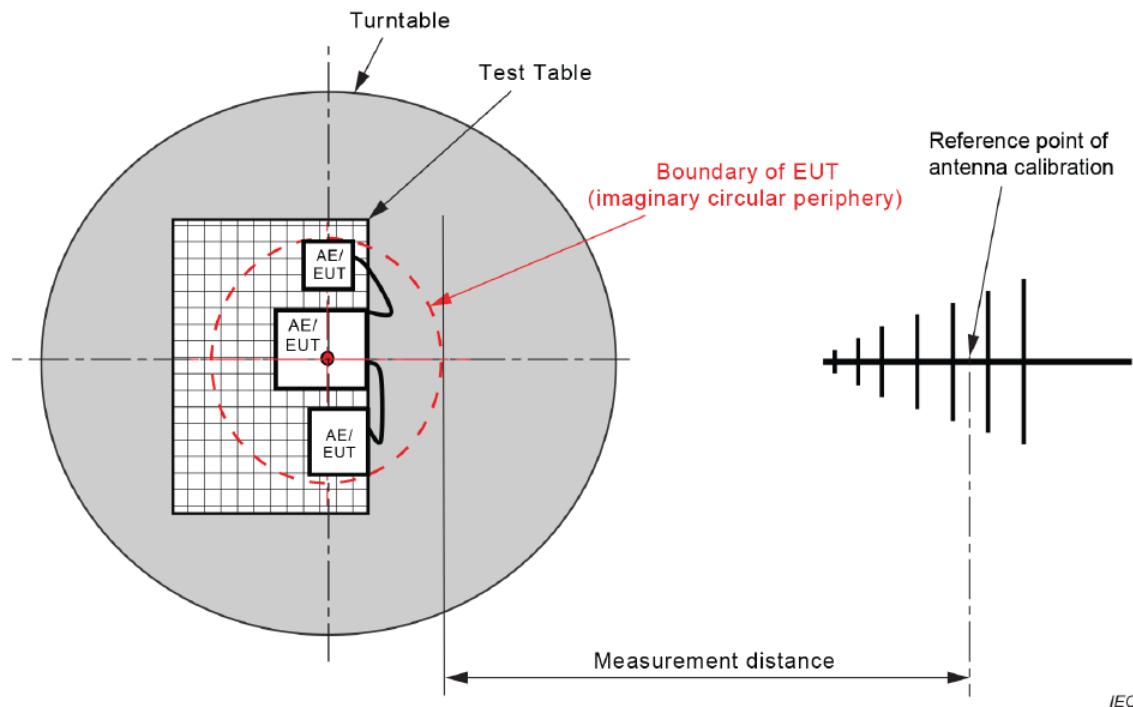


Figure C.1 – Measurement distance


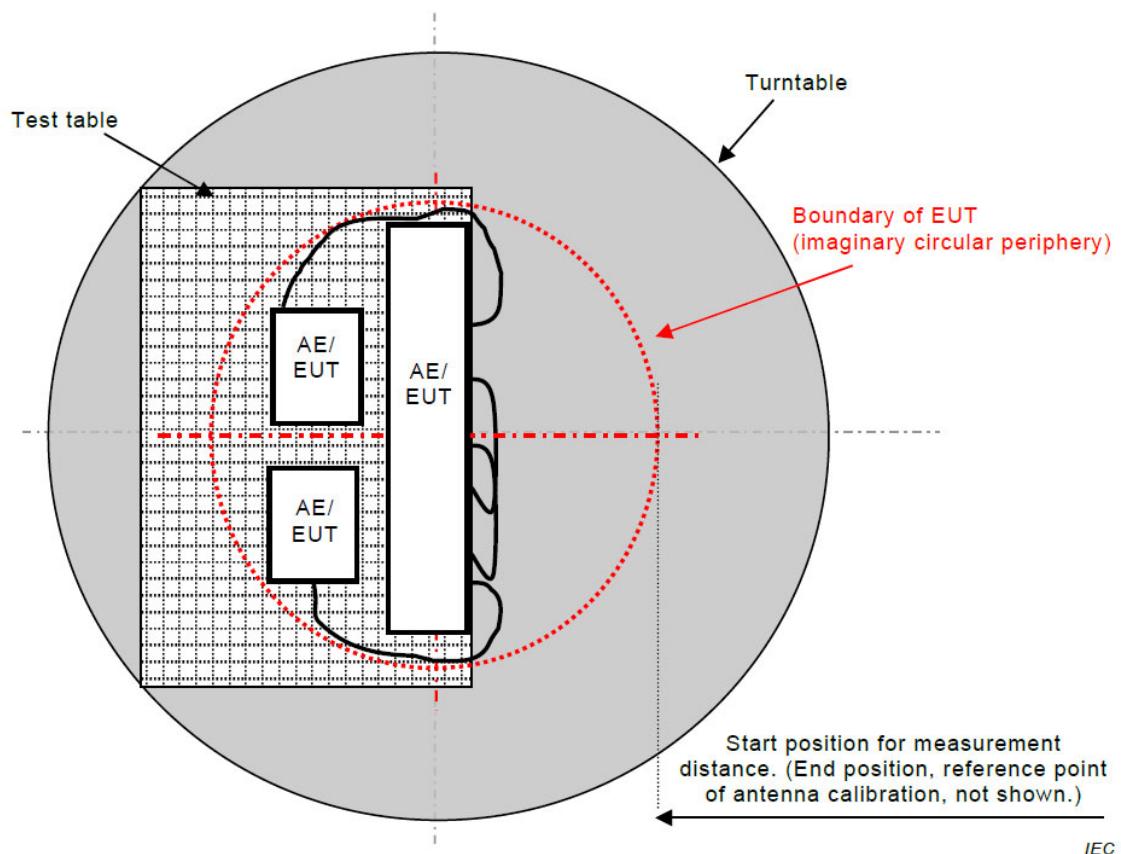


Figure C.2 – Boundary of EUT, Local AE and associated cabling


#### 4.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

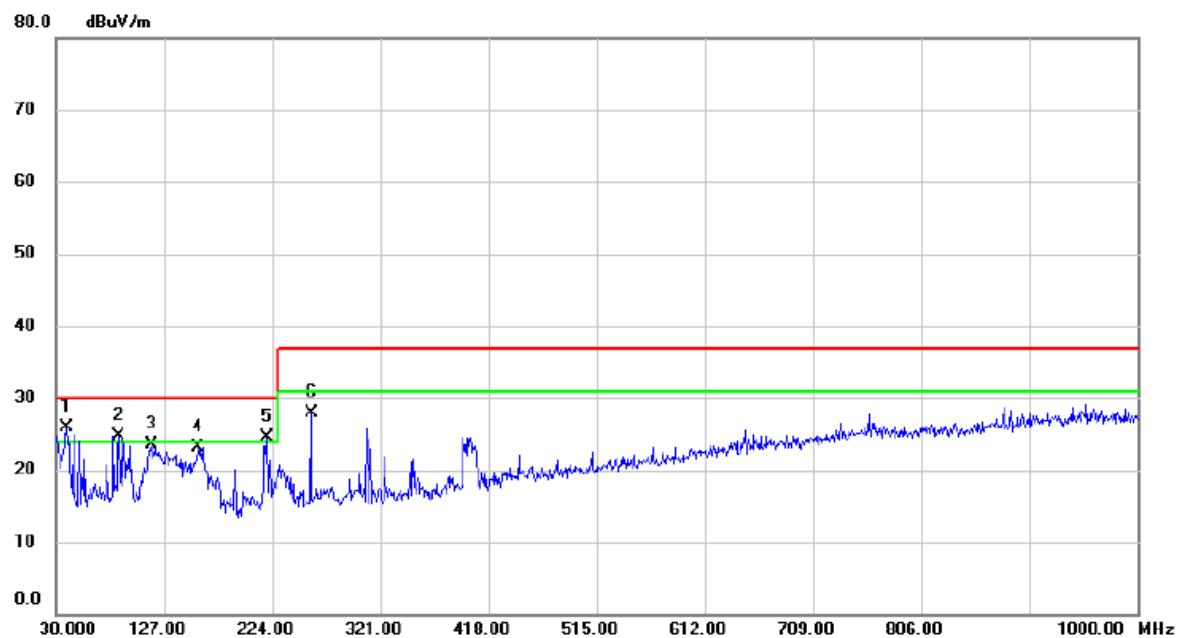


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	39.7000	43.90	-18.09	25.81	30.00	-4.19	QP
2	!	86.2600	46.31	-21.54	24.77	30.00	-5.23	QP
3		115.3600	42.45	-18.86	23.59	30.00	-6.41	QP
4		157.0700	40.04	-16.99	23.05	30.00	-6.95	QP
5	!	219.1500	43.99	-19.52	24.47	30.00	-5.53	QP
6		258.9200	45.03	-17.22	27.81	37.00	-9.19	QP

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

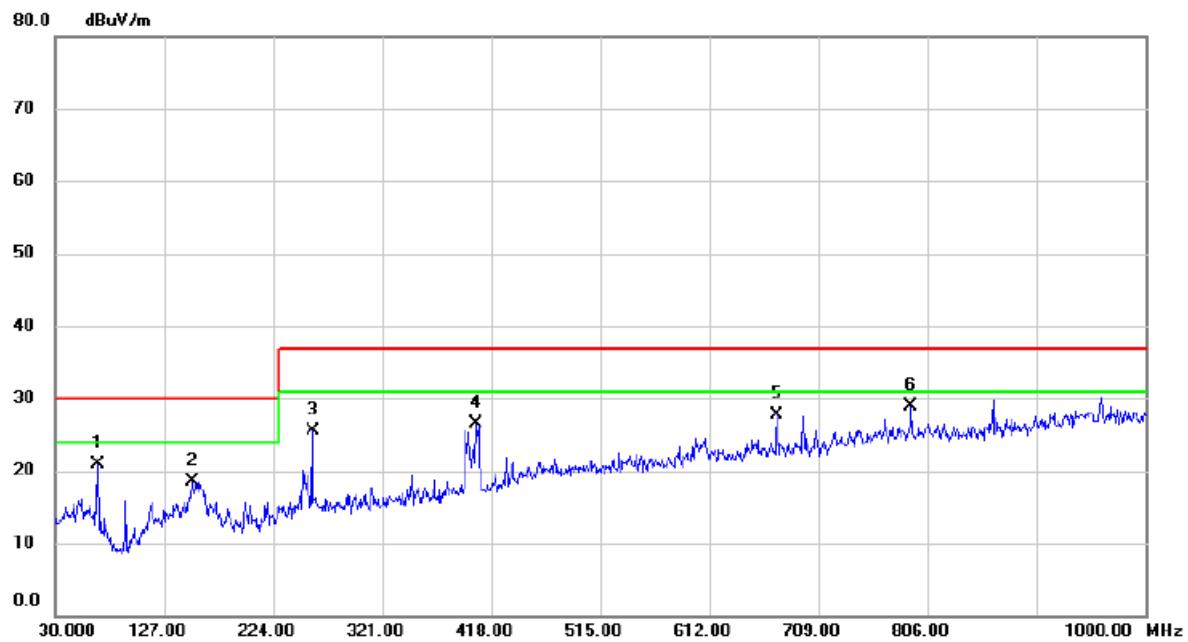


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		67.8300	40.17	-19.24	20.93	30.00	-9.07	QP	
2		152.2200	35.01	-16.49	18.52	30.00	-11.48	QP	
3		259.4050	42.30	-16.79	25.51	37.00	-11.49	QP	
4		404.4200	39.06	-12.63	26.43	37.00	-10.57	QP	
5		672.1400	35.73	-8.07	27.66	37.00	-9.34	QP	
6	*	791.4500	35.46	-6.58	28.88	37.00	-8.12	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 3		

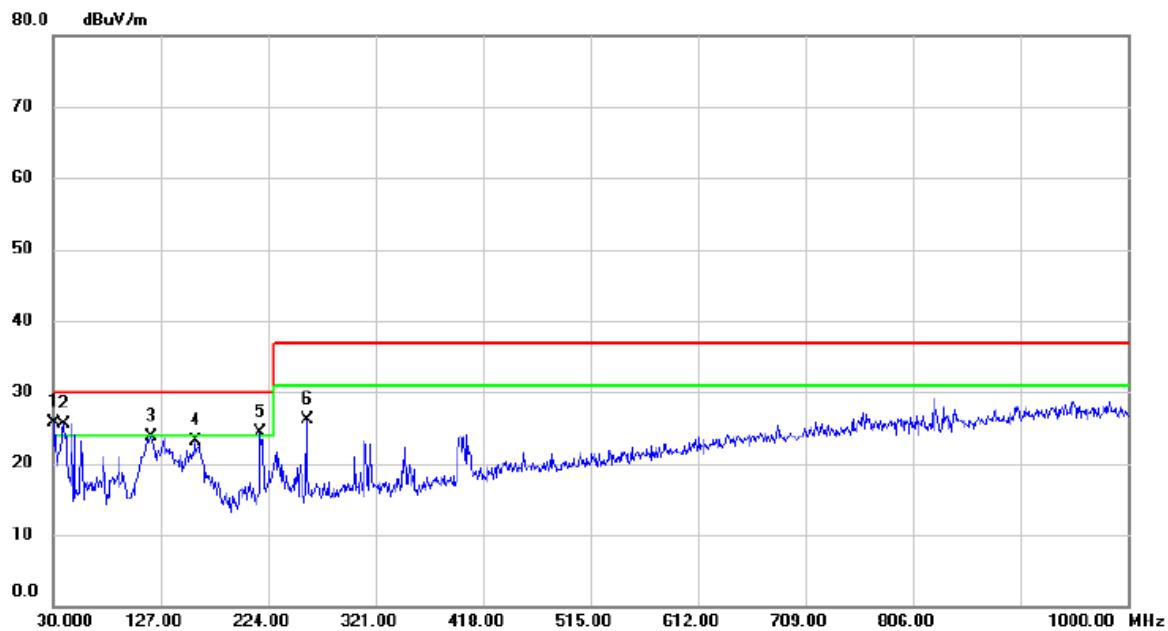


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level						
		MHz	dBuV		dB	dBuV/m	dB		
1	*	30.9700	43.25	-17.61	25.64	30.00	-4.36	QP	
2	!	39.7000	43.56	-18.09	25.47	30.00	-4.53	QP	
3		118.2700	42.19	-18.58	23.61	30.00	-6.39	QP	
4		158.0400	40.01	-16.93	23.08	30.00	-6.92	QP	
5	!	217.2100	43.89	-19.50	24.39	30.00	-5.61	QP	
6		258.9200	43.40	-17.22	26.18	37.00	-10.82	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 3		

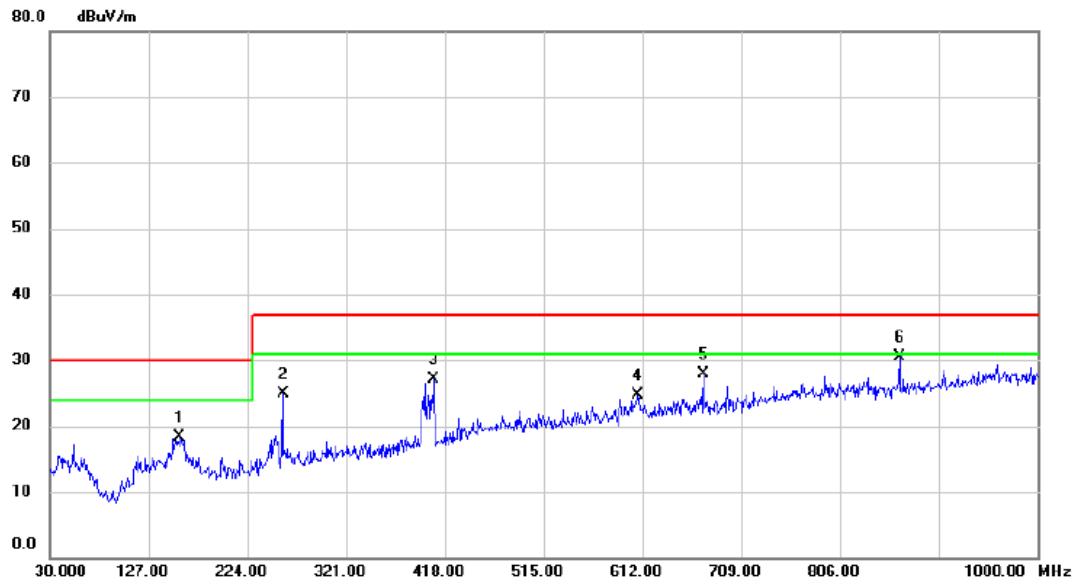


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		157.0700	34.72	-16.43	18.29	30.00	-11.71	QP	
2		258.9200	41.80	-16.80	25.00	37.00	-12.00	QP	
3		407.3300	39.73	-12.54	27.19	37.00	-9.81	QP	
4		607.1500	33.58	-8.79	24.79	37.00	-12.21	QP	
5		672.1400	35.95	-8.07	27.88	37.00	-9.12	QP	
6	*	864.2000	37.13	-6.56	30.57	37.00	-6.43	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 7		

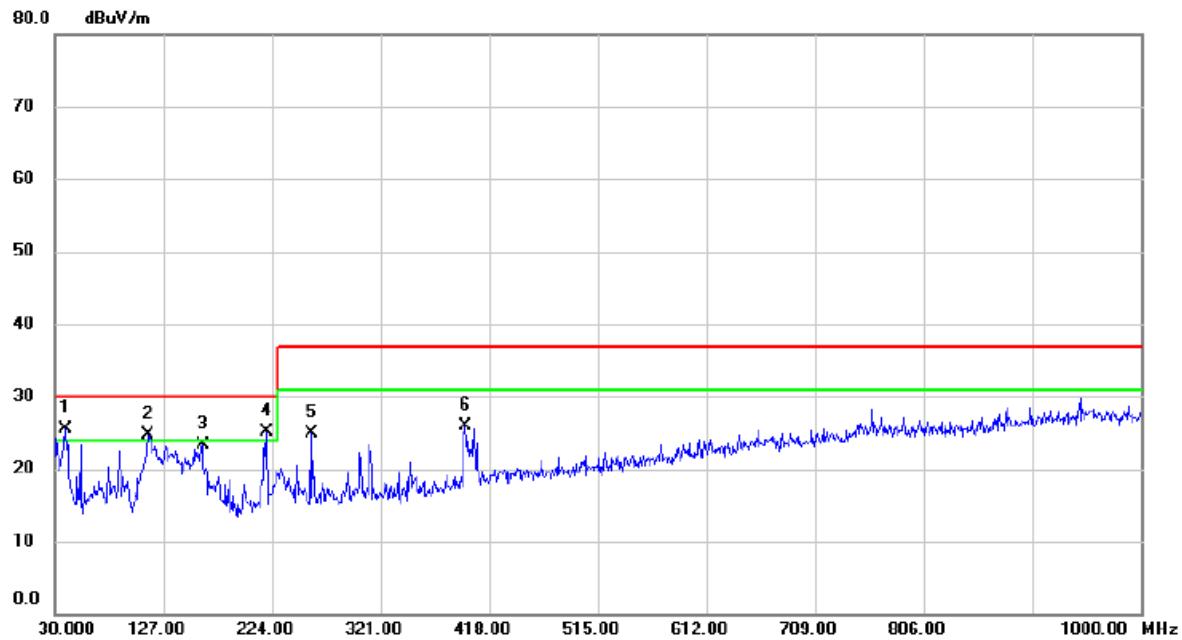


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	39.7000	43.61	-18.09	25.52	30.00	-4.48	QP
2	!	113.4200	43.74	-19.05	24.69	30.00	-5.31	QP
3		161.9200	40.06	-16.80	23.26	30.00	-6.74	QP
4	!	219.1500	44.59	-19.52	25.07	30.00	-4.93	QP
5		258.9200	42.11	-17.22	24.89	37.00	-12.11	QP
6		396.6600	38.64	-12.79	25.85	37.00	-11.15	QP

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 7		

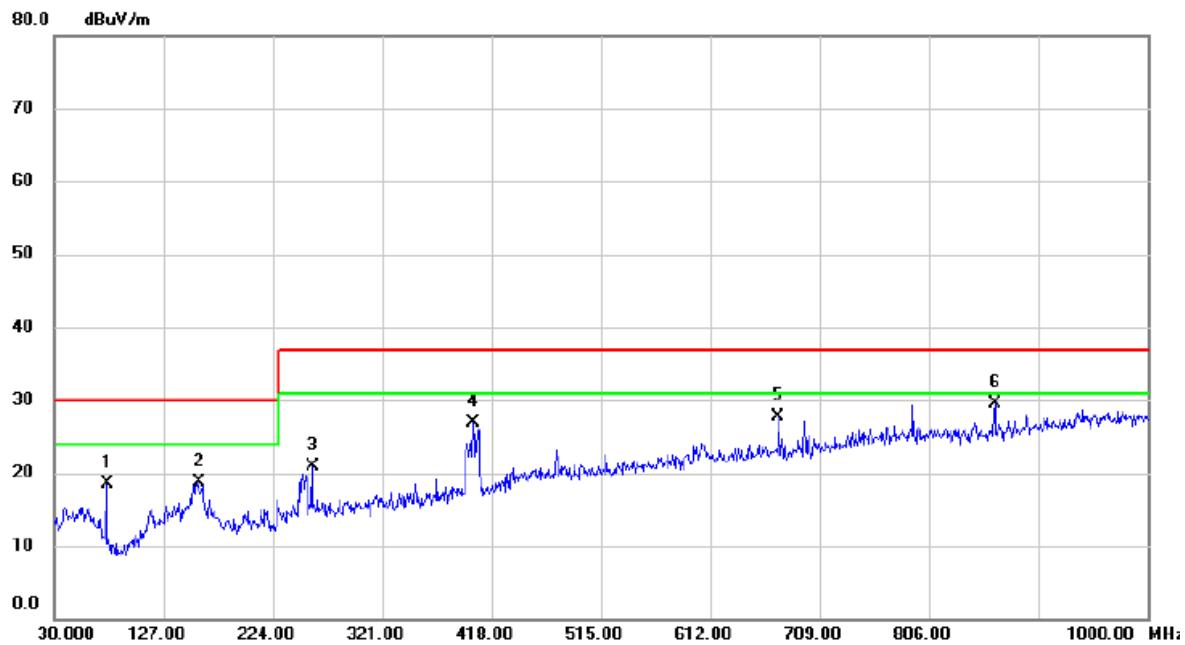


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		76.5600	39.55	-21.07	18.48	30.00	-11.52	QP	
2		158.0400	35.13	-16.42	18.71	30.00	-11.29	QP	
3		258.9200	37.67	-16.80	20.87	37.00	-16.13	QP	
4		401.5100	39.56	-12.72	26.84	37.00	-10.16	QP	
5		672.1400	35.79	-8.07	27.72	37.00	-9.28	QP	
6	*	864.2000	35.97	-6.56	29.41	37.00	-7.59	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 16		

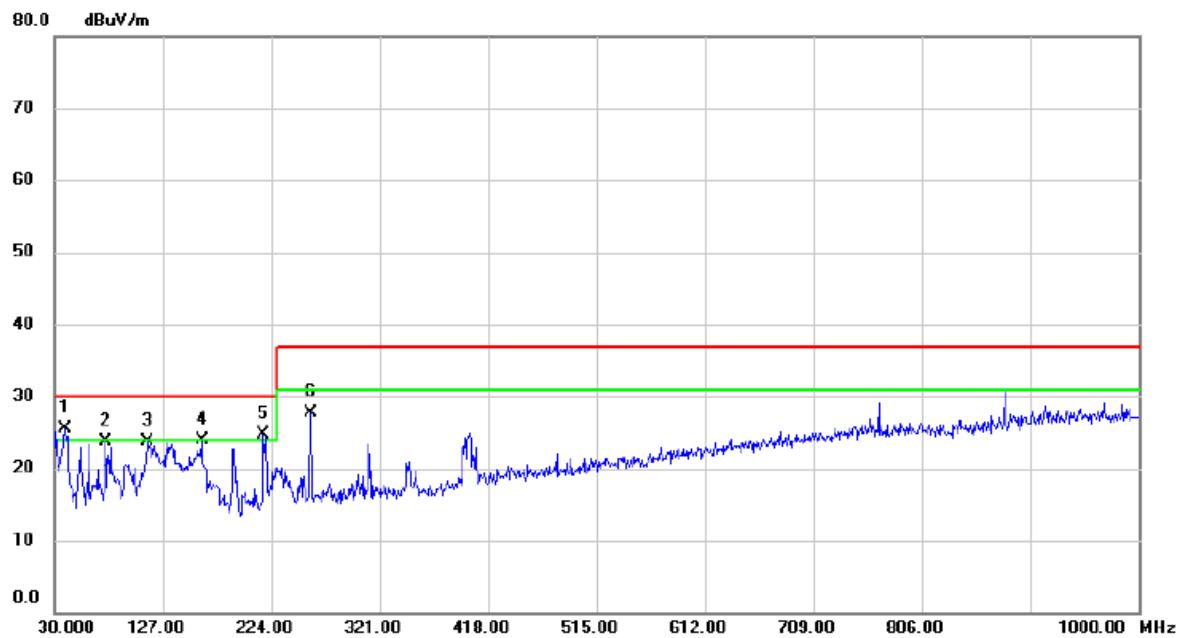


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39.7000	43.63	-18.09	25.54	30.00	-4.46	QP	
2		75.5900	43.01	-19.33	23.68	30.00	-6.32	QP	
3		113.4200	42.66	-19.05	23.61	30.00	-6.39	QP	
4		161.9200	40.64	-16.80	23.84	30.00	-6.16	QP	
5	!	217.2100	44.19	-19.50	24.69	30.00	-5.31	QP	
6		258.9200	44.89	-17.22	27.67	37.00	-9.33	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 16		

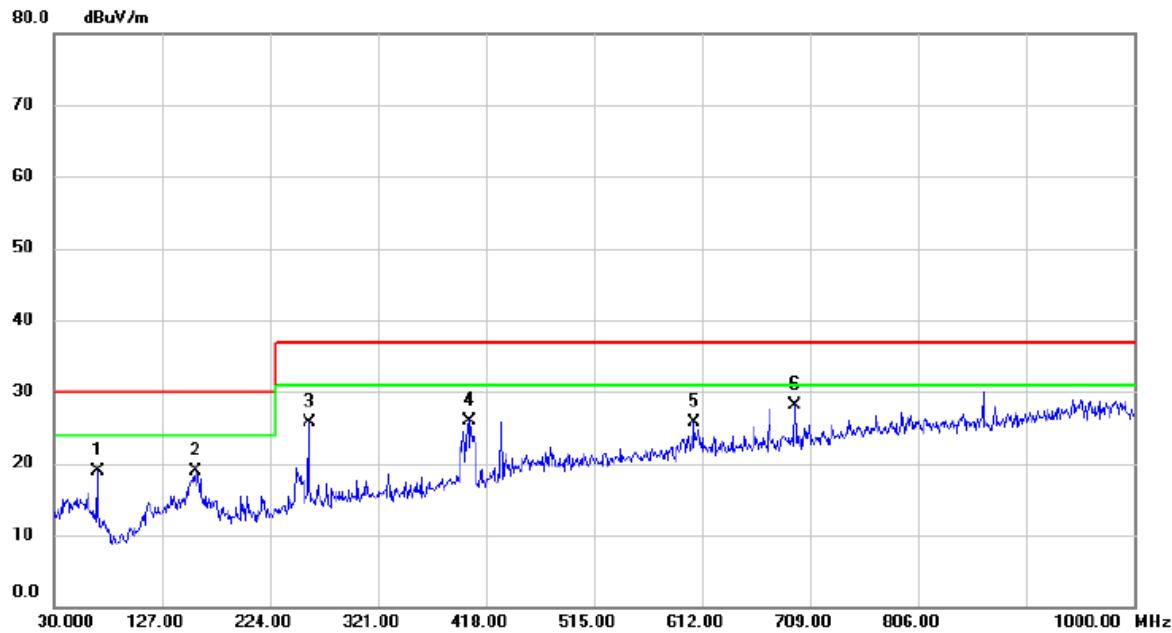


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		68.8000	38.25	-19.42	18.83	30.00	-11.17	QP
2		157.0700	35.24	-16.43	18.81	30.00	-11.19	QP
3		258.9200	42.42	-16.80	25.62	37.00	-11.38	QP
4		402.4800	38.69	-12.69	26.00	37.00	-11.00	QP
5		605.2100	34.61	-8.82	25.79	37.00	-11.21	QP
6	*	695.4200	36.19	-7.99	28.20	37.00	-8.80	QP

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

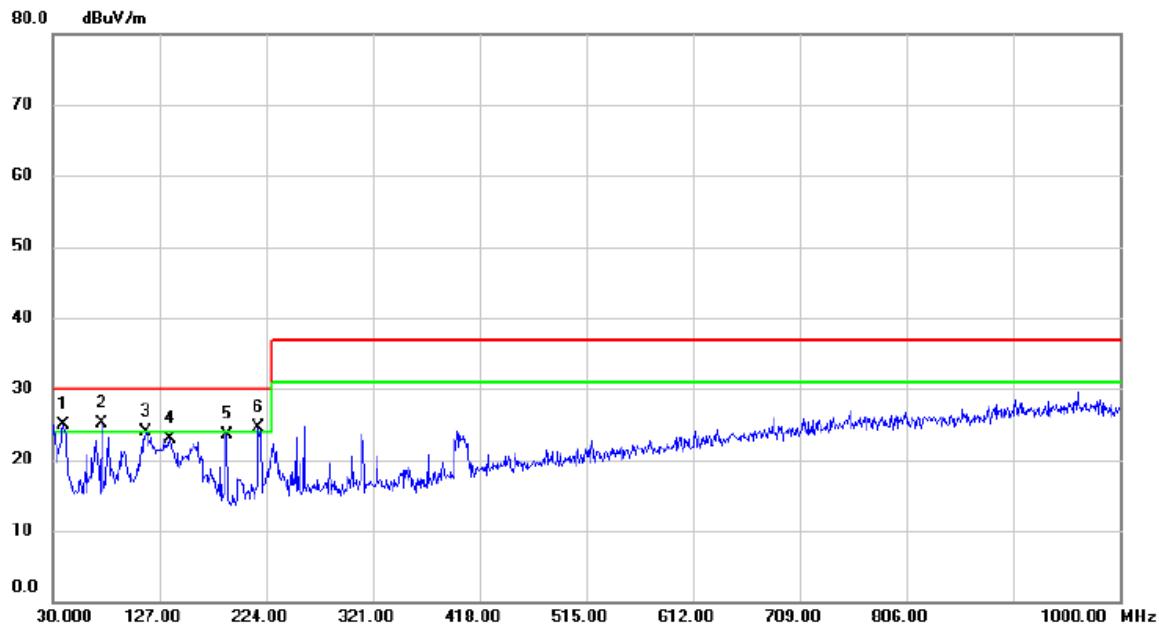

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	!	39.7000	43.07	-18.09	24.98	30.00	-5.02	QP
2	*	74.6200	44.24	-19.16	25.08	30.00	-4.92	QP
3		114.3900	42.95	-18.96	23.99	30.00	-6.01	QP
4		136.7000	40.89	-17.98	22.91	30.00	-7.09	QP
5		188.1100	42.11	-18.61	23.50	30.00	-6.50	QP
6	!	217.2100	43.95	-19.50	24.45	30.00	-5.55	QP

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

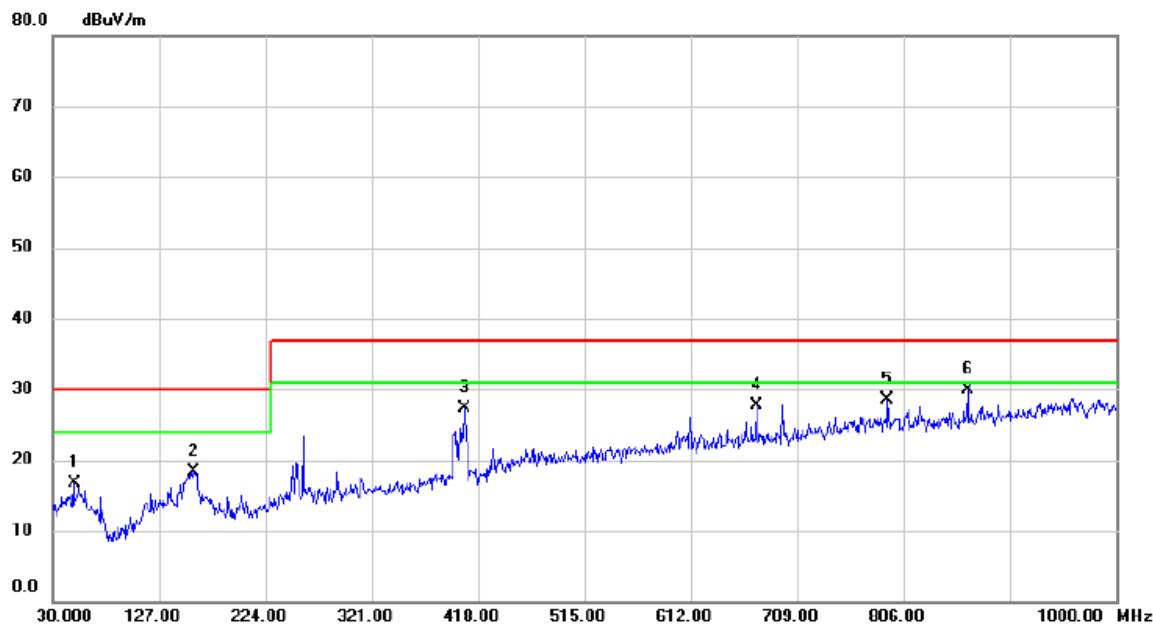

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment	
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		49.4000	34.53	-17.77	16.76	30.00	-13.24	QP	
2		158.0400	34.81	-16.42	18.39	30.00	-11.61	QP	
3		405.3900	39.87	-12.60	27.27	37.00	-9.73	QP	
4		672.1400	35.86	-8.07	27.79	37.00	-9.21	QP	
5		791.4500	35.17	-6.58	28.59	37.00	-8.41	QP	
6	*	864.2000	36.39	-6.56	29.83	37.00	-7.17	QP	

## 4.2 RADIATED EMISSIONS ABOVE 1 GHZ

### 4.2.1 LIMITS

Class B equipment above 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(µV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000			Peak / 1 MHz	54
1000 - 3000			Average / 1 MHz	70
3000 - 6000			Peak / 1 MHz	74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>u</sub>V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F <sub>x</sub> )	Highest measured frequency
F <sub>x</sub> ≤ 108 MHz	1 GHz
108 < F <sub>x</sub> ≤ 500 MHz	2 GHz
500 < F <sub>x</sub> ≤ 1000 MHz	5 GHz
F <sub>x</sub> > 1 GHz	5 × F <sub>x</sub> up to a maximum of 6 GHz

### 4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	Jun. 17, 2024
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981003	Nov. 17, 2024
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	RW	RWLP50-4.0A-N MRASM-12M	N/A	Jul. 30, 2024
8	Cable	RW	RWLP50-4.0A-N MRASM-1M	N/A	Jul. 30, 2024
9	Cable	RW	RWLP50-4.0A-N MRASM-4M	N/A	Jul. 30, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.

#### 4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

#### 4.2.4 DEVIATION FROM TEST STANDARD

The limit of the EN 55032:2015+A1:2020&AS/NZS CISPR 32:2015+AMD1:2020&CISPR 32:2015+AMD1:2019 standard deviates from the requirements, but the limit of the EN 55032:2015+A11:2020 standard is more stringent and can be covered, so the test data meets the EN 55032:2015+A1:2020 &AS/NZS CISPR 32:2015+AMD1:2020&CISPR 32:2015+AMD1:2019 standard.

#### 4.2.5 TEST SETUP

##### ABOVE 1 GHZ

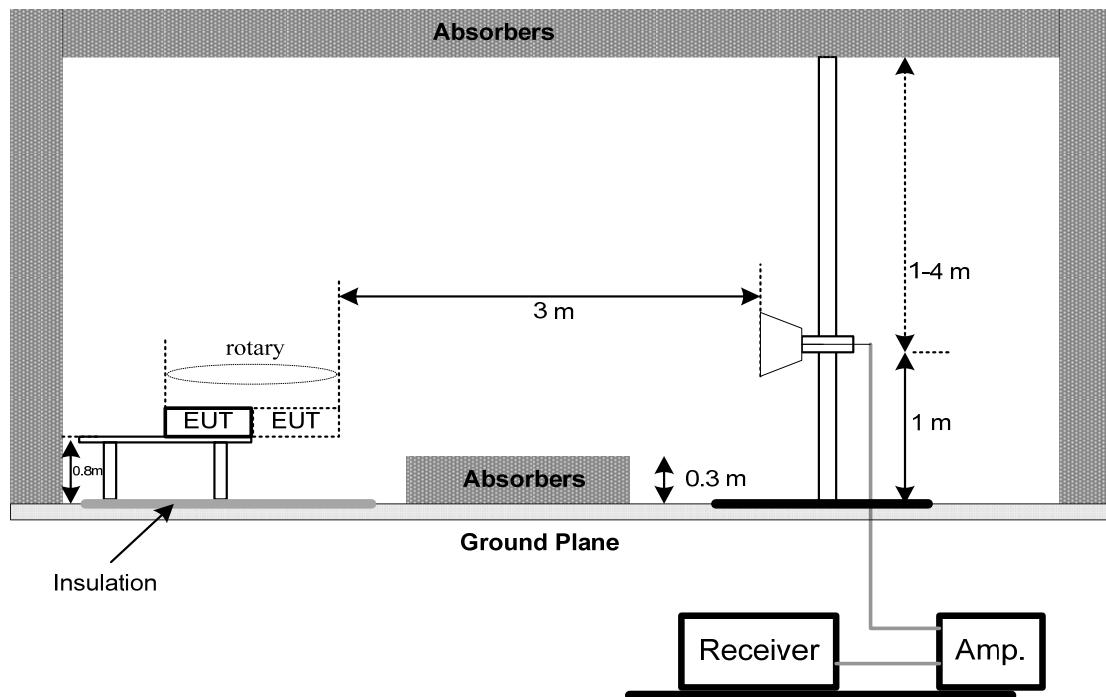

#### 4.2.6 MEASUREMENT DISTANCE

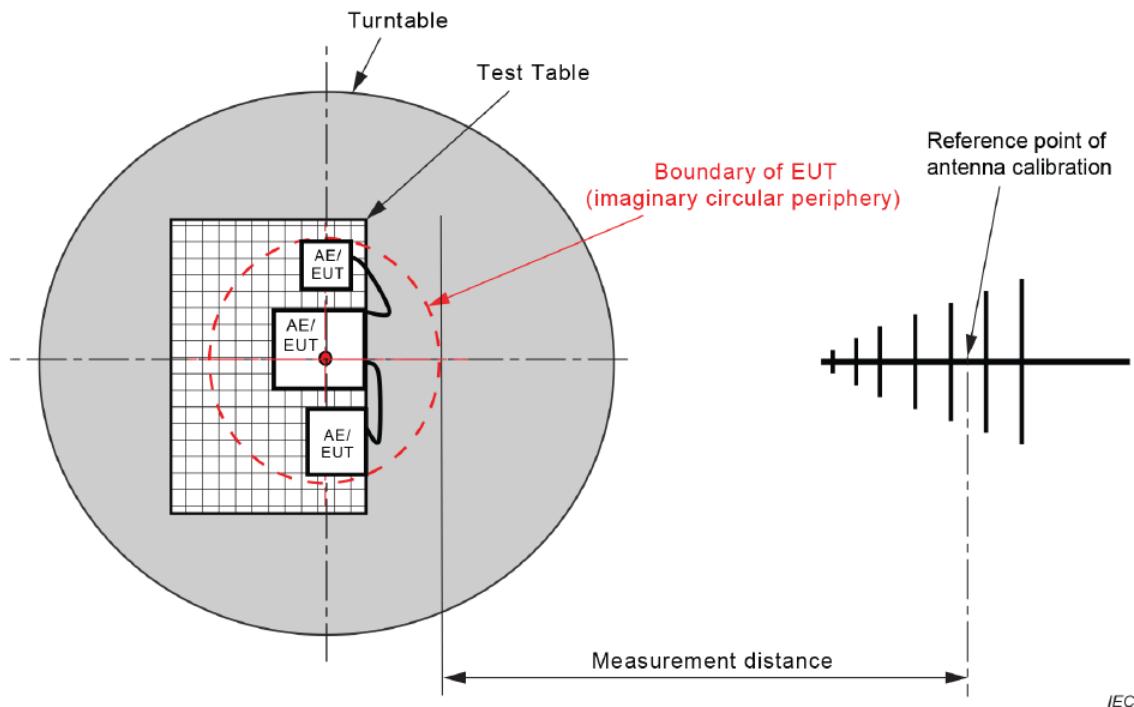


Figure C.1 – Measurement distance


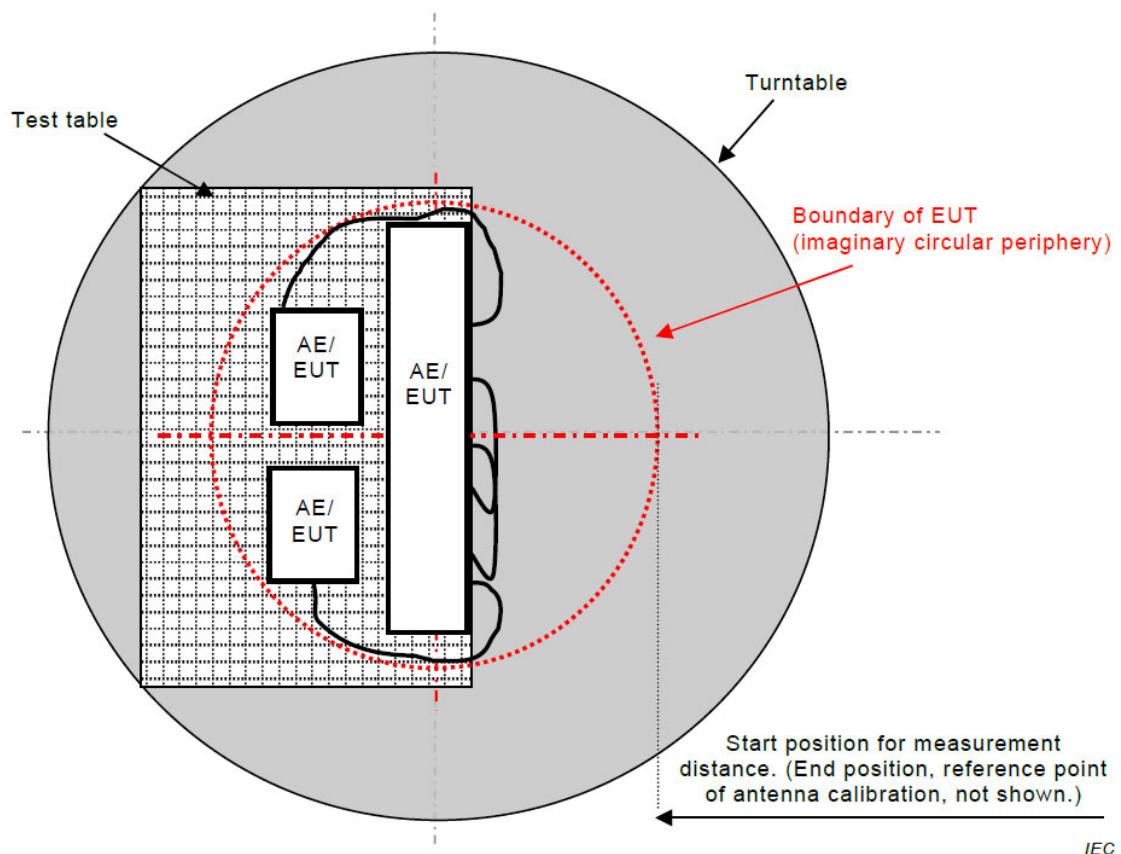


Figure C.2 – Boundary of EUT, Local AE and associated cabling


#### 4.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

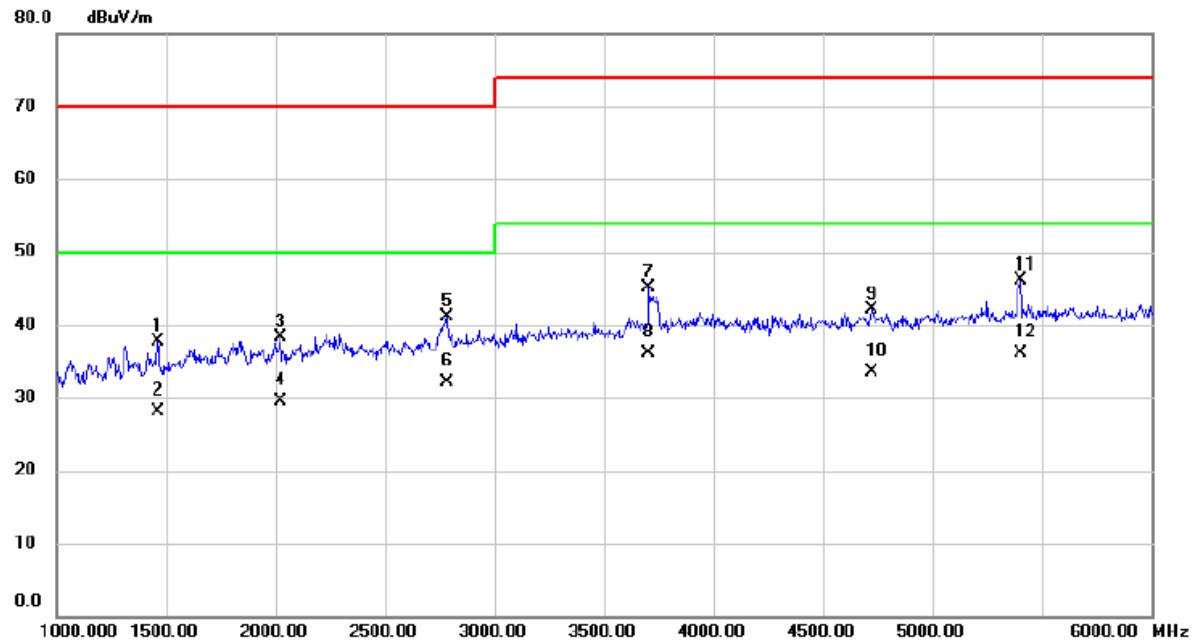


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1462.500	41.20	-3.55	37.65	70.00	-32.35	peak
2		1462.500	31.60	-3.55	28.05	50.00	-21.95	AVG
3		2022.500	39.47	-1.22	38.25	70.00	-31.75	peak
4		2022.500	30.68	-1.22	29.46	50.00	-20.54	AVG
5		2780.000	40.34	0.68	41.02	70.00	-28.98	peak
6	*	2780.000	31.37	0.68	32.05	50.00	-17.95	AVG
7		3705.000	41.71	3.34	45.05	74.00	-28.95	peak
8		3705.000	32.71	3.34	36.05	54.00	-17.95	AVG
9		4722.500	37.55	4.47	42.02	74.00	-31.98	peak
10		4722.500	28.98	4.47	33.45	54.00	-20.55	AVG
11		5400.000	40.10	5.95	46.05	74.00	-27.95	peak
12		5400.000	30.10	5.95	36.05	54.00	-17.95	AVG

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

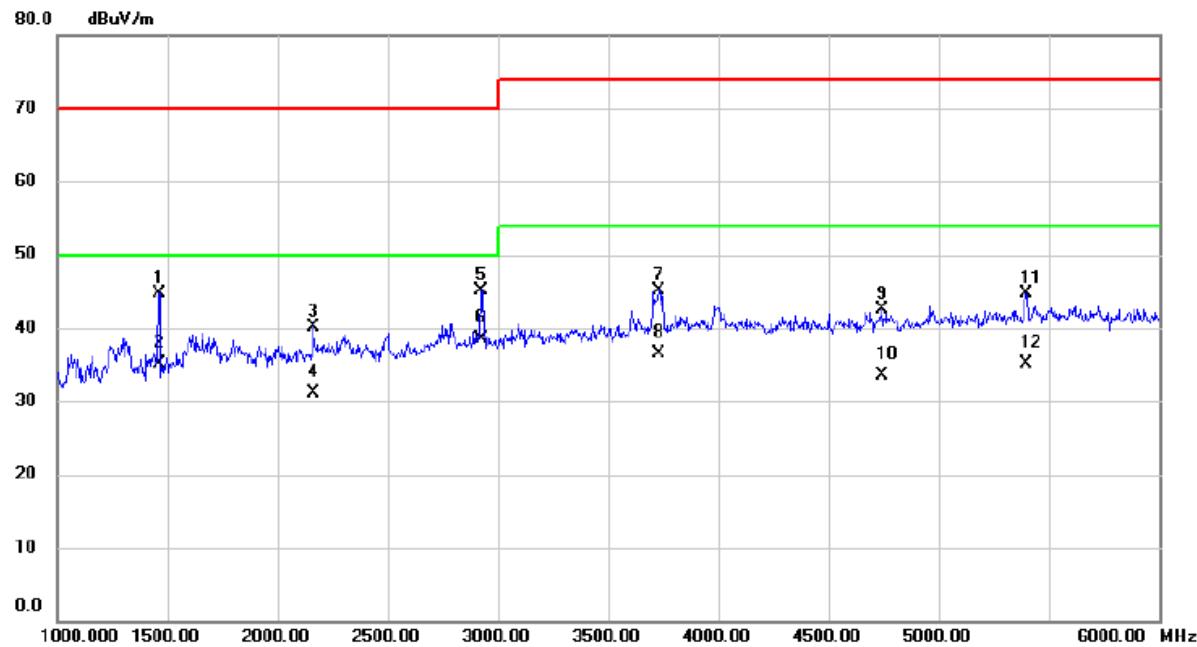


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1462.500	48.28	-3.55	44.73	70.00	-25.27	peak	
2		1462.500	38.60	-3.55	35.05	50.00	-14.95	AVG	
3		2162.500	41.13	-0.93	40.20	70.00	-29.80	peak	
4		2162.500	31.98	-0.93	31.05	50.00	-18.95	AVG	
5		2922.500	43.95	1.16	45.11	70.00	-24.89	peak	
6	*	2922.500	37.29	1.16	38.45	50.00	-11.55	AVG	
7		3732.500	41.79	3.41	45.20	74.00	-28.80	peak	
8		3732.500	33.04	3.41	36.45	54.00	-17.55	AVG	
9		4740.000	37.95	4.50	42.45	74.00	-31.55	peak	
10		4740.000	28.99	4.50	33.49	54.00	-20.51	AVG	
11		5397.500	38.71	5.94	44.65	74.00	-29.35	peak	
12		5397.500	29.11	5.94	35.05	54.00	-18.95	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 3		

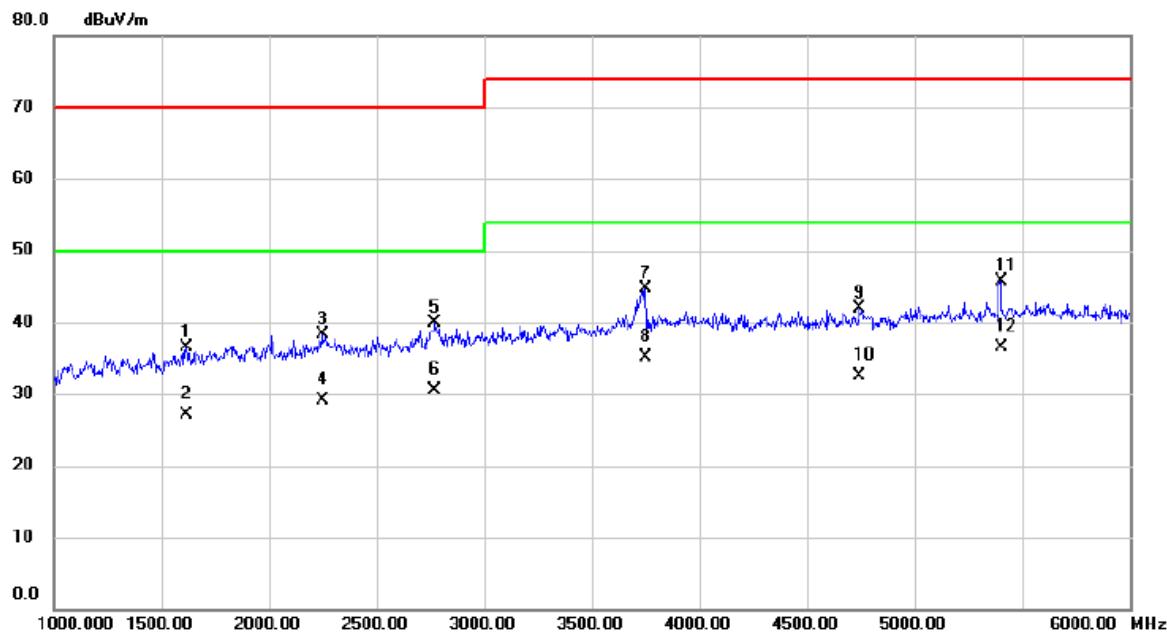


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
			Level			m	dB	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1617.500	39.51	-2.92	36.59	70.00	-33.41	peak	
2		1617.500	29.97	-2.92	27.05	50.00	-22.95	AVG	
3		2247.500	39.05	-0.76	38.29	70.00	-31.71	peak	
4		2247.500	29.81	-0.76	29.05	50.00	-20.95	AVG	
5		2772.500	39.26	0.65	39.91	70.00	-30.09	peak	
6		2772.500	29.80	0.65	30.45	50.00	-19.55	AVG	
7		3750.000	41.15	3.46	44.61	74.00	-29.39	peak	
8		3750.000	31.59	3.46	35.05	54.00	-18.95	AVG	
9		4745.000	37.30	4.51	41.81	74.00	-32.19	peak	
10		4745.000	27.94	4.51	32.45	54.00	-21.55	AVG	
11		5400.000	39.82	5.95	45.77	74.00	-28.23	peak	
12	*	5400.000	30.50	5.95	36.45	54.00	-17.55	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 3		

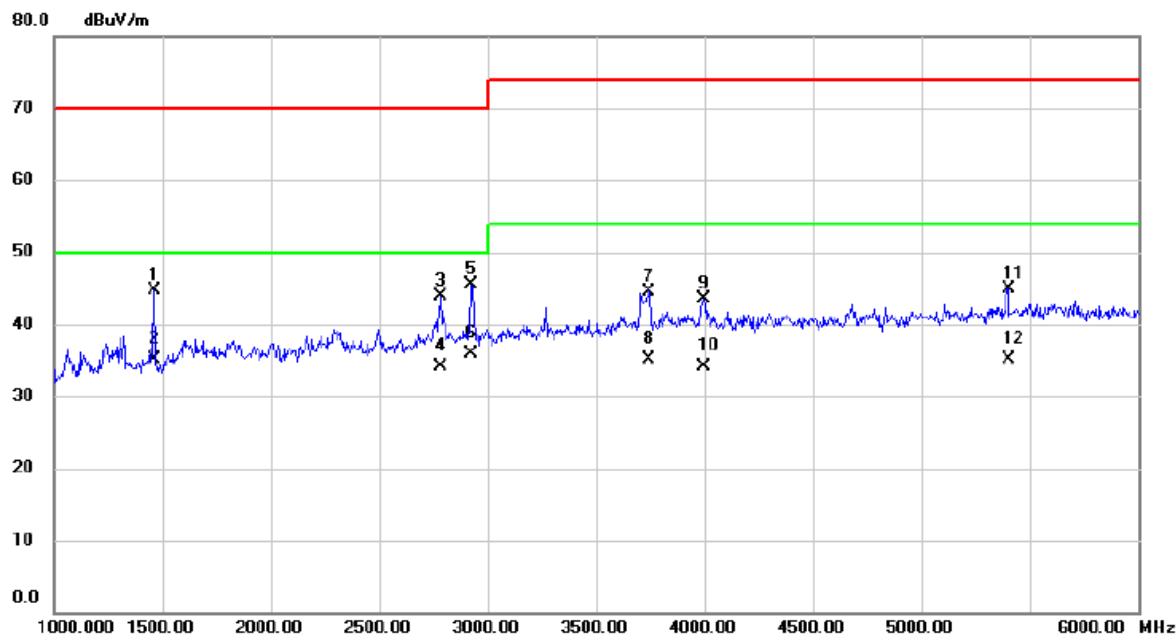


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1465.000	48.19	-3.55	44.64	70.00	-25.36	peak	
2		1465.000	38.60	-3.55	35.05	50.00	-14.95	AVG	
3		2785.000	43.17	0.70	43.87	70.00	-26.13	peak	
4		2785.000	33.35	0.70	34.05	50.00	-15.95	AVG	
5		2922.500	44.31	1.16	45.47	70.00	-24.53	peak	
6	*	2922.500	34.82	1.16	35.98	50.00	-14.02	AVG	
7		3745.000	41.16	3.44	44.60	74.00	-29.40	peak	
8		3745.000	31.61	3.44	35.05	54.00	-18.95	AVG	
9		3997.500	39.57	4.00	43.57	74.00	-30.43	peak	
10		3997.500	30.09	4.00	34.09	54.00	-19.91	AVG	
11		5400.000	38.97	5.95	44.92	74.00	-29.08	peak	
12		5400.000	29.10	5.95	35.05	54.00	-18.95	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 7		

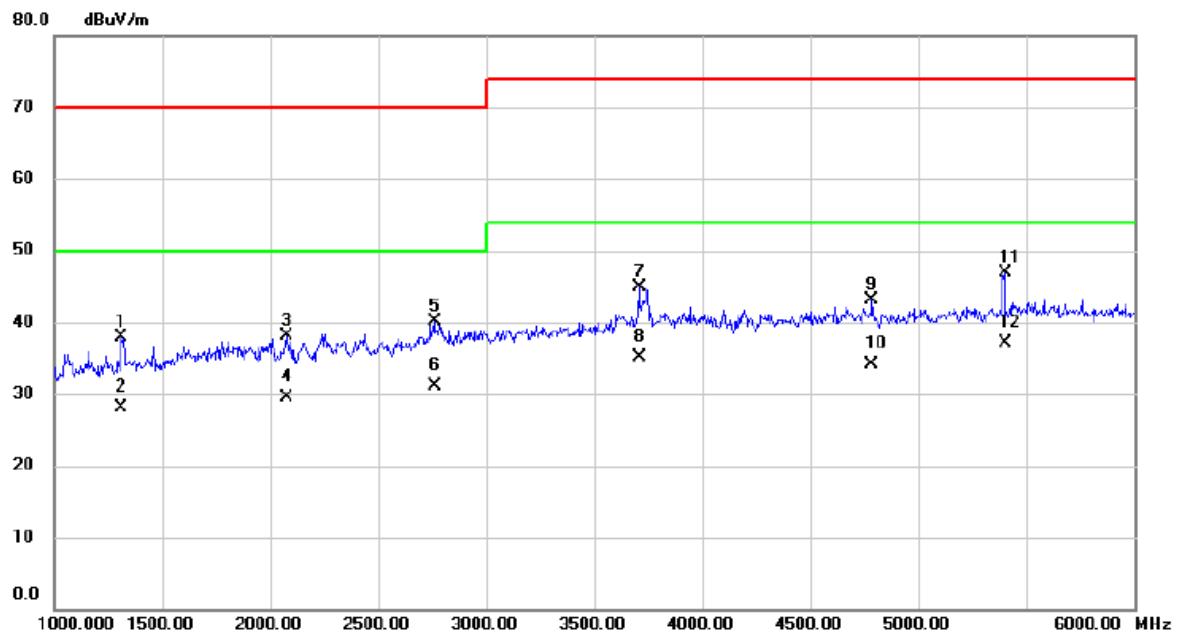


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1310.000	42.02	-4.09	37.93	70.00	-32.07	peak
2		1310.000	32.14	-4.09	28.05	50.00	-21.95	AVG
3		2077.500	39.21	-1.11	38.10	70.00	-31.90	peak
4		2077.500	30.56	-1.11	29.45	50.00	-20.55	AVG
5		2760.000	39.43	0.62	40.05	70.00	-29.95	peak
6		2760.000	30.43	0.62	31.05	50.00	-18.95	AVG
7		3707.500	41.56	3.36	44.92	74.00	-29.08	peak
8		3707.500	31.69	3.36	35.05	54.00	-18.95	AVG
9		4785.000	38.57	4.60	43.17	74.00	-30.83	peak
10		4785.000	29.45	4.60	34.05	54.00	-19.95	AVG
11		5400.000	40.90	5.95	46.85	74.00	-27.15	peak
12	*	5400.000	31.10	5.95	37.05	54.00	-16.95	AVG

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 7		

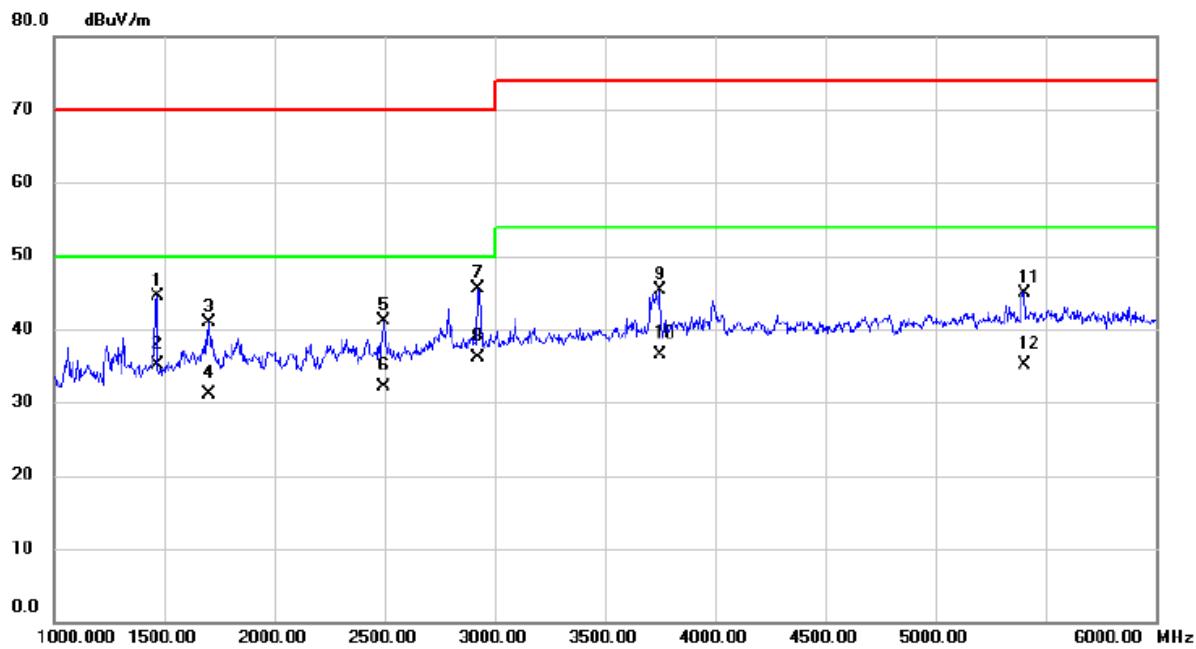


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		1467.500	47.96	-3.54	44.42	70.00	-25.58	peak	
2		1467.500	38.59	-3.54	35.05	50.00	-14.95	AVG	
3		1700.000	43.45	-2.56	40.89	70.00	-29.11	peak	
4		1700.000	33.61	-2.56	31.05	50.00	-18.95	AVG	
5		2495.000	41.36	-0.27	41.09	70.00	-28.91	peak	
6		2495.000	32.32	-0.27	32.05	50.00	-17.95	AVG	
7		2922.500	44.33	1.16	45.49	70.00	-24.51	peak	
8	*	2922.500	34.89	1.16	36.05	50.00	-13.95	AVG	
9		3750.000	41.76	3.46	45.22	74.00	-28.78	peak	
10		3750.000	32.99	3.46	36.45	54.00	-17.55	AVG	
11		5400.000	38.93	5.95	44.88	74.00	-29.12	peak	
12		5400.000	29.10	5.95	35.05	54.00	-18.95	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 16		

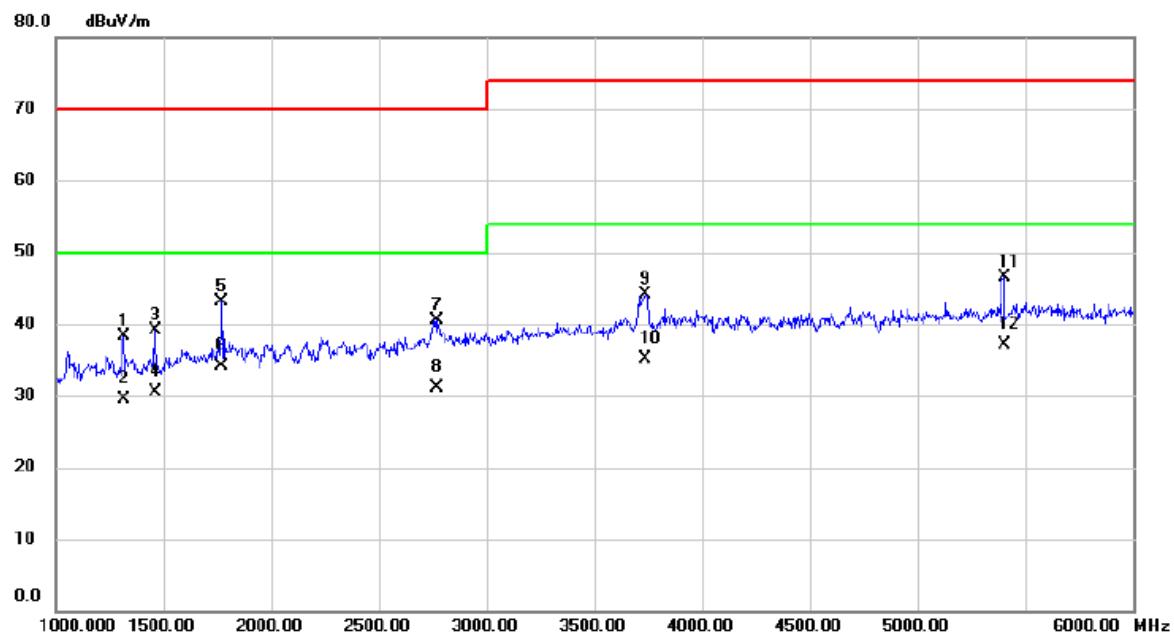


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1315.000	42.34	-4.08	38.26	70.00	-31.74	peak	
2		1315.000	33.57	-4.08	29.49	50.00	-20.51	AVG	
3		1460.000	42.61	-3.57	39.04	70.00	-30.96	peak	
4		1460.000	34.04	-3.57	30.47	50.00	-19.53	AVG	
5		1770.000	45.46	-2.26	43.20	70.00	-26.80	peak	
6	*	1770.000	36.31	-2.26	34.05	50.00	-15.95	AVG	
7		2770.000	39.85	0.65	40.50	70.00	-29.50	peak	
8		2770.000	30.40	0.65	31.05	50.00	-18.95	AVG	
9		3737.500	40.74	3.43	44.17	74.00	-29.83	peak	
10		3737.500	31.62	3.43	35.05	54.00	-18.95	AVG	
11		5400.000	40.57	5.95	46.52	74.00	-27.48	peak	
12		5400.000	31.10	5.95	37.05	54.00	-16.95	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 16		

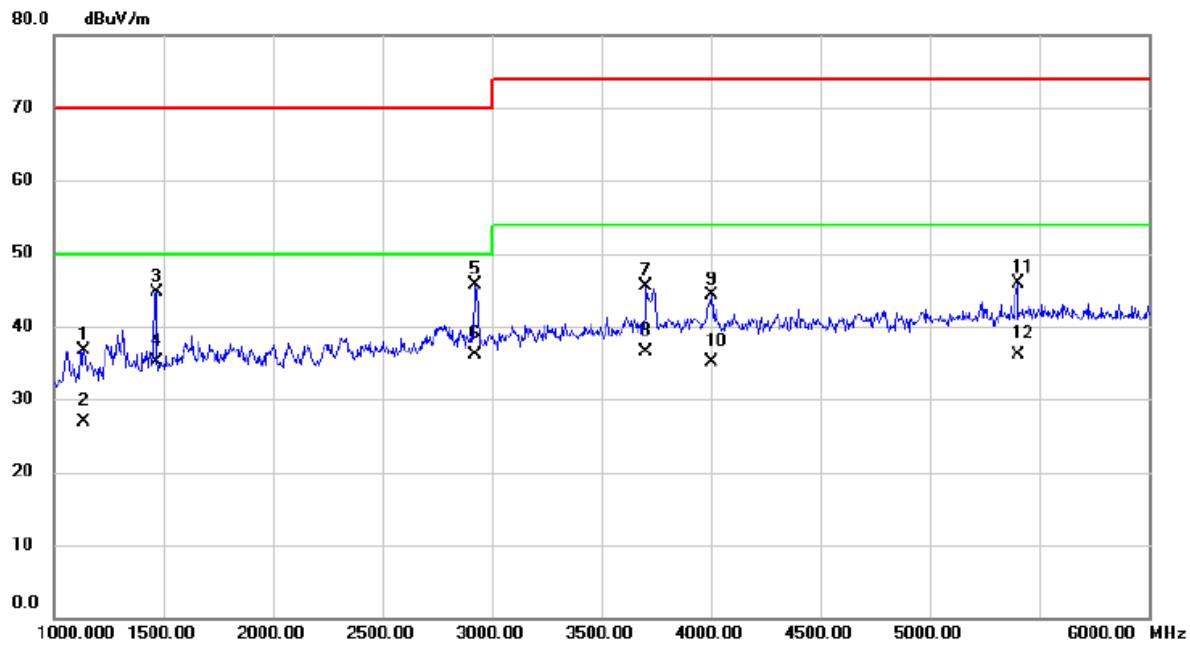


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		1137.500	41.40	-4.68	36.72	70.00	-33.28	peak	
2		1137.500	31.68	-4.68	27.00	50.00	-23.00	AVG	
3		1467.500	48.19	-3.54	44.65	70.00	-25.35	peak	
4		1467.500	38.59	-3.54	35.05	50.00	-14.95	AVG	
5		2920.000	44.54	1.16	45.70	70.00	-24.30	peak	
6	*	2920.000	34.89	1.16	36.05	50.00	-13.95	AVG	
7		3705.000	42.19	3.34	45.53	74.00	-28.47	peak	
8		3705.000	33.11	3.34	36.45	54.00	-17.55	AVG	
9		4000.000	40.30	4.01	44.31	74.00	-29.69	peak	
10		4000.000	31.04	4.01	35.05	54.00	-18.95	AVG	
11		5400.000	39.89	5.95	45.84	74.00	-28.16	peak	
12		5400.000	30.10	5.95	36.05	54.00	-17.95	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

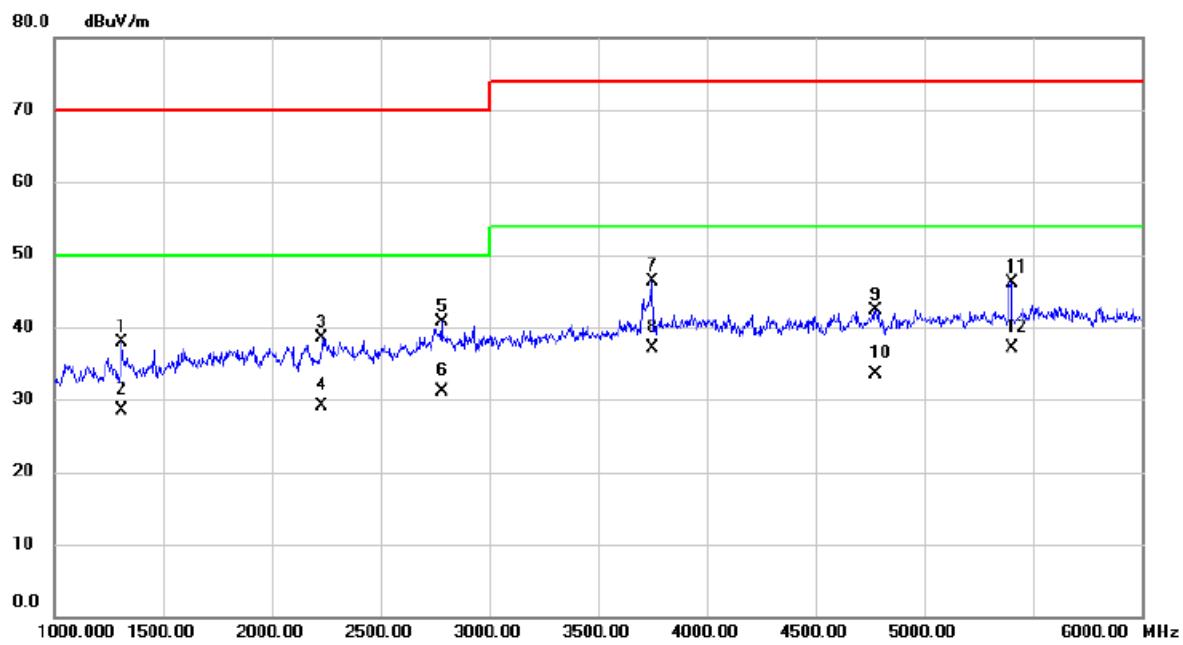

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		1312.500	41.98	-4.07	37.91	70.00	-32.09	peak
2		1312.500	32.48	-4.07	28.41	50.00	-21.59	AVG
3		2232.500	39.23	-0.80	38.43	70.00	-31.57	peak
4		2232.500	29.85	-0.80	29.05	50.00	-20.95	AVG
5		2782.500	39.98	0.68	40.66	70.00	-29.34	peak
6		2782.500	30.37	0.68	31.05	50.00	-18.95	AVG
7		3750.000	42.84	3.46	46.30	74.00	-27.70	peak
8	*	3750.000	33.59	3.46	37.05	54.00	-16.95	AVG
9		4777.500	37.80	4.57	42.37	74.00	-31.63	peak
10		4777.500	28.88	4.57	33.45	54.00	-20.55	AVG
11		5400.000	40.17	5.95	46.12	74.00	-27.88	peak
12		5400.000	31.10	5.95	37.05	54.00	-16.95	AVG

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

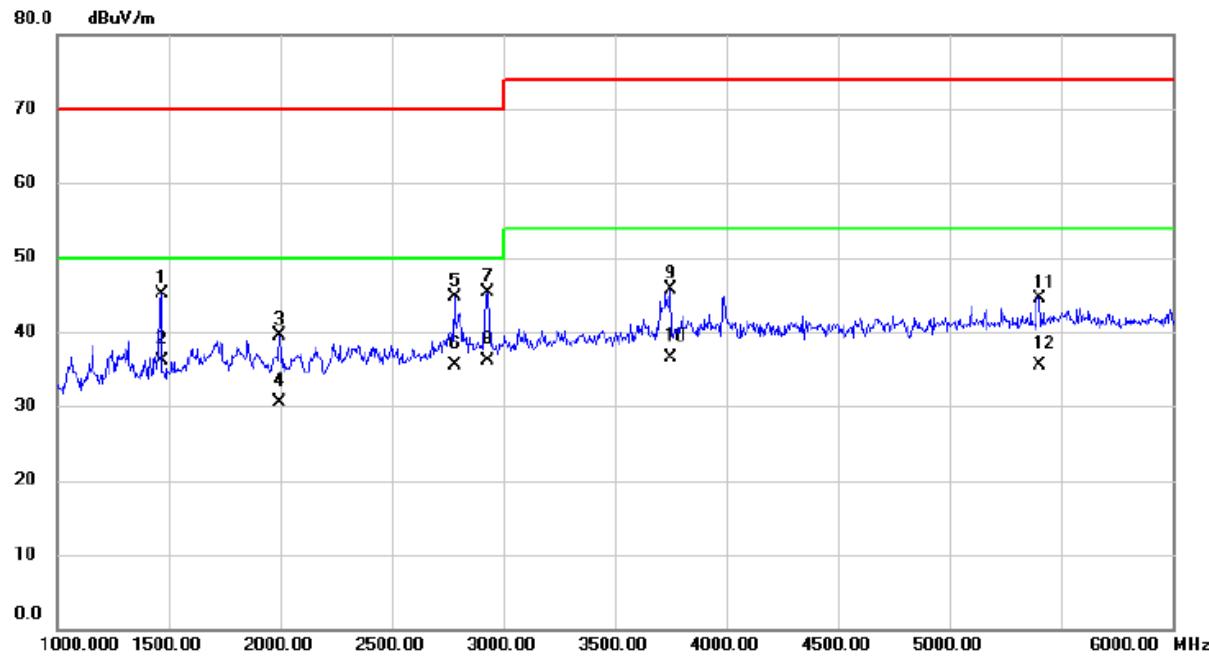

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1467.500	48.61	-3.54	45.07	70.00	-24.93	peak	
2	*	1467.500	39.59	-3.54	36.05	50.00	-13.95	AVG	
3		1995.000	40.71	-1.28	39.43	70.00	-30.57	peak	
4		1995.000	31.76	-1.28	30.48	50.00	-19.52	AVG	
5		2782.500	44.11	0.68	44.79	70.00	-25.21	peak	
6		2782.500	34.77	0.68	35.45	50.00	-14.55	AVG	
7		2927.500	44.15	1.17	45.32	70.00	-24.68	peak	
8		2927.500	34.88	1.17	36.05	50.00	-13.95	AVG	
9		3750.000	42.24	3.46	45.70	74.00	-28.30	peak	
10		3750.000	32.99	3.46	36.45	54.00	-17.55	AVG	
11		5400.000	38.63	5.95	44.58	74.00	-29.42	peak	
12		5400.000	29.53	5.95	35.48	54.00	-18.52	AVG	

## 4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

### 4.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

### 4.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESR3	103027	Jun. 16, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	10274	Dec. 22, 2024
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 27, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


### 4.3.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 4.3.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.3.5 TEST SETUP

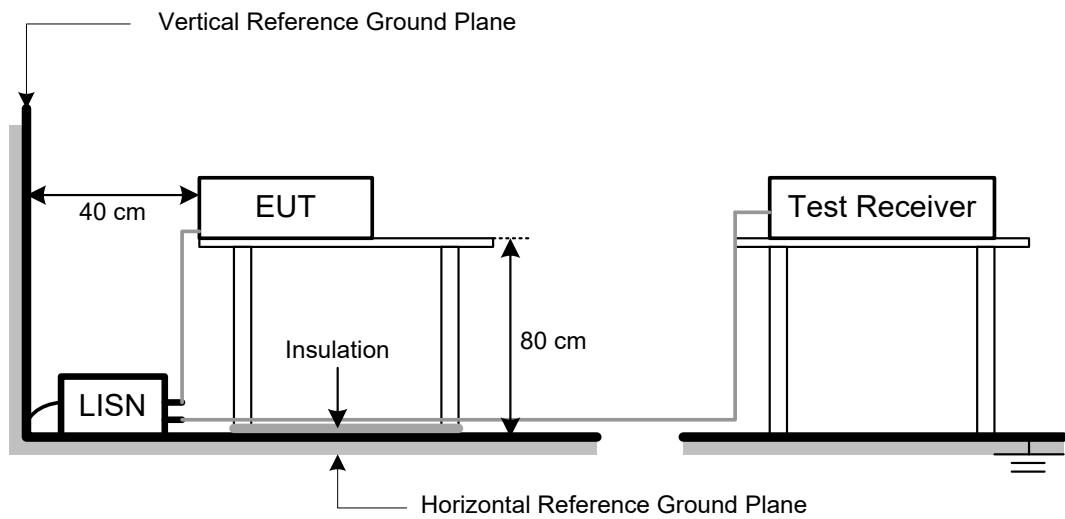


#### 4.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

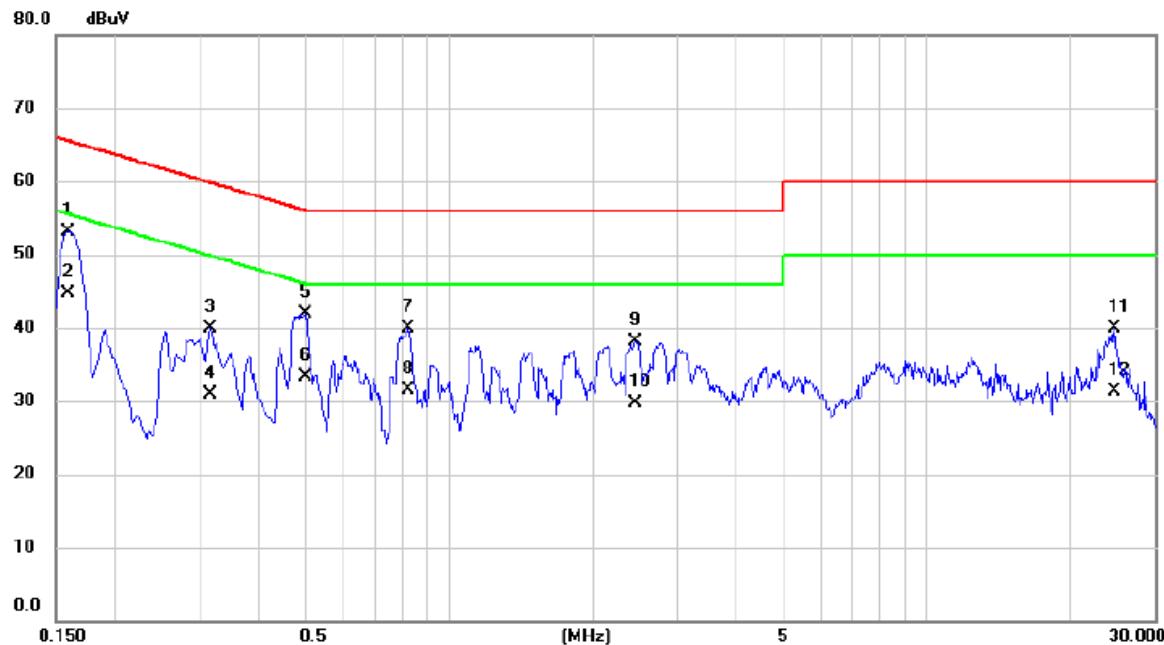


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1590	43.33	9.74	53.07	65.52	-12.45	QP	
2	*	0.1590	34.90	9.74	44.64	55.52	-10.88	AVG	
3		0.3165	30.06	9.77	39.83	59.80	-19.97	QP	
4		0.3165	21.20	9.77	30.97	49.80	-18.83	AVG	
5		0.4987	32.16	9.79	41.95	56.02	-14.07	QP	
6		0.4987	23.50	9.79	33.29	46.02	-12.73	AVG	
7		0.8227	30.13	9.81	39.94	56.00	-16.06	QP	
8		0.8227	21.60	9.81	31.41	46.00	-14.59	AVG	
9		2.4518	28.19	9.88	38.07	56.00	-17.93	QP	
10		2.4518	19.80	9.88	29.68	46.00	-16.32	AVG	
11		24.6368	29.41	10.56	39.97	60.00	-20.03	QP	
12		24.6368	20.70	10.56	31.26	50.00	-18.74	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

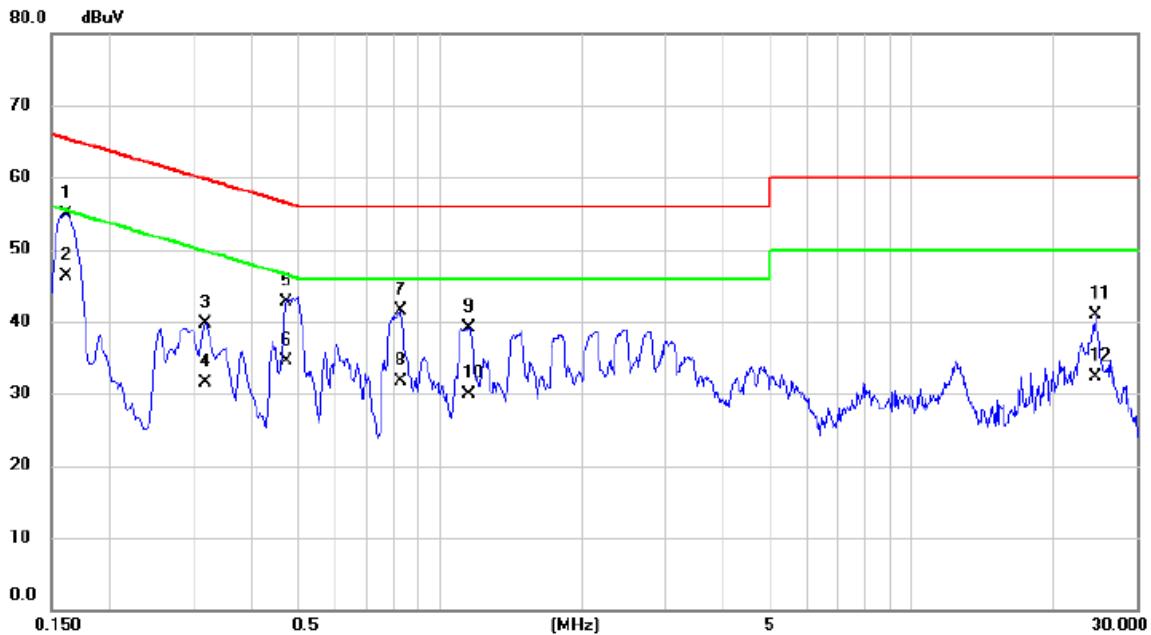


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1613	45.37	9.59	54.96	65.40	-10.44	QP	
2	*	0.1613	36.70	9.59	46.29	55.40	-9.11	AVG	
3		0.3187	30.09	9.63	39.72	59.74	-20.02	QP	
4		0.3187	21.90	9.63	31.53	49.74	-18.21	AVG	
5		0.4717	33.04	9.65	42.69	56.48	-13.79	QP	
6		0.4717	24.80	9.65	34.45	46.48	-12.03	AVG	
7		0.8250	31.77	9.67	41.44	56.00	-14.56	QP	
8		0.8250	22.10	9.67	31.77	46.00	-14.23	AVG	
9		1.1512	29.48	9.68	39.16	56.00	-16.84	QP	
10		1.1512	20.30	9.68	29.98	46.00	-16.02	AVG	
11		24.5220	30.44	10.44	40.88	60.00	-19.12	QP	
12		24.5220	21.80	10.44	32.24	50.00	-17.76	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 3		

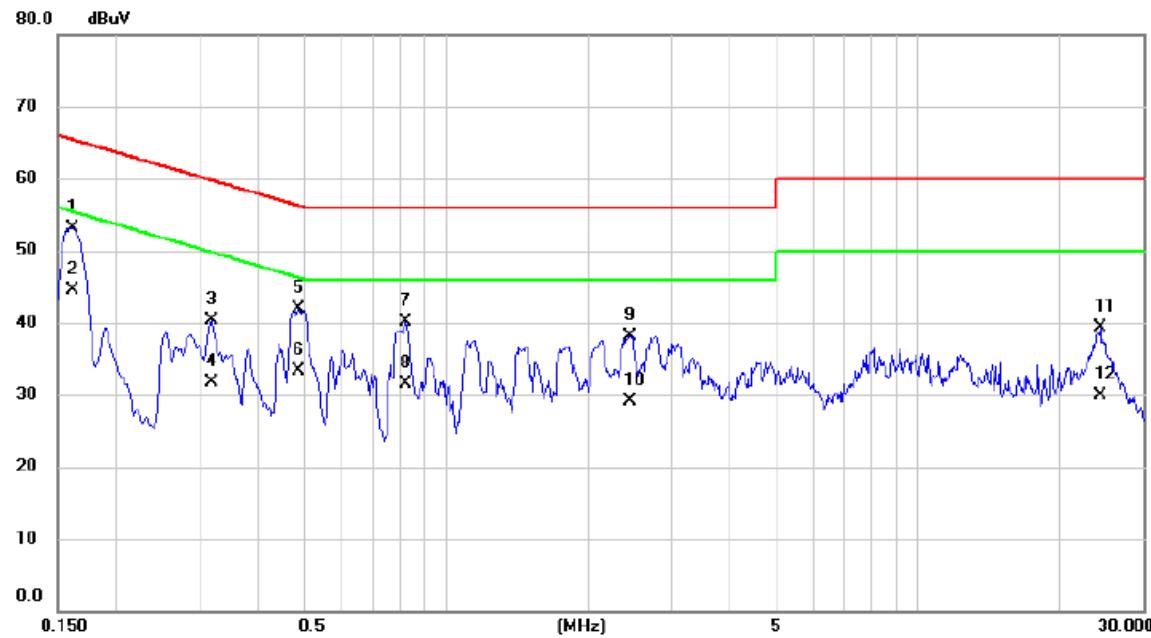


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1613	43.43	9.74	53.17	65.40	-12.23	QP	
2	*	0.1613	34.80	9.74	44.54	55.40	-10.86	AVG	
3		0.3187	30.61	9.77	40.38	59.74	-19.36	QP	
4		0.3187	21.90	9.77	31.67	49.74	-18.07	AVG	
5		0.4875	32.02	9.79	41.81	56.21	-14.40	QP	
6		0.4875	23.50	9.79	33.29	46.21	-12.92	AVG	
7		0.8227	30.24	9.81	40.05	56.00	-15.95	QP	
8		0.8227	21.60	9.81	31.41	46.00	-14.59	AVG	
9		2.4585	28.30	9.88	38.18	56.00	-17.82	QP	
10		2.4585	19.20	9.88	29.08	46.00	-16.92	AVG	
11		24.2723	28.69	10.56	39.25	60.00	-20.75	QP	
12		24.2723	19.30	10.56	29.86	50.00	-20.14	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 3		

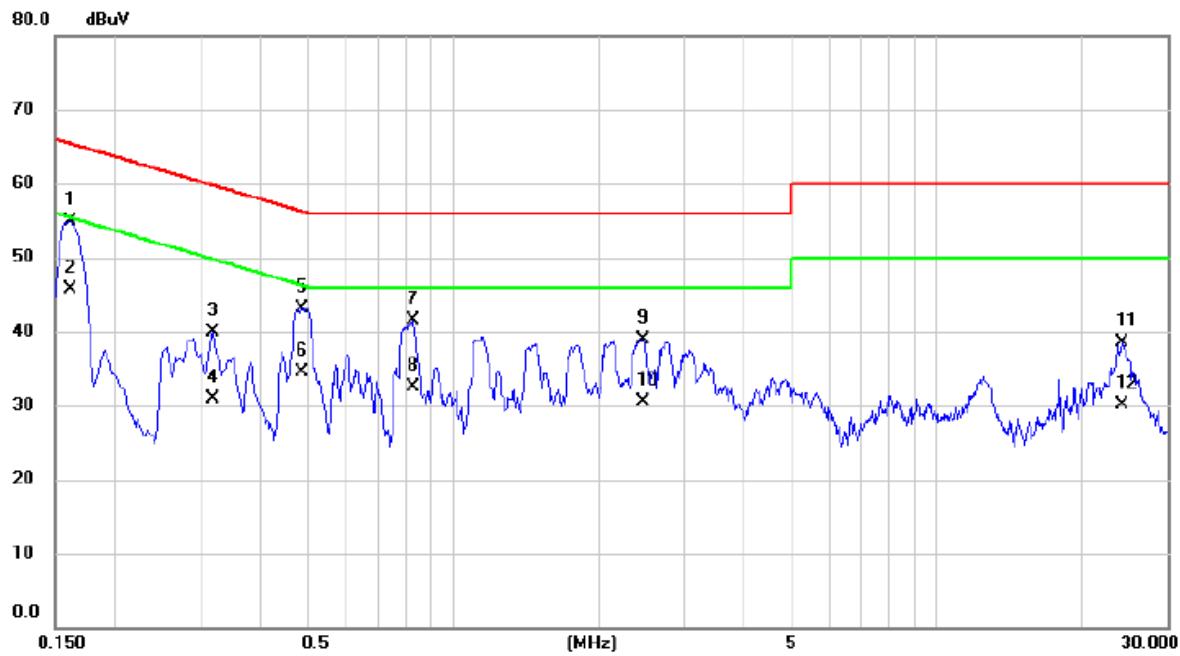


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1613	45.28	9.59	54.87	65.40	-10.53	QP	
2	*	0.1613	36.20	9.59	45.79	55.40	-9.61	AVG	
3		0.3187	30.27	9.63	39.90	59.74	-19.84	QP	
4		0.3187	21.30	9.63	30.93	49.74	-18.81	AVG	
5		0.4875	33.54	9.65	43.19	56.21	-13.02	QP	
6		0.4875	24.80	9.65	34.45	46.21	-11.76	AVG	
7		0.8250	31.74	9.67	41.41	56.00	-14.59	QP	
8		0.8250	22.90	9.67	32.57	46.00	-13.43	AVG	
9		2.4765	29.15	9.73	38.88	56.00	-17.12	QP	
10		2.4765	20.70	9.73	30.43	46.00	-15.57	AVG	
11		24.1103	28.13	10.42	38.55	60.00	-21.45	QP	
12		24.1103	19.60	10.42	30.02	50.00	-19.98	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 7		

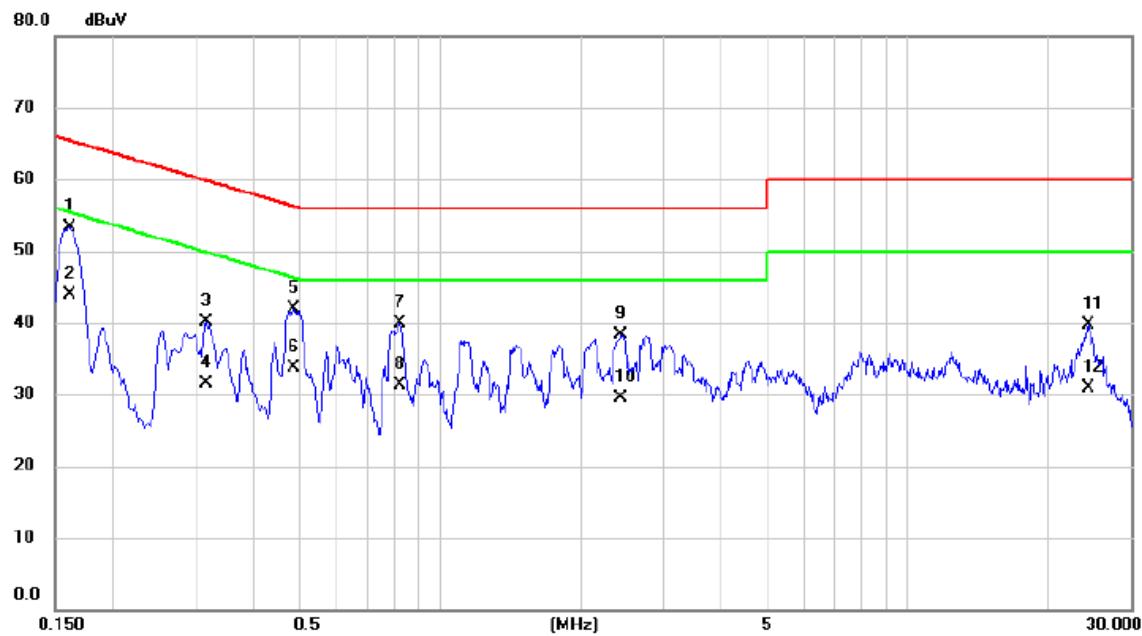


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1613	43.50	9.74	53.24	65.40	-12.16	QP	
2	*	0.1613	34.10	9.74	43.84	55.40	-11.56	AVG	
3		0.3165	30.38	9.77	40.15	59.80	-19.65	QP	
4		0.3165	21.80	9.77	31.57	49.80	-18.23	AVG	
5		0.4852	32.08	9.79	41.87	56.25	-14.38	QP	
6		0.4852	23.90	9.79	33.69	46.25	-12.56	AVG	
7		0.8227	30.06	9.81	39.87	56.00	-16.13	QP	
8		0.8227	21.50	9.81	31.31	46.00	-14.69	AVG	
9		2.4360	28.41	9.88	38.29	56.00	-17.71	QP	
10		2.4360	19.60	9.88	29.48	46.00	-16.52	AVG	
11		24.4388	29.07	10.56	39.63	60.00	-20.37	QP	
12		24.4388	20.40	10.56	30.96	50.00	-19.04	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 7		

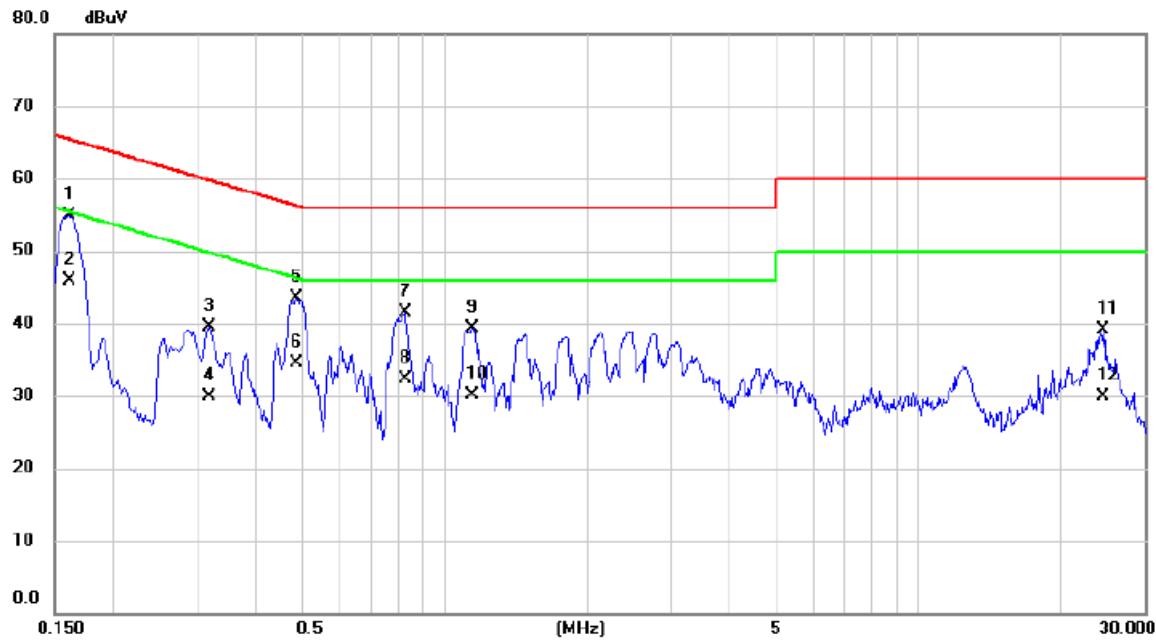


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1613	45.24	9.59	54.83	65.40	-10.57	QP	
2	*	0.1613	36.30	9.59	45.89	55.40	-9.51	AVG	
3		0.3187	29.94	9.63	39.57	59.74	-20.17	QP	
4		0.3187	20.20	9.63	29.83	49.74	-19.91	AVG	
5		0.4852	33.89	9.65	43.54	56.25	-12.71	QP	
6		0.4852	24.90	9.65	34.55	46.25	-11.70	AVG	
7		0.8250	31.87	9.67	41.54	56.00	-14.46	QP	
8		0.8250	22.70	9.67	32.37	46.00	-13.63	AVG	
9		1.1467	29.60	9.68	39.28	56.00	-16.72	QP	
10		1.1467	20.50	9.68	30.18	46.00	-15.82	AVG	
11		24.5760	28.66	10.44	39.10	60.00	-20.90	QP	
12		24.5760	19.40	10.44	29.84	50.00	-20.16	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 1		

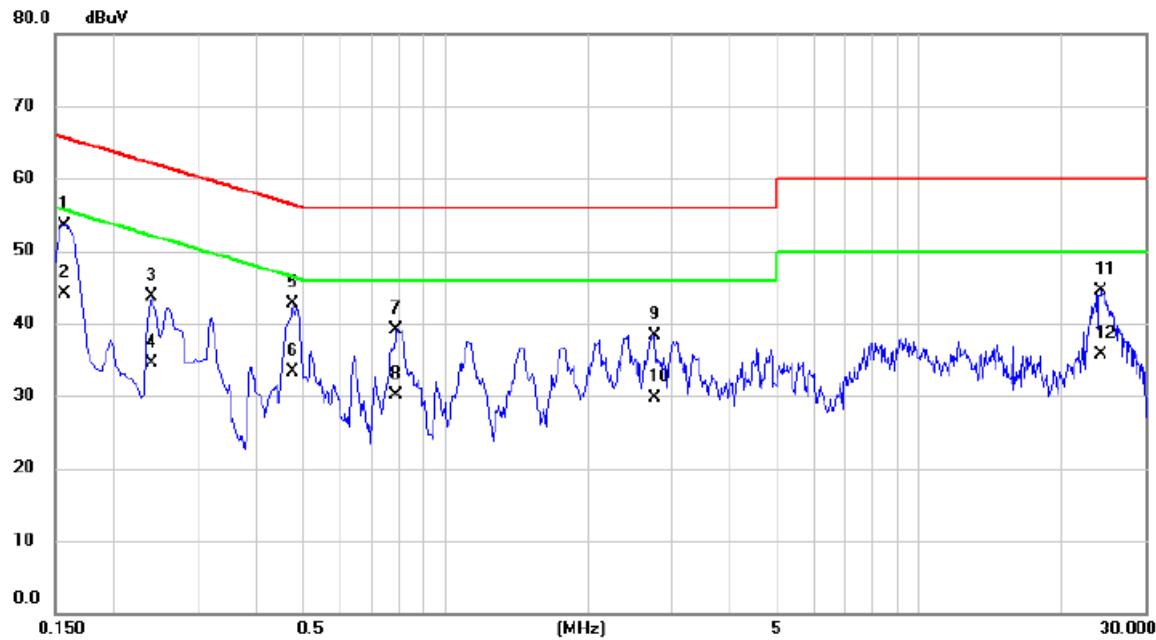

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1568	43.81	9.74	53.55	65.63	-12.08	QP	
2	*	0.1568	34.30	9.74	44.04	55.63	-11.59	AVG	
3		0.2400	33.86	9.75	43.61	62.10	-18.49	QP	
4		0.2400	24.80	9.75	34.55	52.10	-17.55	AVG	
5		0.4762	32.85	9.79	42.64	56.41	-13.77	QP	
6		0.4762	23.50	9.79	33.29	46.41	-13.12	AVG	
7		0.7890	29.39	9.81	39.20	56.00	-16.80	QP	
8		0.7890	20.20	9.81	30.01	46.00	-15.99	AVG	
9		2.7623	28.42	9.90	38.32	56.00	-17.68	QP	
10		2.7623	19.90	9.90	29.80	46.00	-16.20	AVG	
11		24.1665	34.02	10.55	44.57	60.00	-15.43	QP	
12		24.1665	25.10	10.55	35.65	50.00	-14.35	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 1		

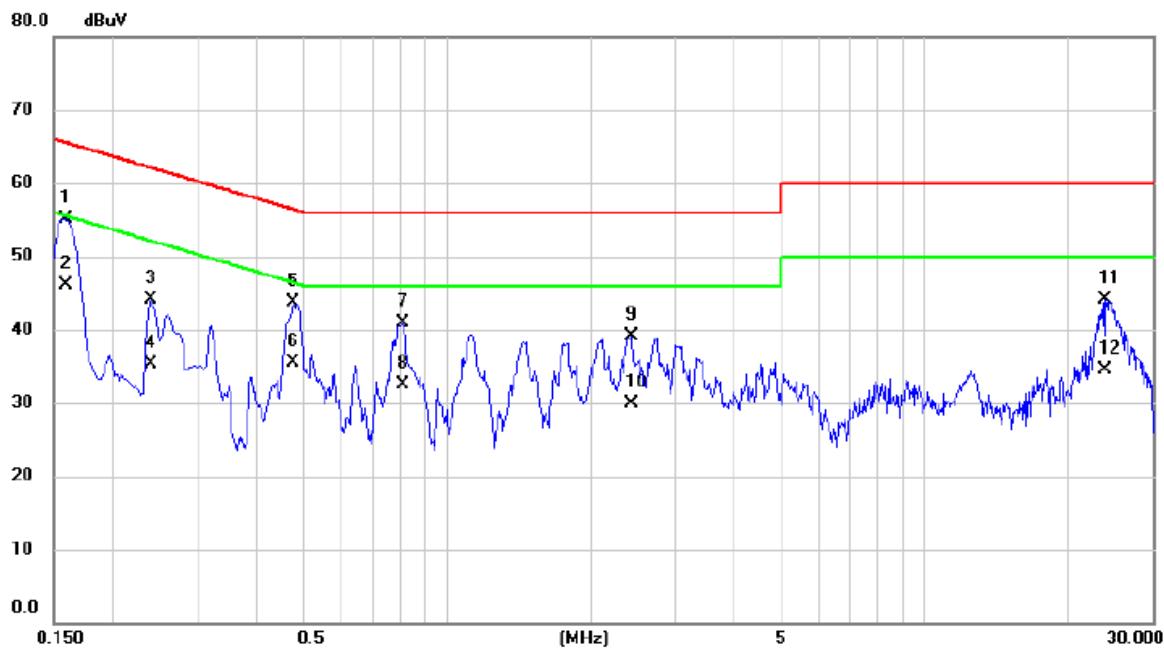

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1590	45.56	9.59	55.15	65.52	-10.37	QP	
2	*	0.1590	36.60	9.59	46.19	55.52	-9.33	AVG	
3		0.2400	34.47	9.61	44.08	62.10	-18.02	QP	
4		0.2400	25.70	9.61	35.31	52.10	-16.79	AVG	
5		0.4762	34.10	9.65	43.75	56.41	-12.66	QP	
6		0.4762	25.80	9.65	35.45	46.41	-10.96	AVG	
7		0.8115	31.31	9.67	40.98	56.00	-15.02	QP	
8		0.8115	22.90	9.67	32.57	46.00	-13.43	AVG	
9		2.4428	29.41	9.73	39.14	56.00	-16.86	QP	
10		2.4428	20.20	9.73	29.93	46.00	-16.07	AVG	
11		23.9258	33.59	10.42	44.01	60.00	-15.99	QP	
12		23.9258	24.10	10.42	34.52	50.00	-15.48	AVG	

## 4.4 HARMONIC CURRENT EMISSIONS TEST

### 4.4.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

### 4.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 16, 2024
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 16, 2024
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


### 4.4.3 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- b. The classification of EUT is according to of EN 61000-3-2. The EUT is classified as Class D.
- c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

### 4.4.4 DEVIATION FROM TEST STANDARD



No deviation

### 4.4.5 TEST SETUP

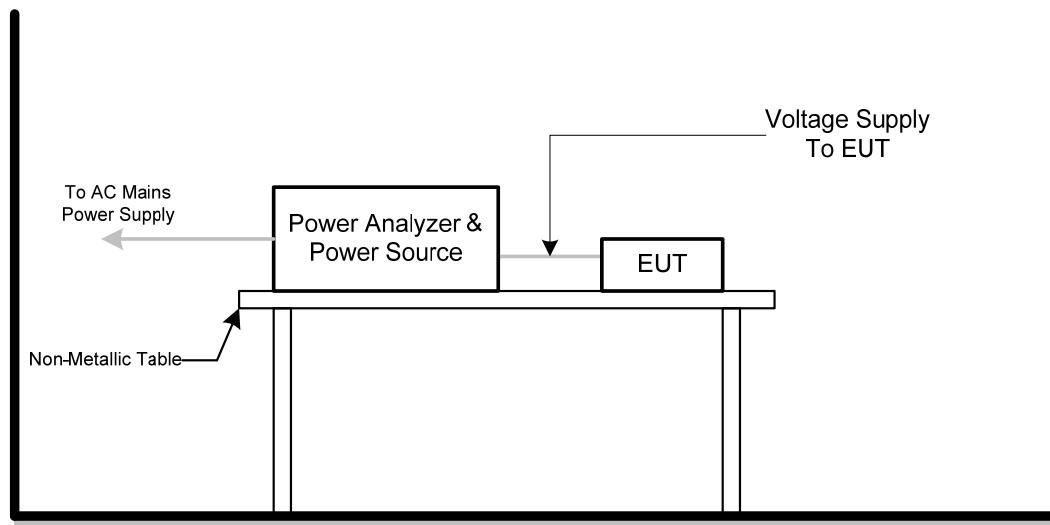

#### 4.4.6 TEST RESULTS

Harmonics – Class-D	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

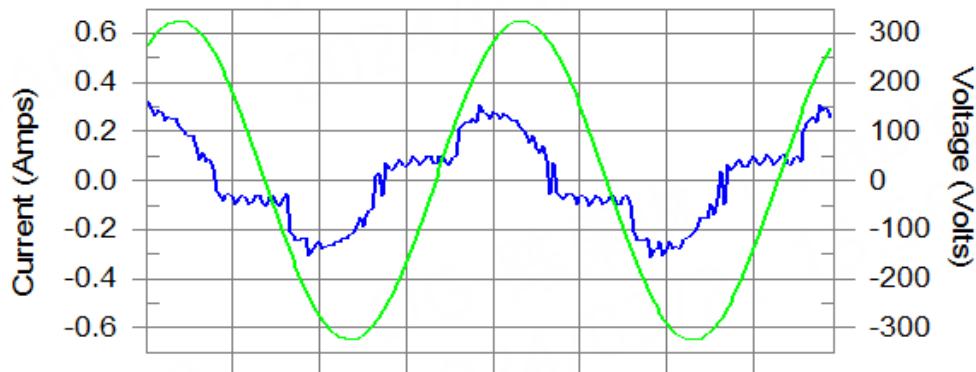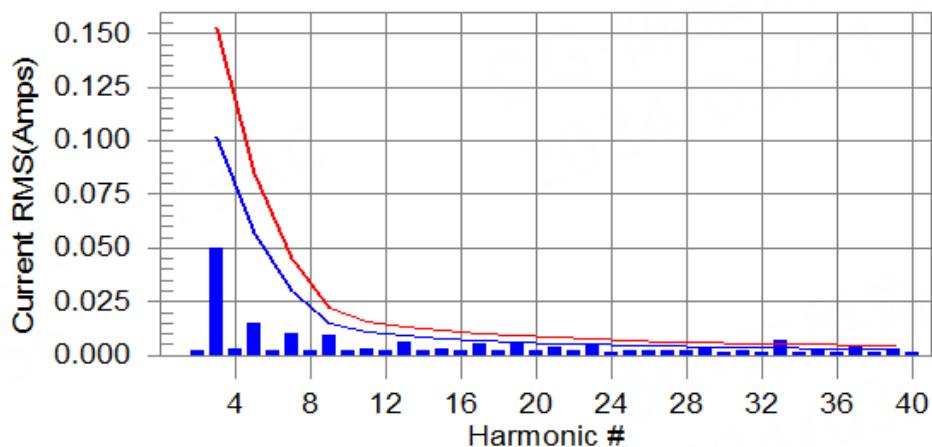Current & voltage waveformsHarmonics and Class D limit line    European Limits

Test result: N/L    Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

Current Test Result Summary (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Highest parameter values during test:**

V RMS (Volts): 229.98      Frequency(Hz): 50.00  
I Peak (Amps): 0.340      I RMS (Amps): 0.178  
I Fund (Amps): 0.166      Crest Factor: 1.938  
Power (Watts): 29.9      Power Factor: 0.742

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.002	0.000	N/A	N/L
3	0.050	0.102	N/A	0.052	0.152	N/A	N/L
4	0.003	0.000	N/A	0.003	0.000	N/A	N/L
5	0.015	0.057	N/A	0.015	0.085	N/A	N/L
6	0.002	0.000	N/A	0.003	0.000	N/A	N/L
7	0.010	0.030	N/A	0.011	0.045	N/A	N/L
8	0.002	0.000	N/A	0.003	0.000	N/A	N/L
9	0.009	0.015	N/A	0.010	0.022	N/A	N/L
10	0.002	0.000	N/A	0.003	0.000	N/A	N/L
11	0.003	0.010	N/A	0.003	0.016	N/A	N/L
12	0.002	0.000	N/A	0.003	0.000	N/A	N/L
13	0.006	0.009	N/A	0.007	0.013	N/A	N/L
14	0.003	0.000	N/A	0.003	0.000	N/A	N/L
15	0.003	0.008	N/A	0.003	0.012	N/A	N/L
16	0.002	0.000	N/A	0.002	0.000	N/A	N/L
17	0.005	0.007	N/A	0.006	0.010	N/A	N/L
18	0.002	0.000	N/A	0.003	0.000	N/A	N/L
19	0.005	0.006	N/A	0.005	0.009	N/A	N/L
20	0.002	0.000	N/A	0.002	0.000	N/A	N/L
21	0.004	0.005	N/A	0.004	0.008	N/A	N/L
22	0.002	0.000	N/A	0.002	0.000	N/A	N/L
23	0.004	0.005	N/A	0.005	0.007	N/A	N/L
24	0.001	0.000	N/A	0.002	0.000	N/A	N/L
25	0.002	0.005	N/A	0.003	0.007	N/A	N/L
26	0.002	0.000	N/A	0.002	0.000	N/A	N/L
27	0.002	0.004	N/A	0.003	0.006	N/A	N/L
28	0.002	0.000	N/A	0.002	0.000	N/A	N/L
29	0.003	0.004	N/A	0.004	0.006	N/A	N/L
30	0.002	0.000	N/A	0.002	0.000	N/A	N/L
31	0.002	0.004	N/A	0.002	0.006	N/A	N/L
32	0.001	0.000	N/A	0.002	0.000	N/A	N/L
33	0.006	0.003	N/A	0.007	0.005	N/A	N/L
34	0.002	0.000	N/A	0.002	0.000	N/A	N/L
35	0.003	0.003	N/A	0.003	0.005	N/A	N/L
36	0.001	0.000	N/A	0.001	0.000	N/A	N/L
37	0.005	0.003	N/A	0.005	0.005	N/A	N/L
38	0.001	0.000	N/A	0.002	0.000	N/A	N/L
39	0.003	0.003	N/A	0.003	0.004	N/A	N/L
40	0.001	0.000	N/A	0.001	0.000	N/A	N/L

*Note: The EUT power level is below 75.0 Watts and therefore has no defined limits*

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Highest parameter values during test:**

Voltage (Vrms):	229.98	Frequency(Hz):	50.00
I_Peak (Amps):	0.340	I_RMS (Amps):	0.178
I_Fund (Amps):	0.166	Crest Factor:	1.938
Power (Watts):	29.9	Power Factor:	0.742

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.142	0.460	30.96	OK
3	0.533	2.069	25.78	OK
4	0.061	0.460	13.32	OK
5	0.070	0.920	7.61	OK
6	0.029	0.460	6.37	OK
7	0.035	0.690	5.12	OK
8	0.023	0.460	4.92	OK
9	0.047	0.460	10.26	OK
10	0.029	0.460	6.27	OK
11	0.019	0.230	8.32	OK
12	0.017	0.230	7.26	OK
13	0.016	0.230	6.80	OK
14	0.013	0.230	5.80	OK
15	0.013	0.230	5.52	OK
16	0.018	0.230	7.69	OK
17	0.013	0.230	5.70	OK
18	0.015	0.230	6.41	OK
19	0.013	0.230	5.69	OK
20	0.020	0.230	8.63	OK
21	0.010	0.230	4.41	OK
22	0.012	0.230	5.10	OK
23	0.005	0.230	2.07	OK
24	0.005	0.230	2.25	OK
25	0.005	0.230	2.22	OK
26	0.008	0.230	3.49	OK
27	0.008	0.230	3.47	OK
28	0.008	0.230	3.48	OK
29	0.003	0.230	1.46	OK
30	0.005	0.230	2.22	OK
31	0.003	0.230	1.43	OK
32	0.006	0.230	2.39	OK
33	0.014	0.230	6.10	OK
34	0.003	0.230	1.21	OK
35	0.004	0.230	1.79	OK
36	0.003	0.230	1.32	OK
37	0.009	0.230	4.01	OK
38	0.003	0.230	1.26	OK
39	0.007	0.230	2.86	OK
40	0.007	0.230	2.94	OK

## 4.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST

### 4.5.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	≤ 1.0, Tp= 10 min.	Short Term Flicker Indicator
Plt	≤ 0.65, Tp=2 hr.	Long Term Flicker Indicator
dc	≤ 3.3%	Relative Steady-State V-Change
dmax	≤ 4%	Maximum Relative V-change
d (t)	≤ 500 ms	Relative V-change characteristic

### 4.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 16, 2024
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 16, 2024
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


### 4.5.3 TEST PROCEDURE

- a. Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- b. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation


#### 4.5.5 TEST SETUP

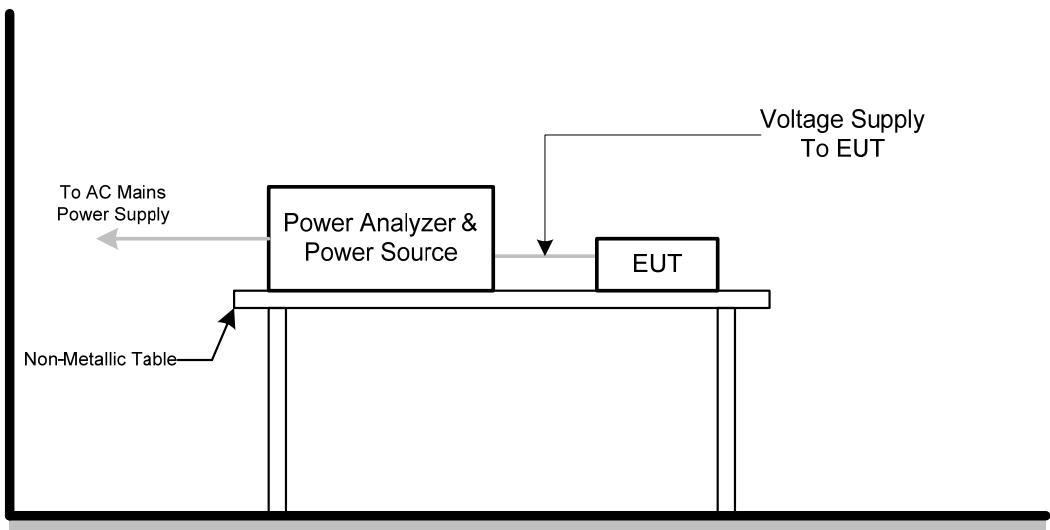

#### 4.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Pst<sub>i</sub> and limit line

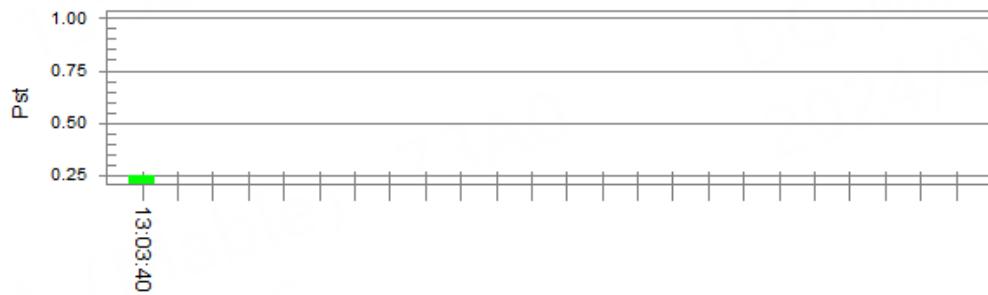

European Limits

Plt and limit line



**Parameter values recorded during the test:**

Vrms at the end of test (Volt): 229.85

Highest dt (%):

T-max (mS): 0

Test limit (%):

Test limit (mS): 500.0

Pass

Highest dc (%): 0.00

Test limit (%):

Test limit (mS): 3.30

Pass

Highest dmax (%): 0.00

Test limit (%):

Test limit (mS): 4.00

Pass

Highest Pst (10 min. period): 0.248

Test limit (%):

Test limit (mS): 1.000

Pass

Highest Plt (2 hr. period): 0.108

Test limit (%):

Test limit (mS): 0.650

Pass

## 5. EMC IMMUNITY TEST

### 5.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports <b>(NOTE 2)</b>	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports <b>(NOTE 2)</b>	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	<b>Port Type: unshielded symmetrical</b> <b>Apply: lines to ground</b>		
	<b>Primary protection is Intended</b> ±1 kV and ±4 kV 10/700(5/320)Tr/Th $\mu$ s	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	C
	<b>Primary protection is not Intended</b> ±1 kV 10/700(5/320) Tr/Th $\mu$ s		C
	<b>Port type: coaxial or shielded</b> <b>Apply: shield to ground</b>		
	±0.5 kV 1.2/50(8/20) Tr/Th $\mu$ s	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	B
	<b>line to reference ground for each individual line:</b> ±0.5 kV(peak) 1.2/50(8/20) Tr/Th $\mu$ s	DC network power ports <b>(NOTE 2)</b>	B
	±1 kV(peak) 1.2/50(8/20) Tr/Th $\mu$ s (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th $\mu$ s (line to earth or ground)	AC mains power ports	B
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 $\Omega$ source impedance	Analogue/digital data ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 $\Omega$ source impedance	DC network power ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 $\Omega$ source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage<5% 0.5 cycle Residual voltage<70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage<5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances,repetitive (BIN-R)	0.15 MHz to 0.5 MHz 107 dBuV 0.5 MHz to 10 MHz 107 dBuV to 36 dBuV 10 MHz to 30 MHz 36 dBuV to 30 dBuV  0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	A
Broadband impulse noise disturbances,isolated (BIN-I)	0.15 MHz to 30 MHz 110 dBuV  0.24 ms 10 ms 300 ms	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	B
		Analogue/digital data ports <b>(Apply period based on the AC mains frequency)</b>	A
		Analogue/digital data ports <b>(Apply all burst durations)</b>	B

Note.

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

## 5.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standards, the general performance criteria as following:

<b>Criterion A</b>	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>Criterion B</b>	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>Criterion C</b>	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

## 5.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION

### 5.3.1 PERFORMANCE CRITERIA

#### Performance criterion A

##### for continuous radiated and conducted disturbances tests:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA. Additionally, an increase in any degradation greater than

just perceptible by observation of the image shall not occur as a consequence of the application of the test. Examples of such degradations are:

- superimposed patterning;
- positional disturbances due to synchronisation errors;
- geometric distortion;
- change of contrast or brightness;
- picture artefacts;
- freezing or disturbance of motion;
- image loss;
- video data or decoding errors.

#### Performance criterion A

##### for the power frequency magnetic field tests:

Alternative 1: A continuous magnetic field of 1 A/m:

The jitter (in mm) shall not exceed the value 
$$\frac{(\text{character height in mm} + 0,3) \times 2,5}{33,3}$$

#### Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA.

#### Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

## 5.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION

### 5.4.1 PERFORMANCE CRITERIA

#### Performance criterion A:

For devices that support telephony functions the limits of Table G.3 shall apply.

With respect to Table G.3:

- the interference ratio (electrical or acoustic) shall meet the limits in column 3; or,
- the acoustic level of the demodulated audio shall be less than the limits in column 4; or,
- the digitally coded level of demodulated audio shall be less than limits in column 5; or,
- the analogue level of the demodulated audio shall be less than the limits in column 6.

**Table G.3 – Performance criterion A – Limits for devices supporting telephony**

Type of immunity test	Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
			dB (SPL)	Digital dBm0	Analogue dBm
Conducted	0,15 to 30	-20 dB	55	-50	-50
	30 to 80	-10 dB	65	-40	-40
Radiated	80 to 1000	0 dB	75	-30	-30

For terminals connected to digital wired network ports (such as Ethernet, ISDN), measurements of the demodulated 1 kHz may be performed on a remote AE, ideally of the same design.

For all other devices:

The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be -20 dB or better.

#### Performance criterion B:

Use the general performance criterion B. See GENERAL PERFORMANCE CRITERIA.

#### Performance criterion C:

Use the general performance criterion C. See GENERAL PERFORMANCE CRITERIA.

## 5.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 5.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ , $\pm 8\text{kV}$ Contact Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

### 5.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Nov. 12, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.5.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- For TABLE-TOP equipment:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.5.5 TEST SETUP

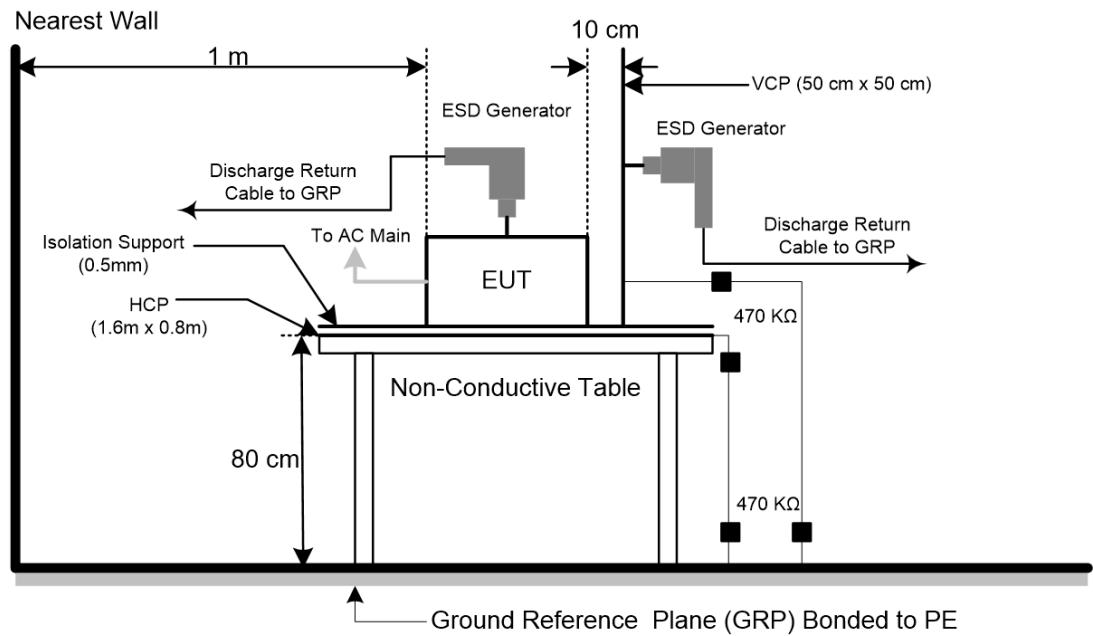

### 5.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz											
Test Mode	Mode 1-7, Mode 10-15											



Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	B	B	-	-	A	A	B	B	-	-
2	A	A	A	A	A	A	-	-	-	-	-	-	-	-
3	A	A	A	A	B	B	-	-	-	-	-	-	-	-
4	A	A	A	A	A	A	-	-	-	-	-	-	-	-
5	A	A	A	A	A	A	-	-	-	-	-	-	-	-
Criteria	B						-		B				-	
Result	B						-		B				-	



Mode	HCP Contact Discharge						VCP Contact Discharge					
	2kV		4kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
Left side	A	A	B	B	-	-	A	A	B	B	-	-
Right side	A	A	B	B	-	-	A	A	B	B	-	-
Front side	A	A	B	B	-	-	A	A	B	B	-	-
Rear side	A	A	B	B	-	-	A	A	B	B	-	-
Criteria	B				-		B				-	
Result	B				-		B				-	

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

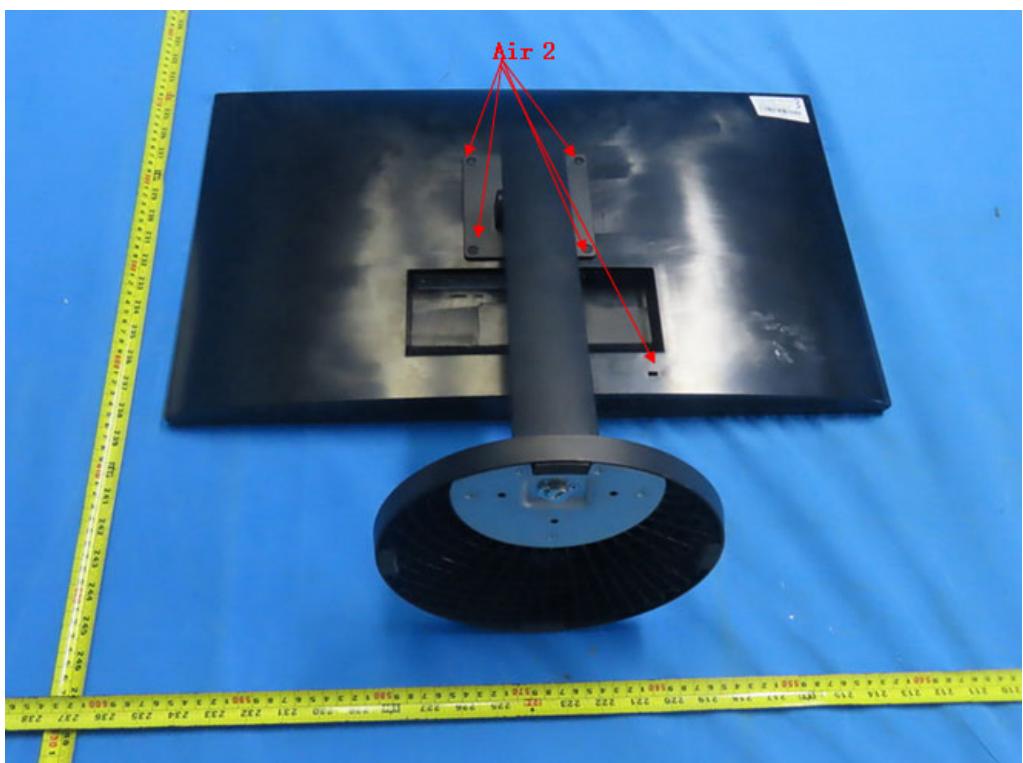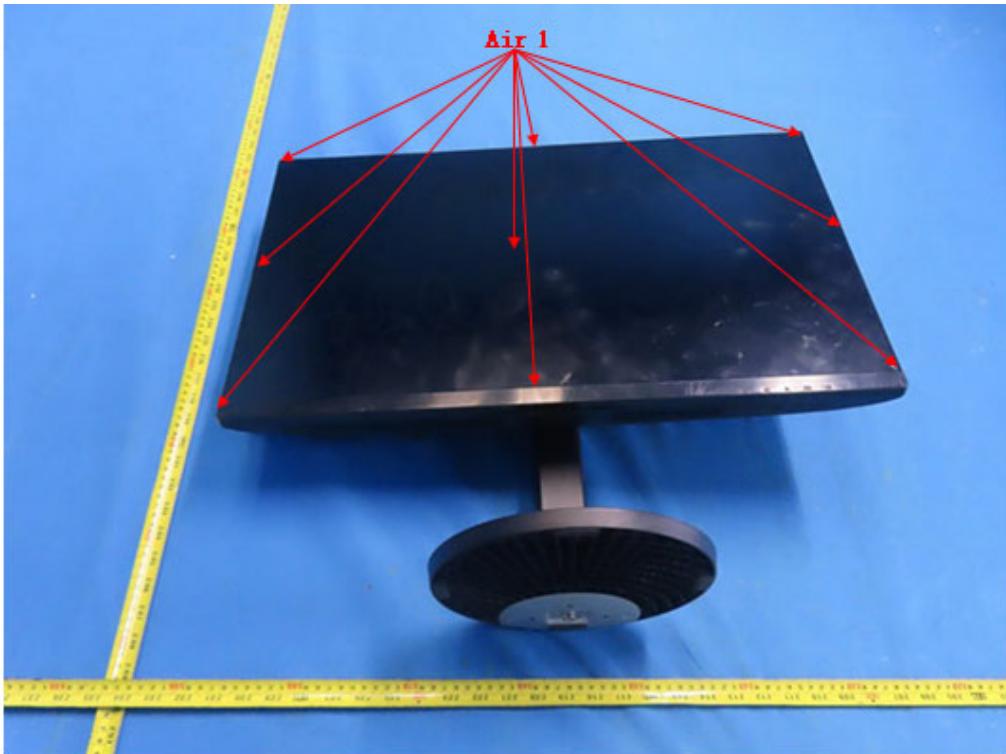

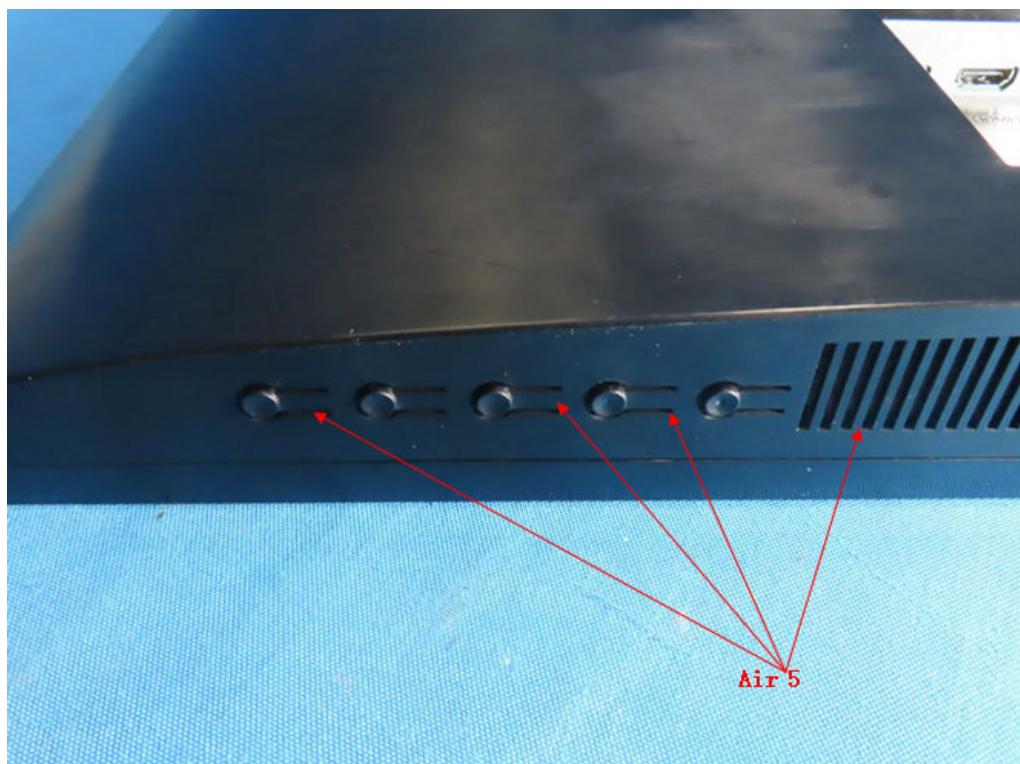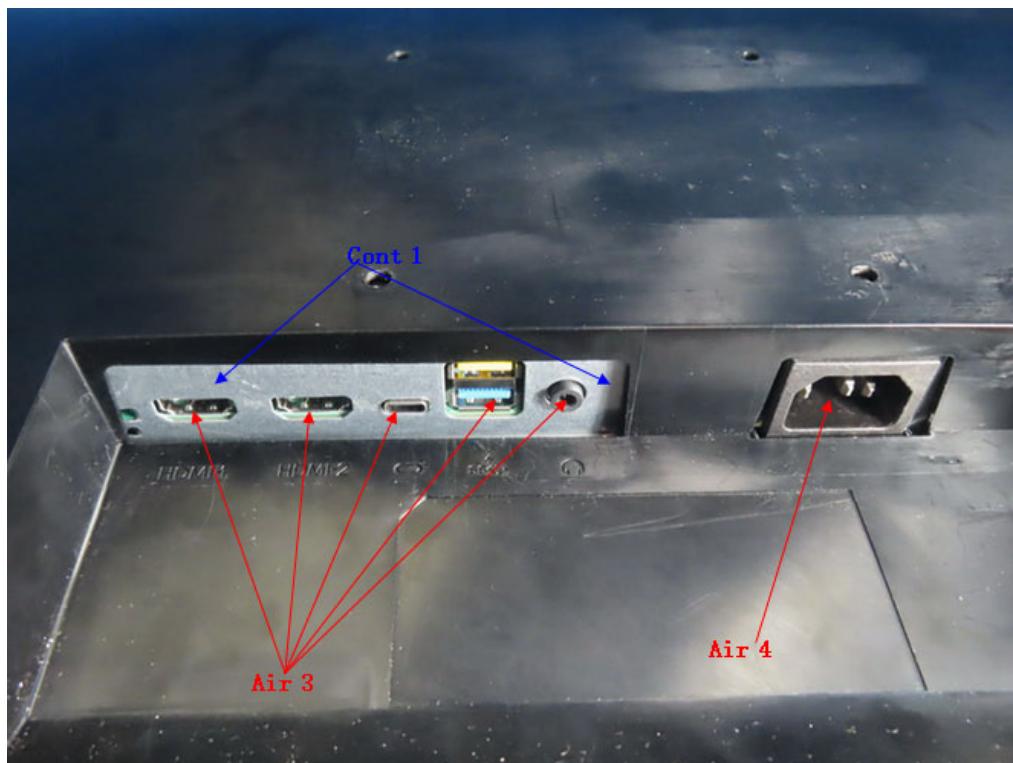

## 5.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

### 5.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz ( $\pm 1\%$ )
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of the preceding frequency.
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

### 5.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3142B	26419	Dec. 19, 2024
2	Amplifier	AR	50S1G4A	326720	Dec. 22, 2024
3	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Jun. 17, 2024
4	Power amplifier	MILMEGA	AS1860-50	1064834	Dec. 22, 2024
5	Microwave Log.-Per. Antenna	Schwarzbeck	STLP 9149	9149-277	Apr. 14, 2024
6	Power amplifier	MILMEGA	80RF1000-250	1064833	Dec. 22, 2024
7	Measurement Software	Farad	(EZ-RS )V2.0.1.3	N/A	N/A
8	Conditioning Amplifier	B&K	_2690_0F2_	2723746	Jun. 11, 2024
9	Free-field 1/2``Microphone	B&K	4190-L-001	2878077	Jun. 25, 2024
10	UPV Audio Analyzer	R&S	UPV	104259	Dec. 22, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.6.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

- a. The field strength level was 3 V/m(unmodulated, r.m.s).
- b. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. Where the frequency range is swept incrementally, the step size was 1% of the preceding frequency.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

For Display and display output functions:

- a. The display quality evaluated by direct observation.
- b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output. the diagonal screen size shall be at least 0,50 m.
- c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

For Acoustic measurements:


- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of  $L_0$ .  
(BTL lab uses the software to take  $L_0$  as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of  $L_1$ .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:  
Acoustic interference ratio =  $L_1 - L_0$ .  
(For step e-f, BTL lab proceeds the test with software and calculate Acoustic interference ratio =  $L_1 - L_0$ ).


#### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation


#### 5.6.5 TEST SETUP

##### a) For Continuous induced RF disturbances

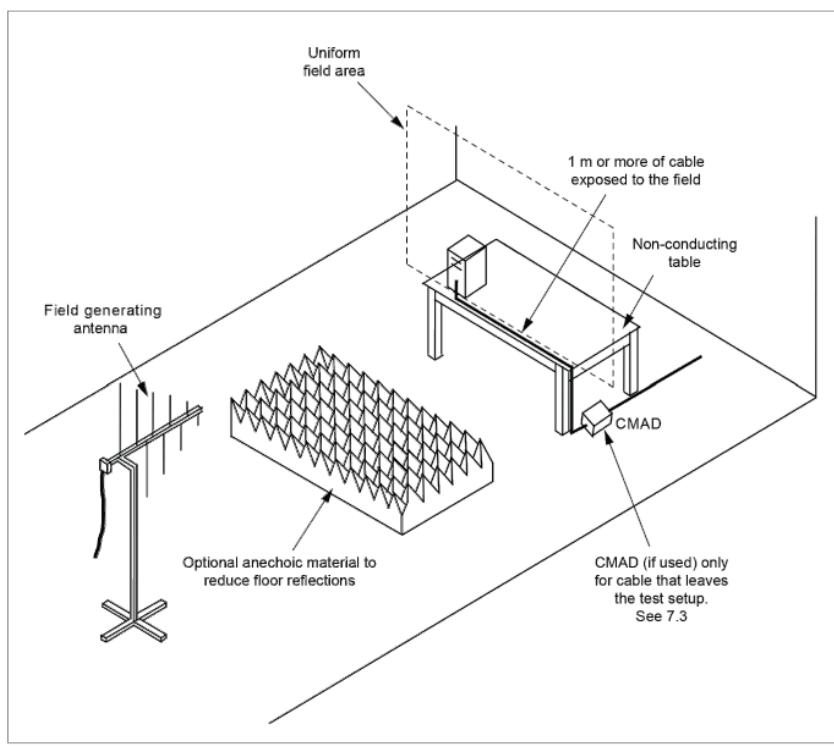


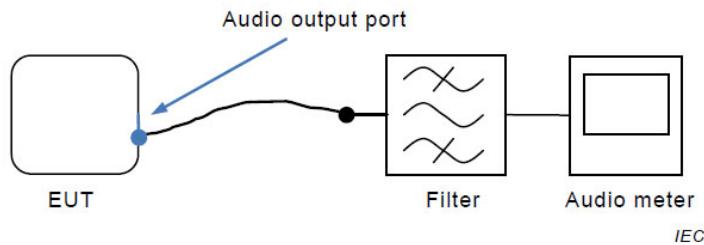**For Audio output function****(1) Audio output port**

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

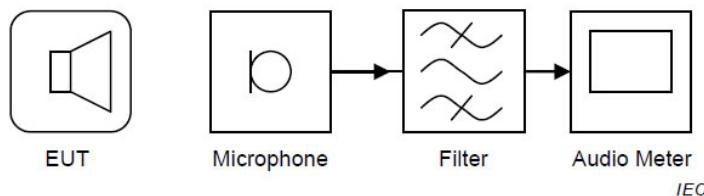**(2) Loudspeaker**

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

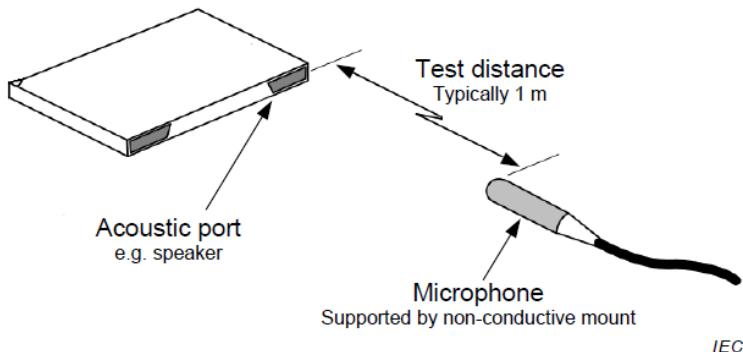

The microphone is connected via the cable to a suitable amplifier. Ensure that there is minimal acoustic loss between EUT and microphone.

**5.6.6 TEST RESULTS**


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7, Mode 10-15

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		


**For Audio output function**

(1) For Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Vertical_Front

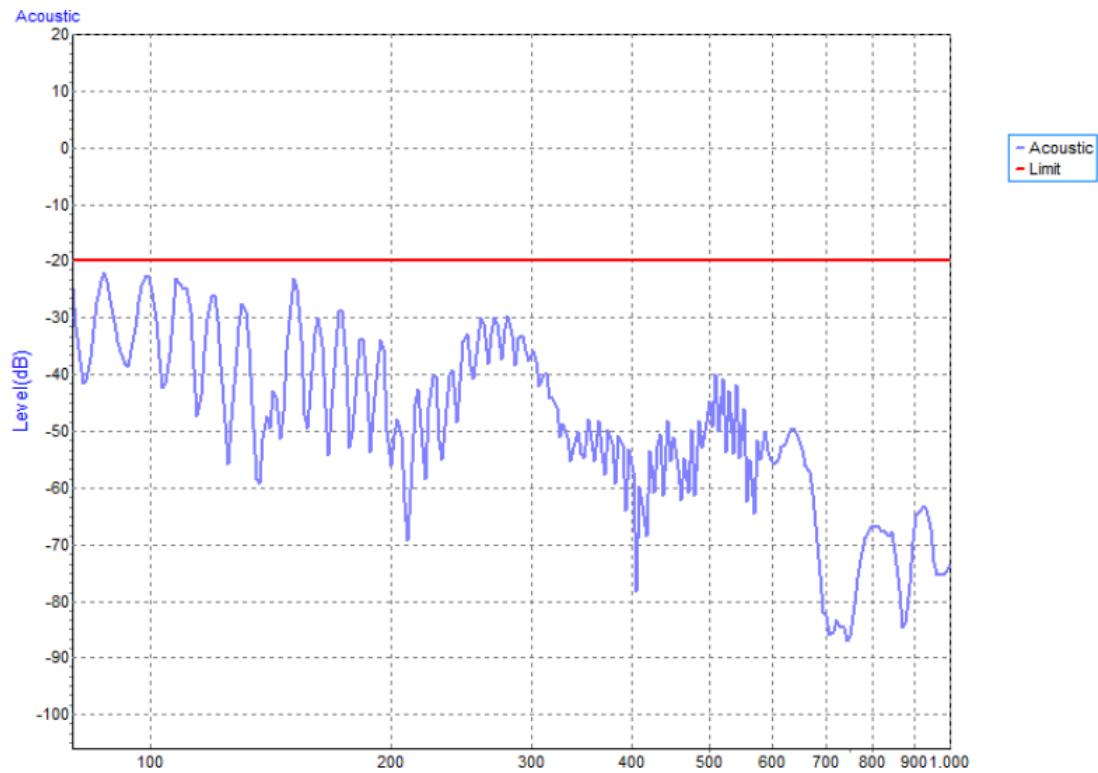


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Horizontal_Front

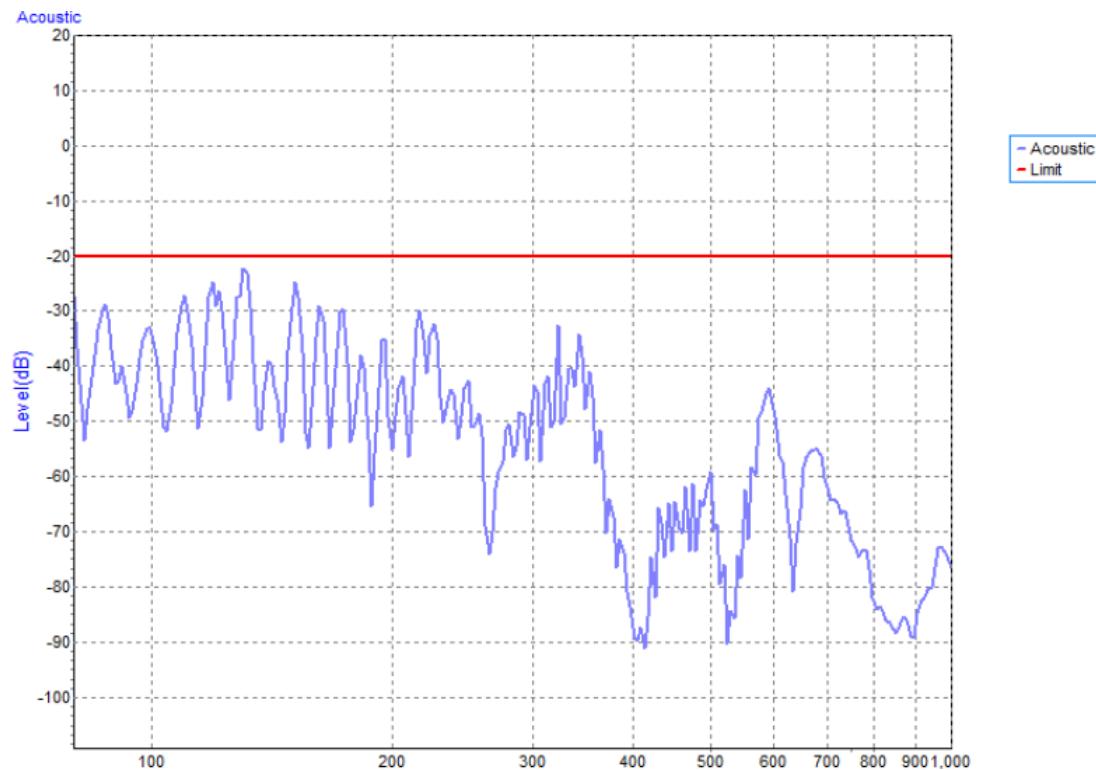


(2) For Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Vertical_Front

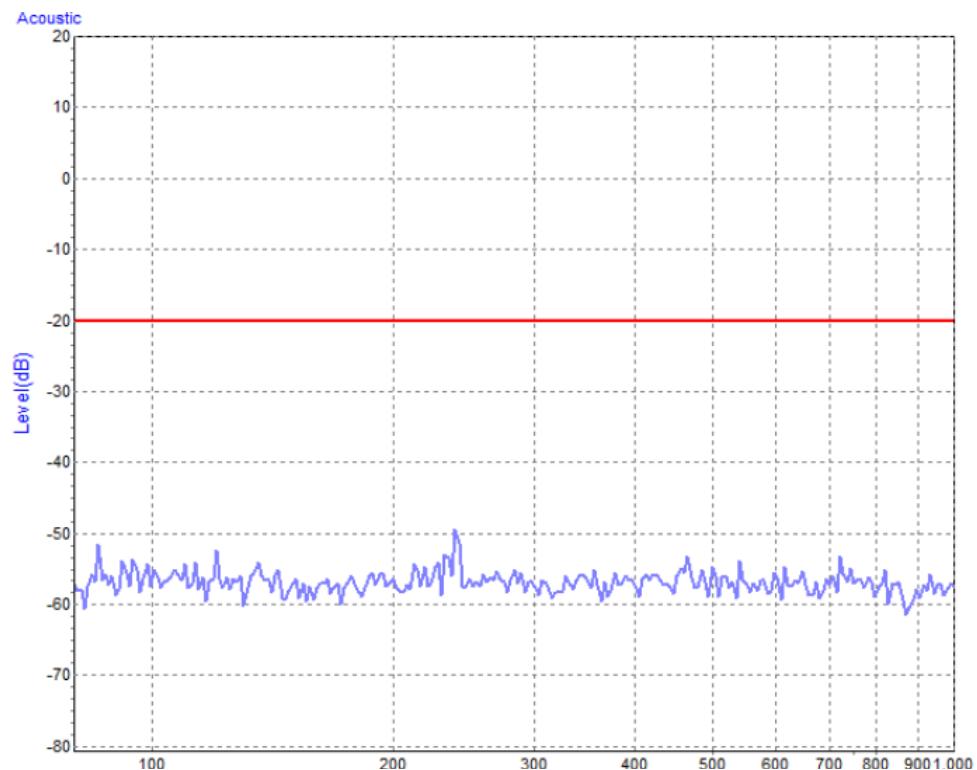

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Horizontal_Front

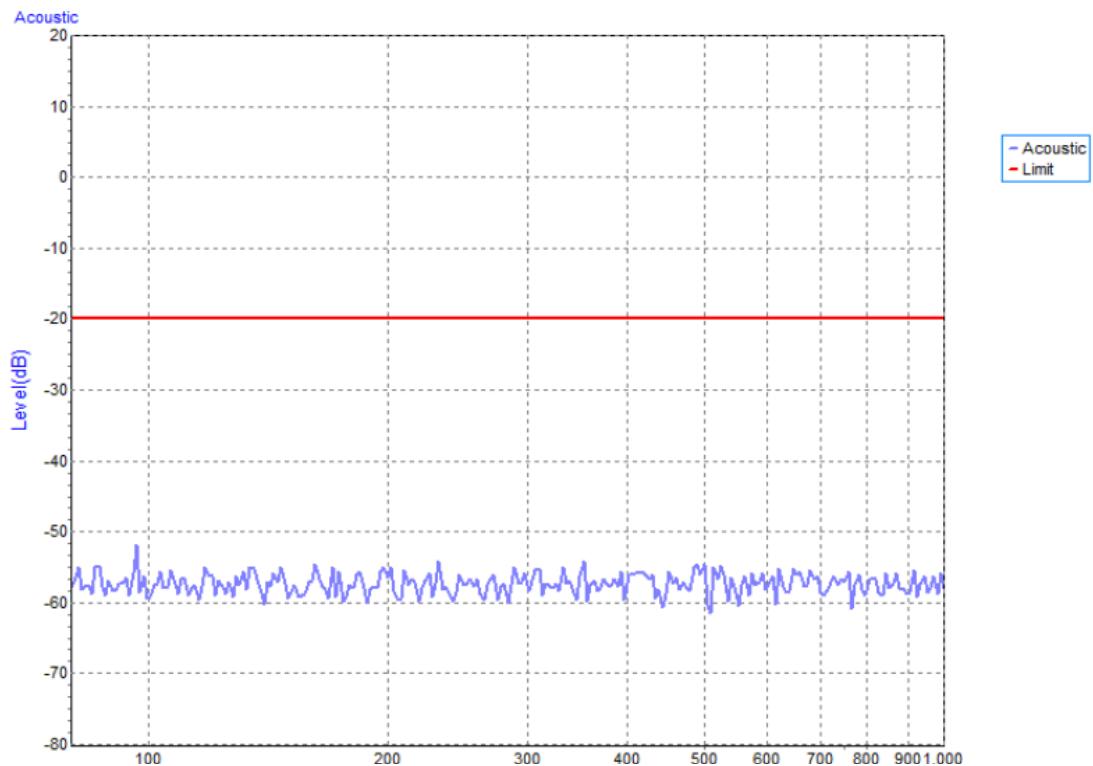

## 5.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

### 5.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC mains power ports: $\pm 1$ kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

### 5.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR201843360	Jul. 07, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.7.3 TEST PROCEDURE

For TABLE-TOP equipment:


The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m +/- 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute.

### 5.7.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.7.5 TEST SETUP

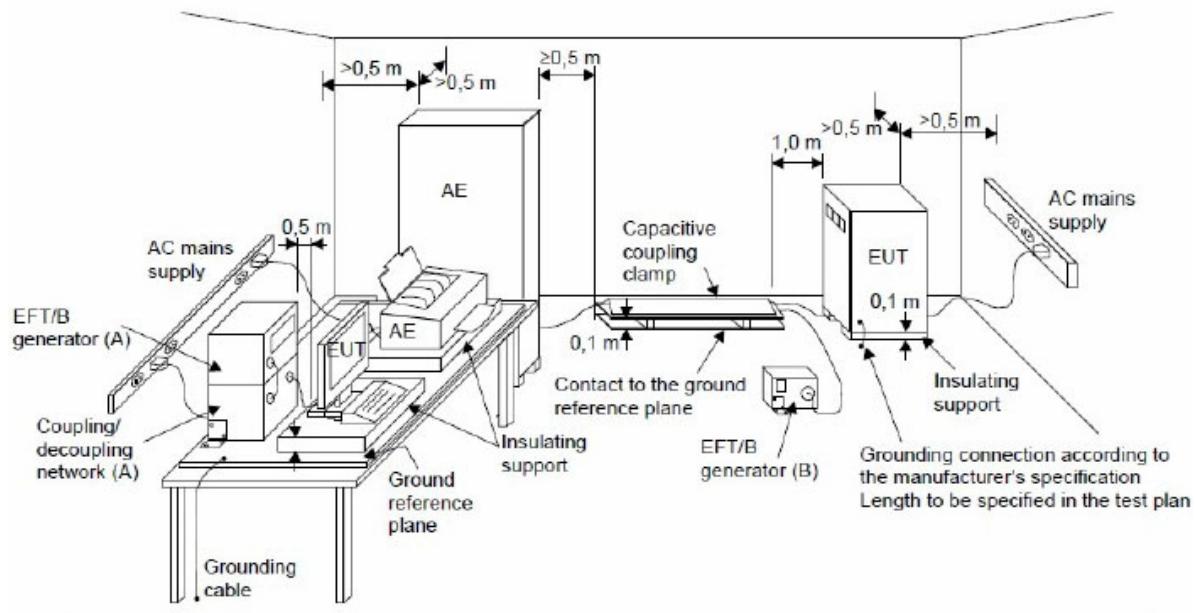

### 5.7.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7, Mode 10-15

EUT Ports Tested	Polarity	Repetition Frequency	Test Level	Criterion	Result
			1kV		
AC Power Port	Line (L)	+	5 kHz	B	B
		-	5 kHz	B	
	Neutral (N)	+	5 kHz	B	B
		-	5 kHz	B	
	Ground (PE)	+	5 kHz	B	B
		-	5 kHz	B	
	L+N	+	5 kHz	B	B
		-	5 kHz	B	
	L+PE	+	5 kHz	B	B
		-	5 kHz	B	
	N+PE	+	5 kHz	B	B
		-	5 kHz	B	
	L+N+PE	+	5 kHz	B	B
		-	5 kHz	B	

## 5.8 SURGE IMMUNITY TEST (SURGE)

### 5.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B(AC mains power ports)
Wave-Shape	1.2/50(8/20) Tr/Th $\mu$ s combination wave
Test Voltage	AC mains power ports: $\pm 0.5$ kV, $\pm 1$ kV, $\pm 2$ kV
Generator Source Impedance	2 $\Omega$ of the low-voltage power supply network. 12 $\Omega$ (10 $\Omega$ +2 $\Omega$ ) of the low-voltage power supply network and ground.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90°phase Five negative pulses line-to-neutral at 270°phase Five positive pulses line-to-earth at 90°phase Five negative pulses line-to-earth at 270°phase Five negative pulses neutral-to-earth at 90°phase Five positive pulses neutral-to-earth at 270°phase
Pulse Repetition Rate	1 time / min

### 5.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR210655102	Jul. 07, 2024
2	Measurement Software	Prima	SUG_Series	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.8.3 TEST PROCEDURE

#### a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

#### b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


#### c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

### 5.8.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.8.5 TEST SETUP

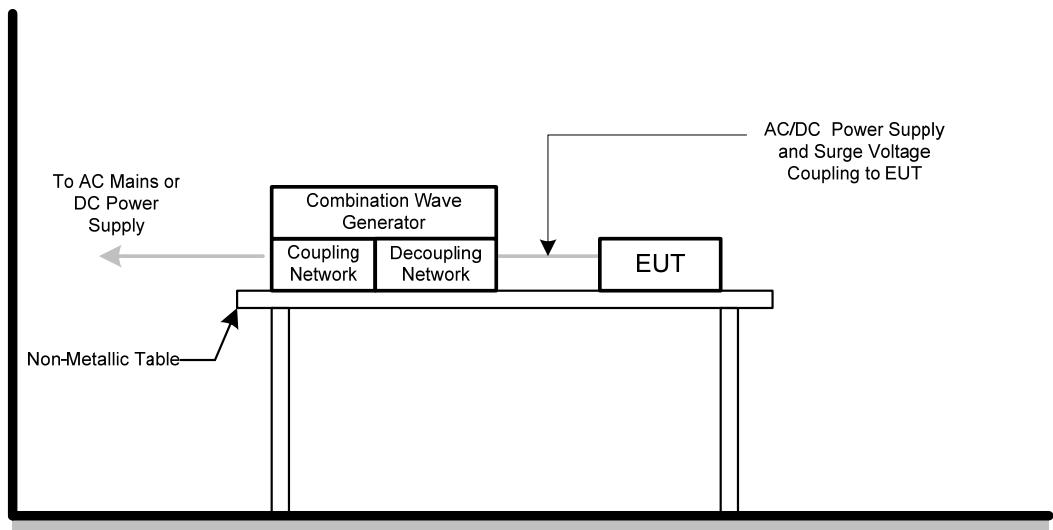

**5.8.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz					
Test Mode	Mode 1-7, Mode 10-15					

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Th $\mu$ s						Criterion	Result		
		Polarity	Phase	Voltage							
				0.5kV	1kV	-- kV	-- kV				
AC	L - N	+	90°	A	A	-	-	B	A		
		-	270°	A	A	-	-				

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Th $\mu$ s						Criterion	Result		
		Polarity	Phase	Voltage							
				0.5kV	1kV	2kV	-- kV				
AC	L - PE	+	90°	A	A	A	-	B	A		
		-	270°	A	A	A	-				
	N - PE	-	90°	A	A	A	-	B	A		
		+	270°	A	A	A	-				

## 5.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

### 5.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Dwell Time	3 seconds

### 5.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test system for conducted immunity	TESEQ	NSG4070	61322	Jul. 07, 2024
2	Measurement Software	Farad	EZ-CS (Ver:B-3.1)	N/A	N/A
3	Coupling Decoupling Network	TESEQ	CDN M016	61183	Jul. 07, 2024
4	UPV Audio Analyzer	R&S	UPV	101941	Jul. 07, 2024
5	Free-field 1/2"Microphone	B&K	4190-L-001	3230388	Oct. 22, 2024
6	Conditioning Amplifier	B&K	-2690--0F2-	3313664	Oct. 24, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.9.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m\*1m min. and 0.65mm thick min.

The other condition as following manner:

- a. The field strength level was 3 V (unmodulated, r.m.s.)
- b. The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sinewave. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.


For Display and display output functions:

- a. The display quality evaluated by direct observation.
- b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output.the diagonal screen size shall be at least 0.50 m.
- c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

#### 5.9.4 DEVIATION FROM TEST STANDARD


No deviation

#### 5.9.5 TEST SETUP

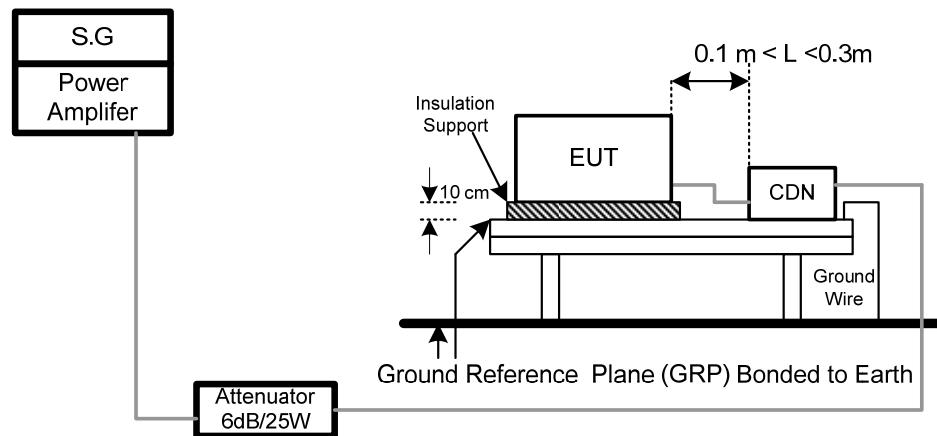


**For Audio output function**

## (1) Audio output port

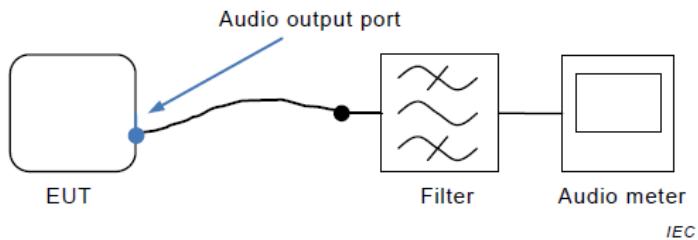


The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

## (2) Loudspeaker

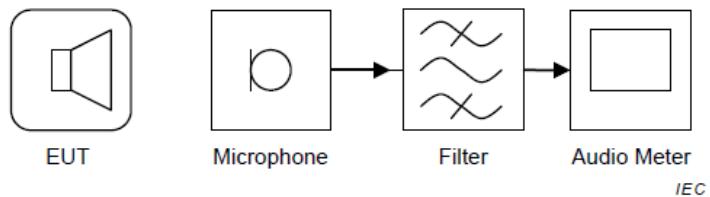

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

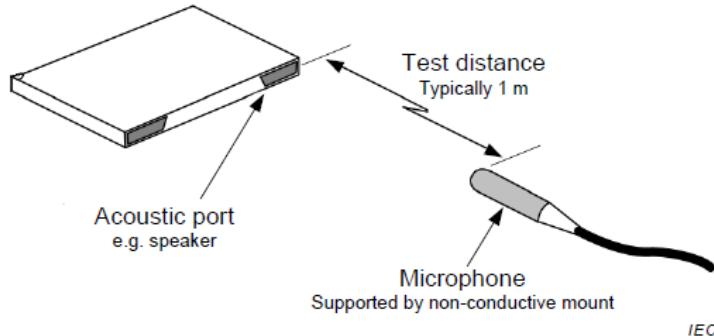

The microphone is connected via the cable to a suitable amplifier. Ensure that there is minimal acoustic loss between EUT and microphone.

**5.9.6 TEST RESULTS**


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7, Mode 10-15

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			

**For Audio output function**


(1) For Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CDN M3

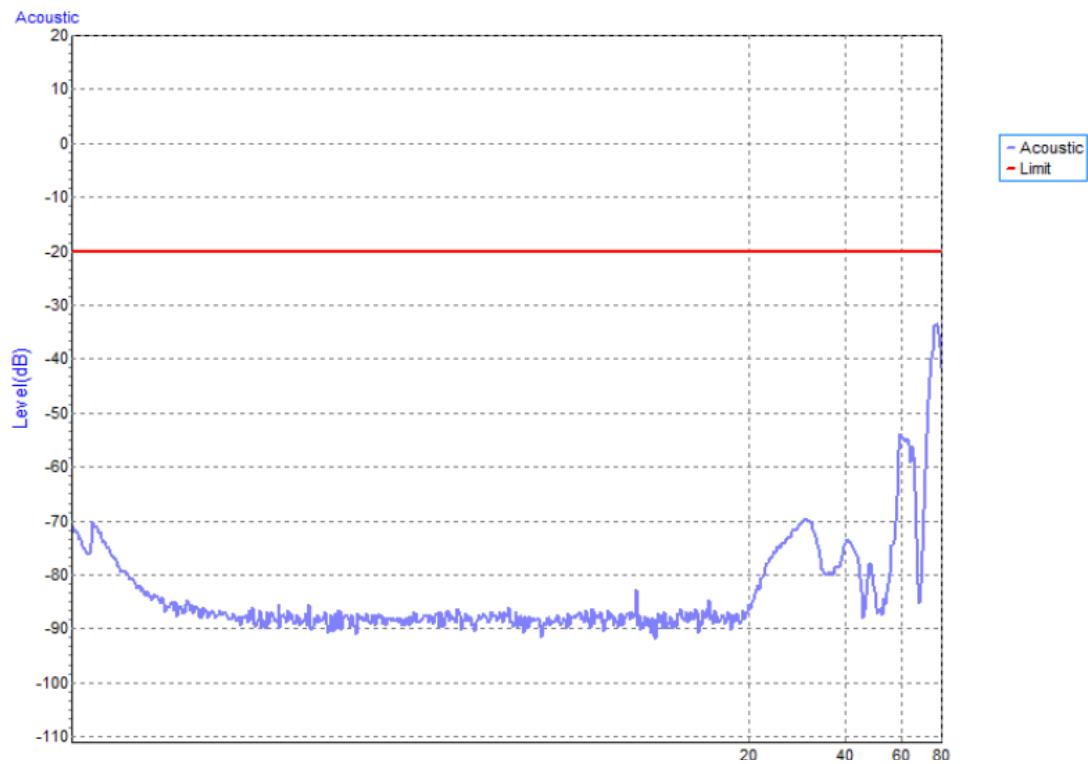

(2) For Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CDN M3

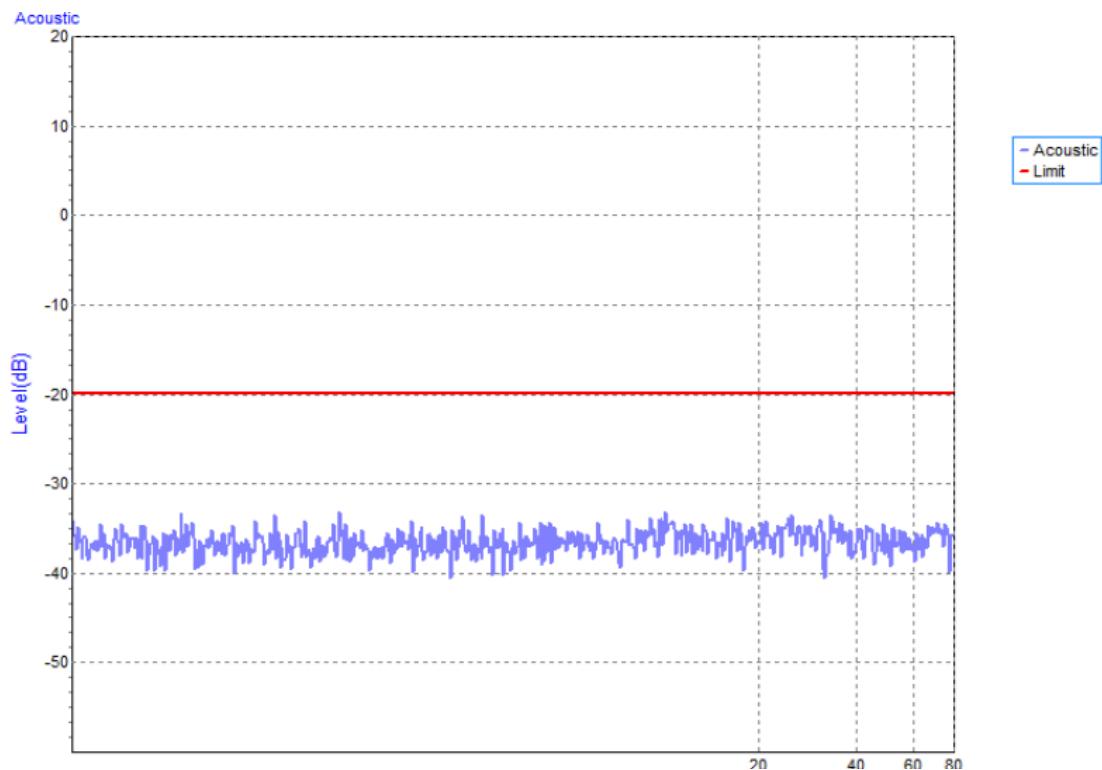

## 5.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

### 5.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

### 5.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power frequency magnetic field interferes with main engine	3ctest	MFS 400	ES045000821015	Aug. 14, 2024
2	Magnetic field generator module	3ctest	MFT400	ES046000121015	Aug. 14, 2024
3	magnetic field coil	3ctest	TCXS111	TCXS21070924	Aug. 14, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.10.3 TEST PROCEDURE

For TABLE-TOP equipment:

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.


The other condition as following manner:

- a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 5.10.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.10.5 TEST SETUP

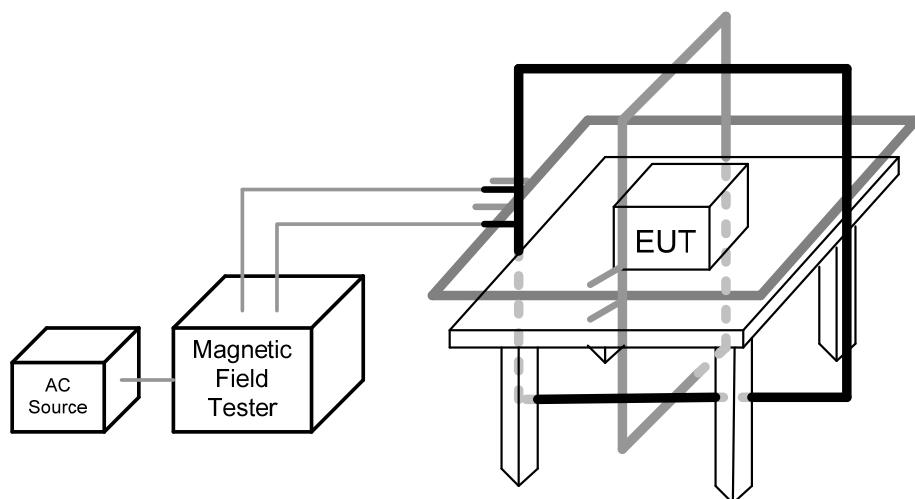

### 5.10.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7, Mode 10-15

50Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

60Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

## 5.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

### 5.11.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

### 5.11.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	Jun. 16, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


### 5.11.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

### 5.11.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.11.5 TEST SETUP

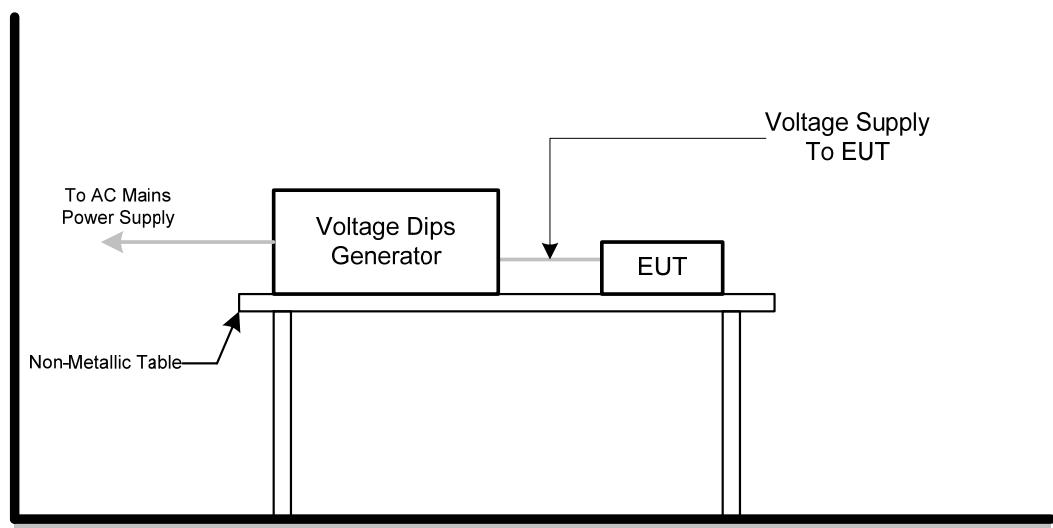

### 5.11.6 TEST RESULTS

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode	Mode 1-7, Mode 10-15

AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C


AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



**6. EUT TEST PHOTO**

EN 55032:2015


Radiated emissions up to 1 GHz

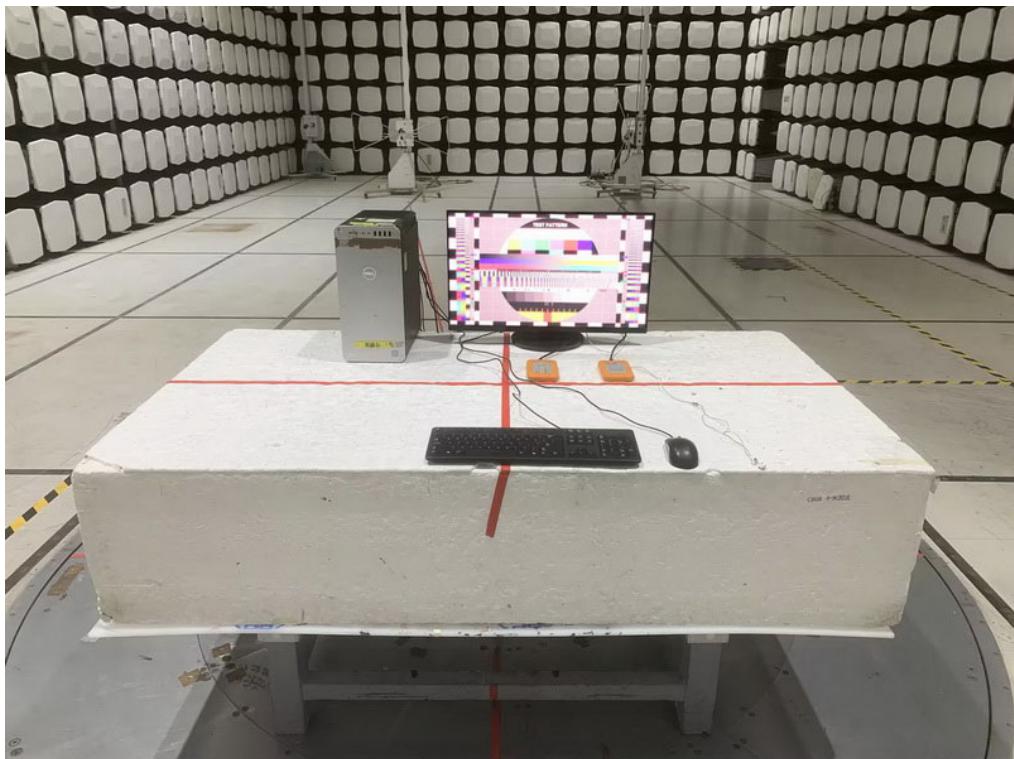

## Radiated emissions above 1 GHz

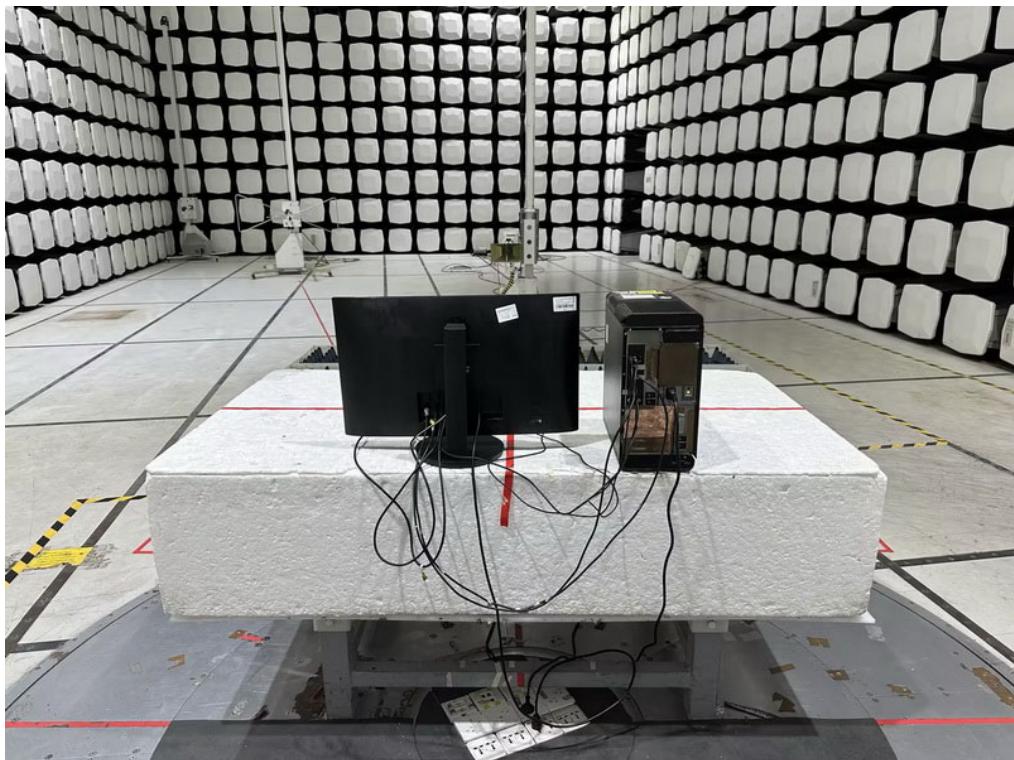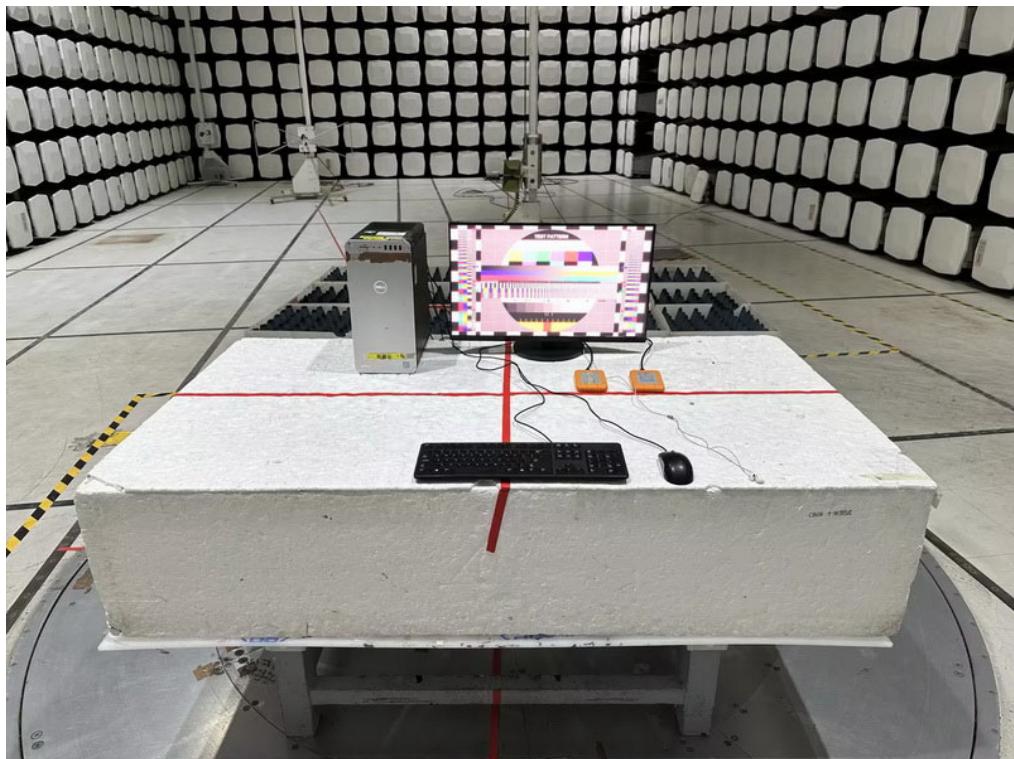


## Conducted emissions AC mains power port


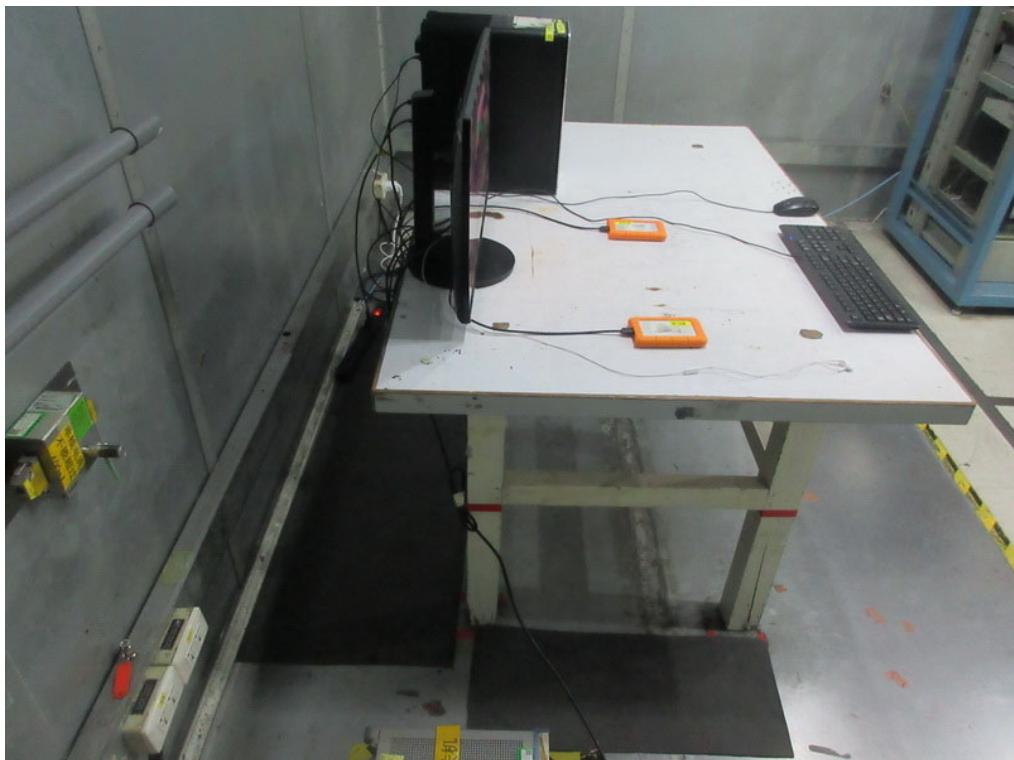


EN 55032:2015+A11:2020


Radiated emissions up to 1 GHz

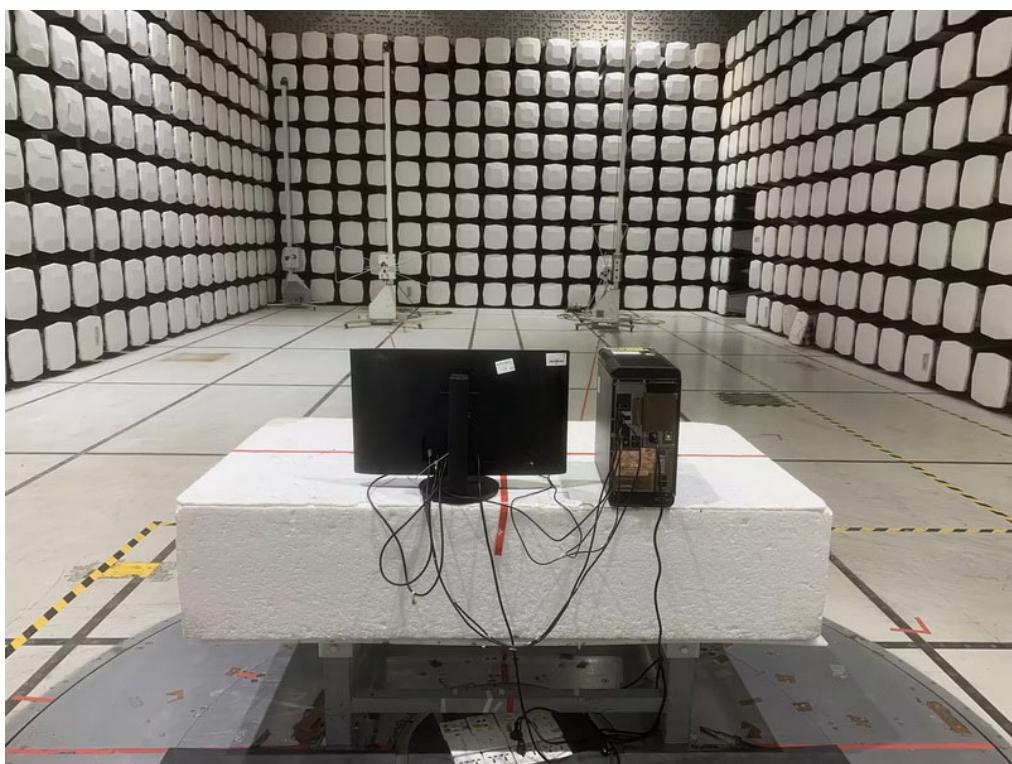

## Radiated emissions above 1 GHz

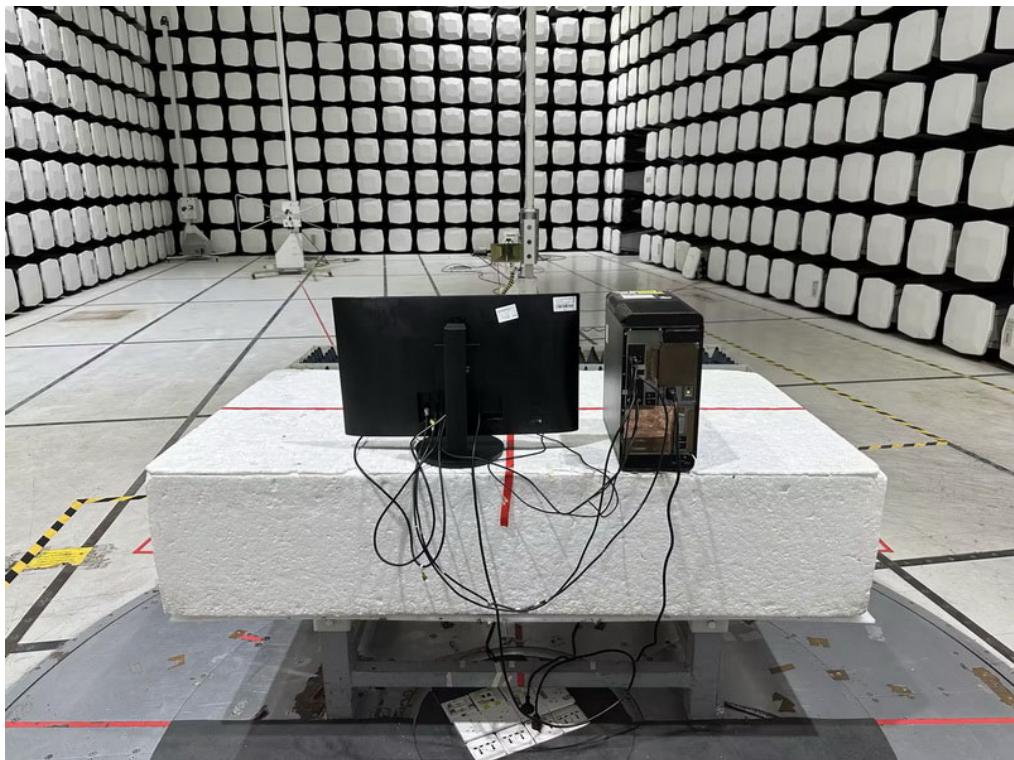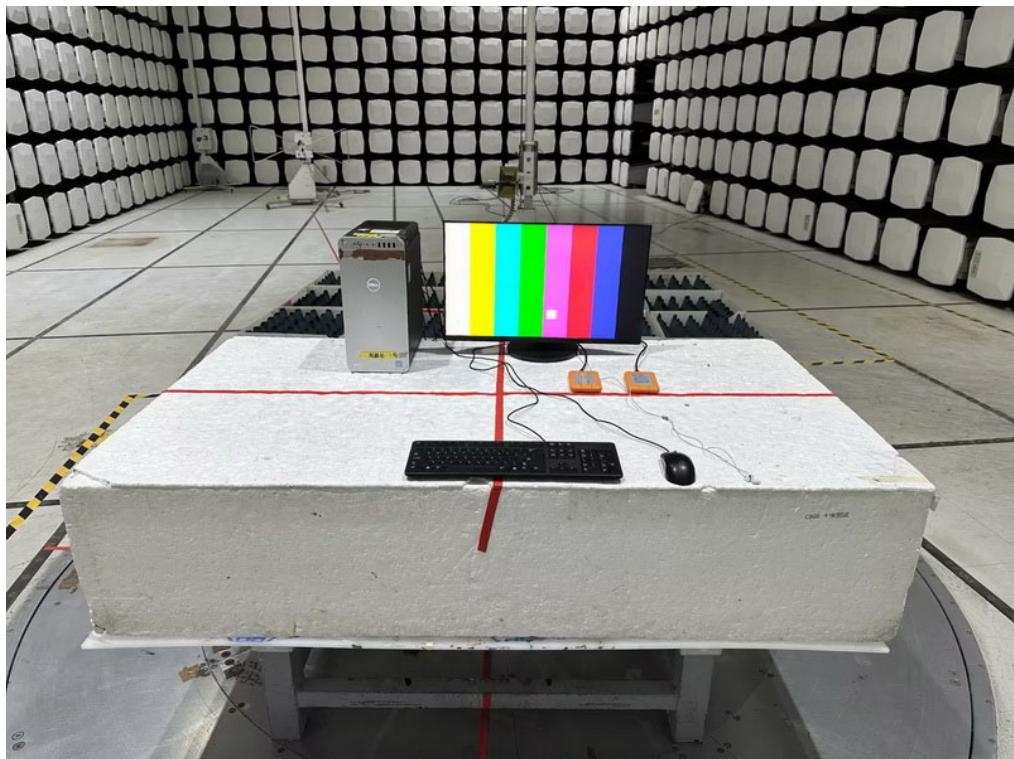

## Conducted emissions AC mains power port

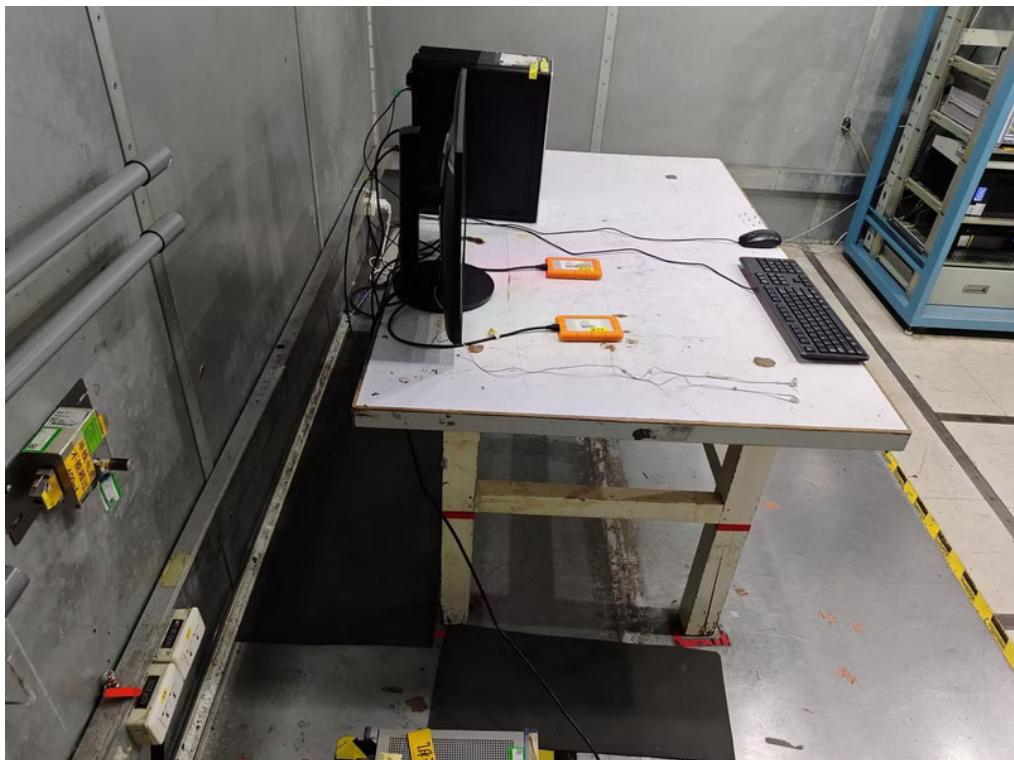

## Harmonic current



## Voltage fluctuations (Flicker)



## Electrostatic discharge immunity



## Radiated, radio-frequency, electromagnetic field immunity – Up to 1GHz




Radiated, radio-frequency, electromagnetic field immunity – Above 1GHz



Electrical fast transient/burst immunity - AC

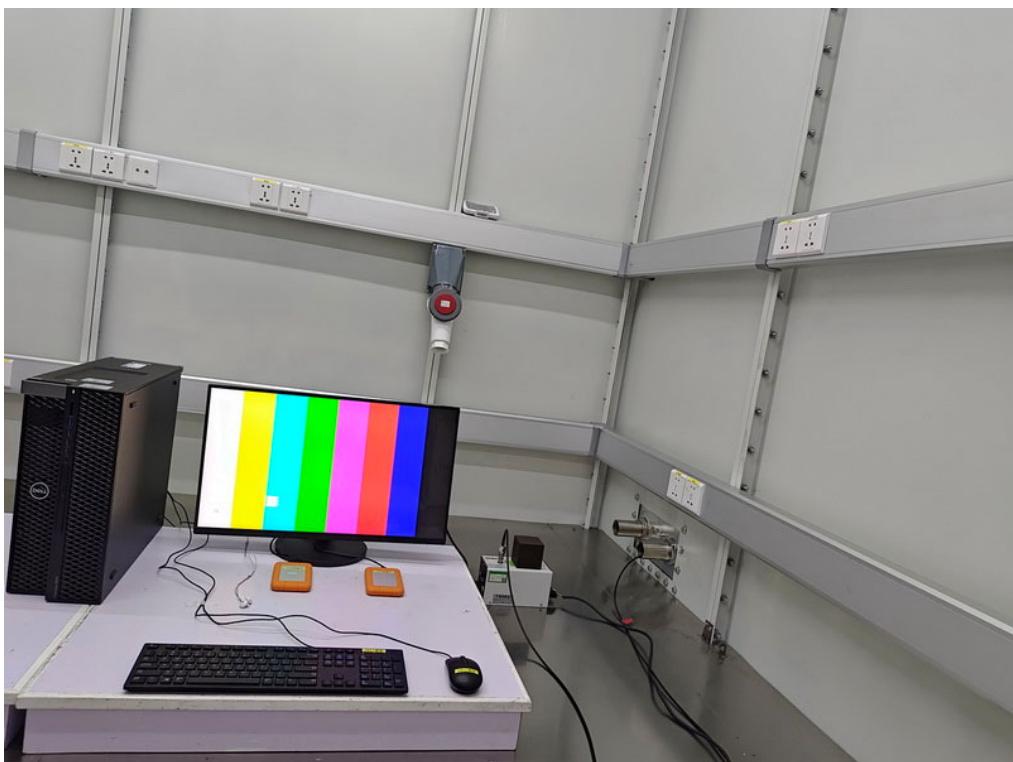

**Surge immunity - AC****Immunity to conducted disturbances, induced by radio-frequency fields - AC**

## Power frequency magnetic field immunity



## Voltage dips, short interruptions and voltage variations immunity

**End of Test Report**