


Find your product and get support

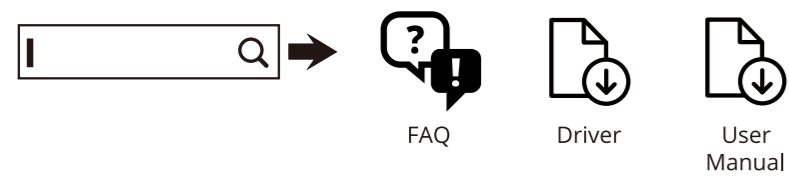

Europe
<https://aoc.com/uk/support>

Россия
<https://aoc.com/ru/support>

Australia
https://au.aoc.com/user_manual

Hong Kong S.A.R.
https://hk.aoc.com/user_manual

中國台灣
https://tw.aoc.com/user_manual

Indonesia
https://id.aoc.com/user_manual

日本
https://jp.aoc.com/user_manual

한국
https://kr.aoc.com/user_manual

Malaysia
https://my.aoc.com/user_manual

Myanmar
https://mm.aoc.com/user_manual

New Zealand
https://nz.aoc.com/user_manual

Philippines
https://ph.aoc.com/user_manual

Singapore
https://sg.aoc.com/user_manual

ประเทศไทย
https://th.aoc.com/user_manual

Việt Nam
https://vn.aoc.com/user_manual

Middle East
https://me.aoc.com/user_manual

South Africa
https://za.aoc.com/user_manual

Brasil
<https://aoc.portaltpv.com.br/>

India
<https://aoc.com/in-en/support>

US
<https://aoc.com/us/support>

Canada
<https://aoc.com/ca-en/support>



Product information for EU/UK Energy



F41G24S1615-4A----


AOC



Quick Start Guide



24B3QA2

www.aoc.com
 ©2025 AOC.All Rights Reserved


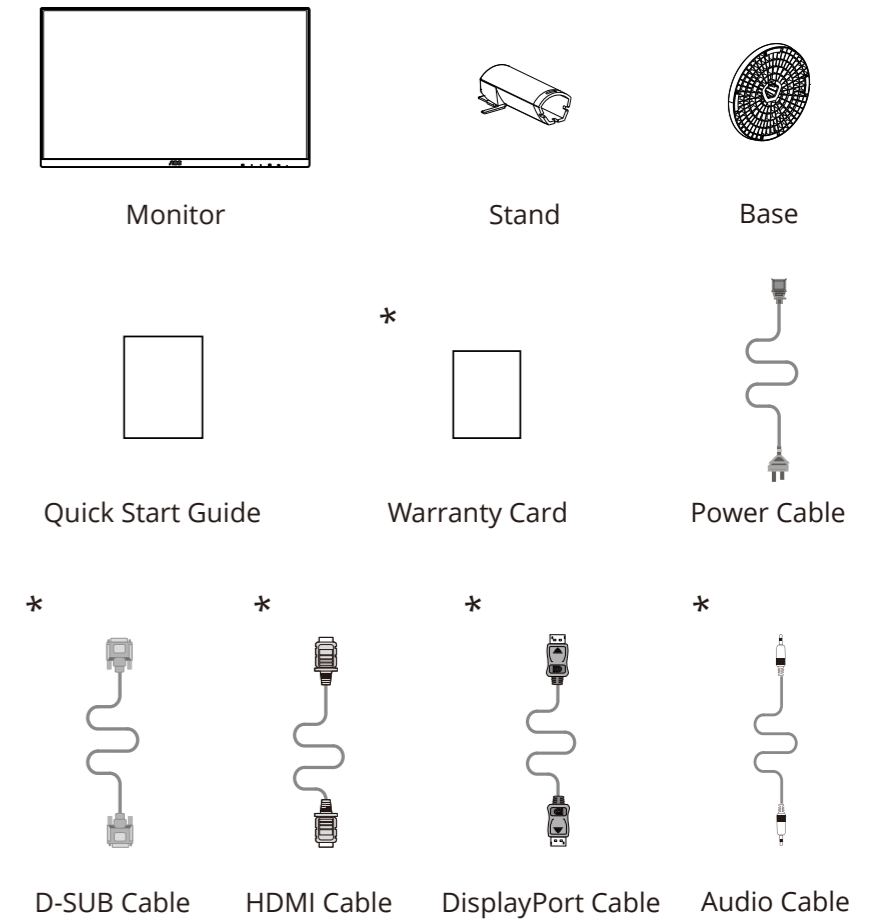


*Different according to countries/regions
 Display design may differ from that illustrated


1

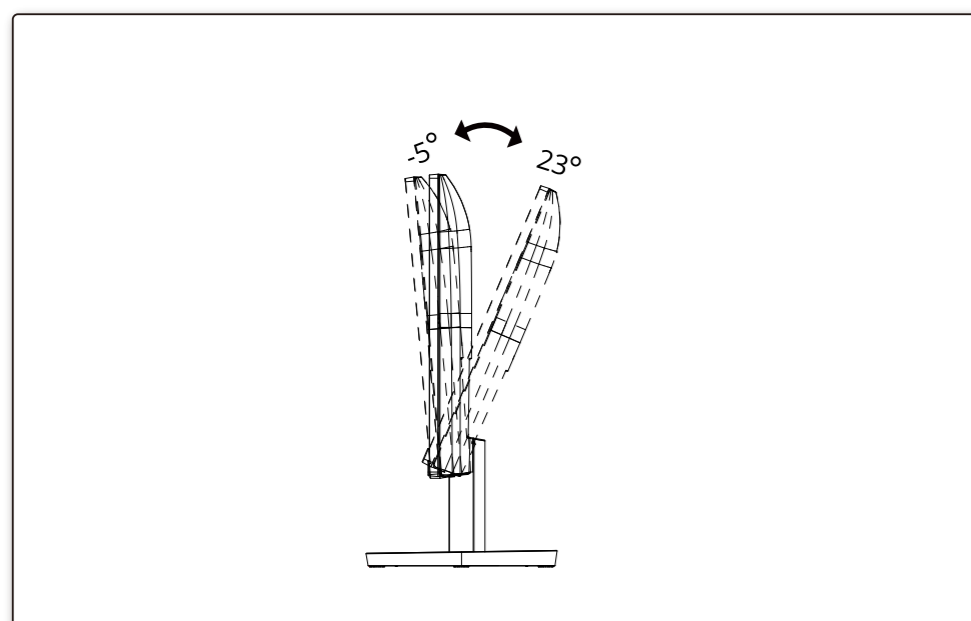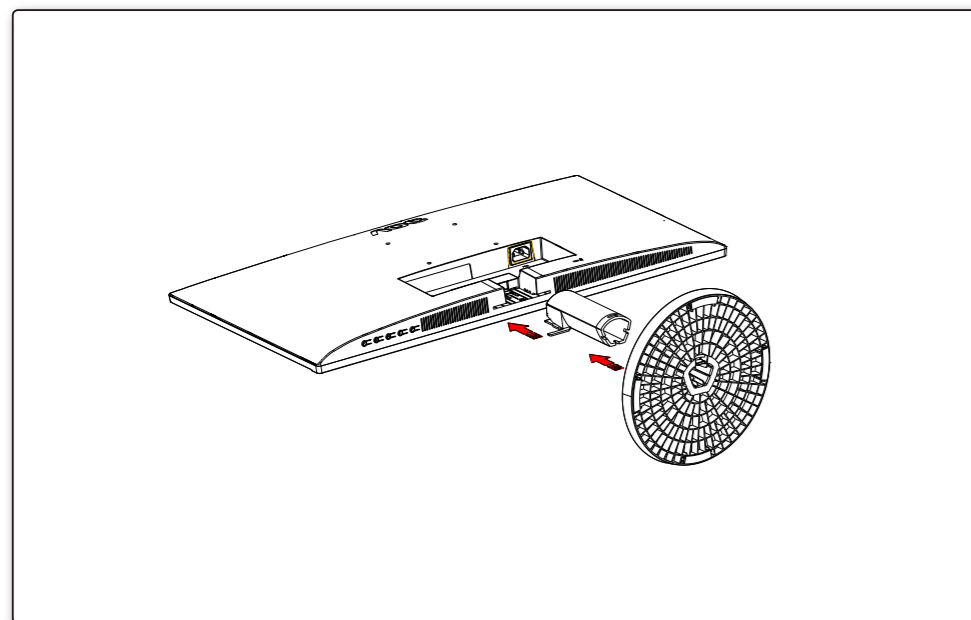

2

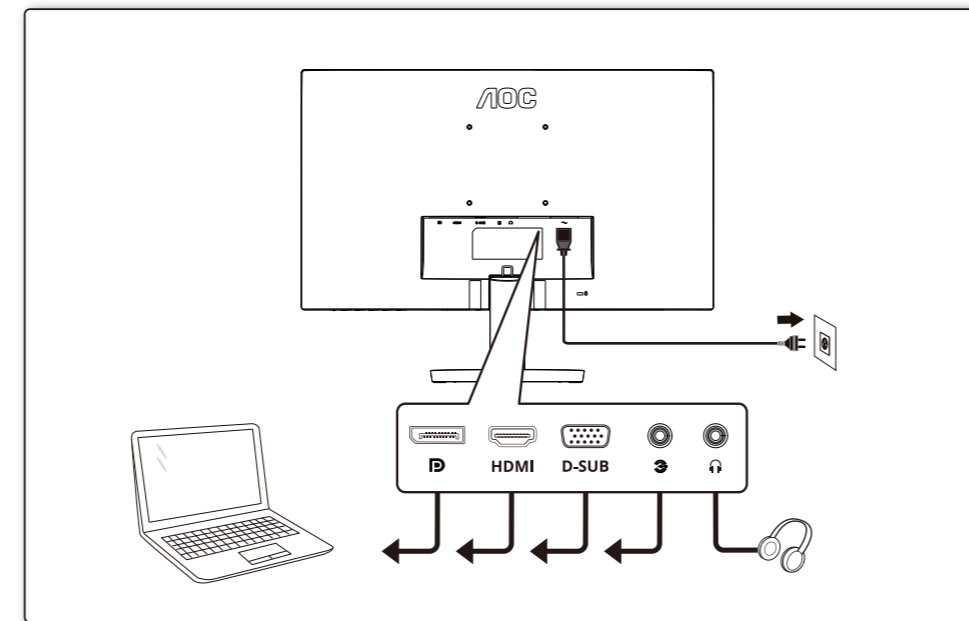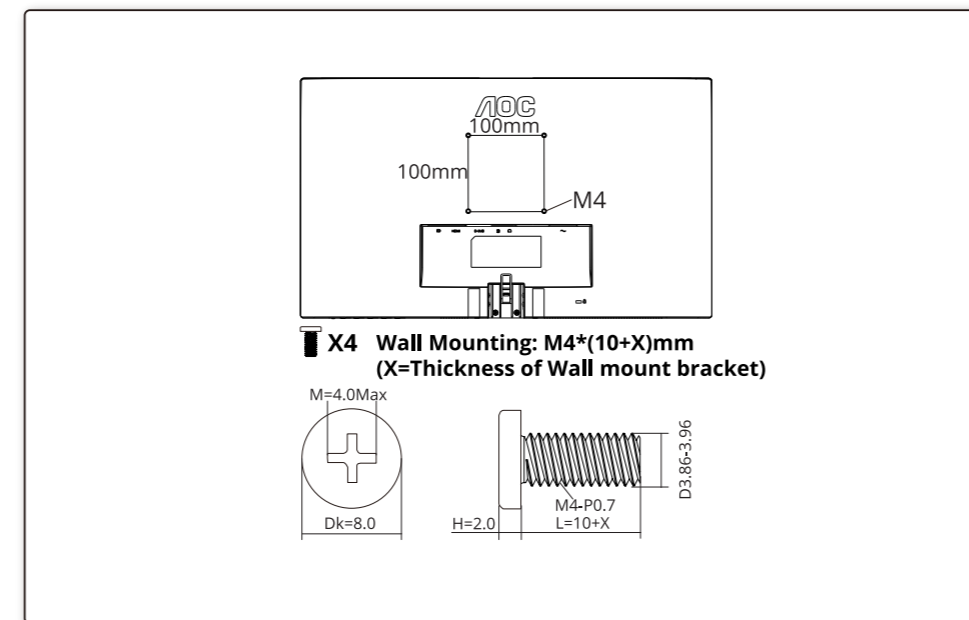

3

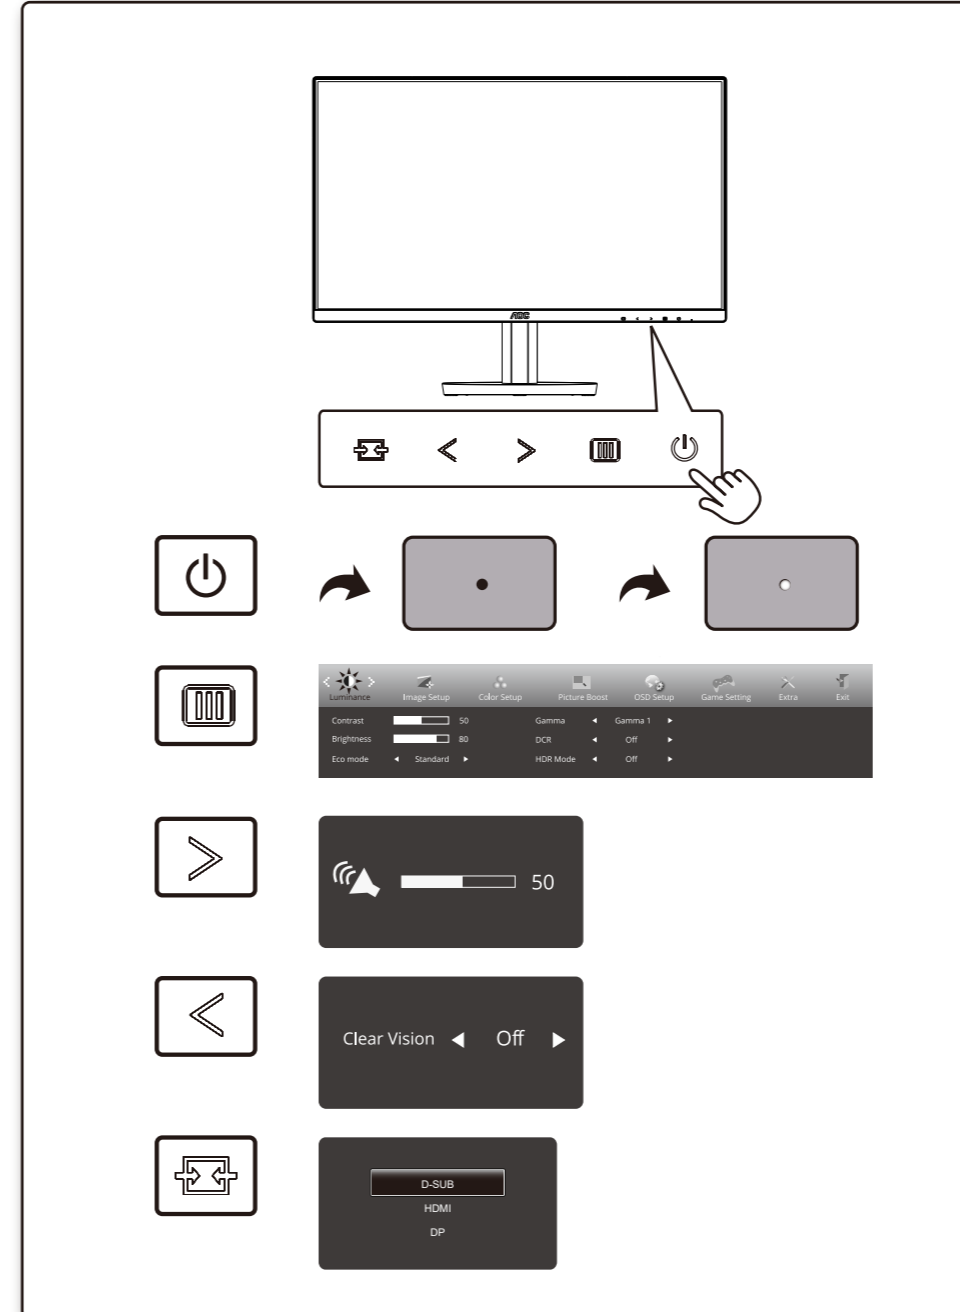

4

General Specification

Panel	Model name	24B3QA2		
	Driving system	TFT Color LCD		
	Viewable image size	60.5cm diagonal (23.8" wide screen)		
	Pixel pitch	0.2745mm(H) x 0.2745mm(V)		
Others	Horizontal scan range	30k-85kHz (D-SUB) 30k-140kHz (HDMI/DisplayPort)		
	Horizontal scan Size (Maximum)	527.04mm		
	Vertical scan range	48-75Hz (D-SUB) 48-120Hz (HDMI/DisplayPort)		
	Vertical scan Size (Maximum)	296.46mm		
	Max resolution	1920x1080@75Hz(D-SUB) 1920x1080@120Hz (HDMI/DisplayPort)		
	Plug & Play	VESA DDC2B/CI		
	Power source	100-240V~, 50/60Hz, 1.5A		
	Power consumption	Typical (default brightness and contrast)	19W	
		Max. (brightness =100, contrast =100)	≤33W	
		Standby mode	≤0.5W	
Dimensions (with stand)	542.4x412.1x202.3mm (WxHxD)			
Net weight	2.97kg			
Physical Characteristics	Connector type	DisplayPort/HDMI/D-Sub/Audio in/Earphone out		
	Signal cable type	Detachable		
	Built-In Speaker	2Wx2		
Environmental	Temperature	Operating	0°C~40°C	
		Non-operating	-25°C~55°C	
	Humidity	Operating	10%~85% (non-condensing)	
		Non-operating	5%~93% (non-condensing)	
Altitude	Operating	0~5000m (0~16404ft)		
	Non-operating	0~12192m (0~40000ft)		