



## CE&UKCA EMC Test Report

**Project No.** : 2403C059A  
**Equipment** : LCD Monitor  
**Brand Name** : N/A  
**Model Name** : 24B3  
**Series Model** : \*\*24B3\*\*\*\*\* (\*=0-9, A-Z, a-z, +, -, /, \ or blank)  
**Applicant** : TPV Electronics (Fujian) Co., Ltd.  
**Address** : Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China  
**Date of Receipt** : Aug. 08, 2024  
**Date of Test** : Aug. 08, 2024 ~ Aug. 26, 2024  
**Issued Date** : Sep. 12, 2024  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG2024080840  
**Standard(s)** : Please refer to Page 2.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

**Prepared by** : Albe Zhou  
Albe Zhou

**Approved by** : Kevin Li  
Kevin Li

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China

Tel: +86-769-8318-3000 Web: [www.newbtl.com](http://www.newbtl.com) Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

<b>Standard(s)</b>	:	EN 55032:2015 EN 55032:2015+A11:2020 EN 55032:2015+A1:2020 CISPR 32:2015+AMD1:2019 AS/NZS CISPR 32:2015+AMD1:2020 EN 61000-3-2:2014 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013 EN 61000-3-3:2013+A1:2019 EN 61000-3-3:2013+A2:2021 EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020
		BS EN 55032:2015 BS EN 55032:2015+A11:2020 BS EN 55032:2015+A1:2020 BS EN 61000-3-2:2014 BS EN IEC 61000-3-2:2019+A1:2021 BS EN 61000-3-3:2013 BS EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A2:2021 BS EN 55035:2017 BS EN 55035:2017+A11:2020

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>7</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>8</b>
1.1 TEST FACILITY	10
1.2 MEASUREMENT UNCERTAINTY	10
1.3 TEST ENVIRONMENT CONDITIONS	12
<b>2 . GENERAL INFORMATION</b>	<b>13</b>
2.1 GENERAL DESCRIPTION OF EUT	13
2.2 DESCRIPTION OF TEST MODES	14
2.3 EUT OPERATING CONDITIONS	15
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
2.5 DESCRIPTION OF SUPPORT UNITS	16
<b>3 . EMC EMISSION TEST</b>	<b>17</b>
3.1 RADIATED EMISSIONS UP TO 1 GHZ	17
3.1.1 LIMITS	17
3.1.2 MEASUREMENT INSTRUMENTS LIST	17
3.1.3 TEST PROCEDURE	18
3.1.4 DEVIATION FROM TEST STANDARD	18
3.1.5 TEST SETUP	18
3.1.6 MEASUREMENT DISTANCE	19
3.1.7 TEST RESULTS	20
3.2 RADIATED EMISSIONS ABOVE 1 GHZ	24
3.2.1 LIMITS	24
3.2.2 MEASUREMENT INSTRUMENTS LIST	24
3.2.3 TEST PROCEDURE	25
3.2.4 DEVIATION FROM TEST STANDARD	25
3.2.5 TEST SETUP	25
3.2.6 MEASUREMENT DISTANCE	26
3.2.7 TEST RESULTS	27
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	31
3.3.1 LIMITS	31
3.3.2 MEASUREMENT INSTRUMENTS LIST	31
3.3.3 TEST PROCEDURE	31
3.3.4 DEVIATION FROM TEST STANDARD	31
3.3.5 TEST SETUP	32
3.3.6 TEST RESULTS	33
3.4 HARMONIC CURRENT EMISSIONS TEST	37
3.4.1 LIMITS	37
3.4.2 MEASUREMENT INSTRUMENTS LIST	37
3.4.3 TEST PROCEDURE	37

**Table of Contents**

	<b>Page</b>
3.4.4 DEVIATION FROM TEST STANDARD	37
3.4.5 TEST SETUP	37
3.4.6 TEST RESULTS	38
<b>3.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST</b>	<b>41</b>
3.5.1 LIMITS	41
3.5.2 MEASUREMENT INSTRUMENTS LIST	41
3.5.3 TEST PROCEDURE	41
3.5.4 DEVIATION FROM TEST STANDARD	41
3.5.5 TEST SETUP	42
3.5.6 TEST RESULTS	43
<b>4 . EMC IMMUNITY TEST</b>	<b>44</b>
4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	44
4.2 GENERAL PERFORMANCE CRITERIA	47
4.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION	48
4.3.1 PERFORMANCE CRITERIA	48
4.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	49
4.4.1 TEST SPECIFICATION	49
4.4.2 MEASUREMENT INSTRUMENTS	49
4.4.3 TEST PROCEDURE	49
4.4.4 DEVIATION FROM TEST STANDARD	50
4.4.5 TEST SETUP	50
4.4.6 TEST RESULTS	51
4.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	55
4.5.1 TEST SPECIFICATION	55
4.5.2 MEASUREMENT INSTRUMENTS	55
4.5.3 TEST PROCEDURE	55
4.5.4 DEVIATION FROM TEST STANDARD	56
4.5.5 TEST SETUP	56
4.5.6 TEST RESULTS	57
4.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)	58
4.6.1 TEST SPECIFICATION	58
4.6.2 MEASUREMENT INSTRUMENTS	58
4.6.3 TEST PROCEDURE	58
4.6.4 DEVIATION FROM TEST STANDARD	58
4.6.5 TEST SETUP	59
4.6.6 TEST RESULTS	60
4.7 SURGE IMMUNITY TEST (SURGE)	61
4.7.1 TEST SPECIFICATION	61
4.7.2 MEASUREMENT INSTRUMENTS	61
4.7.3 TEST PROCEDURE	61
4.7.4 DEVIATION FROM TEST STANDARD	61
4.7.5 TEST SETUP	62
4.7.6 TEST RESULTS	63

**Table of Contents** **Page**

<b>4.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY</b>	
<b>FIELDS TEST (CS)</b>	<b>64</b>
<b>4.8.1 TEST SPECIFICATION</b>	<b>64</b>
<b>4.8.2 MEASUREMENT INSTRUMENTS</b>	<b>64</b>
<b>4.8.3 TEST PROCEDURE</b>	<b>64</b>
<b>4.8.4 DEVIATION FROM TEST STANDARD</b>	<b>65</b>
<b>4.8.5 TEST SETUP</b>	<b>65</b>
<b>4.8.6 TEST RESULTS</b>	<b>66</b>
<b>4.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)</b>	<b>67</b>
<b>4.9.1 TEST SPECIFICATION</b>	<b>67</b>
<b>4.9.2 MEASUREMENT INSTRUMENTS</b>	<b>67</b>
<b>4.9.3 TEST PROCEDURE</b>	<b>67</b>
<b>4.9.4 DEVIATION FROM TEST STANDARD</b>	<b>67</b>
<b>4.9.5 TEST SETUP</b>	<b>68</b>
<b>4.9.6 TEST RESULTS</b>	<b>69</b>
<b>4.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY</b>	
<b>TEST (DIPS)</b>	<b>70</b>
<b>4.10.1 TEST SPECIFICATION</b>	<b>70</b>
<b>4.10.2 MEASUREMENT INSTRUMENTS</b>	<b>70</b>
<b>4.10.3 TEST PROCEDURE</b>	<b>70</b>
<b>4.10.4 DEVIATION FROM TEST STANDARD</b>	<b>70</b>
<b>4.10.5 TEST SETUP</b>	<b>70</b>
<b>4.10.6 TEST RESULTS</b>	<b>71</b>
<b>5 . EUT TEST PHOTO</b>	<b>72</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-EMC-1-2403C059A	R00	<p>This is a supplementary report to the original test report (BTL-EMC-1-2403C059).</p> <p>1. Added mainboard (Model: 715GE780), so the EMI&amp;Harmonic current&amp;Flicker used worst case to test, the EMS have been re-evaluated and recorded. In this report only recorded the new test results. The original test results please refer to original report.</p>	Sep. 12, 2024	Valid

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission		
Standard(s)	Test Item	Result
EN 55032:2015 EN 55032:2015+A11:2020 EN 55032:2015+A1:2020 CISPR 32:2015+AMD1:2019 AS/NZS CISPR 32:2015+AMD1:2020 BS EN 55032:2015 BS EN 55032:2015+A11:2020 BS EN 55032:2015+A1:2020	Radiated emissions up to 1 GHz	PASS
	Radiated emissions above 1 GHz	PASS
	Radiated emissions from FM receivers	N/A
	Conducted emissions AC mains power port	PASS
	Asymmetric mode	AAN
	conducted emissions	N/A
	Current Probe	N/A
	CP+CVP	N/A
Conducted differential voltage emissions		N/A

Standard(s)	Test Item	Result
EN 61000-3-2:2014 EN IEC 61000-3-2:2019+A1:2021 BS EN 61000-3-2:2014 BS EN IEC 61000-3-2:2019+A1:2021	Harmonic current	PASS
EN 61000-3-3:2013 EN 61000-3-3:2013+A1:2019 EN 61000-3-3:2013+A2:2021 BS EN 61000-3-3:2013 BS EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A2:2021	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017 BS EN 55035:2017+A11:2020	IEC 61000-4-2:2008 EN 61000-4-2:2009	ESD	PASS
	IEC 61000-4-3:2020 EN IEC 61000-4-3:2020	RS	PASS
	IEC 61000-4-4:2012 EN 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+AMD1:2017 EN 61000-4-5:2014+A1:2017	Surge	PASS
	IEC 61000-4-6:2013 EN 61000-4-6:2014+AC:2015	CS	PASS
	IEC 61000-4-8:2009 EN 61000-4-8:2010	PFMF	PASS
	IEC 61000-4-11:2020 EN IEC 61000-4-11:2020	Dips	PASS

Standard(s)	Section	Test Item	Result
EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017 BS EN 55035:2017+A11:2020	4.2.7	BIN-R	N/A
	4.2.7	BIN-I	N/A

## NOTE:

(1) "N/A" denotes test is not applicable to this device.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location  
For ESD items: Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City,  
Guangdong, People's Republic of China.

For other items: No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of  
China.

## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed  
on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR  
16-4-2  $U_{\text{cisp}}^r$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard  
uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{\text{cisp}}^r$ (dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.48
		30MHz ~ 200MHz	H	4.50
		200MHz ~ 1,000MHz	V	4.60
		200MHz ~ 1,000MHz	H	4.84

B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	$U_{\text{cisp}}^r$ (dB)
DG-CB08 (3m)	CISPR	1GHz ~ 6GHz	4.24

C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	$U_{\text{cisp}}^r$ (dB)
DG-C01	CISPR	150kHz ~ 30MHz	2.98

D. Harmonic current / Voltage fluctuations (Flicker) measurement:

Test Site	Method	Item	$U_{\text{cisp}}^r$ (%)
DG-C01	EN 61000-3-2 EN 61000-3-3	Current	0.757
		Voltage	0.592

**E. Immunity Measurement:**

Test Site	Method	Item	<i>U</i>
SSL-SR02	IEC 61000-4-2	Rise time tr	6.7%
		Peak current Ip	6.5%
		Current at 30 ns	6.4%
		Current at 60 ns	6.4%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.20dB
DG-SR05	IEC 61000-4-4	Peak voltage (VP)	3.8%
		Rise time (tr)	4.4%
		Pulse width(tw)	4.2%
		Pulse Freq.(kHz)	0.7%
		Burst Duration(ms)	1.5%
		Burst Period(ms)	1.4%
DG-SR05	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	4.0%
		Open circuit front time (1.2/50us)	6.2%
		Open circuit time of half value (1.2/50us)	4.7%
DG-CB06	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.28dB
DG-SR05	IEC 61000-4-8	Magnetic Field Strength	1.91%
DG-SR01	IEC 61000-4-11	DIP Amplitude	3.6%
		DIP Time Event	4.0%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By	Test date
Radiated emissions up to 1 GHz	24°C	48%	Zinco Chen	Aug. 22, 2024
Radiated emissions above 1 GHz	24°C	48%	Zinco Chen	Aug. 22, 2024
Conducted emissions AC mains power port	24°C	55%	Riki Ran	Aug. 17, 2024
Harmonic current	24°C	55%	Riki Ran	Aug. 17, 2024
Voltage fluctuations (Flicker)	24°C	55%	Riki Ran	Aug. 17, 2024

Test Item	Temperature	Humidity	Pressure	Tested By	Test date
ESD	23°C	50%	1005hPa	Geoffrey Zou	Aug. 14, 2024
RS	23°C	58%	/	Ternence Li	Aug. 09, 2024
EFT	30°C	62%	/	Ellery Liang	Aug. 12, 2024
Surge	30°C	62%	/	Ellery Liang	Aug. 12, 2024
CS	29°C	65%	/	Penn Li	Aug. 12, 2024
PFMF	30°C	62%	/	Ellery Liang	Aug. 12, 2024
Dips	25°C	51%	/	Heming Zhu	Aug. 26, 2024

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	LCD Monitor
Brand Name	N/A
Model Name	24B3
Series Model	**24B3***** (*=0-9, A-Z, a-z, +, -, /, \ or blank)
Model Difference(s)	Only differ in model name due to marketing purpose.
Identification No. of EUT(S/N)	AOC4240000261
Dimensions and mass	with A base: 542.4*409.97*185.91mm with B base: 542.4*409.97*197.9mm
Component unit of EUT	<input type="checkbox"/> Single unit <input checked="" type="checkbox"/> Multiple unit
Sample Status	<input checked="" type="checkbox"/> Engineering sample <input type="checkbox"/> Final shipment prototype
Power Source	DC voltage supplied from AC adapter Model:STK025-19131T
Power Rating	I/P:100-240V ~ 50/60Hz, 0.7A O/P:19.0V---1.31A
Connecting I/O Port(s)	1* DC port 1* HDMI port 1* D-SUB port
Classification of EUT	Class B
Highest Internal Frequency(Fx)	240MHz

Cable Type	Shielded Type	Ferrite Core	Length(m)	Note
AC Power Cord	Non-shielded	NO	1.8/1.5/1.2	1.8m is worst case Detachable
HDMI	Shielded	NO	1.8/1.5/1.2	-
D-SUB	Shielded	YES	1.8/1.5/1.2	Bonded Two Ferrite Cores

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Power cable 1.8m, 1.5m and 1.2m length, worst case is Power cable 1.8m with HDMI+D-SUB length testing and recorded in test report.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	HDMI 1920*1080/120Hz 1.8m
Mode 2	D-SUB 1920*1080/75Hz 1.8m
Mode 3	HDMI 1080P 1.8m
Mode 4	HDMI 1920*1080/120Hz 1.5m
Mode 5	D-SUB 1920*1080/75Hz 1.5m
Mode 6	HDMI 1920*1080/120Hz 1.2m
Mode 7	D-SUB 1920*1080/75Hz 1.2m

Radiated emissions up to 1 GHz Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/120Hz 1.8m

Radiated emissions Above 1 GHz Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/120Hz 1.8m

Conducted emissions AC mains power port Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/120Hz 1.8m

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/120Hz 1.8m


Immunity Test	
Final Test Mode	Description
Mode 1	HDMI 1920*1080/120Hz 1.8m
Mode 2	D-SUB 1920*1080/75Hz 1.8m
Mode 3	HDMI 1080P 1.8m
Mode 4	HDMI 1920*1080/120Hz 1.5m
Mode 5	D-SUB 1920*1080/75Hz 1.5m
Mode 6	HDMI 1920*1080/120Hz 1.2m
Mode 7	D-SUB 1920*1080/75Hz 1.2m

## 2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. EUT connected to PC via HDMI&D-SUB Cable.
2. Mouse and Keyboard connected to PC via USB Cable.
3. EUT connected to Adapter via DC Cable.

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

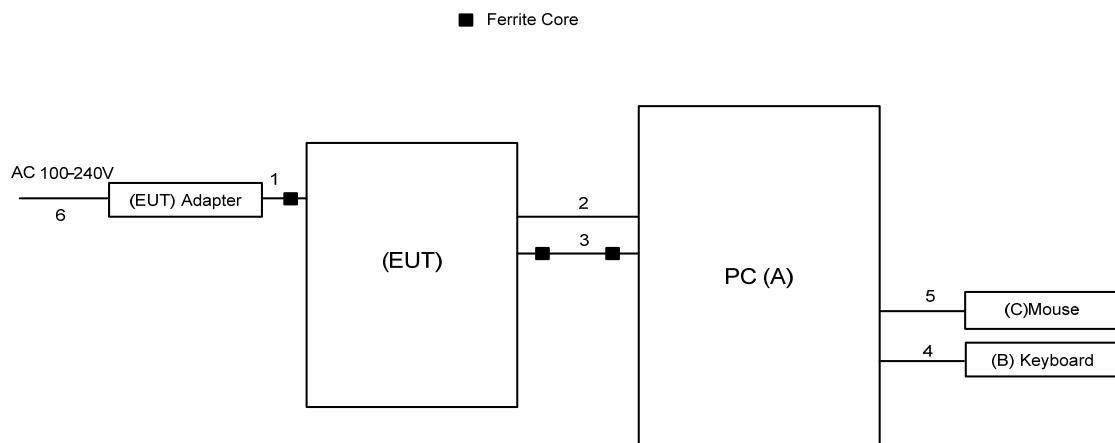

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For ESD:

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	PC	DELL	VOSTOR 3910	F705YQ3
B	Keyboard	DELL	KB216T	N/A
C	Mouse	DELL	MS116T1	N/A

For other items:

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	PC	DELL	8920-D16N8S	GZS91L2
B	Keyboard	DELL	KB212-B	CN0HTXH97158125004DXA01
C	Mouse	DELL	MS111-P	CN011D3V71581279OLOT

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	YES	1.5m
2	HDMI Cable	YES	NO	1.8/1.5/1.2m
3	D-SUB Cable	YES	YES	1.8/1.5/1.2m
4	USB Cable	YES	NO	1.8m
5	USB Cable	YES	NO	1.8m
6	AC Cable	NO	NO	1.8/1.5/1.2m

### 3. EMC EMISSION TEST

#### 3.1 RADIATED EMISSIONS UP TO 1 GHZ

##### 3.1.1 LIMITS

Class B equipment up to 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(µV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>u</sub>V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

#### 3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jun. 01, 2025
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	May 31, 2025
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	May 31, 2025
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 10, 2024
6	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Nov. 10, 2024
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	1461	Nov. 28, 2024
8	Attenuator	EMCI	EMCI-N-6-06	AT-06010	Nov. 28, 2024
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF780208159	N/A
12	Cable	RW	LMR400-NMNM-10M	N/A	Dec. 03, 2024
13	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 03, 2024
14	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024
15	Cable	RW	LMR400-NMNM-8M	N/A	Dec. 03, 2024
16	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 03, 2024
17	Cable	RW	LMR400-NMNM-14M	N/A	Dec. 03, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


### 3.1.3 TEST PROCEDURE

- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.


### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.5 TEST SETUP

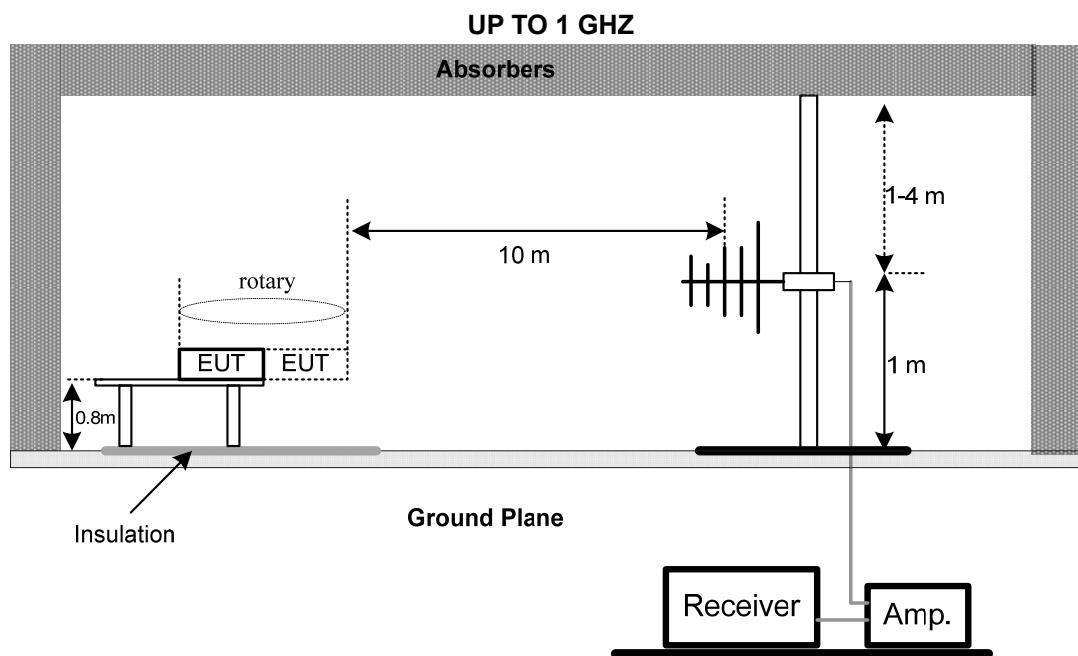


### 3.1.6 MEASUREMENT DISTANCE

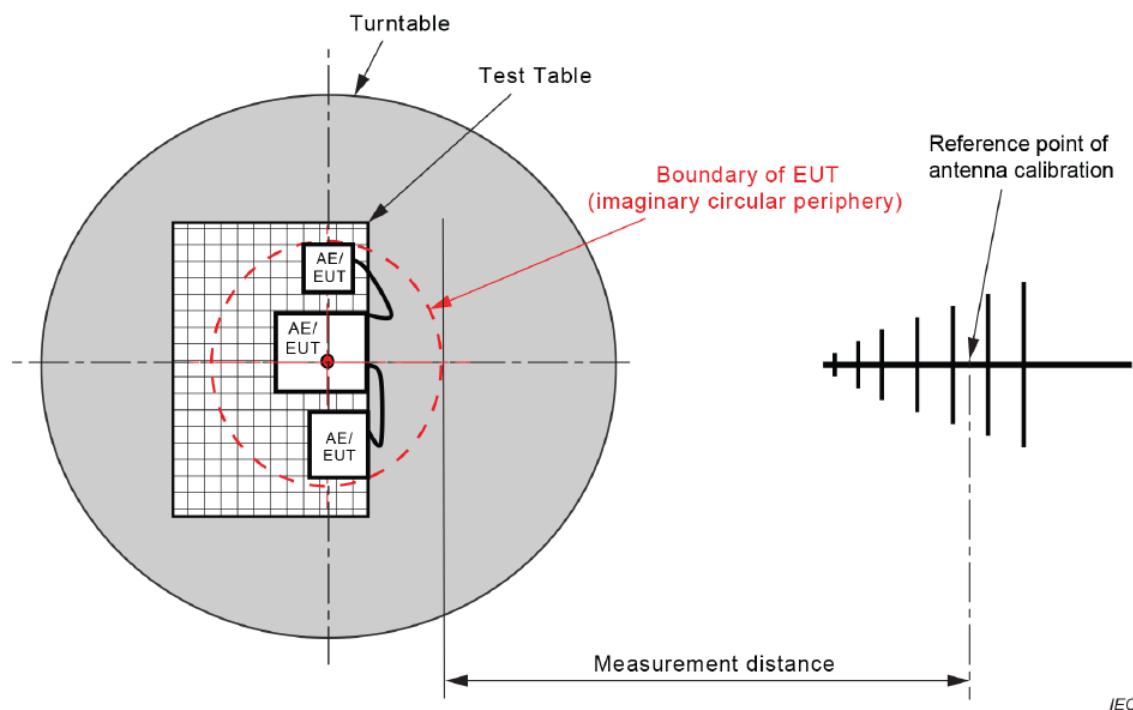

IEC

Figure C.1 – Measurement distance

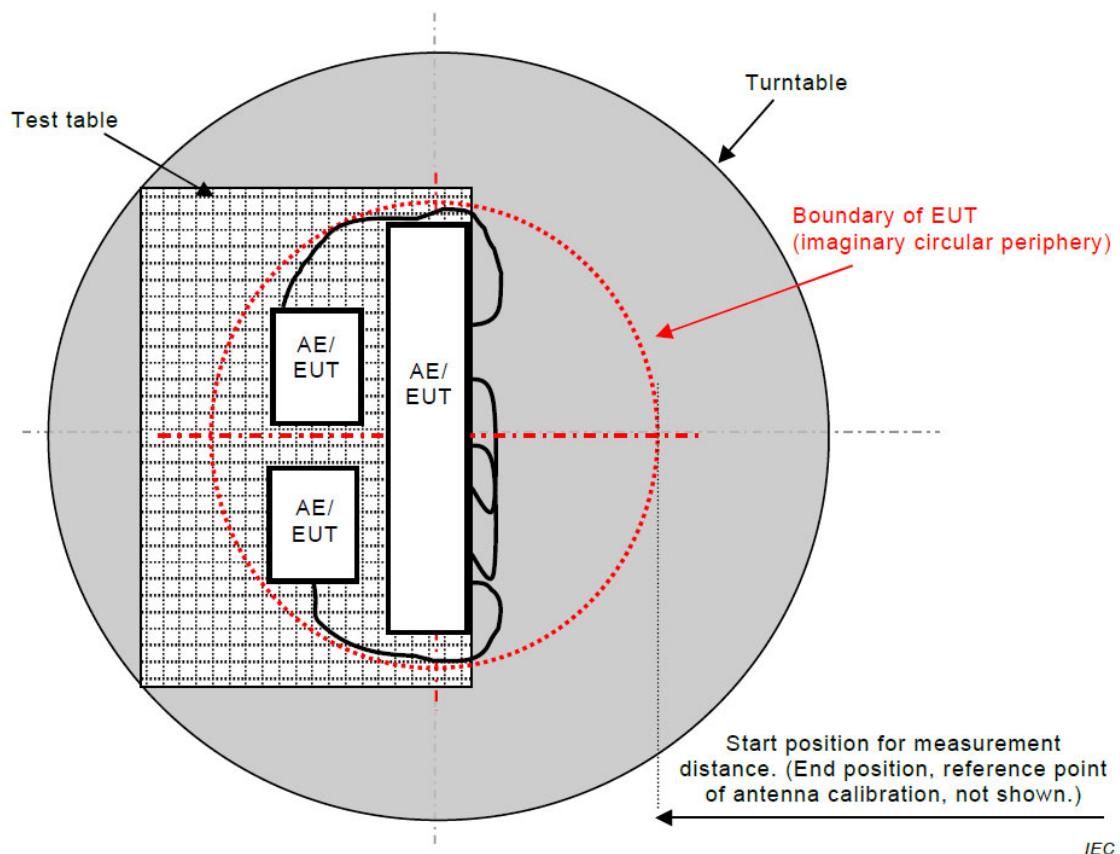


IEC

Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

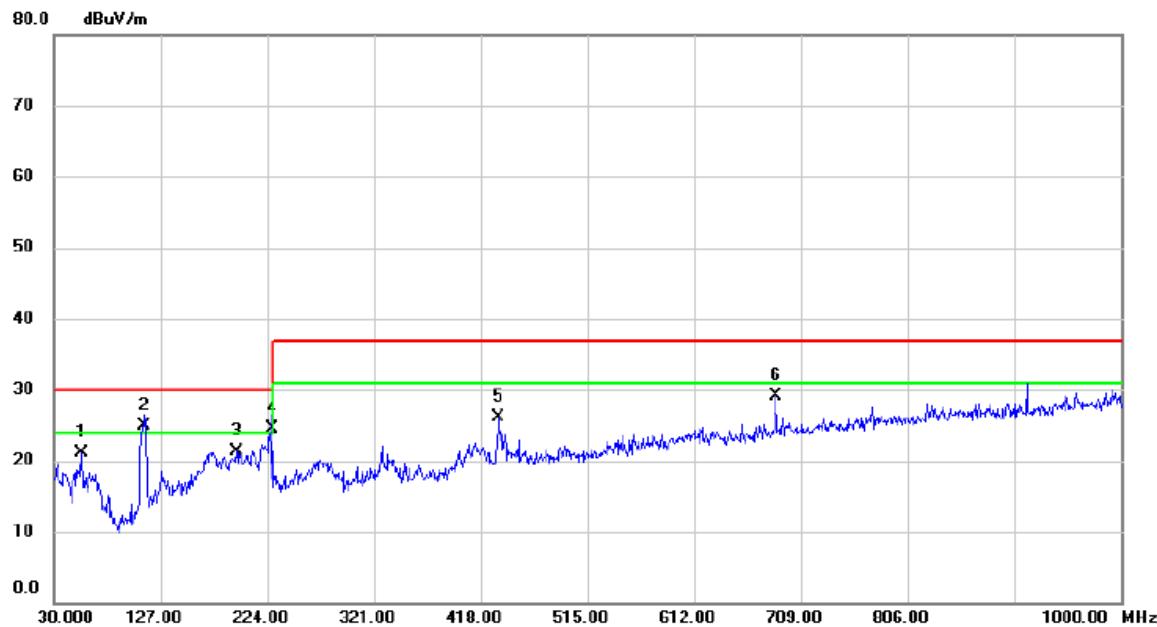


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		55.2200 MHz	38.91 dBuV	-17.90 dB	21.01 dBuV/m	30.00 dBuV/m	-8.99	QP	
2	*	112.4500 MHz	44.85 dBuV	-19.99 dB	24.86 dBuV/m	30.00 dBuV/m	-5.14	QP	
3		195.8700 MHz	40.64 dBuV	-19.43 dB	21.21 dBuV/m	30.00 dBuV/m	-8.79	QP	
4	!	228.8500 MHz	43.24 dBuV	-18.68 dB	24.56 dBuV/m	30.00 dBuV/m	-5.44	QP	
5		434.4900 MHz	37.74 dBuV	-11.71 dB	26.03 dBuV/m	37.00 dBuV/m	-10.97	QP	
6		686.6900 MHz	36.88 dBuV	-7.86 dB	29.02 dBuV/m	37.00 dBuV/m	-7.98	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

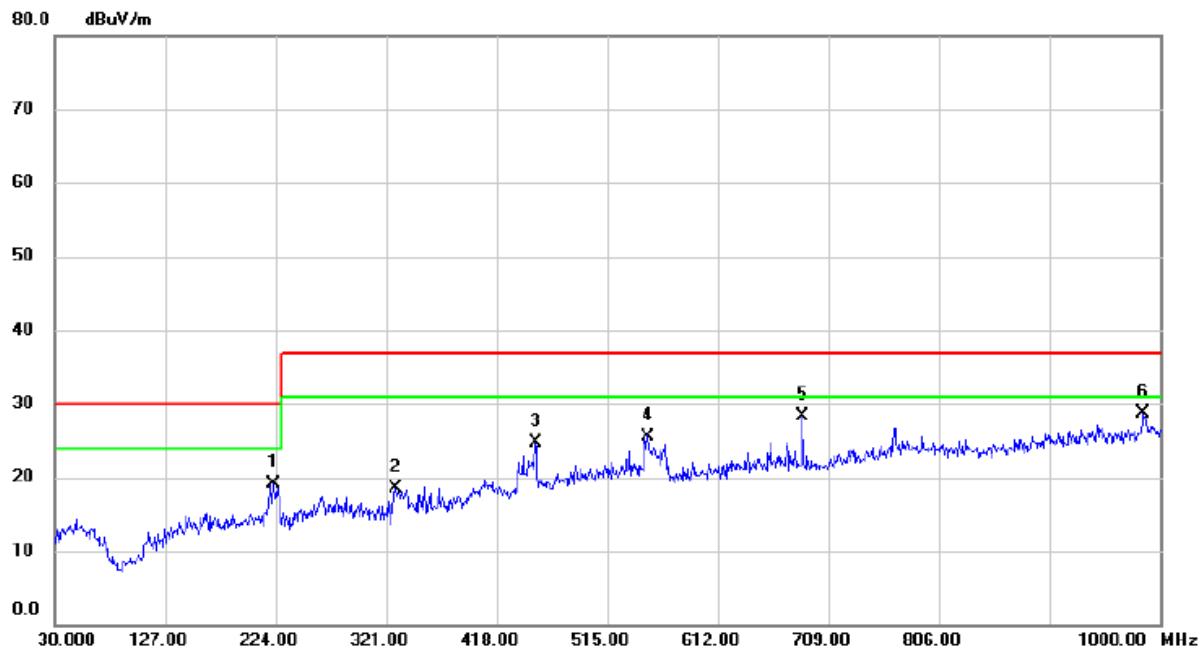


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		222.0600	38.50	-19.43	19.07	30.00	-10.93	QP
2		329.7300	33.49	-14.91	18.58	37.00	-18.42	QP
3		451.9500	36.41	-11.75	24.66	37.00	-12.34	QP
4		550.8900	36.03	-10.43	25.60	37.00	-11.40	QP
5		686.6900	37.23	-8.90	28.33	37.00	-8.67	QP
6	*	985.4500	34.51	-5.82	28.69	37.00	-8.31	QP

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

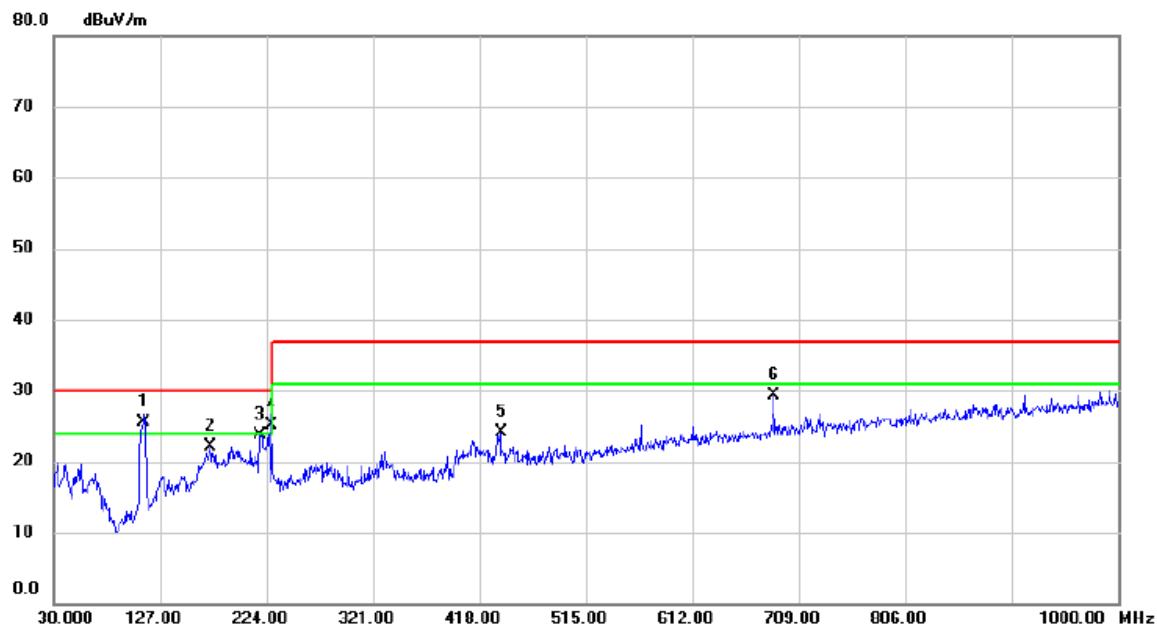

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
1	*	112.4500	45.58	-19.99	25.59	30.00	-4.41	QP
2		172.5900	39.01	-17.00	22.01	30.00	-7.99	QP
3		218.1800	43.23	-19.55	23.68	30.00	-6.32	QP
4	!	228.8500	43.73	-18.68	25.05	30.00	-4.95	QP
5		437.4000	35.78	-11.65	24.13	37.00	-12.87	QP
6		685.7200	37.24	-7.87	29.37	37.00	-7.63	QP

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

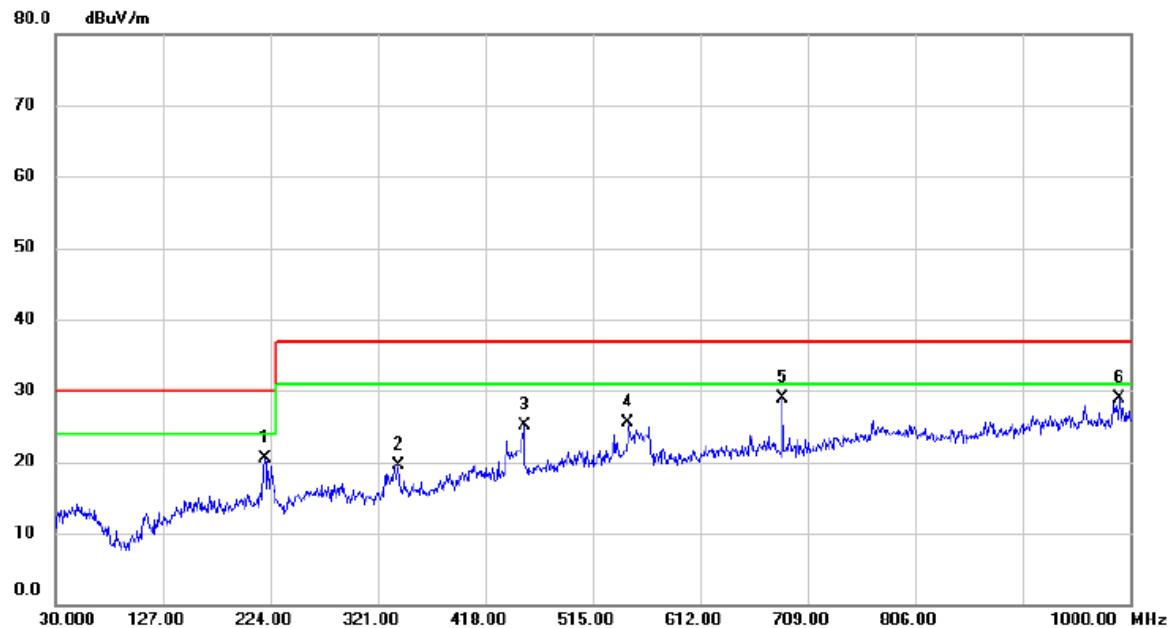

No.	Mk.	Freq.	Reading	Correct Factor	Measure- ment	Limit	Margin	Comment
			Level					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		219.1500	40.03	-19.61	20.42	30.00	-9.58	QP
2		339.4300	34.26	-14.71	19.55	37.00	-17.45	QP
3		452.9200	36.83	-11.73	25.10	37.00	-11.90	QP
4		547.0100	35.91	-10.49	25.42	37.00	-11.58	QP
5	*	685.7200	37.76	-8.89	28.87	37.00	-8.13	QP
6		990.3000	34.63	-5.81	28.82	37.00	-8.18	QP

### 3.2 RADIATED EMISSIONS ABOVE 1 GHZ

#### 3.2.1 LIMITS

Class B equipment above 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000			Peak / 1 MHz	54
1000 - 3000			Average / 1 MHz	70
3000 - 6000			Peak / 1 MHz	74

Notes:

(1) The limit for radiated test was performed according to as following: EN 55032

(2) The tighter limit applies at the band edges.

(3) Emission level (dB<sub>u</sub>V/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F <sub>x</sub> )	Highest measured frequency
F <sub>x</sub> ≤ 108 MHz	1 GHz
108 < F <sub>x</sub> ≤ 500 MHz	2 GHz
500 < F <sub>x</sub> ≤ 1000 MHz	5 GHz
F <sub>x</sub> > 1 GHz	5 × F <sub>x</sub> up to a maximum of 6 GHz

#### 3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	Jul. 07, 2025
2	Receiver	Keysight	N9038A	MY53220133	Oct. 08, 2024
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981003	Nov. 17, 2024
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	RW	RWLP50-4.0A-N MRASM-12M	N/A	Jul. 28, 2025
8	Cable	RW	RWLP50-4.0A-N MRASM-1M	N/A	Jul. 28, 2025
9	Cable	RW	RWLP50-4.0A-N MRASM-4M	N/A	Jul. 28, 2025

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.

### 3.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.

### 3.2.4 DEVIATION FROM TEST STANDARD

The limit of the EN 55032:2015+A1:2020&AS/NZS CISPR 32:2015+AMD1:2020&CISPR 32:2015+AMD1:2019 standard deviates from the requirements, but the limit of the EN 55032:2015+A11:2020 standard is more stringent and can be covered, so the test data meets the EN 55032:2015+A1:2020 &AS/NZS CISPR 32:2015+AMD1:2020&CISPR 32:2015+AMD1:2019 standard.

### 3.2.5 TEST SETUP

#### ABOVE 1 GHZ

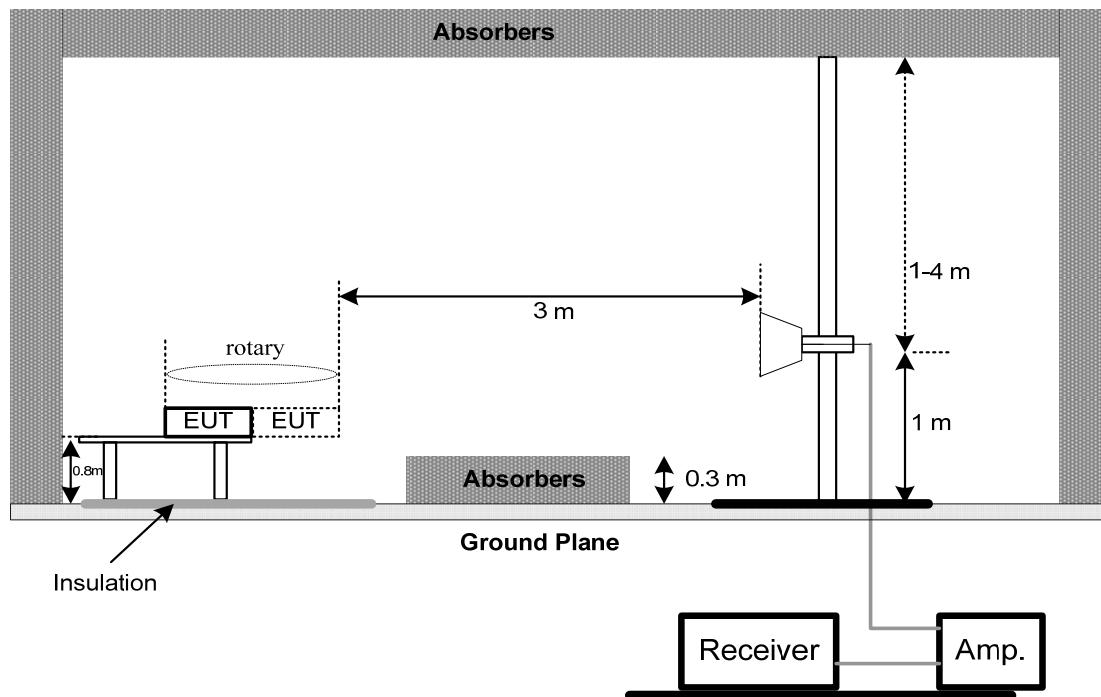

### 3.2.6 MEASUREMENT DISTANCE

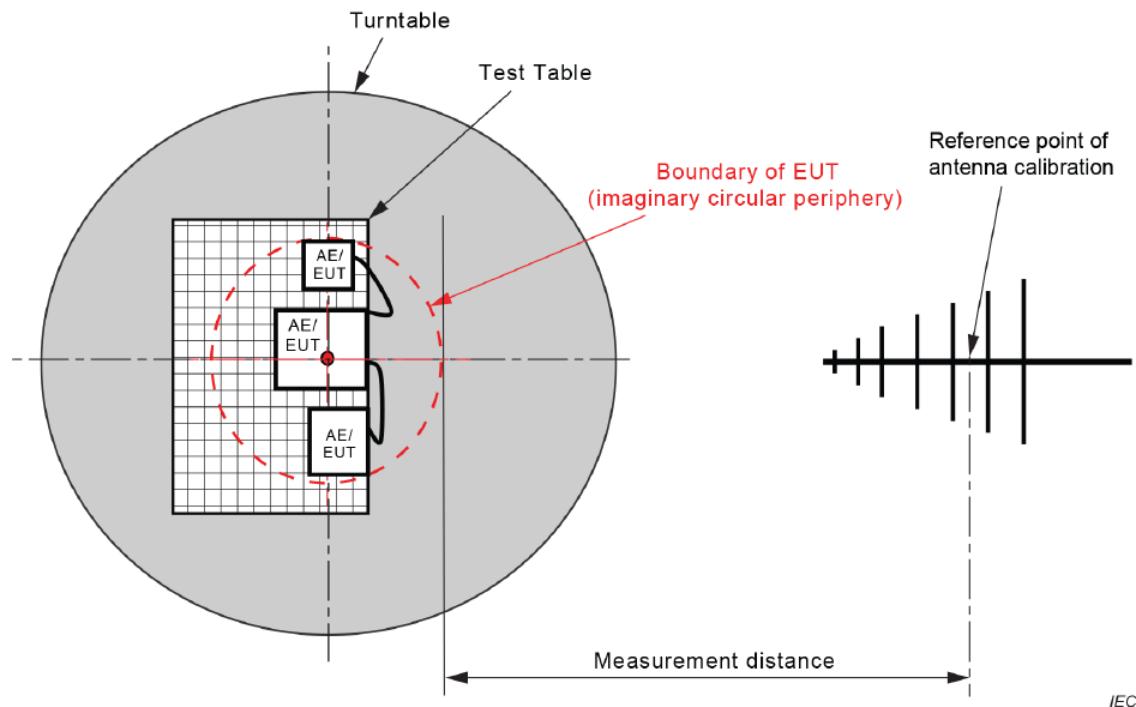


Figure C.1 – Measurement distance


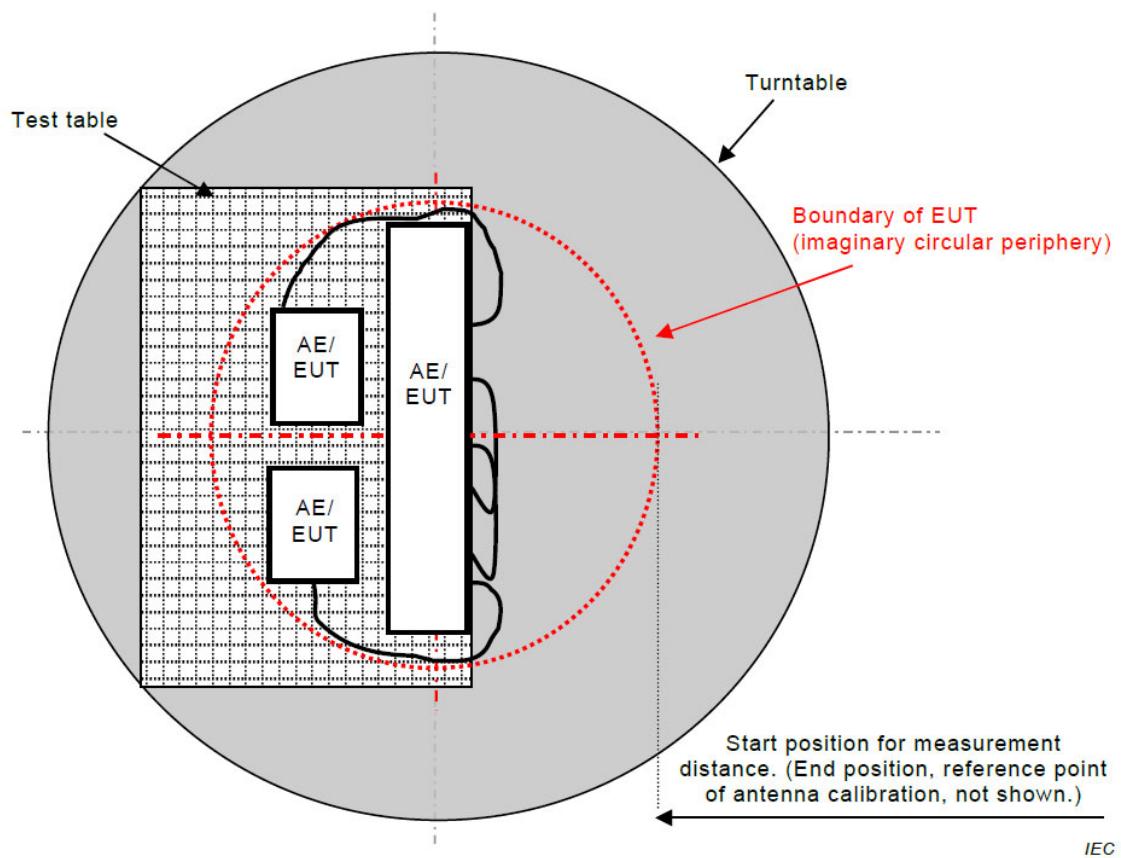


Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

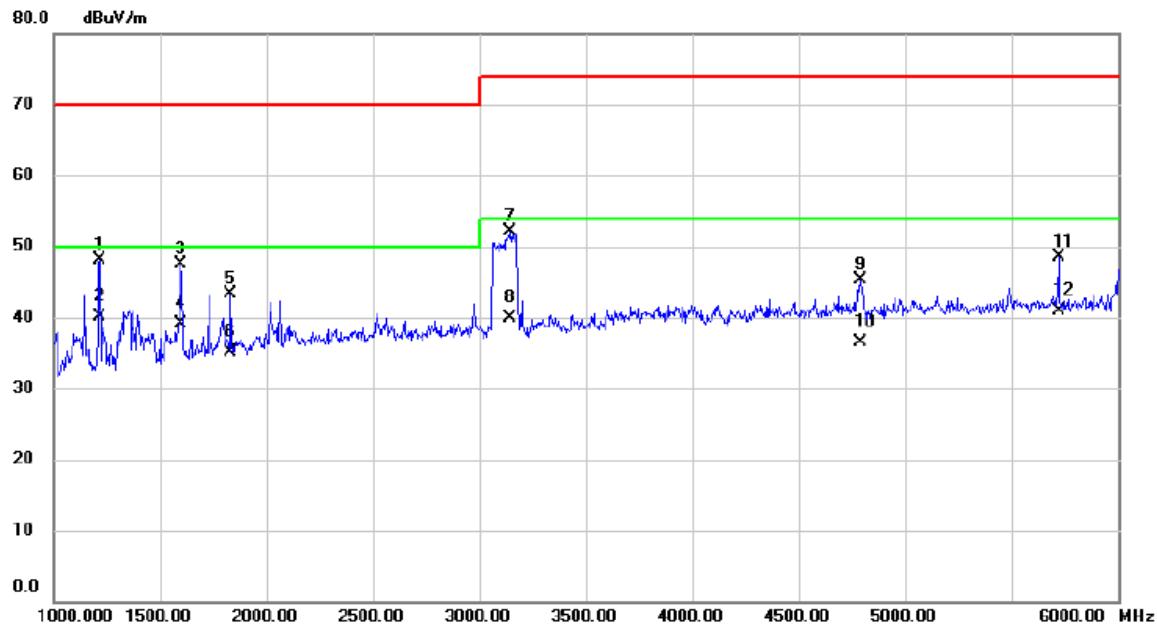


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1215.000	52.52	-4.51	48.01	70.00	-21.99	peak
2	*	1215.000	44.57	-4.51	40.06	50.00	-9.94	AVG
3		1597.500	50.43	-2.91	47.52	70.00	-22.48	peak
4		1597.500	42.04	-2.91	39.13	50.00	-10.87	AVG
5		1830.000	44.57	-1.30	43.27	70.00	-26.73	peak
6		1830.000	36.49	-1.30	35.19	50.00	-14.81	AVG
7		3145.000	49.86	2.29	52.15	74.00	-21.85	peak
8		3145.000	37.53	2.29	39.82	54.00	-14.18	AVG
9		4792.500	39.86	5.37	45.23	74.00	-28.77	peak
10		4792.500	31.20	5.37	36.57	54.00	-17.43	AVG
11		5720.000	41.74	6.84	48.58	74.00	-25.42	peak
12		5720.000	34.03	6.84	40.87	54.00	-13.13	AVG

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

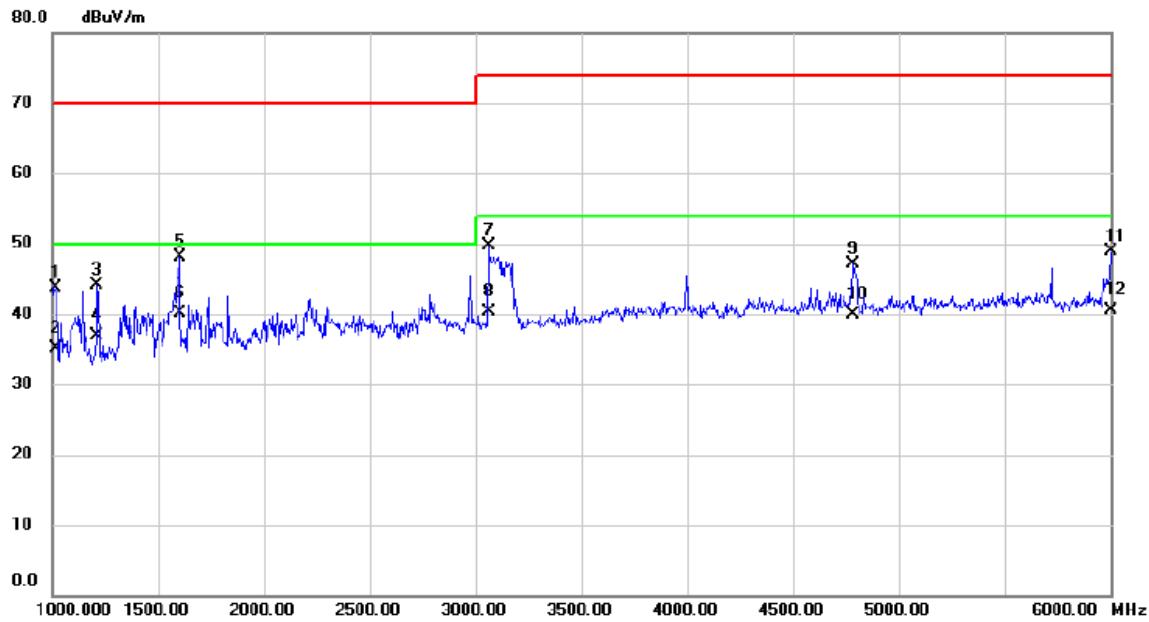


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dB <sub>UV</sub>	dB	dB <sub>UV</sub> /m	dB	Detector	
1		1017.500	48.92	-5.15	43.77	70.00	-26.23	peak
2		1017.500	40.31	-5.15	35.16	50.00	-14.84	AVG
3		1210.000	48.71	-4.52	44.19	70.00	-25.81	peak
4		1210.000	41.33	-4.52	36.81	50.00	-13.19	AVG
5		1602.500	50.99	-2.88	48.11	70.00	-21.89	peak
6	*	1602.500	42.93	-2.88	40.05	50.00	-9.95	AVG
7		3062.500	47.52	2.09	49.61	74.00	-24.39	peak
8		3062.500	38.14	2.09	40.23	54.00	-13.77	AVG
9		4785.000	41.67	5.37	47.04	74.00	-26.96	peak
10		4785.000	34.48	5.37	39.85	54.00	-14.15	AVG
11		6000.000	41.80	7.14	48.94	74.00	-25.06	peak
12		6000.000	33.35	7.14	40.49	54.00	-13.51	AVG

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

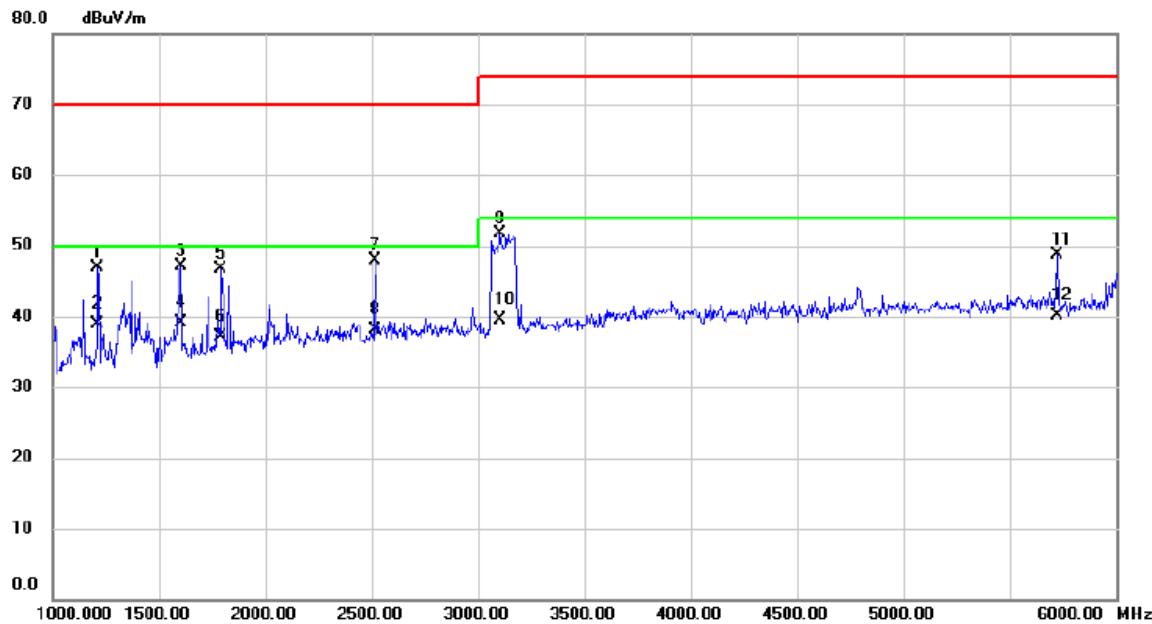

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1210.000	51.47	-4.52	46.95	70.00	-23.05	peak
2		1210.000	43.38	-4.52	38.86	50.00	-11.14	AVG
3		1600.000	50.03	-2.90	47.13	70.00	-22.87	peak
4	*	1600.000	42.07	-2.90	39.17	50.00	-10.83	AVG
5		1792.500	48.22	-1.57	46.65	70.00	-23.35	peak
6		1792.500	38.73	-1.57	37.16	50.00	-12.84	AVG
7		2517.500	47.33	0.65	47.98	70.00	-22.02	peak
8		2517.500	37.54	0.65	38.19	50.00	-11.81	AVG
9		3105.000	49.55	2.19	51.74	74.00	-22.26	peak
10		3105.000	37.30	2.19	39.49	54.00	-14.51	AVG
11		5720.000	41.90	6.84	48.74	74.00	-25.26	peak
12		5720.000	33.35	6.84	40.19	54.00	-13.81	AVG

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

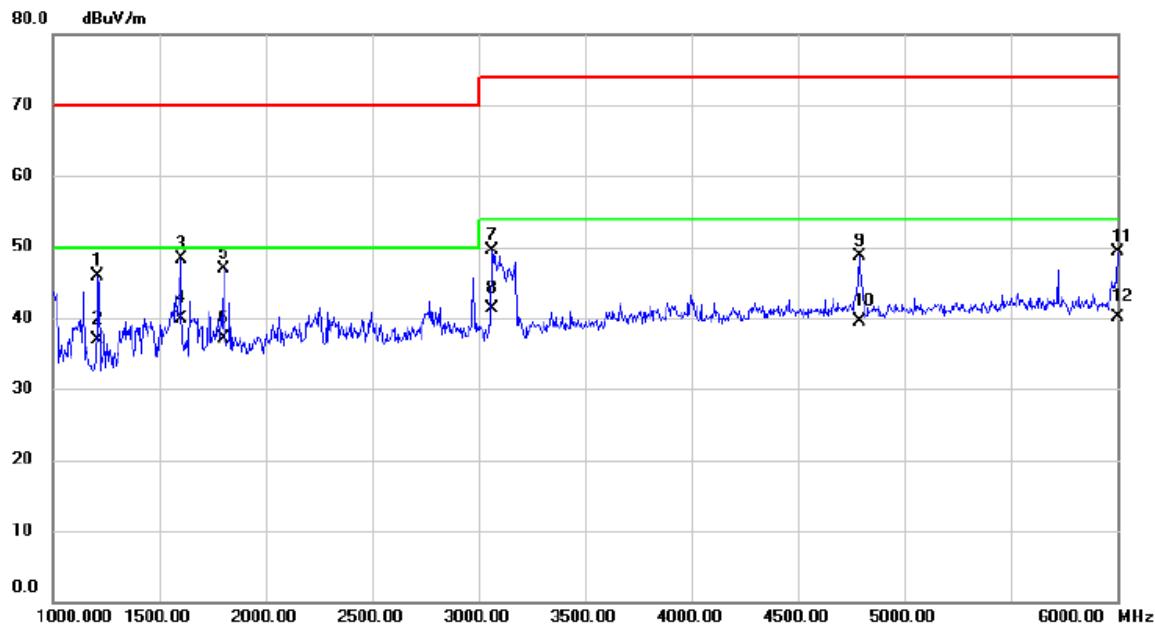

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		1212.500	50.39	-4.53	45.86	70.00	-24.14	peak
2		1212.500	41.40	-4.53	36.87	50.00	-13.13	AVG
3		1602.500	51.13	-2.88	48.25	70.00	-21.75	peak
4	*	1602.500	42.70	-2.88	39.82	50.00	-10.18	AVG
5		1800.000	48.35	-1.51	46.84	70.00	-23.16	peak
6		1800.000	38.70	-1.51	37.19	50.00	-12.81	AVG
7		3062.500	47.34	2.09	49.43	74.00	-24.57	peak
8		3062.500	39.20	2.09	41.29	54.00	-12.71	AVG
9		4787.500	43.33	5.36	48.69	74.00	-25.31	peak
10		4787.500	34.13	5.36	39.49	54.00	-14.51	AVG
11		6000.000	42.23	7.14	49.37	74.00	-24.63	peak
12		6000.000	33.03	7.14	40.17	54.00	-13.83	AVG

### 3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

#### 3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

#### 3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100526	May 31, 2025
2	EMI Test Receiver	R&S	ESR3	103027	Jun. 01, 2025
3	Cable	N/A	SFT205-NMNM-12 M-001	12M	Nov. 27, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Dec. 22, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


#### 3.3.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.3.4 DEVIATION FROM TEST STANDARD


No deviation

### 3.3.5 TEST SETUP

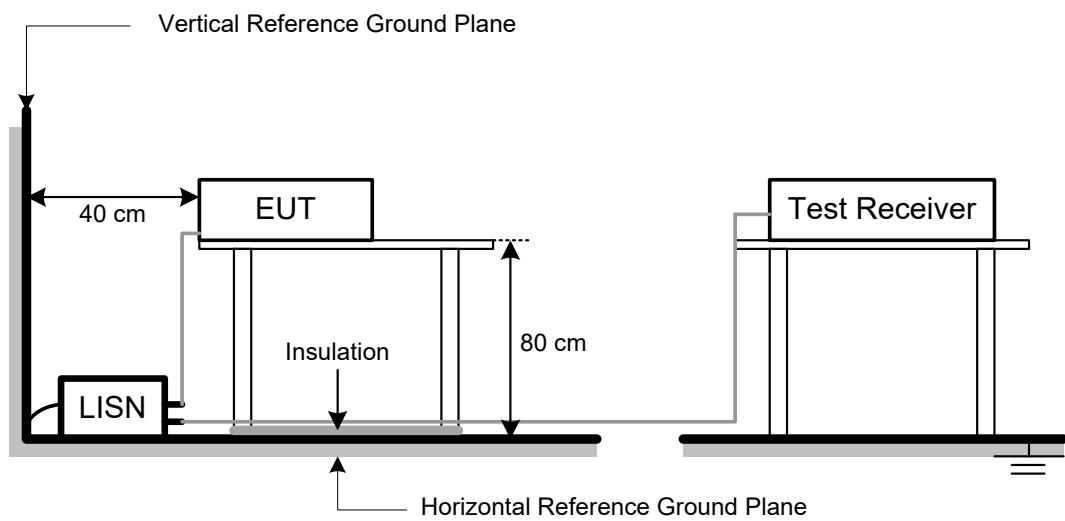


### 3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

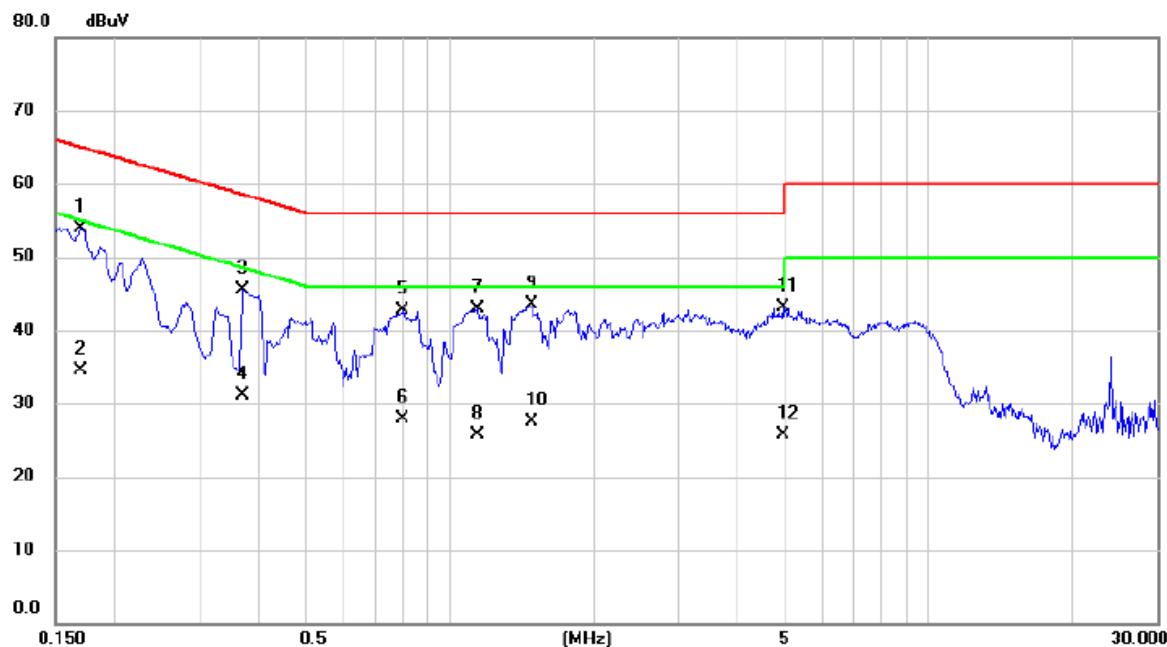

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1703	44.31	9.63	53.94	64.95	-11.01	QP	
2		0.1703	24.88	9.63	34.51	54.95	-20.44	AVG	
3		0.3704	35.80	9.70	45.50	58.49	-12.99	QP	
4		0.3704	21.42	9.70	31.12	48.49	-17.37	AVG	
5		0.8002	33.06	9.72	42.78	56.00	-13.22	QP	
6		0.8002	18.28	9.72	28.00	46.00	-18.00	AVG	
7		1.1422	33.24	9.73	42.97	56.00	-13.03	QP	
8		1.1422	15.93	9.73	25.66	46.00	-20.34	AVG	
9		1.4865	33.74	9.74	43.48	56.00	-12.52	QP	
10		1.4865	17.68	9.74	27.42	46.00	-18.58	AVG	
11		4.9808	33.12	9.93	43.05	56.00	-12.95	QP	
12		4.9808	15.81	9.93	25.74	46.00	-20.26	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

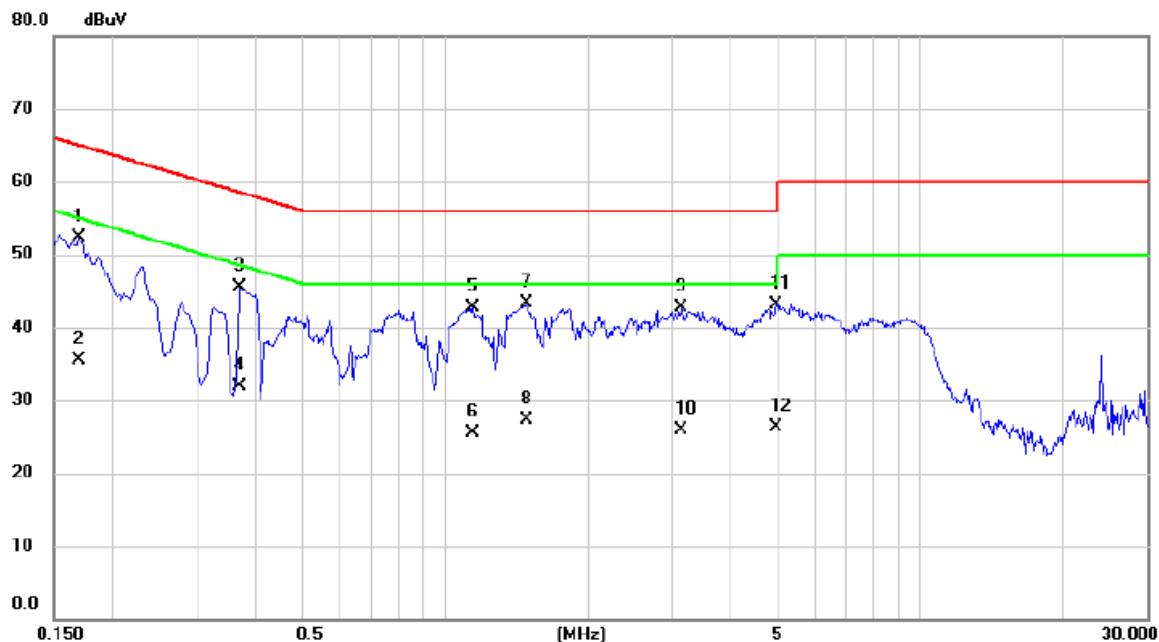


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	0.1703	42.65	9.62	52.27	64.95	-12.68	QP	
2		0.1703	25.98	9.62	35.60	54.95	-19.35	AVG	
3		0.3704	35.81	9.69	45.50	58.49	-12.99	QP	
4		0.3704	22.20	9.69	31.89	48.49	-16.60	AVG	
5		1.1422	32.96	9.73	42.69	56.00	-13.31	QP	
6		1.1422	15.82	9.73	25.55	46.00	-20.45	AVG	
7		1.4865	33.50	9.74	43.24	56.00	-12.76	QP	
8		1.4865	17.55	9.74	27.29	46.00	-18.71	AVG	
9		3.1470	32.95	9.82	42.77	56.00	-13.23	QP	
10		3.1470	16.17	9.82	25.99	46.00	-20.01	AVG	
11		4.9763	33.27	9.93	43.20	56.00	-12.80	QP	
12		4.9763	16.37	9.93	26.30	46.00	-19.70	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 1		



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	0.1680	41.51	9.63	51.14	65.06	-13.92	QP	
2		0.1680	24.75	9.63	34.38	55.06	-20.68	AVG	
3		0.2333	38.38	9.66	48.04	62.33	-14.29	QP	
4		0.2333	16.89	9.66	26.55	52.33	-25.78	AVG	
5		0.2805	33.49	9.67	43.16	60.80	-17.64	QP	
6		0.2805	17.11	9.67	26.78	50.80	-24.02	AVG	
7		0.3907	31.68	9.71	41.39	58.05	-16.66	QP	
8		0.3907	19.60	9.71	29.31	48.05	-18.74	AVG	
9		0.5055	29.71	9.71	39.42	56.00	-16.58	QP	
10		0.5055	15.99	9.71	25.70	46.00	-20.30	AVG	
11		4.8705	28.85	9.92	38.77	56.00	-17.23	QP	
12		4.8705	12.50	9.92	22.42	46.00	-23.58	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 1		

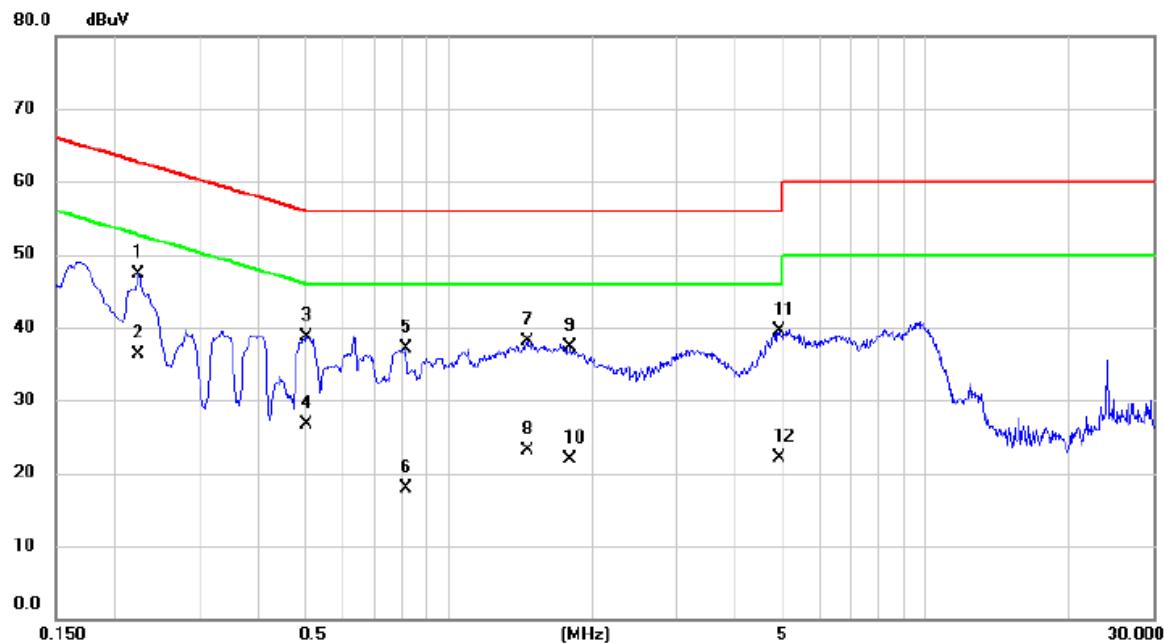

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.2243	37.62	9.64	47.26	62.66	-15.40	QP	
2		0.2243	26.68	9.64	36.32	52.66	-16.34	AVG	
3		0.5032	29.05	9.70	38.75	56.00	-17.25	QP	
4		0.5032	17.02	9.70	26.72	46.00	-19.28	AVG	
5		0.8137	27.48	9.71	37.19	56.00	-18.81	QP	
6		0.8137	8.12	9.71	17.83	46.00	-28.17	AVG	
7		1.4595	28.39	9.74	38.13	56.00	-17.87	QP	
8		1.4595	13.44	9.74	23.18	46.00	-22.82	AVG	
9		1.8015	27.54	9.76	37.30	56.00	-18.70	QP	
10		1.8015	12.18	9.76	21.94	46.00	-24.06	AVG	
11		4.9268	29.55	9.93	39.48	56.00	-16.52	QP	
12		4.9268	12.27	9.93	22.20	46.00	-23.80	AVG	

### 3.4 HARMONIC CURRENT EMISSIONS TEST

#### 3.4.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

#### 3.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 01, 2025
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 01, 2025
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


#### 3.4.3 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- b. The classification of EUT is according to of EN 61000-3-2. The EUT is classified as Class D.
- c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

#### 3.4.4 DEVIATION FROM TEST STANDARD


No deviation

#### 3.4.5 TEST SETUP

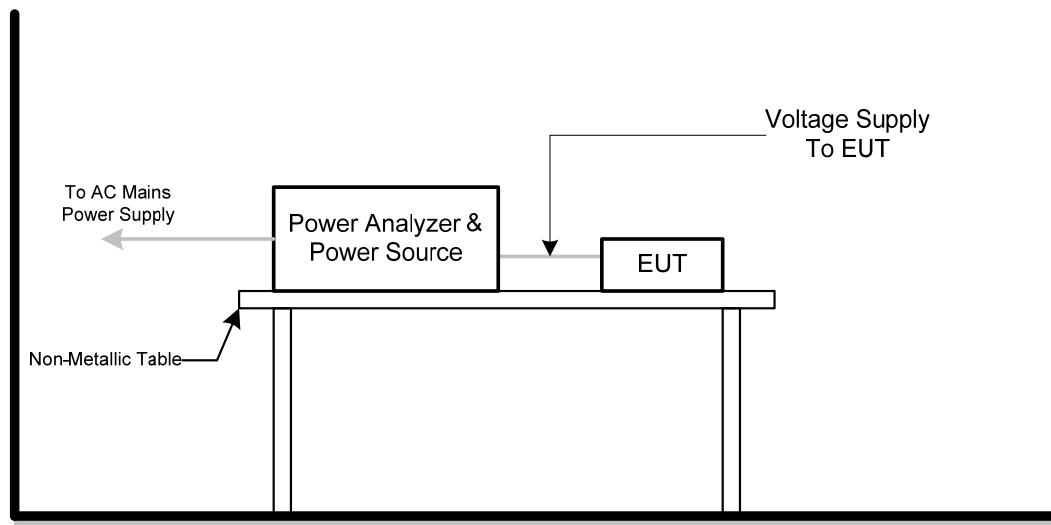

### 3.4.6 TEST RESULTS

Harmonics – Class-D	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

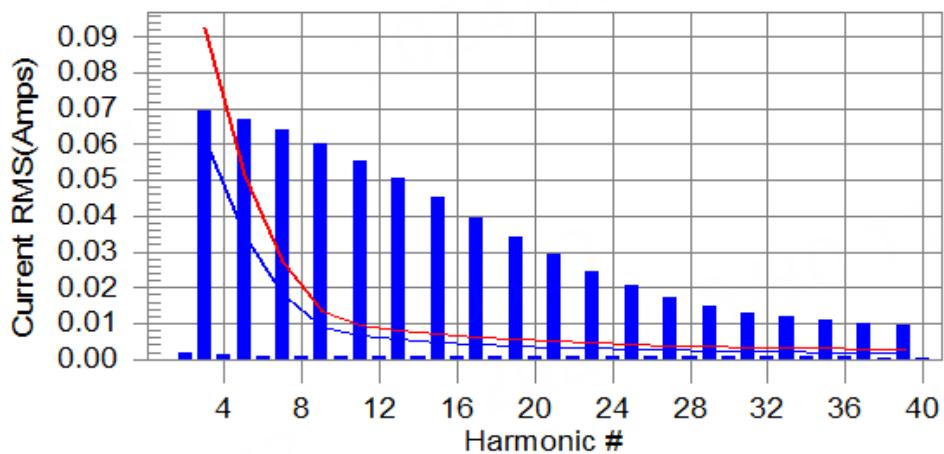Current & voltage waveformsHarmonics and Class D limit lineEuropean Limits

Test result: N/L    Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

Current Test Result Summary (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Highest parameter values during test:**

$V_{RMS}$  (Volts): 230.00      Frequency(Hz): 50.00  
 $I_{Peak}$  (Amps): 1.098       $I_{RMS}$  (Amps): 0.212  
 $I_{Fund}$  (Amps): 0.091      Crest Factor: 5.336  
 $P$  (Watts): 18.1      Power Factor: 0.374

Harm #	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.002	0.000	N/A	N/L
3	0.070	0.062	N/A	0.079	0.092	N/A	N/L
4	0.001	0.000	N/A	0.002	0.000	N/A	N/L
5	0.067	0.034	N/A	0.075	0.052	N/A	N/L
6	0.001	0.000	N/A	0.001	0.000	N/A	N/L
7	0.064	0.018	N/A	0.071	0.027	N/A	N/L
8	0.001	0.000	N/A	0.001	0.000	N/A	N/L
9	0.060	0.009	N/A	0.066	0.014	N/A	N/L
10	0.001	0.000	N/A	0.001	0.000	N/A	N/L
11	0.056	0.006	N/A	0.061	0.010	N/A	N/L
12	0.001	0.000	N/A	0.001	0.000	N/A	N/L
13	0.050	0.005	N/A	0.055	0.008	N/A	N/L
14	0.001	0.000	N/A	0.001	0.000	N/A	N/L
15	0.045	0.005	N/A	0.048	0.007	N/A	N/L
16	0.001	0.000	N/A	0.001	0.000	N/A	N/L
17	0.040	0.004	N/A	0.042	0.006	N/A	N/L
18	0.001	0.000	N/A	0.001	0.000	N/A	N/L
19	0.034	0.004	N/A	0.035	0.006	N/A	N/L
20	0.001	0.000	N/A	0.001	0.000	N/A	N/L
21	0.029	0.003	N/A	0.030	0.005	N/A	N/L
22	0.001	0.000	N/A	0.001	0.000	N/A	N/L
23	0.024	0.003	N/A	0.025	0.005	N/A	N/L
24	0.001	0.000	N/A	0.001	0.000	N/A	N/L
25	0.020	0.003	N/A	0.021	0.004	N/A	N/L
26	0.001	0.000	N/A	0.001	0.000	N/A	N/L
27	0.017	0.003	N/A	0.018	0.004	N/A	N/L
28	0.001	0.000	N/A	0.001	0.000	N/A	N/L
29	0.015	0.002	N/A	0.016	0.004	N/A	N/L
30	0.001	0.000	N/A	0.001	0.000	N/A	N/L
31	0.013	0.002	N/A	0.015	0.003	N/A	N/L
32	0.001	0.000	N/A	0.001	0.000	N/A	N/L
33	0.012	0.002	N/A	0.014	0.003	N/A	N/L
34	0.001	0.000	N/A	0.001	0.000	N/A	N/L
35	0.011	0.002	N/A	0.013	0.003	N/A	N/L
36	0.001	0.000	N/A	0.001	0.000	N/A	N/L
37	0.010	0.002	N/A	0.012	0.003	N/A	N/L
38	0.001	0.000	N/A	0.001	0.000	N/A	N/L
39	0.009	0.002	N/A	0.011	0.003	N/A	N/L
40	0.000	0.000	N/A	0.001	0.000	N/A	N/L

*Note: The EUT power level is below 75.0 Watts and therefore has no defined limits*

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Highest parameter values during test:**

Voltage (Vrms):	230.00	Frequency(Hz):	50.00
I_Peak (Amps):	1.098	I_RMS (Amps):	0.212
I_Fund (Amps):	0.091	Crest Factor:	5.336
Power (Watts):	18.1	Power Factor:	0.374

Harm#	Harmonics	V-rms	Limit V-rms	% of Limit	Status
2		0.119	0.460	25.91	OK
3		0.538	2.069	26.00	OK
4		0.064	0.460	13.85	OK
5		0.055	0.920	5.93	OK
6		0.035	0.460	7.68	OK
7		0.060	0.690	8.66	OK
8		0.019	0.460	4.09	OK
9		0.042	0.460	9.15	OK
10		0.023	0.460	4.94	OK
11		0.044	0.230	19.08	OK
12		0.019	0.230	8.44	OK
13		0.032	0.230	13.97	OK
14		0.016	0.230	6.84	OK
15		0.041	0.230	17.80	OK
16		0.016	0.230	6.95	OK
17		0.033	0.230	14.39	OK
18		0.014	0.230	5.93	OK
19		0.036	0.230	15.82	OK
20		0.018	0.230	7.86	OK
21		0.026	0.230	11.19	OK
22		0.011	0.230	4.80	OK
23		0.028	0.230	12.17	OK
24		0.005	0.230	2.39	OK
25		0.025	0.230	10.67	OK
26		0.008	0.230	3.46	OK
27		0.022	0.230	9.72	OK
28		0.008	0.230	3.41	OK
29		0.025	0.230	10.86	OK
30		0.005	0.230	2.24	OK
31		0.018	0.230	7.66	OK
32		0.005	0.230	2.06	OK
33		0.025	0.230	10.78	OK
34		0.004	0.230	1.55	OK
35		0.019	0.230	8.23	OK
36		0.003	0.230	1.11	OK
37		0.018	0.230	7.92	OK
38		0.004	0.230	1.65	OK
39		0.017	0.230	7.56	OK
40		0.006	0.230	2.71	OK

### 3.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST

#### 3.5.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	≤ 1.0, Tp= 10 min.	Short Term Flicker Indicator
Plt	≤ 0.65, Tp=2 hr.	Long Term Flicker Indicator
dc	≤ 3.3%	Relative Steady-State V-Change
dmax	≤ 4%	Maximum Relative V-change
d (t)	≤ 500 ms	Relative V-change characteristic

#### 3.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 01, 2025
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 01, 2025
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


#### 3.5.3 TEST PROCEDURE

- a. Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- b. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

#### 3.5.4 DEVIATION FROM TEST STANDARD

No deviation


### 3.5.5 TEST SETUP

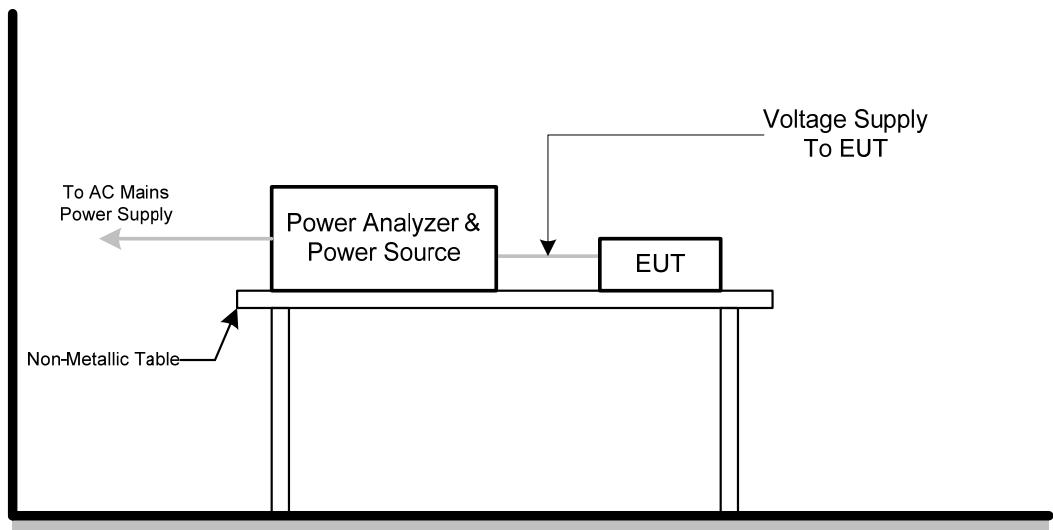

### 3.5.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Pst and limit line

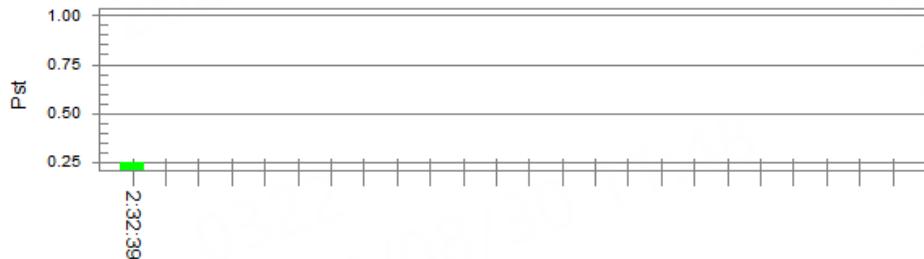

European Limits

Plt and limit line

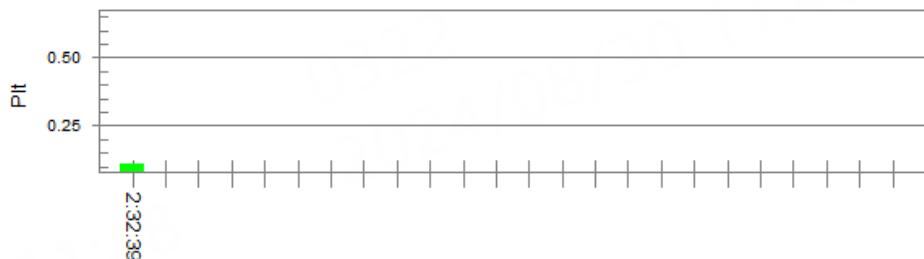

Parameter values recorded during the test:  
Vrms at the end of test (Volt): 229.96

Highest dt (%):	0	Test limit (%):	
T-max (mS):	0	Test limit (mS):	500.0
Highest dc (%):	0.00	Test limit (%):	3.30
Highest dmax (%):	0.00	Test limit (%):	4.00
Highest Pst (10 min. period):	0.248	Test limit:	1.000
Highest Plt (2 hr. period):	0.108	Test limit:	0.650

## 4. EMC IMMUNITY TEST

### 4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports <b>(NOTE 2)</b>	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports <b>(NOTE 2)</b>	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	<b>Port Type: unshielded symmetrical</b> <b>Apply: lines to ground</b>		
	<b>Primary protection is Intended</b> ±1 kV and ±4 kV 10/700(5/320)Tr/Th $\mu$ s	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	C
	<b>Primary protection is not Intended</b> ±1 kV 10/700(5/320) Tr/Th $\mu$ s		C
	<b>Port type: coaxial or shielded</b> <b>Apply: shield to ground</b>		
	±0.5 kV 1.2/50(8/20) Tr/Th $\mu$ s	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	B
	<b>line to reference ground for each individual line:</b> ±0.5 kV(peak) 1.2/50(8/20) Tr/Th $\mu$ s	DC network power ports <b>(NOTE 2)</b>	B
	±1 kV(peak) 1.2/50(8/20) Tr/Th $\mu$ s (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th $\mu$ s (line to earth or ground)	AC mains power ports	B
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 $\Omega$ source impedance	Analogue/digital data ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 $\Omega$ source impedance	DC network power ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 $\Omega$ source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage<5% 0.5 cycle Residual voltage<70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage<5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances,repetitive (BIN-R)	0.15 MHz to 0.5 MHz 107 dBuV 0.5 MHz to 10 MHz 107 dBuV to 36 dBuV 10 MHz to 30 MHz 36 dBuV to 30 dBuV  0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	A
Broadband impulse noise disturbances,isolated (BIN-I)	0.15 MHz to 30 MHz 110 dBuV  0.24 ms 10 ms 300 ms	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	B
		Analogue/digital data ports <b>(Apply period based on the AC mains frequency)</b>	A
		Analogue/digital data ports <b>(Apply all burst durations)</b>	B

Note.

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

## 4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standards, the general performance criteria as following:

<b>Criterion A</b>	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>Criterion B</b>	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>Criterion C</b>	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

## 4.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION

### 4.3.1 PERFORMANCE CRITERIA

#### Performance criterion A

##### for continuous radiated and conducted disturbances tests:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA. Additionally, an increase in any degradation greater than

just perceptible by observation of the image shall not occur as a consequence of the application of the test. Examples of such degradations are:

- superimposed patterning;
- positional disturbances due to synchronisation errors;
- geometric distortion;
- change of contrast or brightness;
- picture artefacts;
- freezing or disturbance of motion;
- image loss;
- video data or decoding errors.

#### Performance criterion A

##### for the power frequency magnetic field tests:

Alternative 1: A continuous magnetic field of 1 A/m:

The jitter (in mm) shall not exceed the value 
$$\frac{(\text{character height in mm} + 0,3) \times 2,5}{33,3}$$

#### Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA.

#### Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

## 4.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 4.4.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ , $\pm 8\text{kV}$ Contact Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

### 4.4.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ	NSG 437	1726	Sep. 25, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.4.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- For TABLE-TOP equipment:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP

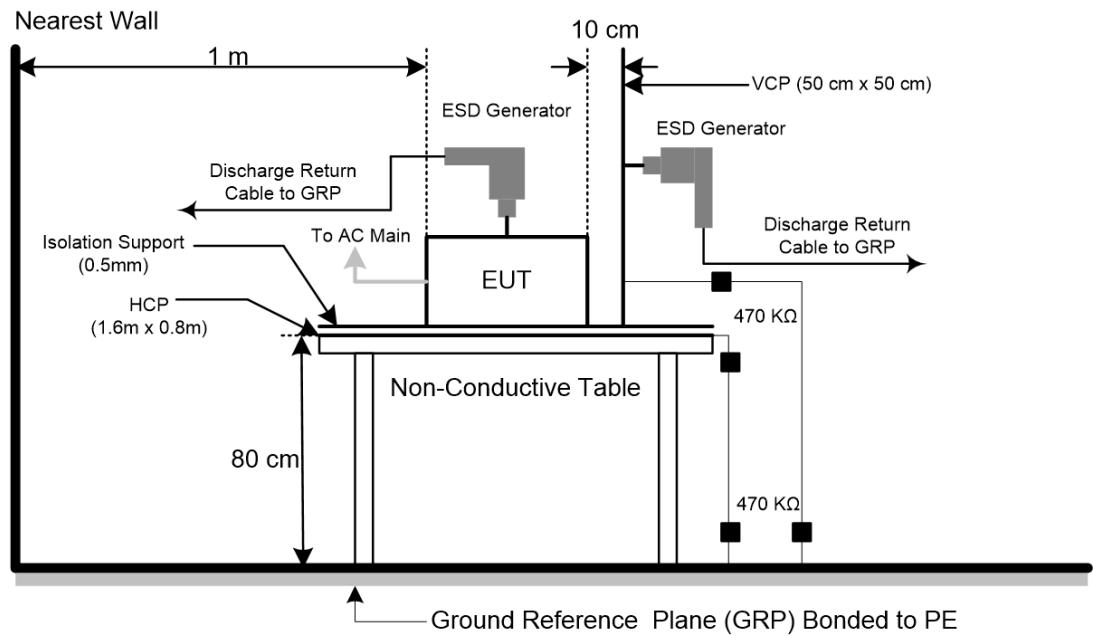

#### 4.4.6 TEST RESULTS

Test Voltage	AC 230V/50Hz											
Test Mode	Mode 1-7											



Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	B	B	-	-	A	A	B	B	-	-
2	A	A	A	A	B	B	-	-	-	-	-	-	-	-
3	A	A	A	A	B	B	-	-	-	-	-	-	-	-
4	A	A	A	A	B	B	-	-	-	-	-	-	-	-
5	A	A	A	A	B	B	-	-	-	-	-	-	-	-
6	A	A	A	A	B	B	-	-	-	-	-	-	-	-
Criteria	B						-		B				-	
Result	B						-		B				-	



Mode	HCP Contact Discharge						VCP Contact Discharge					
	2kV		4kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
Left side	A	A	A	A	-	-	A	A	A	A	-	-
Right side	A	A	A	A	-	-	A	A	A	A	-	-
Front side	A	A	A	A	-	-	A	A	A	A	-	-
Rear side	A	A	A	A	-	-	A	A	A	A	-	-
Criteria	B				-		B				-	
Result	A				-		A				-	


Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

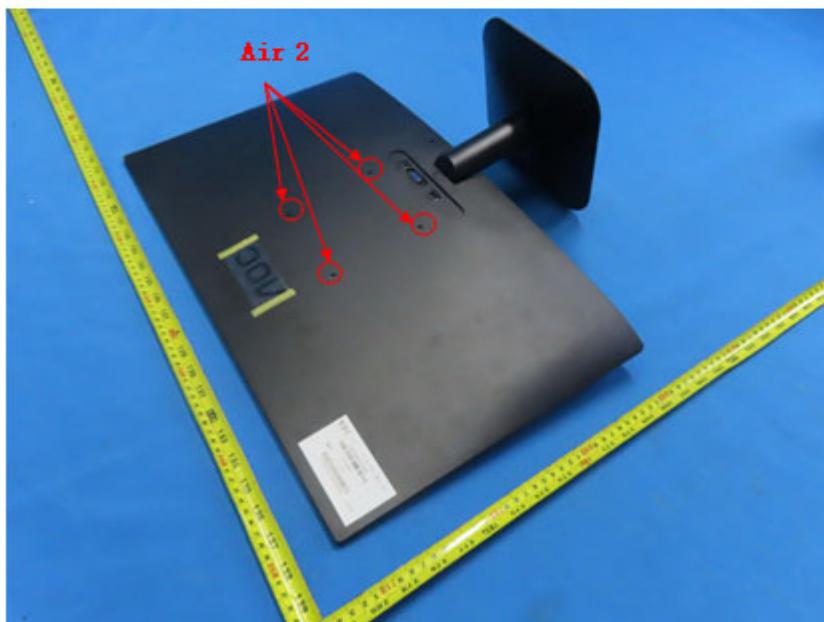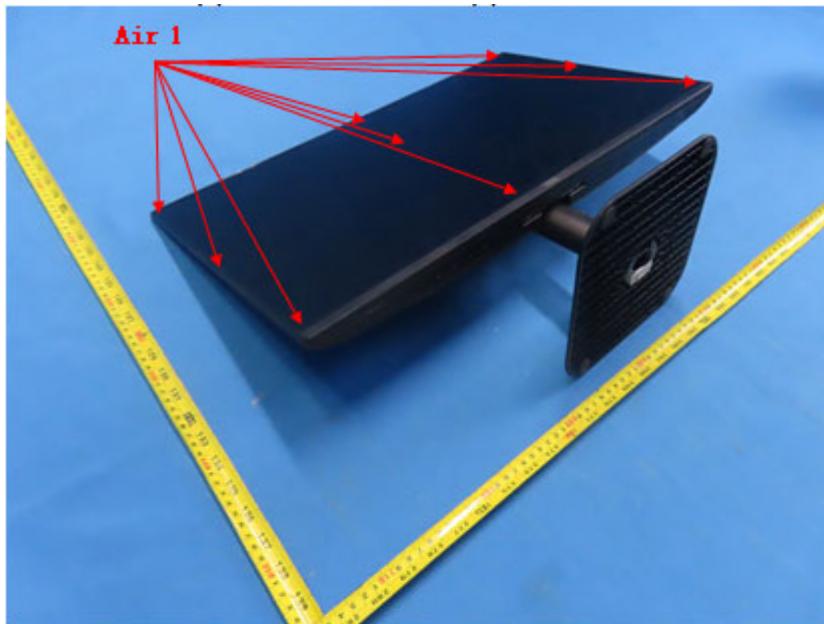

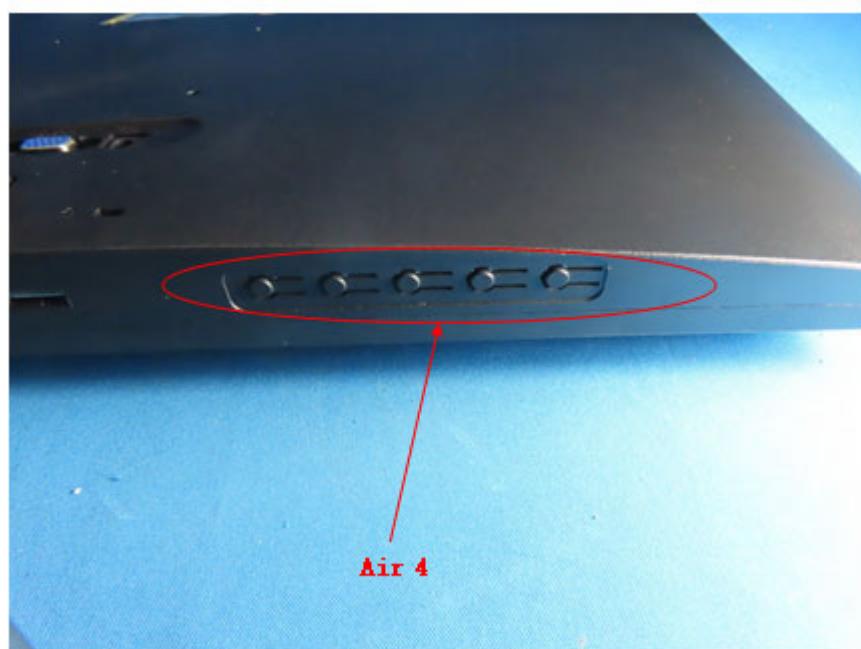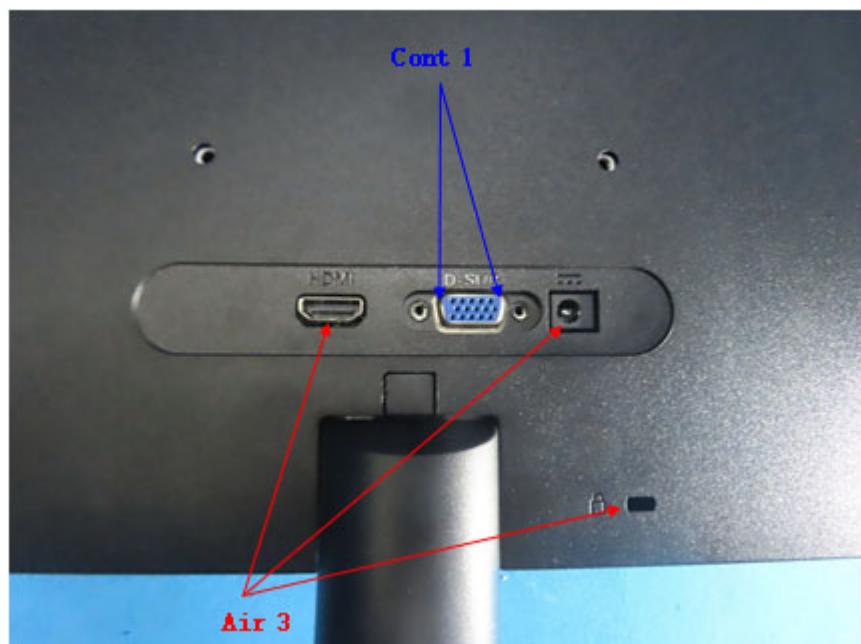

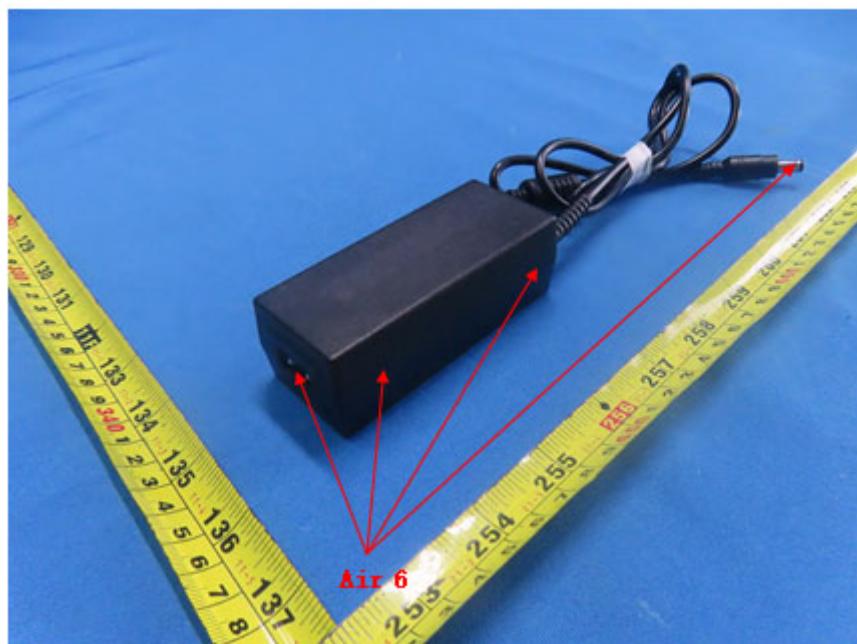

## 4.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

### 4.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz ( $\pm 1\%$ )
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of the preceding frequency.
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

### 4.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3142B	26419	N/A
2	Amplifier	AR	50S1G4A	326720	Dec. 22, 2024
3	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	May 31, 2025
4	Power amplifier	MILMEGA	AS1860-50	1064834	Dec. 22, 2024
5	Microwave Log.-Per. Antenna	Schwarzbeck	STLP 9149	9149-277	N/A
6	Power amplifier	MILMEGA	80RF1000-250	1064833	Dec. 22, 2024
7	Measurement Software	Farad	(EZ-RS )V2.0.1.3	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.5.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

- a. The field strength level was 3 V/m(unmodulated, r.m.s).
- b. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. Where the frequency range is swept incrementally, the step size was 1% of the preceding frequency.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

For Display and display output functions:


- a. The display quality evaluated by direct observation.
- b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output. the diagonal screen size shall be at least 0,50 m.
- c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP

- a) For Continuous induced RF disturbances

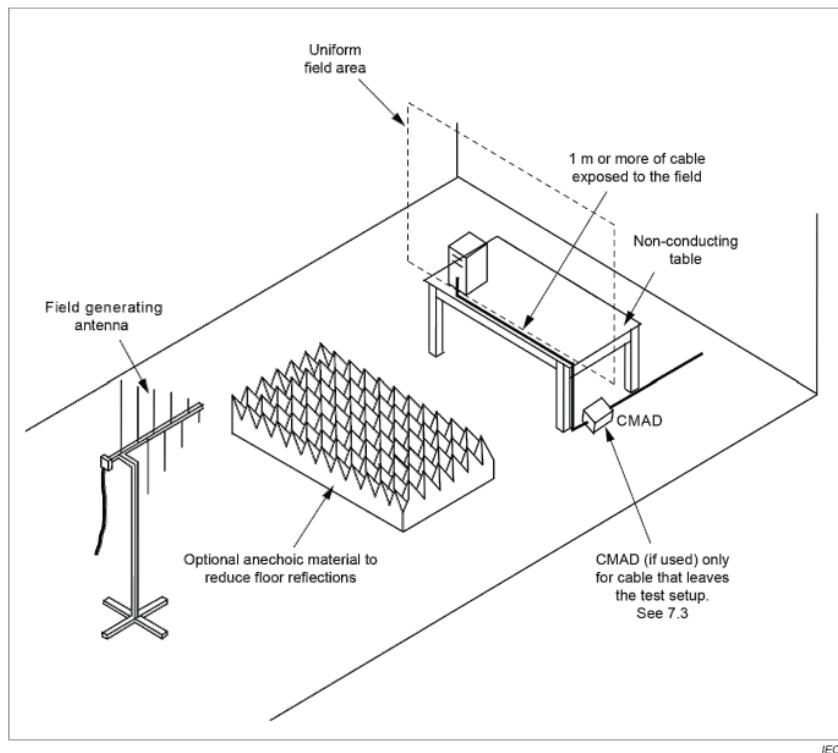

**4.5.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		

## 4.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

### 4.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC mains power ports: $\pm 1$ kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

### 4.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	May 31, 2025
2	Measurement Software	Prima	EFT_Series V1.0.0. 0.20180710	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.6.3 TEST PROCEDURE

For TABLE-TOP equipment:


The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m +/- 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

- a. Both positive and negative polarity discharges were applied.
- b. The duration time of each test sequential was 1 minute.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP

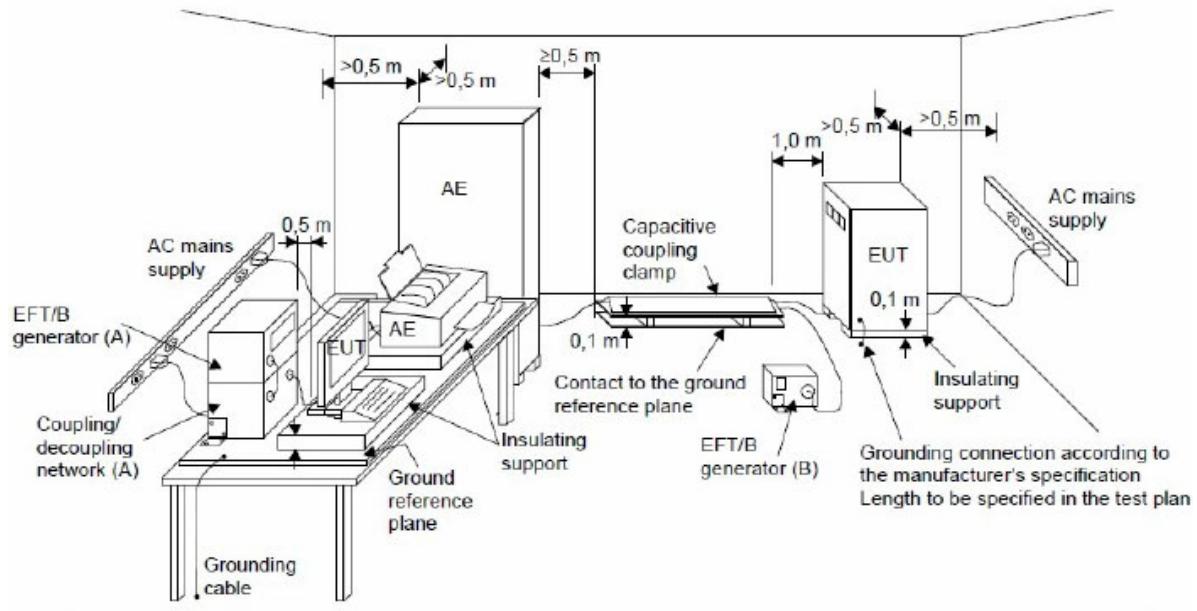

**4.6.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result
				1kV		
AC Power Port	Line (L)	+	5 kHz	B	B	B
		-	5 kHz	B		
	Neutral (N)	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+N	+	5 kHz	B	B	B
		-	5 kHz	B		

## 4.7 SURGE IMMUNITY TEST (SURGE)

### 4.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B(AC mains power ports)
Wave-Shape	1.2/50(8/20) Tr/Th $\mu$ s combination wave
Test Voltage	AC mains power ports: $\pm 0.5$ kV, $\pm 1$ kV
Generator Source Impedance	2 $\Omega$ of the low-voltage power supply network.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90°phase Five negative pulses line-to-neutral at 270°phase
Pulse Repetition Rate	1 time / min

### 4.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	May 31, 2025
2	Measurement Software	Prima	SUG_Series V1.0. 0.7.20190827	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.7.3 TEST PROCEDURE

#### a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

#### b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


#### c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.7.5 TEST SETUP

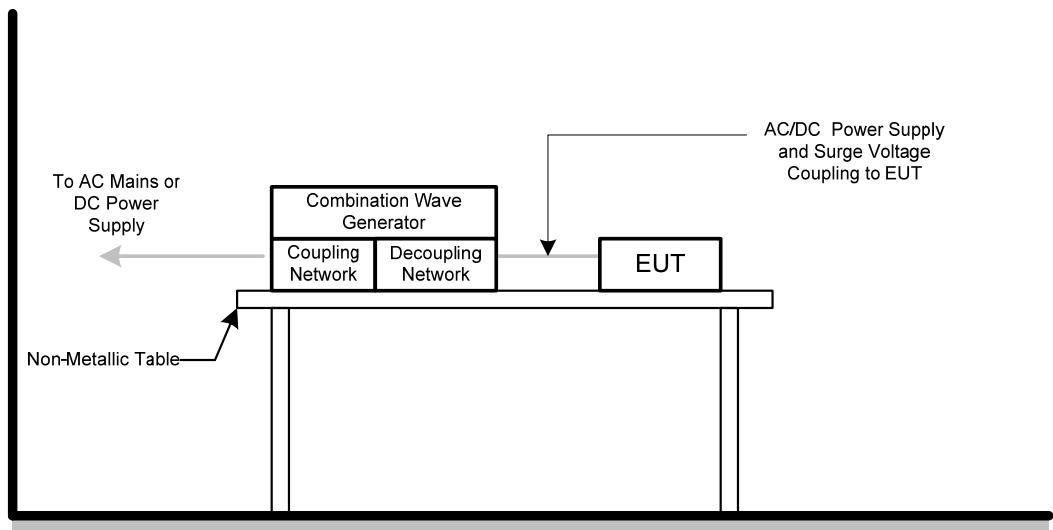

**4.7.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thus						Criterion	Result		
		Polarity	Phase	Voltage							
				0.5kV	1kV	-- kV	-- kV				
AC	L - N	+	90°	A	B	-	-	B	B		
		-	270°	A	B	-	-				

## 4.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

### 4.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of the preceding frequency value
Dwell Time	3 seconds

### 4.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TEST SYSTEM FOR CONDUCTED AND RADIATED IMMUNITY	TESEQ	NSG 4070B	37513	Jun. 01, 2025
2	Attenuator	Teseq	100-SA-FFN-06	163357	May 31, 2025
3	Measurement Software	Farad	EZ-CS (V2.0.1.4)	N/A	N/A
4	Power CDN	FCC	FCC-801-M2/M3-16A	100270	Dec. 22, 2024
5	Coupling Decoupling Network	Teseq GmbH	CDN M016	35834	May 31, 2025

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.8.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m\*1m min. and 0.65mm thick min.

The other condition as following manner:

- a. The field strength level was 3 V (unmodulated, r.m.s.)
- b. The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sinewave. Where the frequency range is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.


For Display and display output functions:

- a. The display quality evaluated by direct observation.
- b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output.the diagonal screen size shall be at least 0,50 m.
- c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

#### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.8.5 TEST SETUP

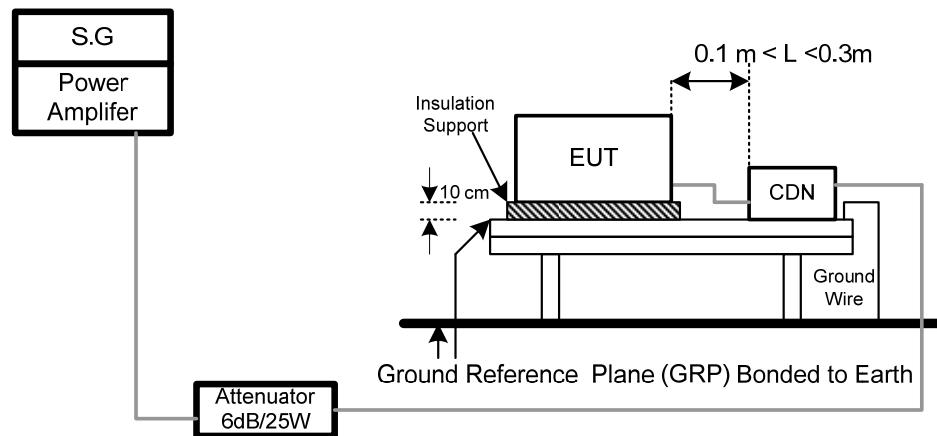

**4.8.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			

## 4.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

### 4.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

### 4.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	4032	Dec. 22, 2024
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9 /10-L-1M	4024	Dec. 22, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.9.3 TEST PROCEDURE

For TABLE-TOP equipment:

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.


The other condition as following manner:

- a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 4.9.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.9.5 TEST SETUP

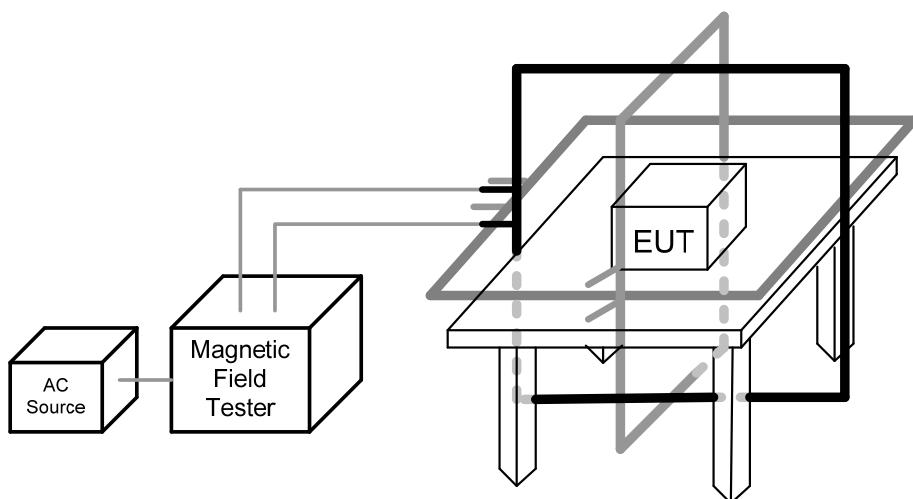

#### 4.9.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-7

50Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

60Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

## 4.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

### 4.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

### 4.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	May 31, 2025

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


### 4.10.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

### 4.10.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.10.5 TEST SETUP

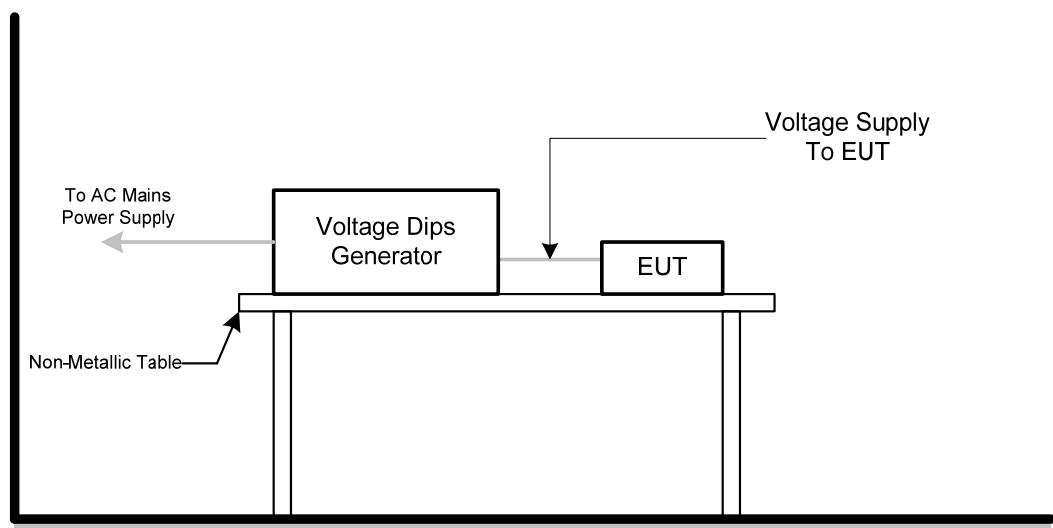

#### 4.10.6 TEST RESULTS

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode	Mode 1-7


AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

## 5. EUT TEST PHOTO


Radiated emissions up to 1 GHz

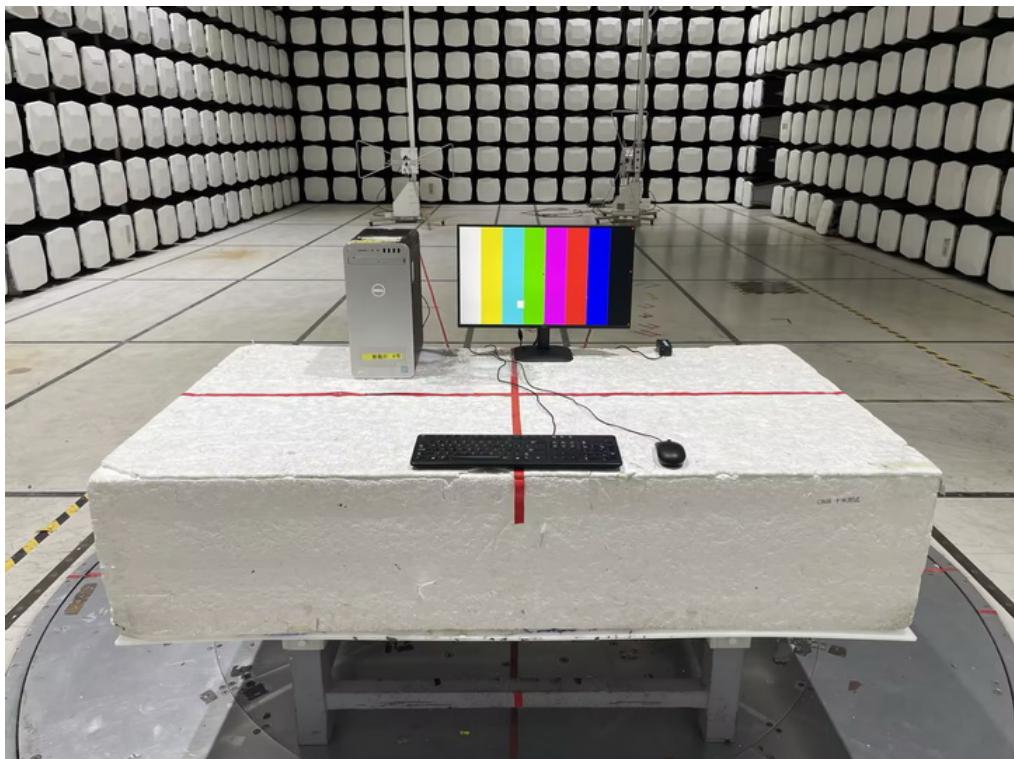

## Radiated emissions above 1 GHz

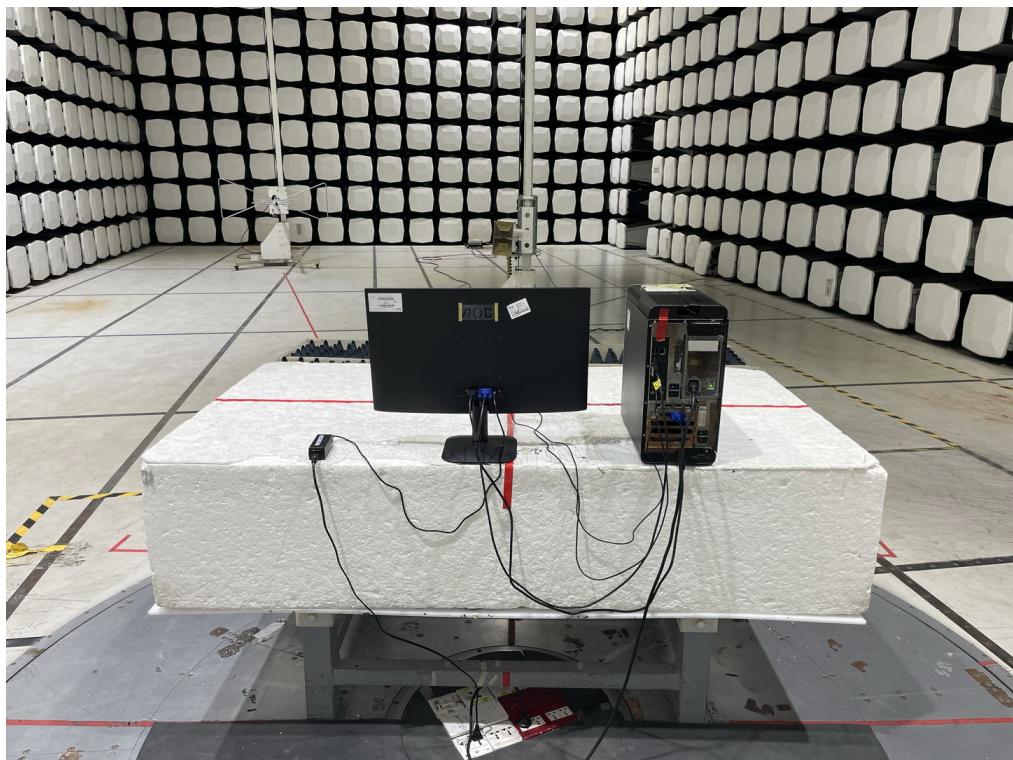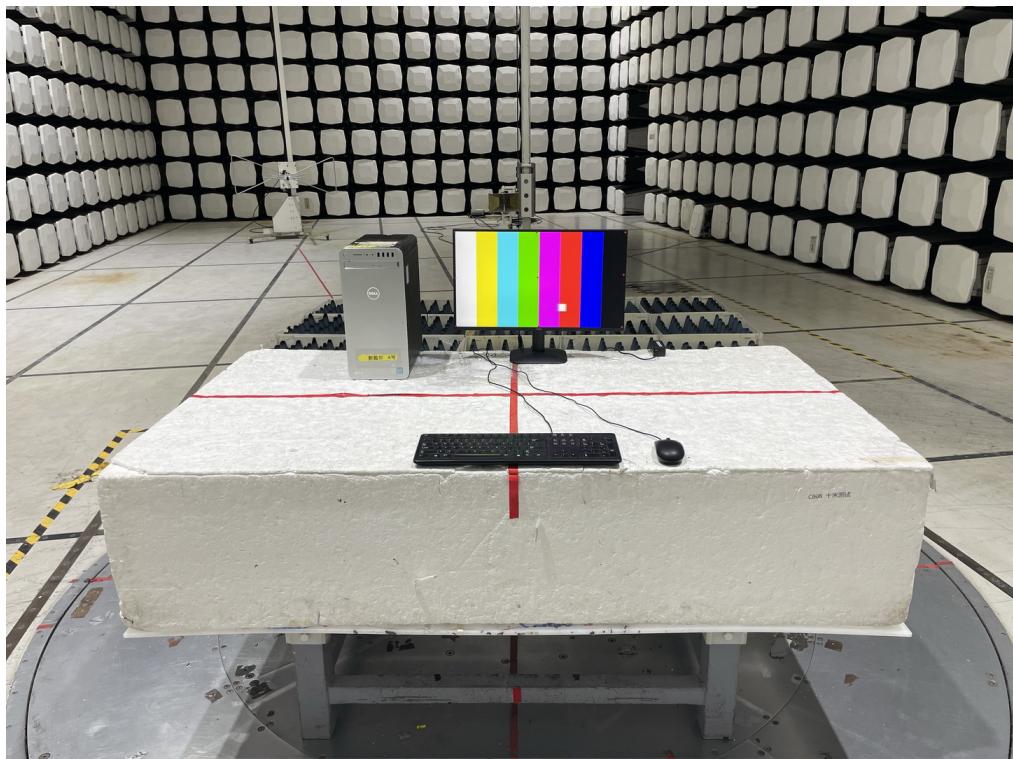

## Conducted emissions AC mains power port

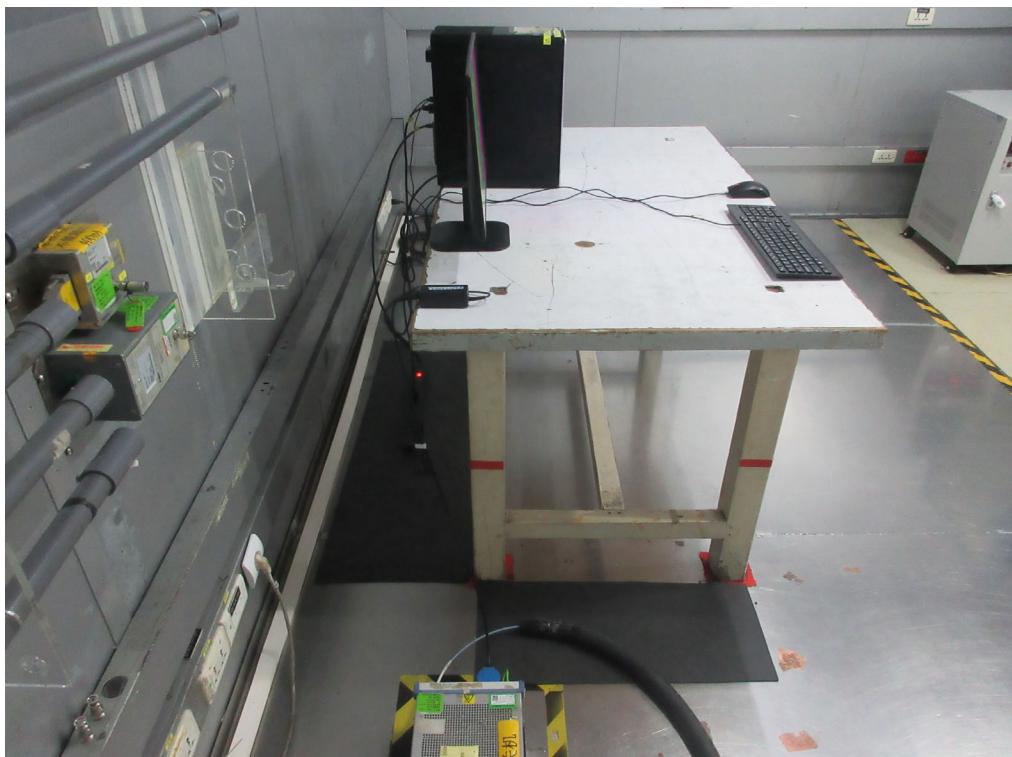

## Harmonic current



## Voltage fluctuations (Flicker)



## Electrostatic discharge immunity



## Radiated, radio-frequency, electromagnetic field immunity – Up to 1GHz



Radiated, radio-frequency, electromagnetic field immunity – Above 1GHz



Electrical fast transient/burst immunity - AC




## Surge immunity - AC



## Immunity to conducted disturbances, induced by radio-frequency fields - AC



### Power frequency magnetic field immunity

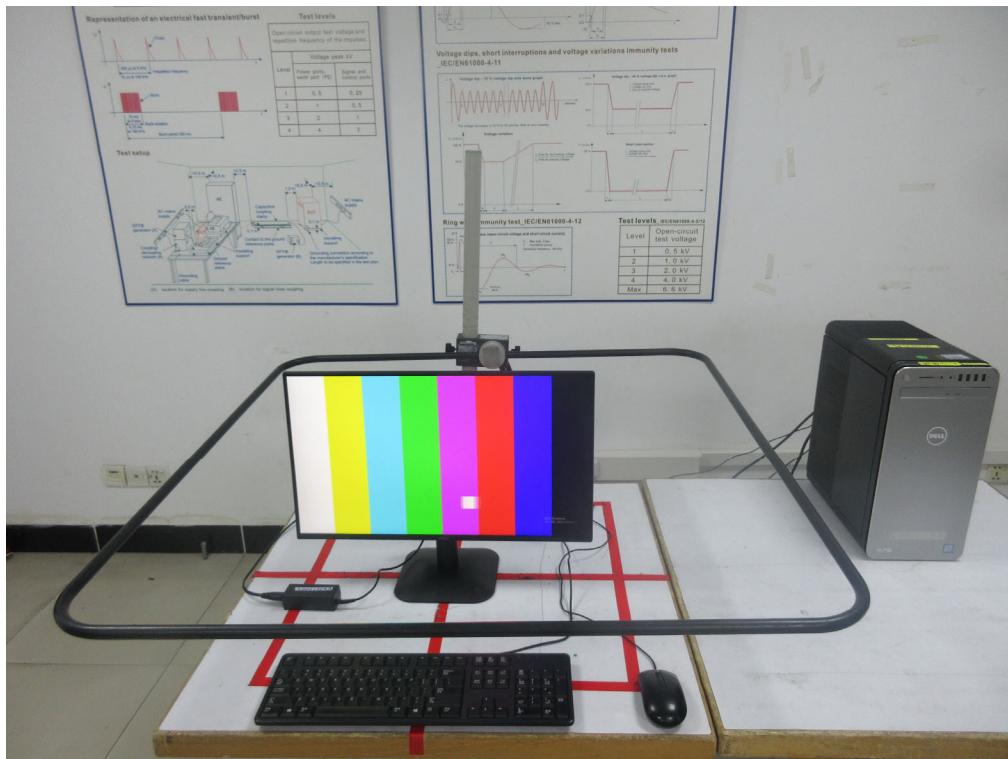

Voltage dips, short interruptions and voltage variations immunity



**End of Test Report**