


Find your product and get support




- Europe**
<https://aoc.com/uk/support>
- Россия**
<https://aoc.com/ru/support>
- Australia**
https://au.aoc.com/user_manual
- Hong Kong S.A.R.**
https://hk.aoc.com/user_manual
- 中國台灣**
https://tw.aoc.com/user_manual
- Indonesia**
https://id.aoc.com/user_manual
- 日本**
https://jp.aoc.com/user_manual
- 한국**
https://kr.aoc.com/user_manual
- Malaysia**
https://my.aoc.com/user_manual
- Myanmar**
https://mm.aoc.com/user_manual
- New Zealand**
https://nz.aoc.com/user_manual
- Philippines**
https://ph.aoc.com/user_manual

- Singapore**
https://sg.aoc.com/user_manual
- ประเทศไทย**
https://th.aoc.com/user_manual
- Việt Nam**
https://vn.aoc.com/user_manual
- Middle East**
https://me.aoc.com/user_manual
- South Africa**
https://za.aoc.com/user_manual
- Brasil**
<https://aoc.portaltpv.com.br/>
- India**
<https://aoc.com/in-en/support>
- US**
<https://aoc.com/us/support>
- Canada**
<https://aoc.com/ca-en/support>

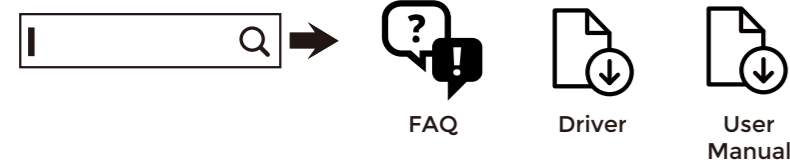

AOC GAMING

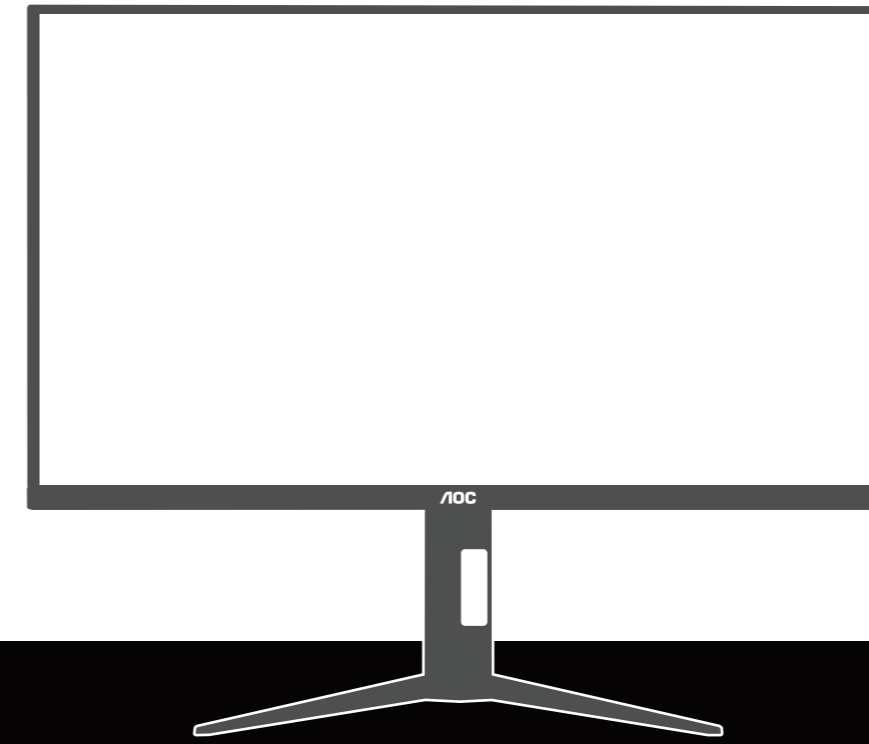


QUICK START GUIDE

Q27G4ZD

AOC GAMING MONITOR



©2024 AOC. All rights reserved

WWW.AOC.COM


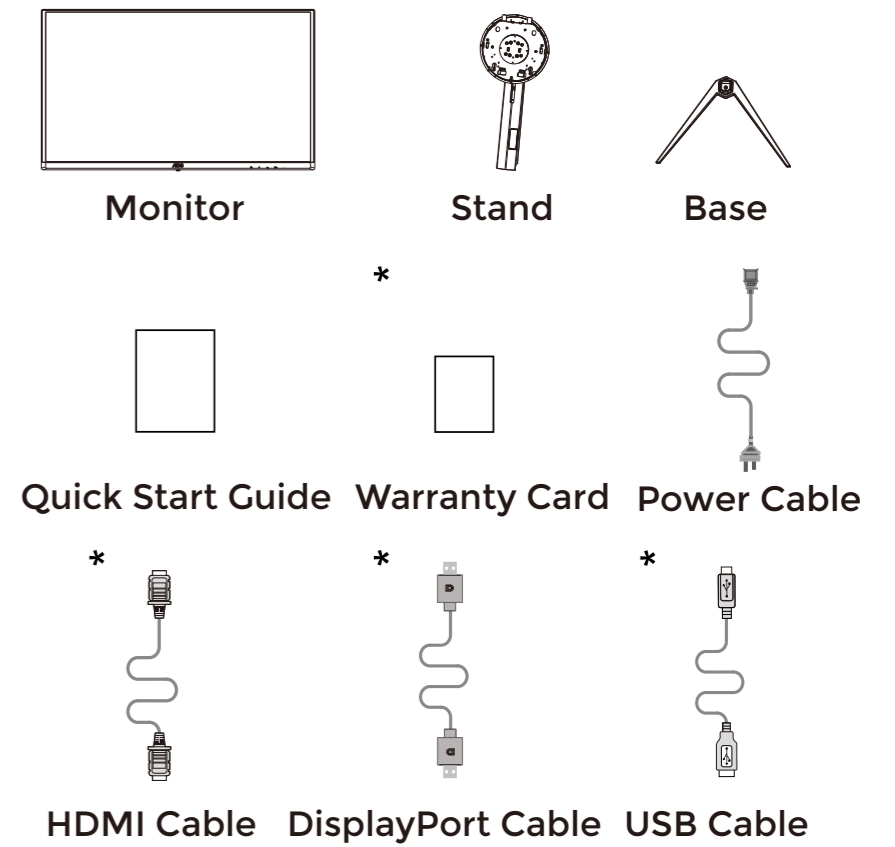


*Different according to countries/regions
Display design may differ from that illustrated


1

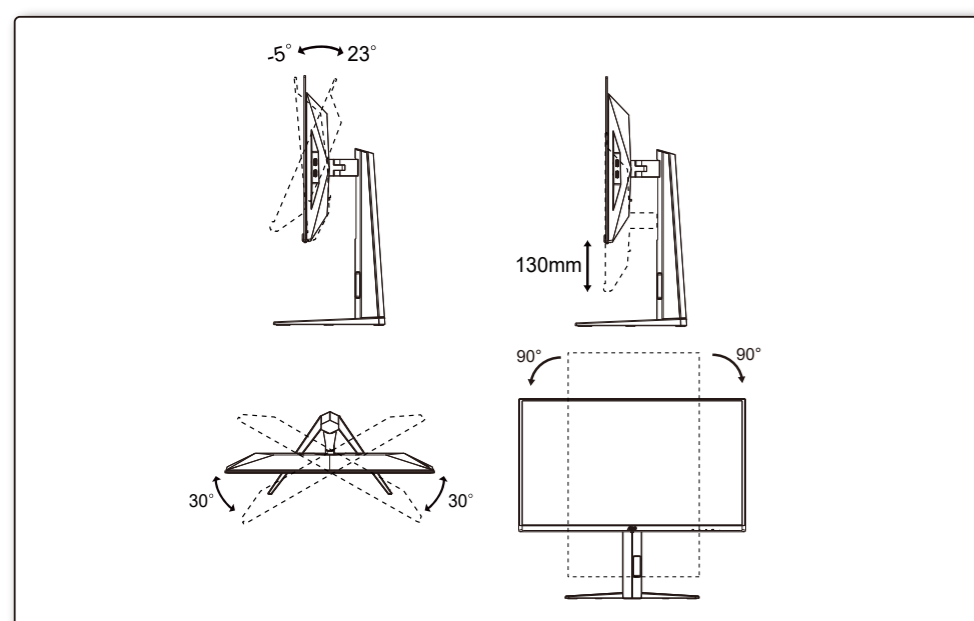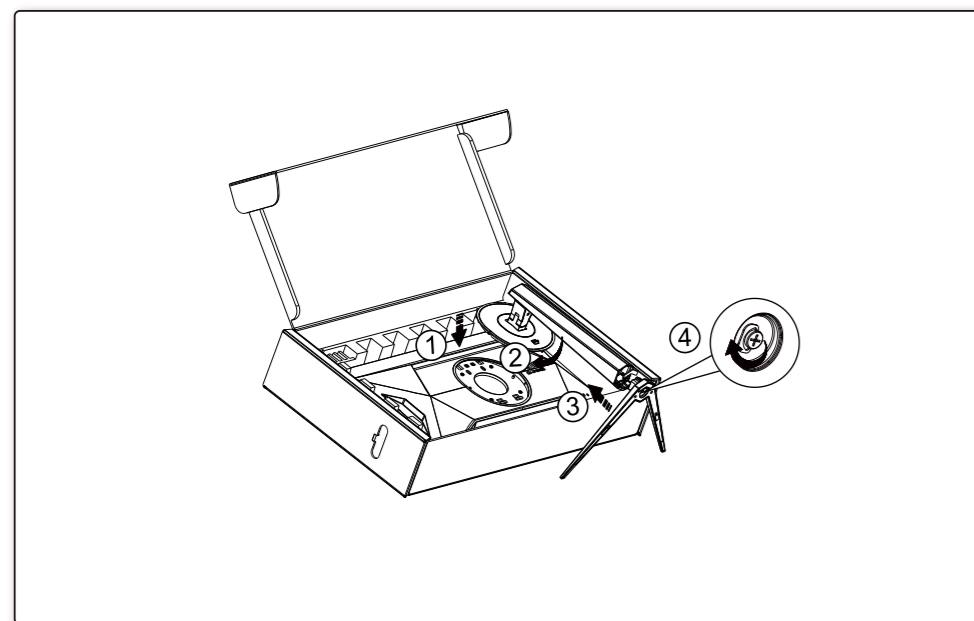

2

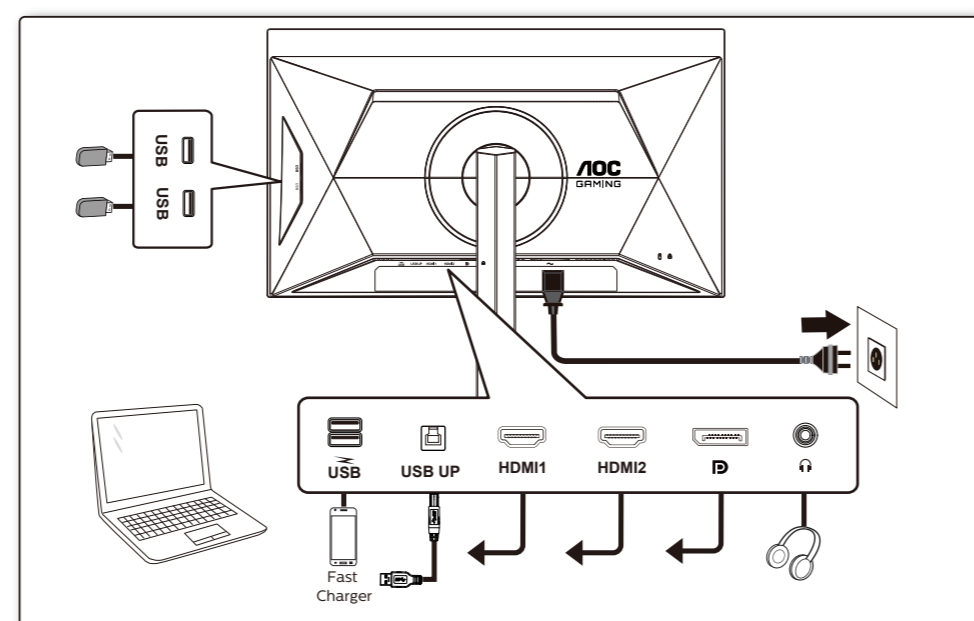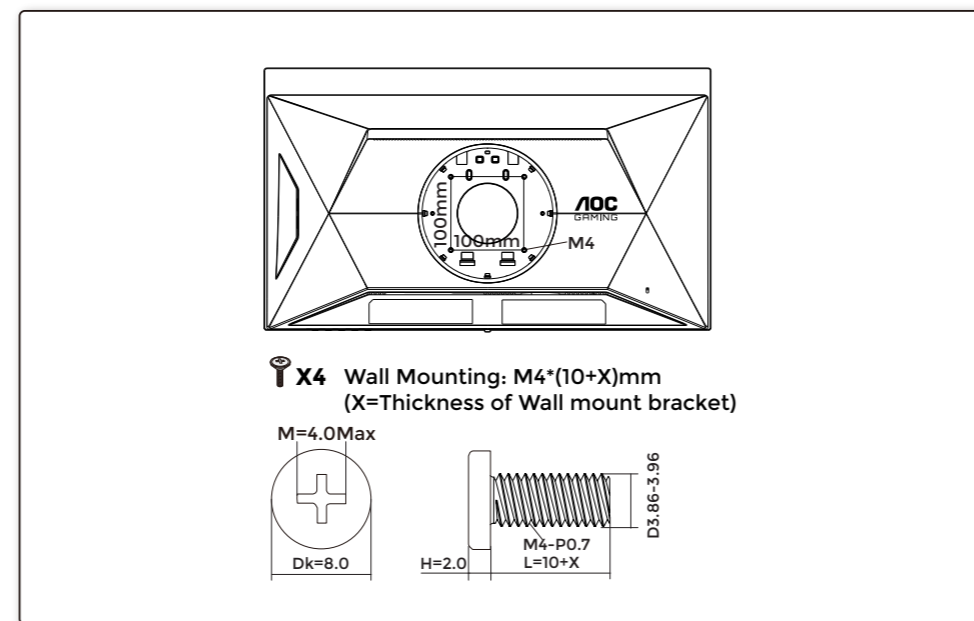

3

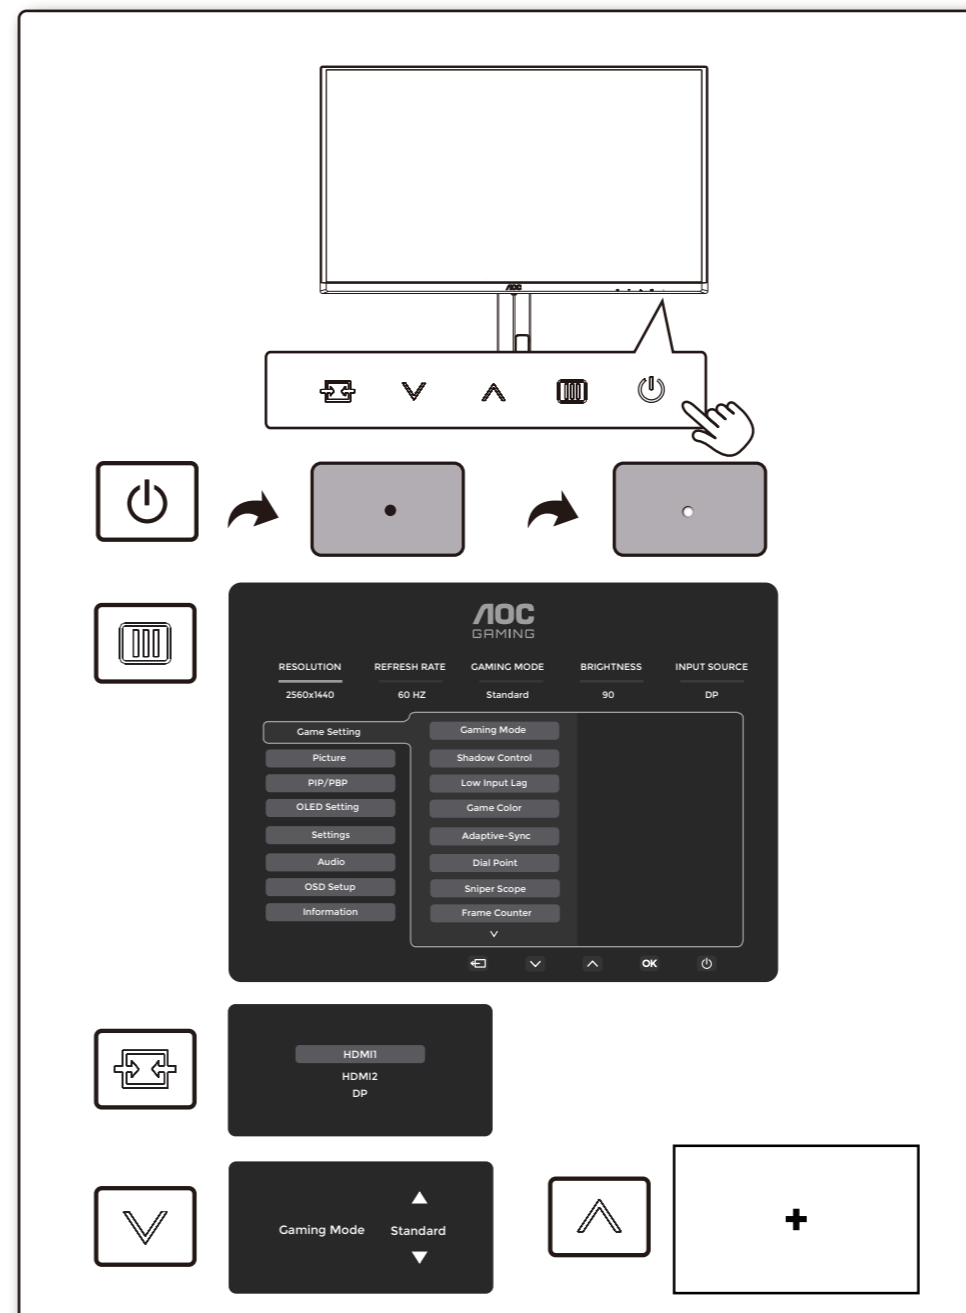

4

General Specification

Panel	Model Name	Q27G4ZD		
	Driving System	OLED		
	Viewable Image Size	67.3cm diagonal(26.5" Wide Screen)		
	Pixel Pitch	0.2292mm(H) x 0.2292mm(V)		
Others	Horizontal Scan Range	30k-230kHz(HDMI) 30k-360kHz(DisplayPort)		
	Horizontal Scan Size(Maximum)	590.42mm		
	Vertical Scan Range	48-144Hz (HDMI) 48-240Hz (DisplayPort)		
	Vertical Scan Size(Maximum)	333.72mm		
	Max Resolution	2560 x 1440@144Hz (HDMI) 2560 x 1440@240Hz (DisplayPort)		
	Plug & Play	VESA DDC2B/C1		
	Power Source	100-240V- 50/60Hz 2A		
	Power Consumption	Typical (default brightness and contrast)	78W	
		Max. (brightness =100, contrast =100)	≤ 117W	
	Dimensions (with stand)	Standby Mode	≤ 0.5W	
Net Weight		6.60kg		
Physical Characteristics	Connector Type	USB UP/USB-Ax4 (include 1 fast charge) HDMIx2/DisplayPort/Earphone		
	Signal Cable Type	Detachable		
Environmental	Temperature	Operating	0°C- 40°C	
		Non-Operating	-25°C-55°C	
Humidity	Operating	10%-85% (Non-Condensing)		
	Non-Operating	5%-93% (Non-Condensing)		
Altitude	Operating	0m-5000m (0ft-16404ft)		
	Non-Operating	0m-12192m (0ft-40000ft)		