

Suggest Tools

Here are some tools that can be used for the LCD monitor's service and repair.

Philips-head Screwdriver

Use a Philips-head screwdriver to fasten/remove the K- or B-typed screws



P/N: N/A

Gloves

To protect LCD Panel and your hand



P/N: (L) N/A (M) N/A

C/D Disassembly Tool

Use C/D Disassembly Tool to open cosmetic cover and avoid scratch.



P/N: N/A

Spacer Screwdriver

Use a spacer screwdriver to fasten/remove spacer screws or hex screws.





P/N: N/A

Disassembly Instruction




1. Remove the COVER_VESA, and the screws to remove the rear cover





2. Remove the screws, Disconnect the connection to remove the LED board

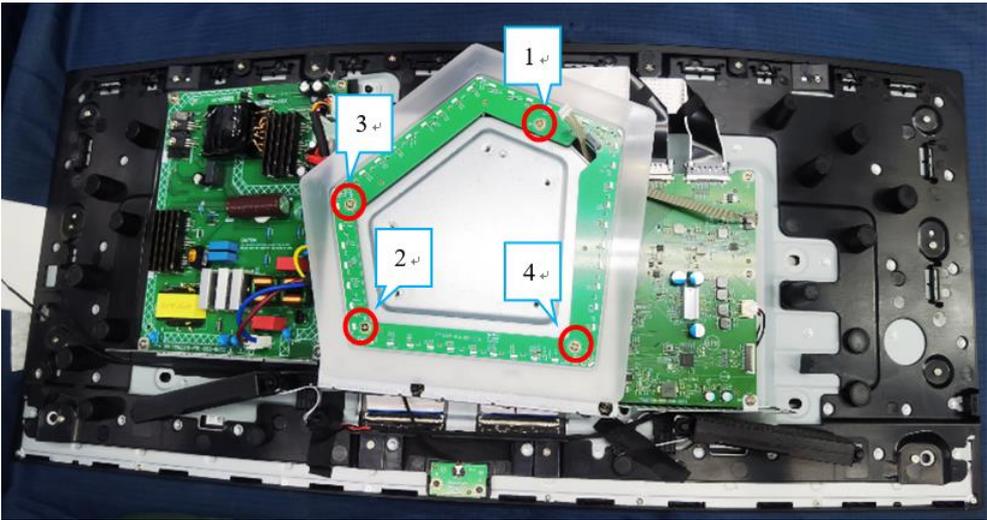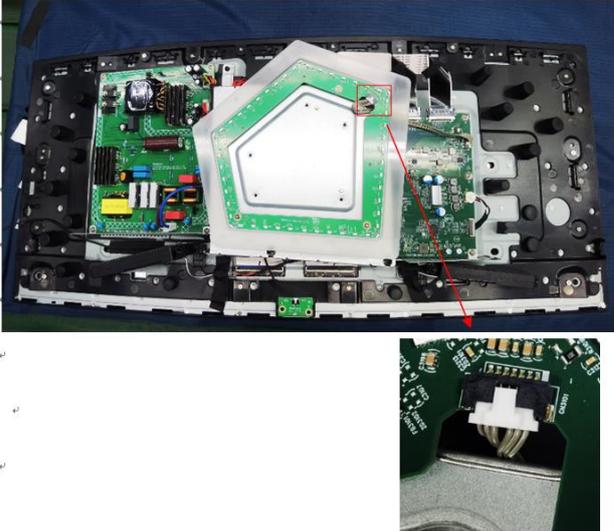



3. Disconnect the connection ,remove the screws to remove the Main board、 Power board

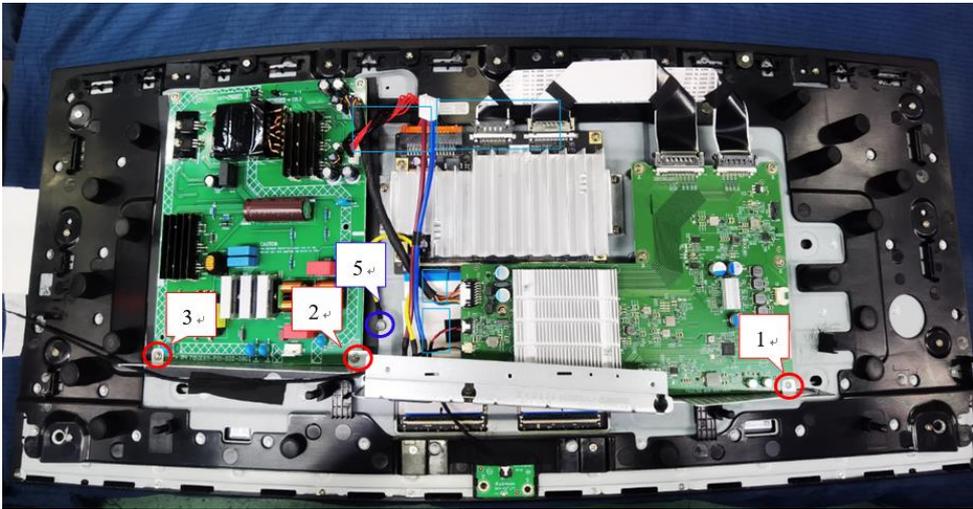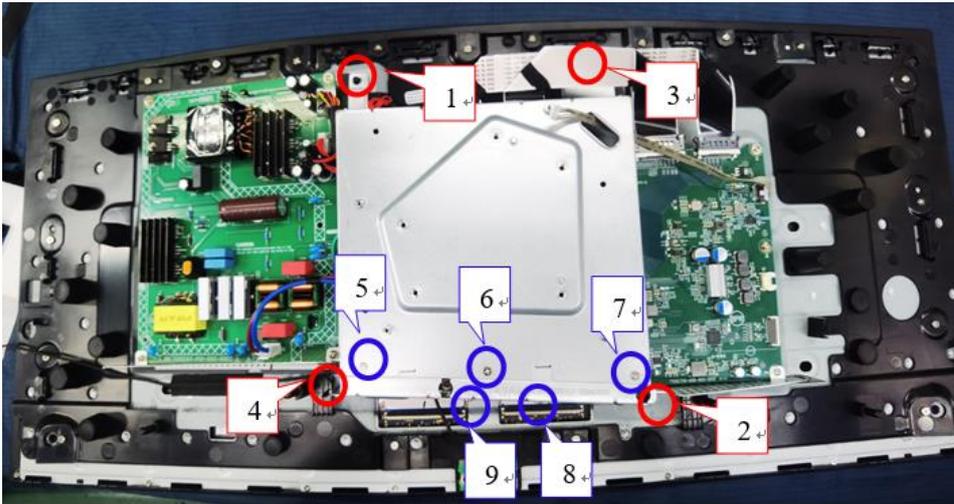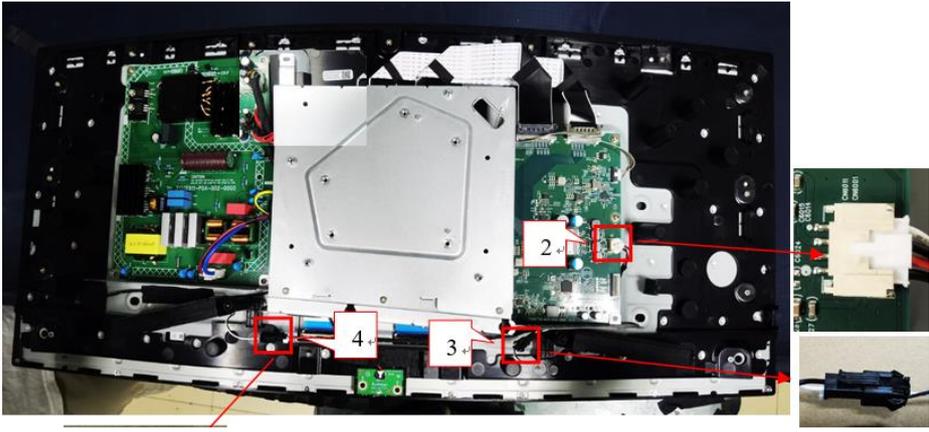

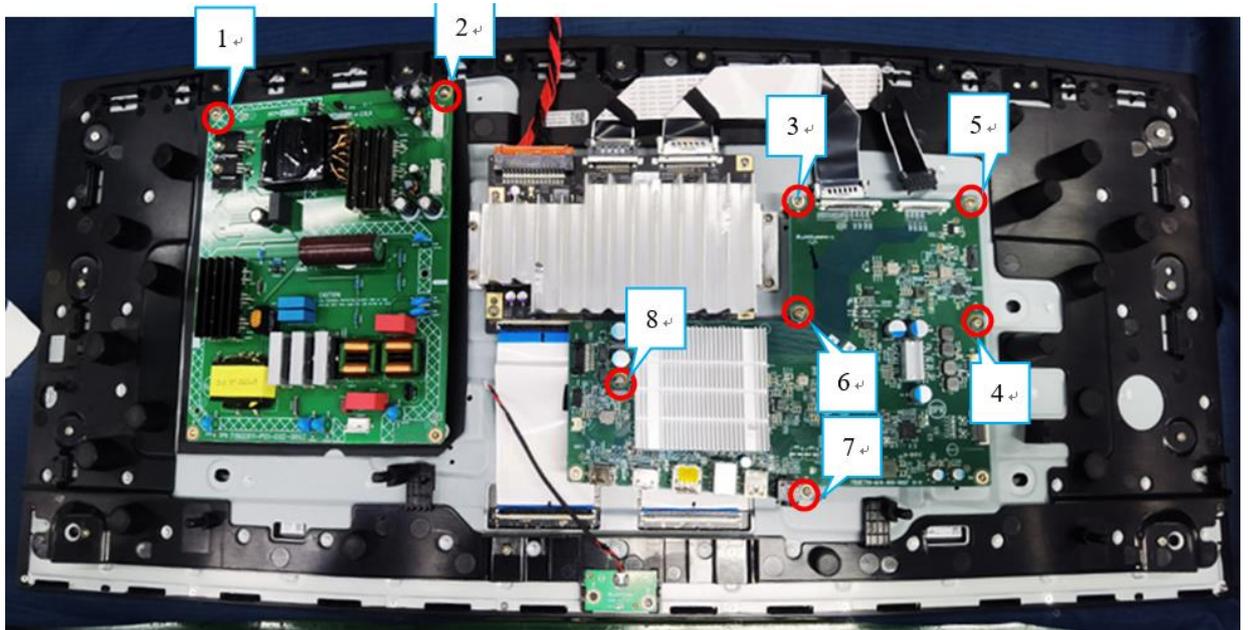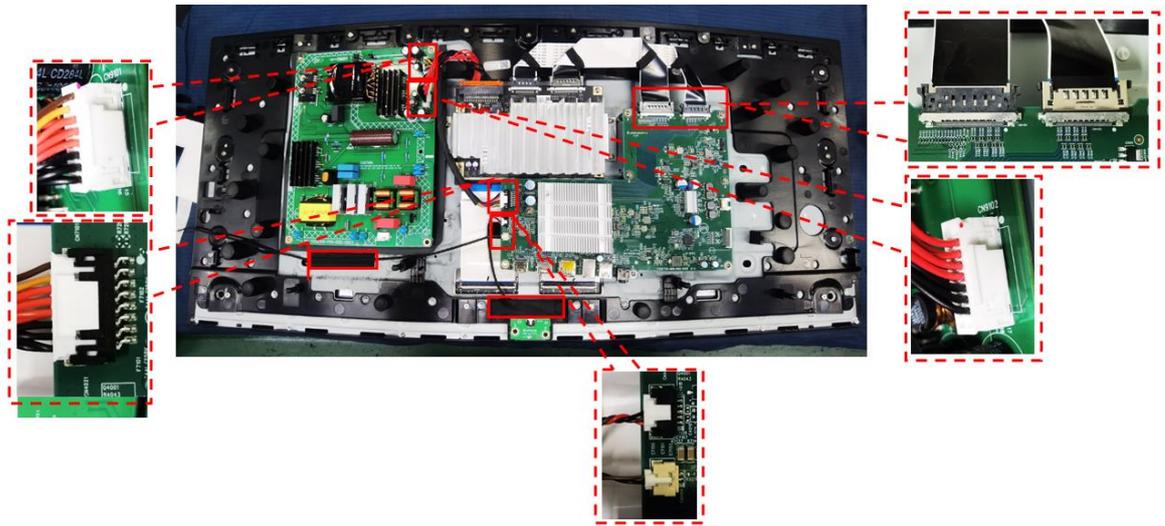

4. Remove the Screws to remove the Panel、Middle frame, Deco

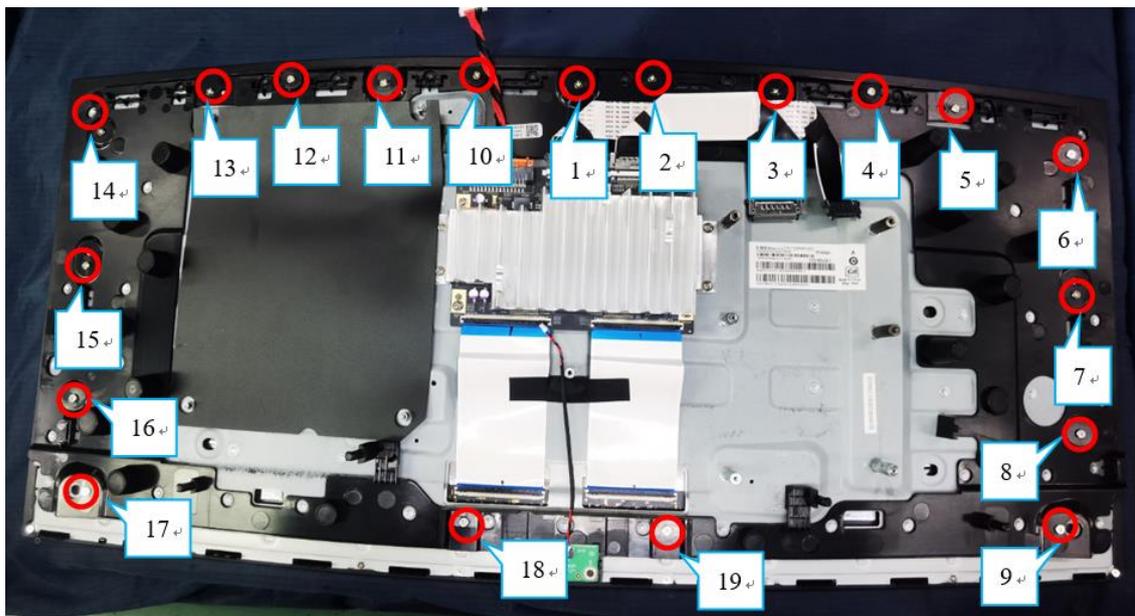

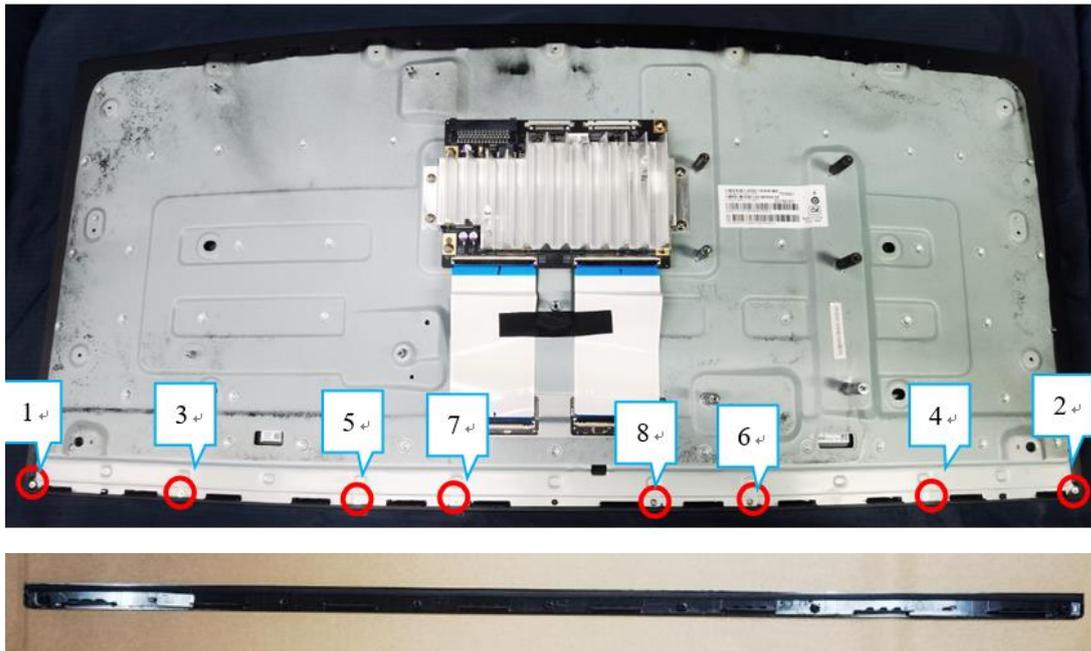

5. Remove the key board, USB Board

