

### Find your product and get support



**Europe**  
<https://eu.aoc.com/en/support>

**Россия**  
<https://eu.aoc.com/ru/support>

**Australia**  
[https://au.aoc.com/user\\_manual](https://au.aoc.com/user_manual)

**Hong Kong S.A.R.**  
[https://hk.aoc.com/user\\_manual](https://hk.aoc.com/user_manual)

**中國台灣**  
[https://tw.aoc.com/user\\_manual](https://tw.aoc.com/user_manual)

**Indonesia**  
[https://id.aoc.com/user\\_manual](https://id.aoc.com/user_manual)

**日本**  
[https://jp.aoc.com/user\\_manual](https://jp.aoc.com/user_manual)

**한국**  
[https://kr.aoc.com/user\\_manual](https://kr.aoc.com/user_manual)

**Malaysia**  
[https://my.aoc.com/user\\_manual](https://my.aoc.com/user_manual)

**Myanmar**  
[https://mm.aoc.com/user\\_manual](https://mm.aoc.com/user_manual)

**New Zealand**  
[https://nz.aoc.com/user\\_manual](https://nz.aoc.com/user_manual)

**Philippines**  
[https://ph.aoc.com/user\\_manual](https://ph.aoc.com/user_manual)

**Singapore**  
[https://sg.aoc.com/user\\_manual](https://sg.aoc.com/user_manual)

**ประเทศไทย**  
[https://th.aoc.com/user\\_manual](https://th.aoc.com/user_manual)

**Việt Nam**  
[https://vn.aoc.com/user\\_manual](https://vn.aoc.com/user_manual)

**Middle East**  
[https://me.aoc.com/user\\_manual](https://me.aoc.com/user_manual)

**South Africa**  
[https://za.aoc.com/user\\_manual](https://za.aoc.com/user_manual)


**Brasil**  
<https://aoc.portaltv.com.br/>

**India**  
[https://www.aocindia.com/download\\_manuals.php](https://www.aocindia.com/download_manuals.php)

**US/Canada**  
<https://us.aoc.com/en-US/downloads>




# QUICK START GUIDE

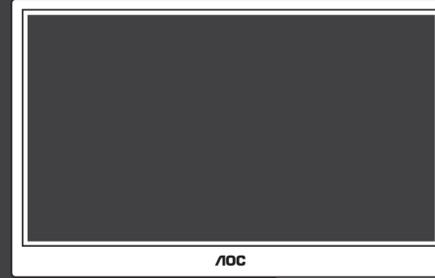



**16T3EA**  
 MONITOR

AOC.COM  
 ©2023 AOC. All rights reserved

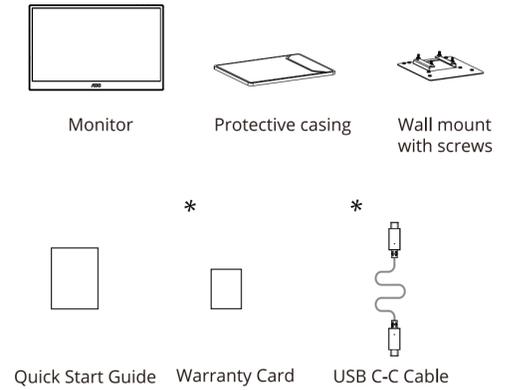


\*Different according to countries/regions  
 Display design may differ from that illustrated


**1**

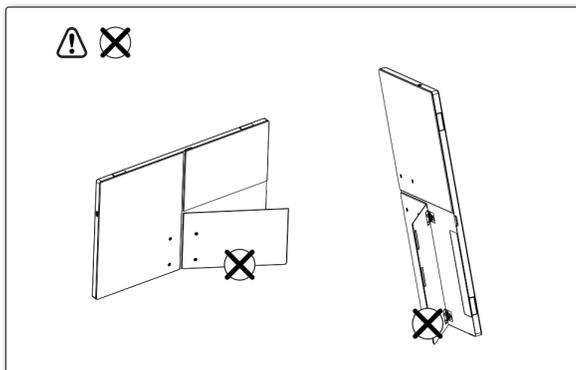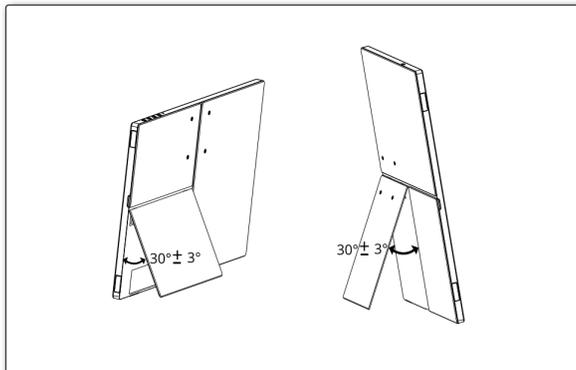

**2**

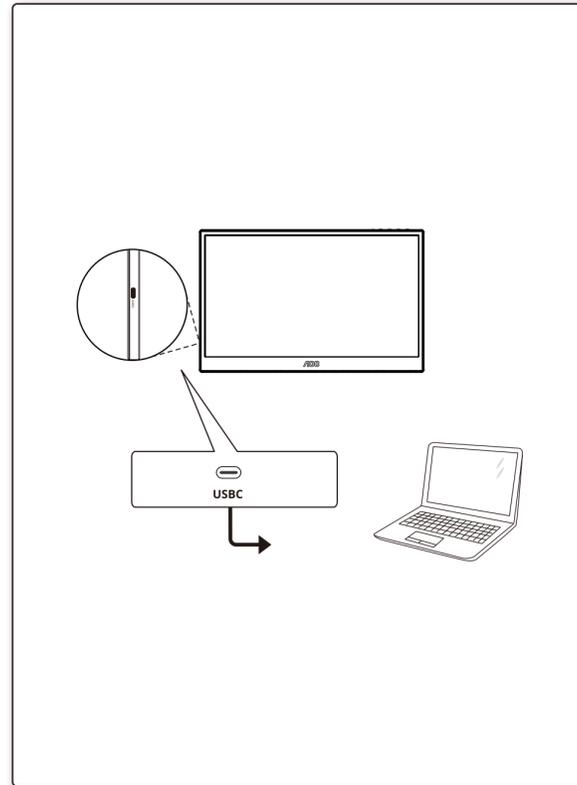

**3**

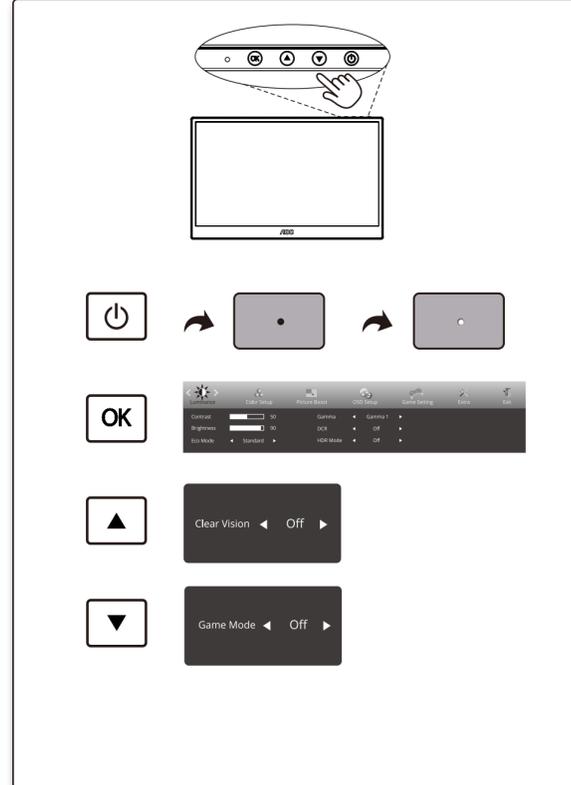

**4**

### General Specification

Panel	Model Name	16T3EA	
	Driving System	TFT Color LCD	
	Viewable Image Size	39.5cm diagonal(15.6" wide screen)	
	Pixel Pitch	0.17925mm(H) x 0.17925mm(V)	
Others	Horizontal Scan Range	30k-85kHz	
	Horizontal Scan size(Maximum)	344.16mm	
	Vertical Scan Range	48-75Hz	
	Vertical Scan Size(Maximum)	193.59mm	
	Optimal Preset Resolution	1920x1080@60Hz	
	Plug & Play	VESA DDC2B/CI	
	Power Source	5Vdc, 3A	
Power Consumption	Typical(default brightness and contrast)	7W	
	Max. (brightness = 100, contrast = 100)	≤ 8W	
	Standby Mode	≤ 0.5W	
Dimensions(with stand)	363.7x229.25x12.5mm(WxHxD)		
Net Weight	0.83kg		
Physical Characteristics	Connector Type	USB-C	
	Signal Cable Type	Detachable	
Environmental	Temperature	Operating	0°C-40°C
		Non-operating	-25°C-55°C
	Humidity	Operating	10%-85% (non-condensing)
		Non-operating	5%-93% (non-condensing)
	Altitude	Operating	0m-5000m (0ft-16404ft)
		Non-operating	0m-12192m (0ft-40000ft)