


CE&UKCA EMC Test Report


Project No. : 2103C131
Equipment : LCD Monitor
Brand Name : N/A
Test Model : **32G3*****(*=0-9,A-Z,a-z,+, -, \ or blank)
Series Model : N/A
Applicant : TPV Electronics (Fujian) Co., Ltd.
Address : Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China
Date of Receipt : Mar. 16, 2021
Date of Test : Mar. 16, 2021 ~ Apr. 06, 2021
Issued Date : Apr. 27, 2021
Report Version : R00
Test Sample : Engineering Sample No.: DG2021031622
Standard(s) : EN 55032:2015 / CISPR 32:2015, Class B
EN 55032:2015+AC:2016 / CISPR 32:2015+cor1:2016, Class B
EN 55032:2015+A11:2020, Class B
EN 55035:2017/ CISPR 35:2016
EN 55035:2017+A11:2020
IEC 61000-3-2:2014 / EN 61000-3-2:2014, Class D
IEC 61000-3-2:2018 / EN IEC 61000-3-2:2019, Class D
IEC 61000-3-3:2013 / EN 61000-3-3:2013
IEC 61000-3-3:2013+A1:2017 / EN 61000-3-3:2013+A1:2019

BS EN 55032:2015+A11:2020, Class B
BS EN IEC 61000-3-2:2019, Class D
BS EN 61000-3-3:2013+A1:2019
BS EN 55035:2017+A11:2020

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

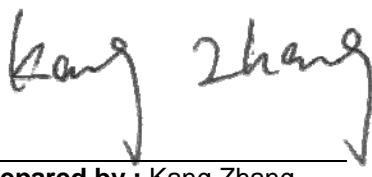

Prepared by : Kang Zhang



Approved by : Kevin Li



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	7
1 . SUMMARY OF TEST RESULTS	8
1.1 TEST FACILITY	10
1.2 MEASUREMENT UNCERTAINTY	10
1.3 TEST ENVIRONMENT CONDITIONS	12
2 . GENERAL INFORMATION	13
2.1 GENERAL DESCRIPTION OF EUT	13
2.2 DESCRIPTION OF TEST MODES	14
2.3 EUT OPERATING CONDITIONS	16
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
2.5 DESCRIPTION OF SUPPORT UNITS	17
3 . EMC EMISSION TEST- EN55032:2015	18
3.1 RADIATED EMISSION UP TO 1 GHZ	18
3.1.1 LIMITS	18
3.1.2 MEASUREMENT INSTRUMENTS LIST	18
3.1.3 TEST PROCEDURE	19
3.1.4 DEVIATION FROM TEST STANDARD	19
3.1.5 TEST SETUP	19
3.1.6 MEASUREMENT DISTANCE	20
3.1.7 TEST RESULTS (UP TO 1 GHZ)	21
3.2 RADIATED EMISSION ABOVE 1 GHZ	31
3.2.1 LIMITS	31
3.2.2 MEASUREMENT INSTRUMENTS LIST	31
3.2.3 TEST PROCEDURE	32
3.2.4 DEVIATION FROM TEST STANDARD	32
3.2.5 TEST SETUP	32
3.2.6 MEASUREMENT DISTANCE	33
3.2.7 TEST RESULTS (ABOVE 1 GHZ)	34
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	44
3.3.1 LIMITS	44
3.3.2 MEASUREMENT INSTRUMENTS LIST	44
3.3.3 TEST PROCEDURE	44
3.3.4 DEVIATION FROM TEST STANDARD	44
3.3.5 TEST SETUP	45
3.3.6 TEST RESULTS	46
4 . EMC EMISSION TEST- EN 55032:2015+AC:2016	54
4.1 RADIATED EMISSIONS UP TO 1 GHZ	54

Table of Contents	Page
4.1.1 LIMITS	54
4.1.2 MEASUREMENT INSTRUMENTS LIST	54
4.1.3 TEST PROCEDURE	55
4.1.4 DEVIATION FROM TEST STANDARD	55
4.1.5 TEST SETUP	55
4.1.6 MEASUREMENT DISTANCE	56
4.1.7 TEST RESULTS (UP TO 1 GHZ)	57
4.2 RADIATED EMISSIONS ABOVE 1 GHZ	59
4.2.1 LIMITS	59
4.2.1 MEASUREMENT INSTRUMENTS LIST	59
4.2.1.1 TEST PROCEDURE	60
4.2.1.2 DEVIATION FROM TEST STANDARD	60
4.2.1.3 TEST SETUP	60
4.2.1.4 MEASUREMENT DISTANCE	61
4.2.1.5 TEST RESULTS (ABOVE 1 GHZ)	62
4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	64
4.3.1 LIMITS	64
4.3.2 MEASUREMENT INSTRUMENTS LIST	64
4.3.3 TEST PROCEDURE	64
4.3.4 TEST SETUP	65
4.3.5 TEST RESULTS	66
5 . HARMONIC AND FLICKER TEST	68
5.1 HARMONIC CURRENT EMISSIONS	68
5.1.1 LIMITS	68
5.1.2 MEASUREMENT INSTRUMENTS LIST	68
5.1.3 TEST PROCEDURE	68
5.1.4 DEVIATION FROM TEST STANDARD	68
5.1.5 TEST SETUP	68
5.1.6 TEST RESULTS	69
5.2 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST	72
5.2.1 LIMITS	72
5.2.2 MEASUREMENT INSTRUMENTS LIST	72
5.2.3 TEST PROCEDURE	72
5.2.4 DEVIATION FROM TEST STANDARD	72
5.2.5 TEST SETUP	73
5.2.6 TEST RESULTS	74
6 . EMC IMMUNITY TEST	75
6.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	75
6.2 GENERAL PERFORMANCE CRITERIA	78
6.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION	79
6.3.1 PERFORMANCE CRITERIA	79

Table of Contents	Page
6.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION	80
6.4.1 PERFORMANCE CRITERIA	80
6.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	81
6.5.1 TEST SPECIFICATION	81
6.5.2 MEASUREMENT INSTRUMENTS	81
6.5.3 TEST PROCEDURE	81
6.5.4 DEVIATION FROM TEST STANDARD	82
6.5.5 TEST SETUP	82
6.5.6 TEST RESULTS	83
6.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	86
6.6.1 TEST SPECIFICATION	86
6.6.2 MEASUREMENT INSTRUMENTS	86
6.6.3 TEST PROCEDURE	86
6.6.4 DEVIATION FROM TEST STANDARD	87
6.6.5 TEST SETUP	87
6.6.6 TEST RESULTS	89
6.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)	91
6.7.1 TEST SPECIFICATION	91
6.7.2 MEASUREMENT INSTRUMENTS	91
6.7.3 TEST PROCEDURE	91
6.7.4 DEVIATION FROM TEST STANDARD	91
6.7.5 TEST SETUP	92
6.7.6 TEST RESULTS	93
6.8 SURGE IMMUNITY TEST	94
6.8.1 TEST SPECIFICATION	94
6.8.2 MEASUREMENT INSTRUMENTS	94
6.8.3 TEST PROCEDURE	94
6.8.4 DEVIATION FROM TEST STANDARD	95
6.8.5 TEST SETUP	95
6.8.6 TEST RESULTS	96
6.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)	97
6.9.1 TEST SPECIFICATION	97
6.9.2 MEASUREMENT INSTRUMENTS	97
6.9.3 TEST PROCEDURE	97
6.9.4 DEVIATION FROM TEST STANDARD	98
6.9.5 TEST SETUP	98
6.9.6 TEST RESULTS	99
6.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)	101
6.10.1 TEST SPECIFICATION	101
6.10.2 MEASUREMENT INSTRUMENTS	101
6.10.3 TEST PROCEDURE	101

Table of Contents	Page
6.10.4 DEVIATION FROM TEST STANDARD	101
6.10.5 TEST SETUP	102
6.10.6 TEST RESULTS	103
6.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY	
TEST (DIPS)	104
6.11.1 TEST SPECIFICATION	104
6.11.2 MEASUREMENT INSTRUMENTS	104
6.11.3 TEST PROCEDURE	104
6.11.4 DEVIATION FROM TEST STANDARD	104
6.11.5 TEST SETUP	104
6.11.6 TEST RESULTS	105
7 . EUT TEST PHOTO	106

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Apr. 27, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission		
Standard(s)	Test Item	Result
EN 55032:2015/ CISPR 32:2015 EN 55032:2015+AC:2016/ CISPR 32:2015+cor1:2016 EN 55032:2015+A11:2020 BS EN 55032:2015+A11:2020	Radiated emissions up to 1 GHz	PASS
	Radiated emissions above 1 GHz	PASS
	Radiated emissions from FM receivers	N/A
	Conducted emissions AC mains power port	PASS
	Asymmetric mode conducted emissions	AAN
		Current Probe
		CP+CVP
	Conducted differential voltage emissions	N/A

Standard(s)	Test Item	Result
IEC 61000-3-2:2014 / EN 61000-3-2:2014 IEC 61000-3-2:2018 / EN IEC 61000-3-2:2019 BS EN IEC 61000-3-2:2019	Harmonic current	PASS
IEC 61000-3-3:2013 / EN 61000-3-3:2013 IEC 61000-3-3:2013+A1:2017 / EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A1:2019	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017/ CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017+A11:2020	IEC 61000-4-2:2008 / EN 61000-4-2:2009	ESD	PASS
	IEC 61000-4-3:2006+A1:2007+A2:2010 EN 61000-4-3:2006+A1:2008+A2:2010	RS	PASS
	IEC 61000-4-4:2012 / EN 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+A1:2017 EN 61000-4-5:2014+A1:2017	Surge	PASS
	IEC 61000-4-6:2013 EN 61000-4-6:2014+AC:2015	CS	PASS
	IEC 61000-4-8:2009 / EN 61000-4-8:2010	PFMF	PASS
	IEC 61000-4-11:2004+A1:2017 EN 61000-4-11:2004+A1:2017	Dips	PASS

EN 55035:2017/ CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017+A11:2020	4.2.7	Broadband impulse noise disturbances,repetitive	N/A
	4.2.7	Broadband impulse noise disturbances,isolated	N/A

NOTE:

(1) "N/A" denotes test is not applicable to this device.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.44
		30MHz ~ 200MHz	H	3.44
		200MHz ~ 1,000MHz	V	4.28
		200MHz ~ 1,000MHz	H	3.52

B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-CB08 (3m)	CISPR	1GHz ~ 6GHz	4.36

C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-C01	CISPR	150kHz ~ 30MHz	3.18

D. Harmonic/ Flicker Measurement:

Test Site	Method	Item	U (%)
DG-C01	EN 61000-3-2	Current	0.593
	EN 61000-3-3	Voltage	0.595

E. Immunity Measurement:

Test Site	Method	Item	U
DG-SR02	IEC 61000-4-2	Rise time tr	6.80%
		Peak current Ip	6.30%
		Current at 30 ns	6.50%
		Current at 60 ns	6.90%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.38dB
		On-ear acoustic & Acoustic measurements on loudspeakers	2.40dB
		Electrical measurements	2.40dB
DG-SR05	IEC 61000-4-4	Peak voltage (V _P)	3.7%
		Rise time (tr)	4.4%
		Pulse width(tw)	4.1%
		Pulse Freq.(kHz)	0.8%
		Burst Duration(ms)	1.4%
		Burst Period(ms)	1.4%
DG-SR05	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	3.8%
		Open circuit front time (1.2/50us)	6.3%
		Open circuit time of half value (1.2/50us)	4.6%
DG-CB06	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.32dB
		EM clamp	3.16dB
		On-ear acoustic & Acoustic measurements on loudspeakers	1.36dB
		Electrical measurements	1.34dB
DG-SR05	IEC 61000-4-8	Magnetic Field Strength	2.38%
DG-SR05	IEC 61000-4-11	DIP Amplitude	0.5%
		DIP Time Event	3%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By
Radiated emissions up to 1 GHz	25°C	60%	Albe Zhou
Radiated emissions above 1 GHz	25°C	60%	Albe Zhou
Conducted emissions AC mains power port	25°C	53%	Heng Lao
Harmonic current	25°C	55%	Heng Lao
Voltage fluctuations (Flicker)	25°C	55%	Heng Lao

Test Item	Temperature	Humidity	Pressure	Tested By
ESD	22°C	45%	1010hPa	Rich Ye
RS	22°C	50%	/	Hunter Xu
EFT	22°C	50%	/	Celina Lai
Surge	22°C	50%	/	Celina Lai
CS	22°C	50%	/	Daniel Li
PFMF	22°C	50%	/	Daniel Li
Dips	22°C	50%	/	Daniel Li

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	LCD Monitor
Brand Name	N/A
Test Model	**32G3*****(*=0-9,A-Z,a-z,+, -, /, \ or blank)
Series Model	N/A
Model Difference(s)	N/A
Power Source	AC Mains
Power Rating	100-240V~ 50-60Hz
Connecting I/O Port(s)	1* AC port 1* DP port 2* HDMI port 1* Earphone port
Classification Of EUT	Class B
Highest Internal Frequency(Fx)	380.96MHz

Cable Type	Shielded Type	Ferrite Core	Length(m)	Note
AC Power Cord	Shielded	NO	1.8/1.5	1.8m is worst case Detachable
HDMI	Shielded	YES	1.8/1.5	-
DP	Shielded	NO	1.8/1.5	-

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Power cable 1.8m, 1.5m length, worst case is Power cable 1.8m with HDMI+DP length testing and recording in test report.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	DP 1920*1080/160Hz 1.8m
Mode 2	HDMI1 1920*1080/144Hz 1.8m
Mode 3	HDMI2 1920*1080/144Hz 1.8m
Mode 4	HDMI1 1080P 1.8m
Mode 5	HDMI2 1080P 1.8m
Mode 6	HDMI1 1280*1024/75Hz 1.8m
Mode 7	HDMI1 640*480/75Hz 1.8m
Mode 8	HDMI1 1920*1080/144Hz 1.5m
Mode 9	HDMI1 1920*1080/144Hz 1.8m (Without earphone)

Radiated emissions up to 1 GHz test	
Final Test Mode	Description
Mode 2	HDMI1 1920*1080/144Hz 1.8m
Mode 3	HDMI2 1920*1080/144Hz 1.8m
Mode 4	HDMI1 1080P 1.8m
Mode 9	HDMI1 1920*1080/144Hz 1.8m (Without earphone)

Radiated emissions Above 1 GHz test	
Final Test Mode	Description
Mode 2	HDMI1 1920*1080/144Hz 1.8m
Mode 3	HDMI2 1920*1080/144Hz 1.8m
Mode 4	HDMI1 1080P 1.8m
Mode 9	HDMI1 1920*1080/144Hz 1.8m (Without earphone)

Conducted emissions AC mains power port test	
Final Test Mode	Description
Mode 2	HDMI1 1920*1080/144Hz 1.8m
Mode 3	HDMI2 1920*1080/144Hz 1.8m
Mode 4	HDMI1 1080P 1.8m

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 2	HDMI1 1920*1080/144Hz 1.8m

Immunity Test	
Final Test Mode	Description
Mode 1	DP 1920*1080/160Hz 1.8m
Mode 2	HDMI1 1920*1080/144Hz 1.8m
Mode 3	HDMI2 1920*1080/144Hz 1.8m
Mode 4	HDMI1 1080P 1.8m
Mode 5	HDMI2 1080P 1.8m
Mode 8	HDMI1 1920*1080/144Hz 1.5m

Evaluation description:


1. The maximum resolution is evaluated Mode 1-5. The worst case is Mode 1 and evaluated the middle and low resolution Mode 6 and Mode 7.
2. According to the client's requirement, choose Mode 2, Mode 3, Mode 4 and recorded in test report.
3. RS Acoustic: The Front, Rear, Left and Right were evaluated. The worst placement direction is Front and recorded in this report.

2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. EUT connected to PC via HDMI&DP cable.
2. EUT connected to Earphone via Earphone cable.
3. Mouse and Keyboard connected to PC via USB cable.

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

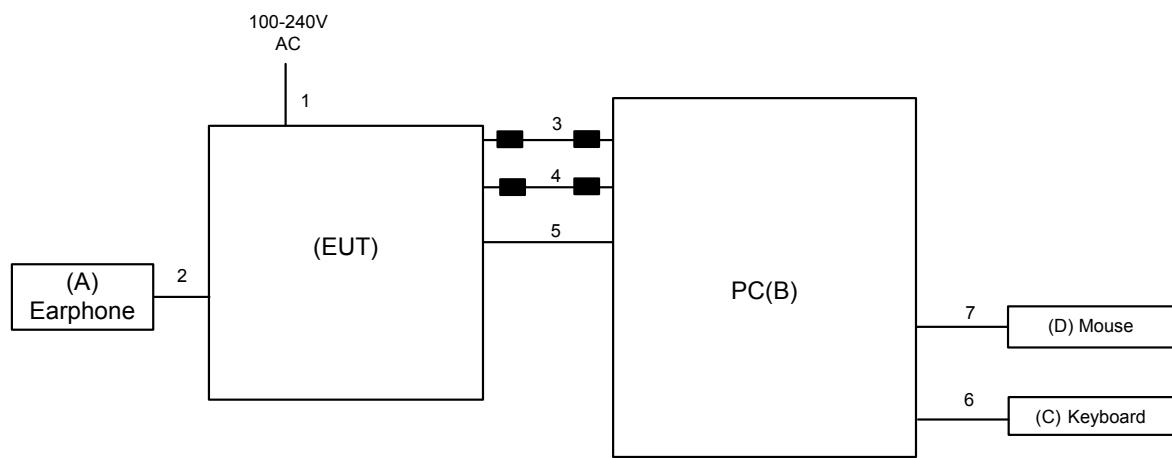

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Earphone	APPLE	N/A	N/A
B	PC	DELL	Vostro 470	28747261333
C	Keyboard	DELL	KB212-B	CN0HTXH97158125004DXA01
D	Mouse	Lenovo	M-SBF96	8B4643223001509

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	AC Cable	YES	NO	1.8m/1.5m
2	Earphone Cable	NO	NO	1.2m
3	HDMI Cable	YES	YES	1.8m/1.5m
4	HDMI Cable	YES	YES	1.8m/1.5m
5	DP Cable	YES	NO	1.8m/1.5m
6	USB Cable	YES	NO	1.8m
7	USB Cable	YES	NO	1.8m

3. EMC EMISSION TEST- EN55032:2015

3.1 RADIATED EMISSION UP TO 1 GHZ

3.1.1 LIMITS

Class B equipment up to 1000MHz

Frequency MHz	Measurement		Class B limit dB(uV/m)
	Distance m	Detector type/bandwidth	SAC
30-230	10	Quasi peak / 120 kHz	30
230-1000			37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jul. 25, 2021
2	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	Dec. 13, 2021
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	Dec. 13, 2021
4	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	946	Oct. 16, 2021
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 09, 2021
6	Cable	emci	LMR-400 (5m+8m+8m)	N/A	Jan. 06, 2022
7	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
8	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
9	Attenuator	EMCI	EMCI-N-6-06	N0670	Nov. 09, 2021
10	Attenuator	EMCI	EMCI-N-6-06	N0671	Oct. 16, 2021

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.1.3 TEST PROCEDURE

- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz).
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1GHz)
- g. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

3.1.4 DEVIATION FROM TEST STANDARD


No deviation

3.1.5 TEST SETUP

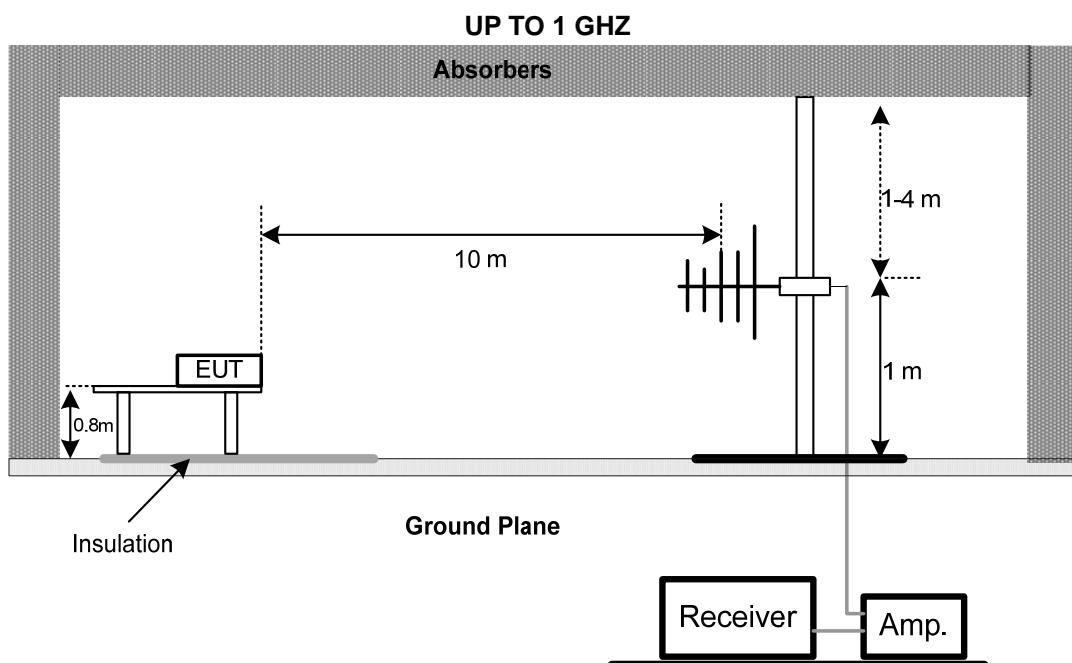

Note: The antenna can be moved between 1 to 4 meters above the ground.

3.1.6 MEASUREMENT DISTANCE

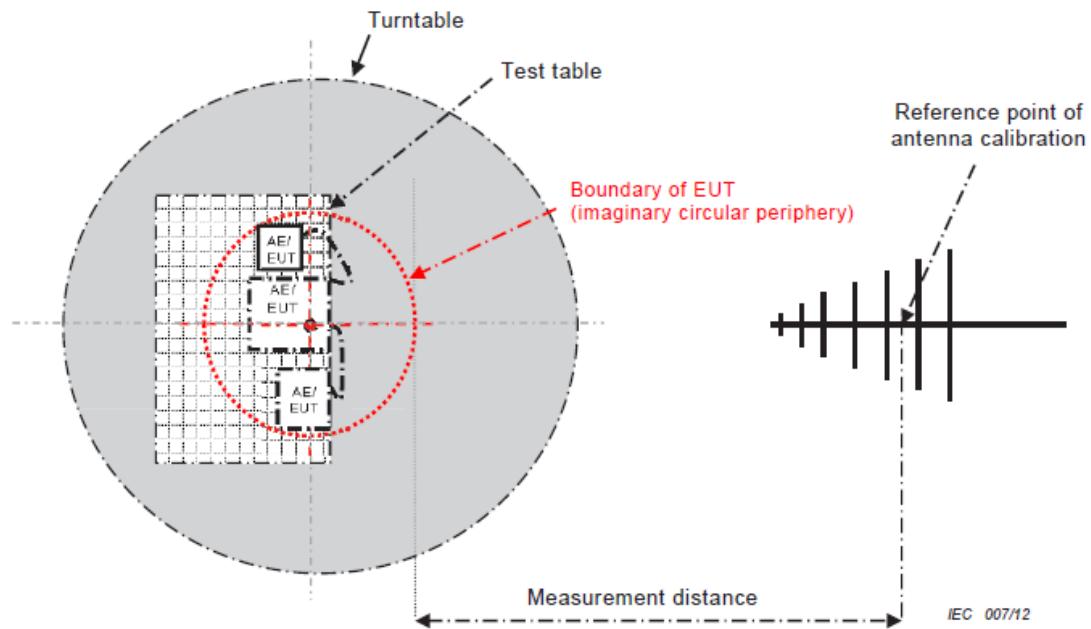

- 34 -

CISPR 32 © IEC:2012


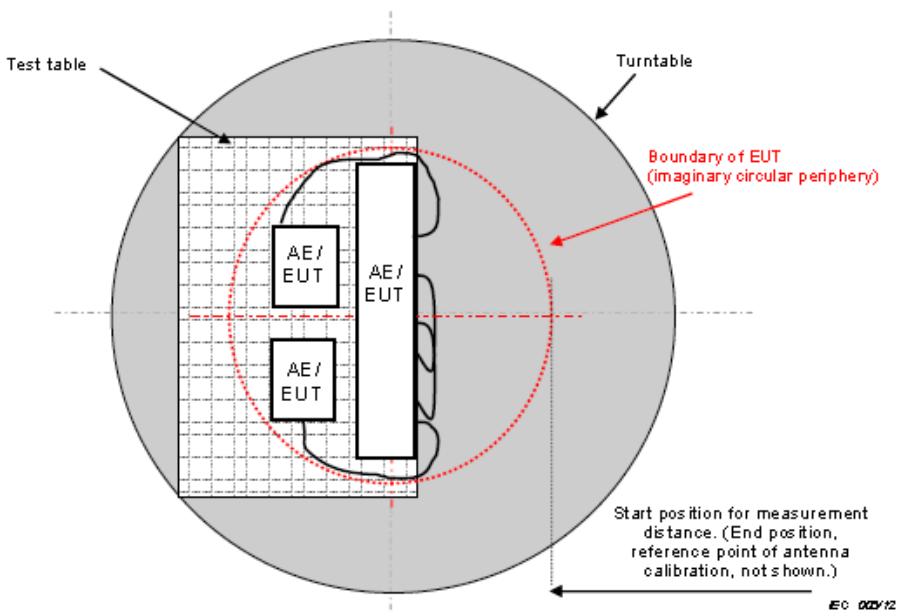


Figure C.2 – Boundary of EUT, Local AE and associated cabling


3.1.7 TEST RESULTS (UP TO 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

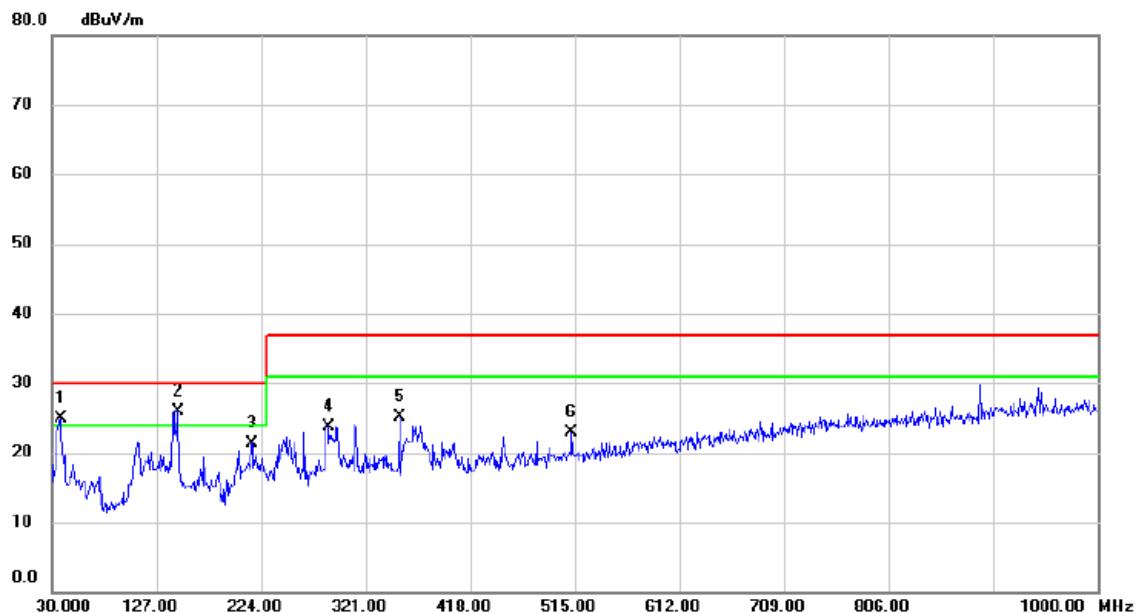


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	37.7600	43.61	-18.67	24.94	30.00	-5.06	QP	
2	*	146.4000	43.10	-17.15	25.95	30.00	-4.05	QP	
3		215.2700	40.72	-19.38	21.34	30.00	-8.66	QP	
4		286.0800	39.47	-15.68	23.79	37.00	-13.21	QP	
5		352.0400	39.40	-14.23	25.17	37.00	-11.83	QP	
6		512.0900	33.46	-10.57	22.89	37.00	-14.11	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

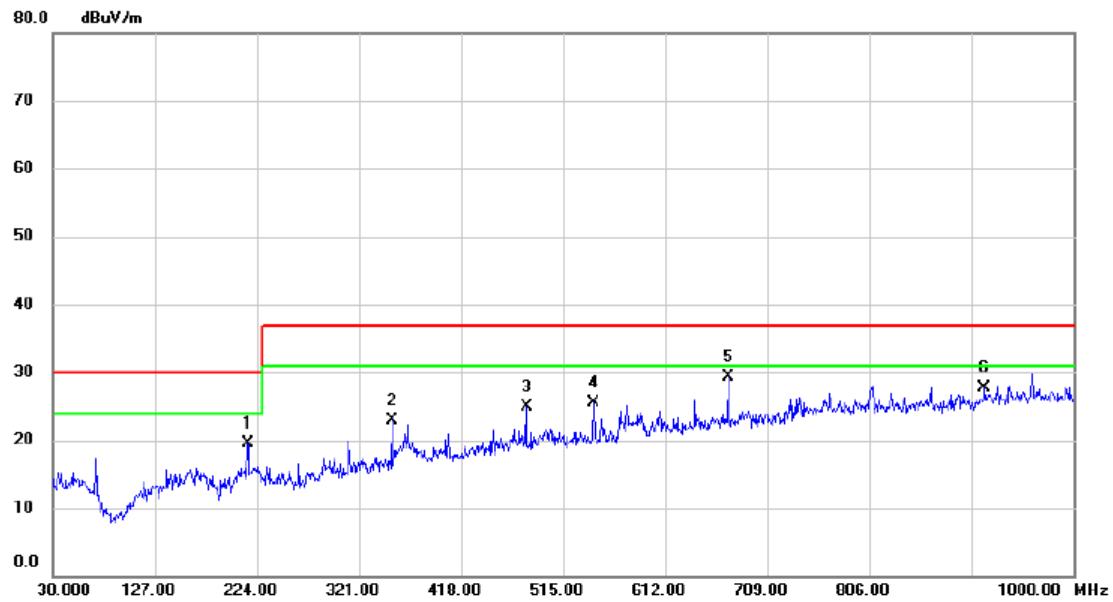


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dB _{UV}	dB	dB _{UV} /m	dB _{UV} /m	dB		
1		215.2700	36.81	-17.34	19.47	30.00	-10.53	QP	
2		352.0400	36.84	-13.84	23.00	37.00	-14.00	QP	
3		480.0800	35.57	-10.75	24.82	37.00	-12.18	QP	
4		544.1000	35.51	-10.02	25.49	37.00	-11.51	QP	
5	*	672.1400	37.25	-8.01	29.24	37.00	-7.76	QP	
6		915.6100	33.29	-5.59	27.70	37.00	-9.30	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 3		

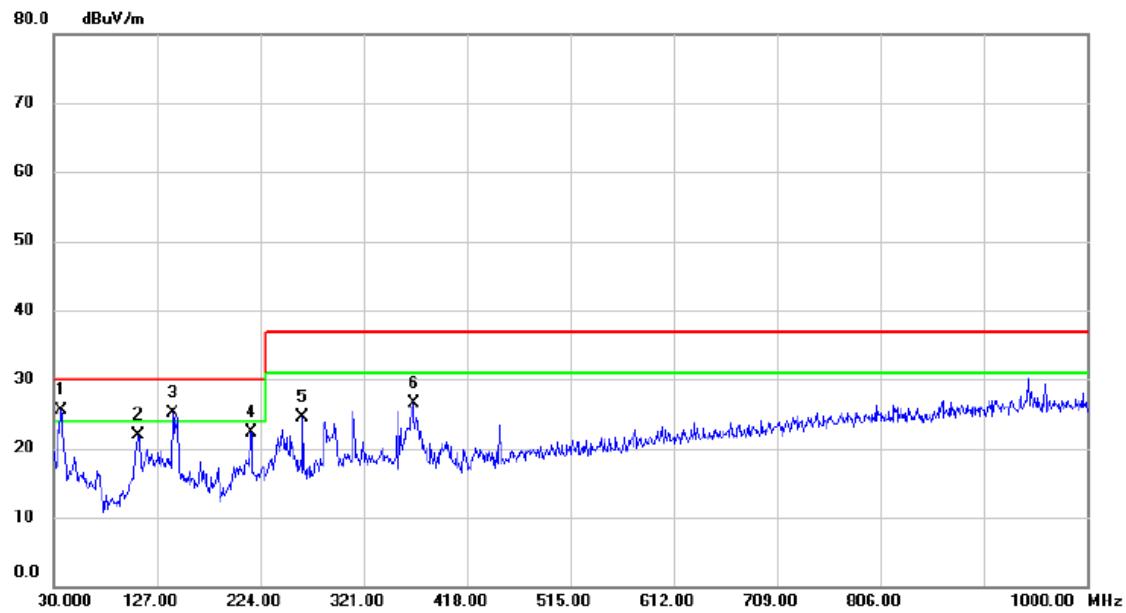


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	36.7900	44.30	-18.74	25.56	30.00	-4.44	QP	
2		109.5400	42.56	-20.57	21.99	30.00	-8.01	QP	
3	!	141.5500	42.57	-17.44	25.13	30.00	-4.87	QP	
4		215.2700	41.61	-19.38	22.23	30.00	-7.77	QP	
5		263.7700	41.17	-16.74	24.43	37.00	-12.57	QP	
6		367.5600	40.26	-13.80	26.46	37.00	-10.54	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 3		

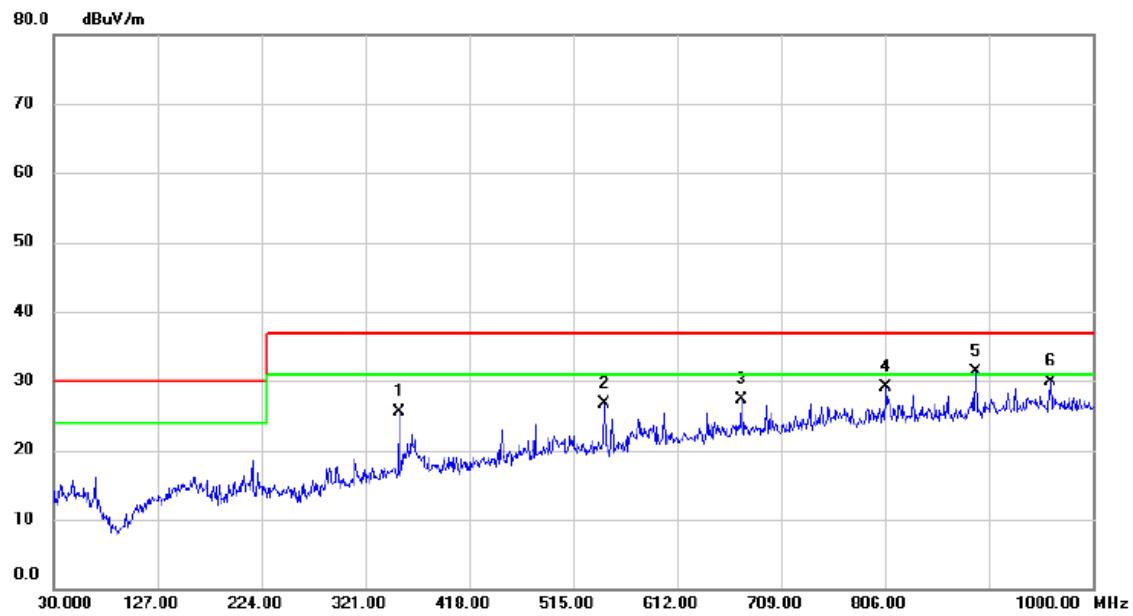


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		352.0400	39.28	-13.84	25.44	37.00	-11.56	QP	
2		544.1000	36.75	-10.02	26.73	37.00	-10.27	QP	
3		672.1400	35.33	-8.01	27.32	37.00	-9.68	QP	
4		806.9700	35.59	-6.50	29.09	37.00	-7.91	QP	
5	*	890.3900	37.37	-6.09	31.28	37.00	-5.72	QP	
6		960.2300	34.52	-4.69	29.83	37.00	-7.17	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 4		

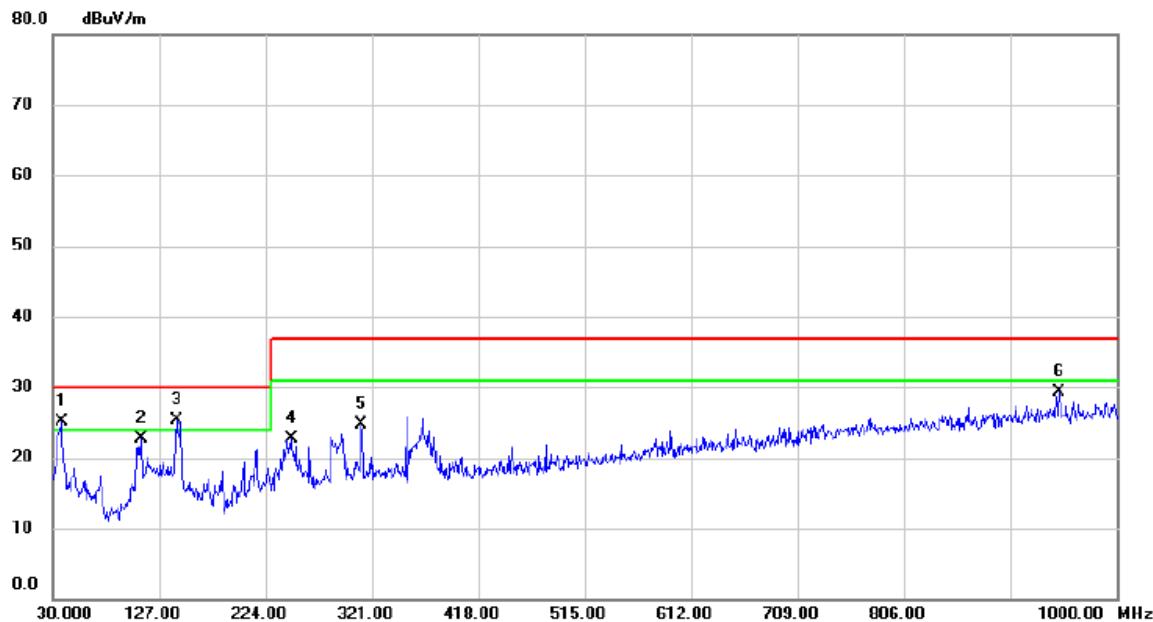


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level						
		MHz	dBuV		dBuV/m	dBuV/m	dB		
1	!	37.7600	43.75	-18.67	25.08	30.00	-4.92	QP	
2		110.5100	43.14	-20.49	22.65	30.00	-7.35	QP	
3	*	142.5200	42.74	-17.38	25.36	30.00	-4.64	QP	
4		247.2800	39.93	-17.23	22.70	37.00	-14.30	QP	
5		311.3000	39.84	-15.09	24.75	37.00	-12.25	QP	
6		947.6200	34.89	-5.55	29.34	37.00	-7.66	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 4		

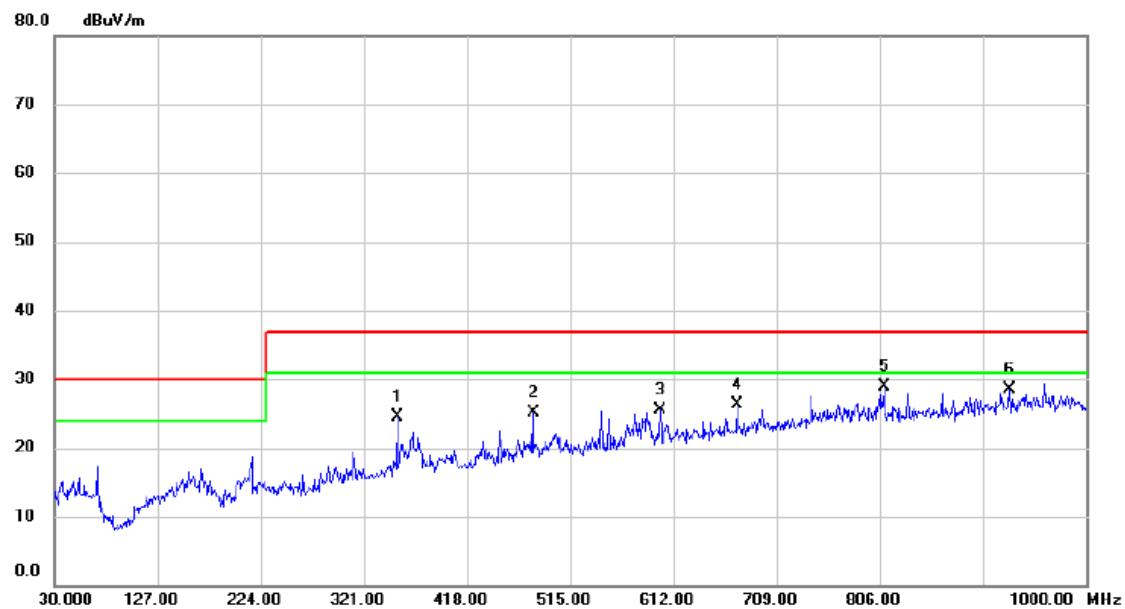


No.	Mk.	Reading		Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV						
1	352.0400	38.25	-13.84	24.41	37.00	-12.59	QP		
2	480.0800	35.80	-10.75	25.05	37.00	-11.95	QP		
3	599.8750	34.22	-8.67	25.55	37.00	-11.45	QP		
4	672.1400	34.38	-8.01	26.37	37.00	-10.63	QP		
5 *	809.8800	35.39	-6.50	28.89	37.00	-8.11	QP		
6	928.2200	33.83	-5.28	28.55	37.00	-8.45	QP		

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 9		

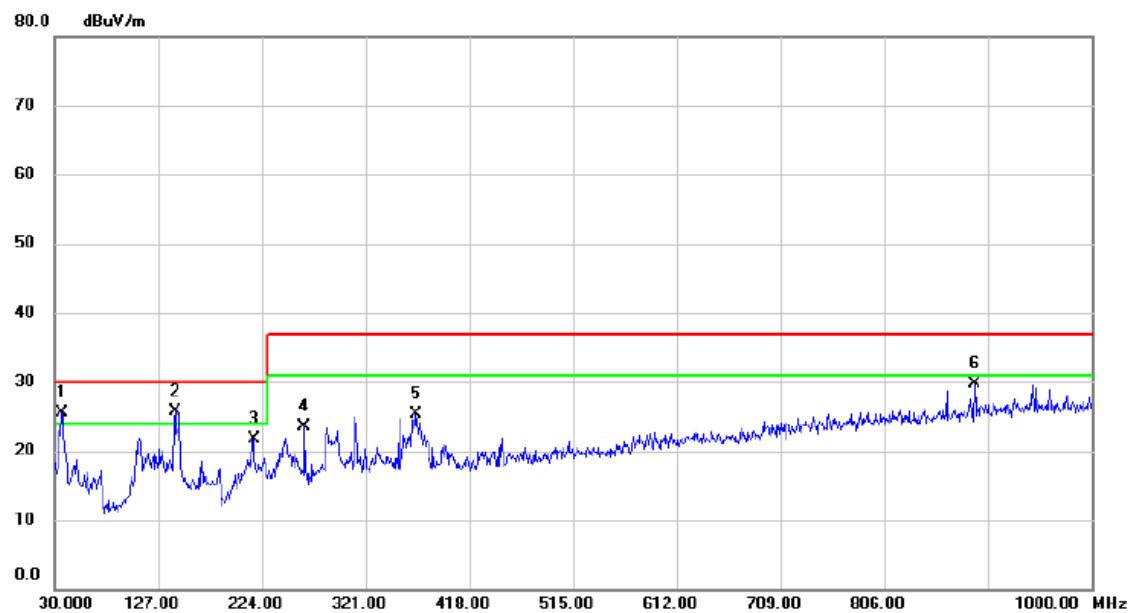


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	!	36.7900	44.33	-18.74	25.59	30.00	-4.41	QP	
2	*	142.5200	43.14	-17.38	25.76	30.00	-4.24	QP	
3		216.2400	41.07	-19.38	21.69	30.00	-8.31	QP	
4		263.7700	40.34	-16.74	23.60	37.00	-13.40	QP	
5		368.5300	39.14	-13.77	25.37	37.00	-11.63	QP	
6		890.3900	36.12	-6.43	29.69	37.00	-7.31	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 9		

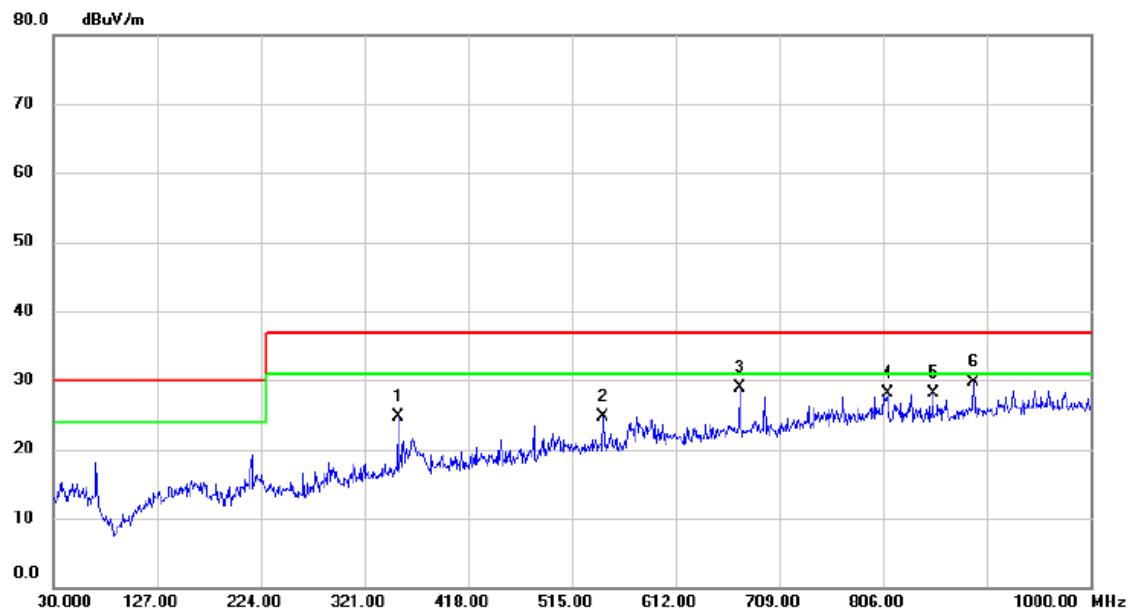


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		352.0400	38.47	-13.84	24.63	37.00	-12.37	QP	
2		544.1000	34.77	-10.02	24.75	37.00	-12.25	QP	
3		672.1400	36.88	-8.01	28.87	37.00	-8.13	QP	
4		809.8800	34.58	-6.50	28.08	37.00	-8.92	QP	
5		852.5600	34.71	-6.55	28.16	37.00	-8.84	QP	
6	*	890.3900	35.73	-6.09	29.64	37.00	-7.36	QP	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 2		

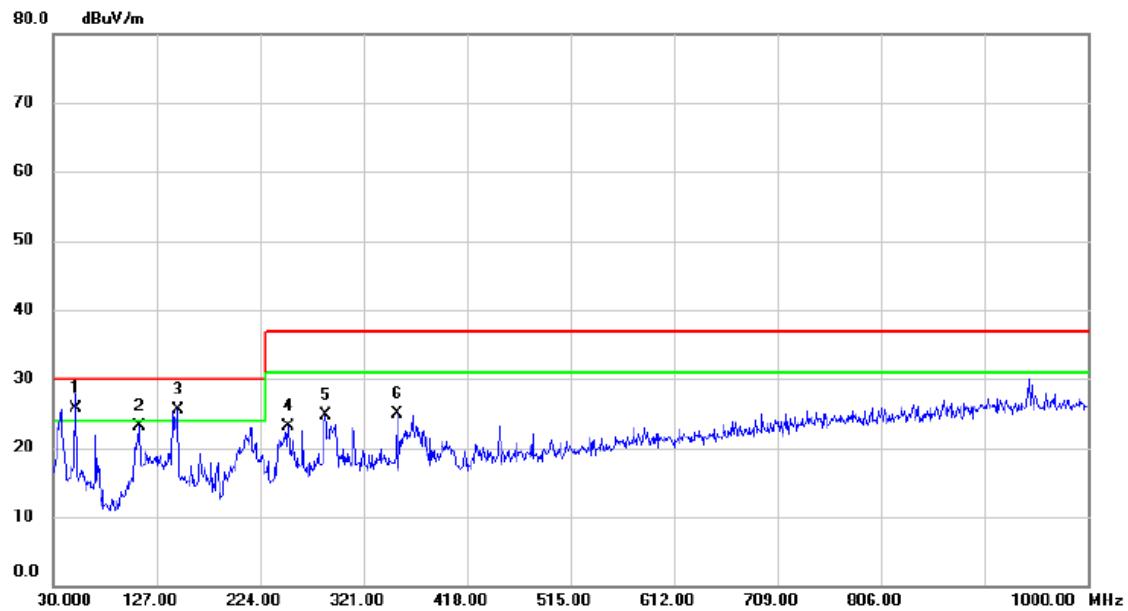

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	51.3400	43.33	-17.70	25.63	30.00	-4.37	QP	
2		110.5100	43.60	-20.49	23.11	30.00	-6.89	QP	
3	!	147.3700	42.64	-17.09	25.55	30.00	-4.45	QP	
4		250.1900	40.21	-17.17	23.04	37.00	-13.96	QP	
5		285.1100	40.42	-15.70	24.72	37.00	-12.28	QP	
6		352.0400	39.18	-14.23	24.95	37.00	-12.05	QP	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 2		

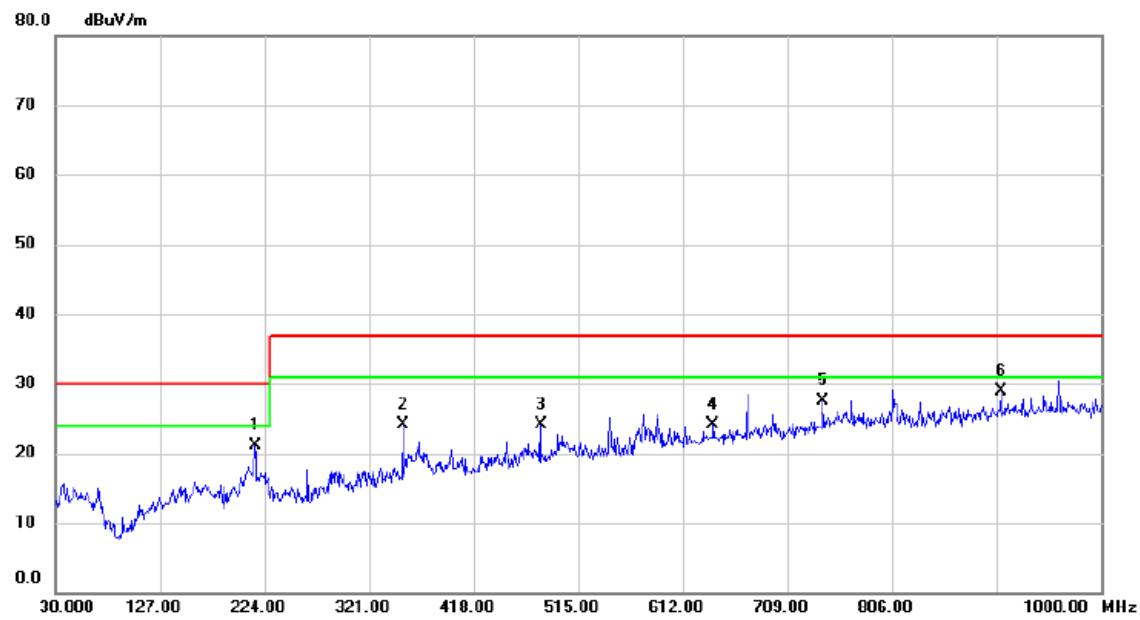

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
1		215.2700	38.41	-17.34	21.07	30.00	-8.93	QP
2		352.0400	37.97	-13.84	24.13	37.00	-12.87	QP
3		480.0800	34.91	-10.75	24.16	37.00	-12.84	QP
4		640.1300	32.29	-8.27	24.02	37.00	-12.98	QP
5		741.9800	34.61	-7.10	27.51	37.00	-9.49	QP
6	*	906.8800	34.62	-5.81	28.81	37.00	-8.19	QP

3.2 RADIATED EMISSION ABOVE 1 GHZ

3.2.1 LIMITS

Class B equipment above 1000MHz

Frequency MHz	Measurement		Class B limit dB(uV/m)
	Distance m	Detector type/bandwidth	FSOATS
1000-3000	3	Average / 1 MHz	50
3000-6000			54
1000-3000		Peak / 1 MHz	70
3000-6000			74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F_x) MHz	Highest measured frequency MHz
$F_x \leq 108$	1000
$108 < F_x \leq 500$	2000
$500 < F_x \leq 1000$	5000
$F_x > 1000$	5 th up to a maximum 6 GHz,

Note for FM and TV broadcast receiver, F_x is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	May 12, 2021
2	Amplifier	Agilent	8449B	3008A02333	Feb. 28, 2022
3	MXE EMI Receiver	Agilent	N9038A	MY53220133	Feb. 28, 2022
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	Mlcable Inc.	B10-01-01-5M	18047123	Jan. 06, 2022
8	Cable	Mlcable Inc.	B10-01-01-12M	18072743	Jan. 06, 2022
9	Cable	RegalWay	RWLPS50-7.9A-SMSM-1M	20200102 001	Jan. 06, 2022

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.

3.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- f. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

3.2.4 DEVIATION FROM TEST STANDARD


No deviation

3.2.5 TEST SETUP

ABOVE 1 GHZ

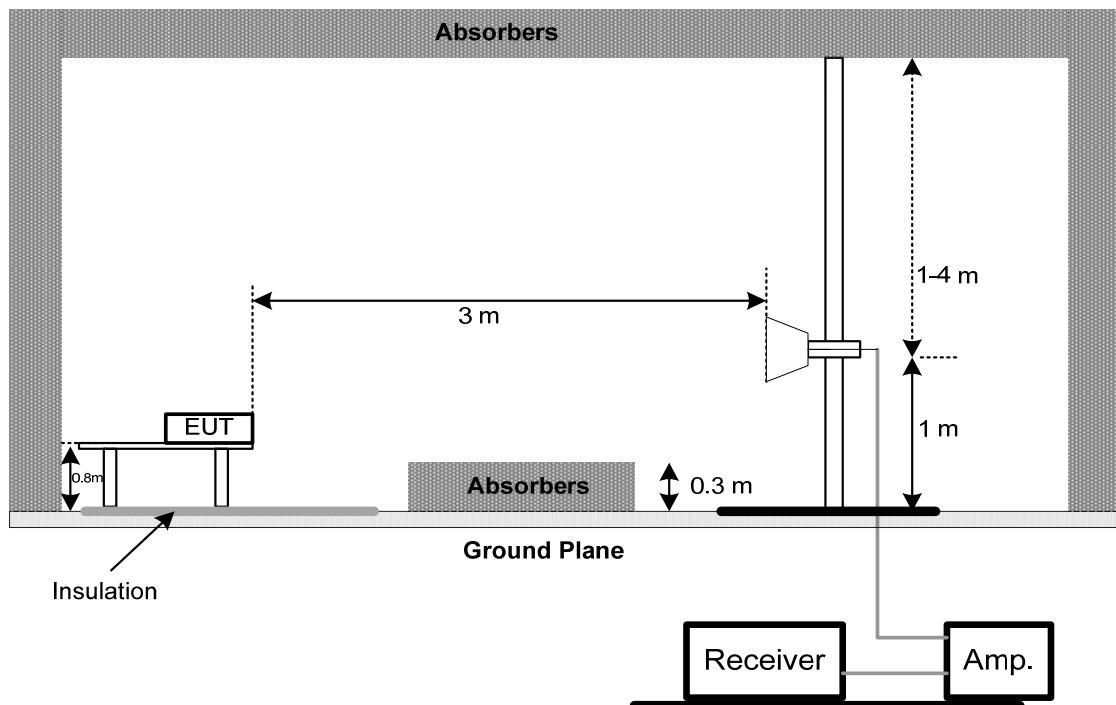

3.2.6 MEASUREMENT DISTANCE

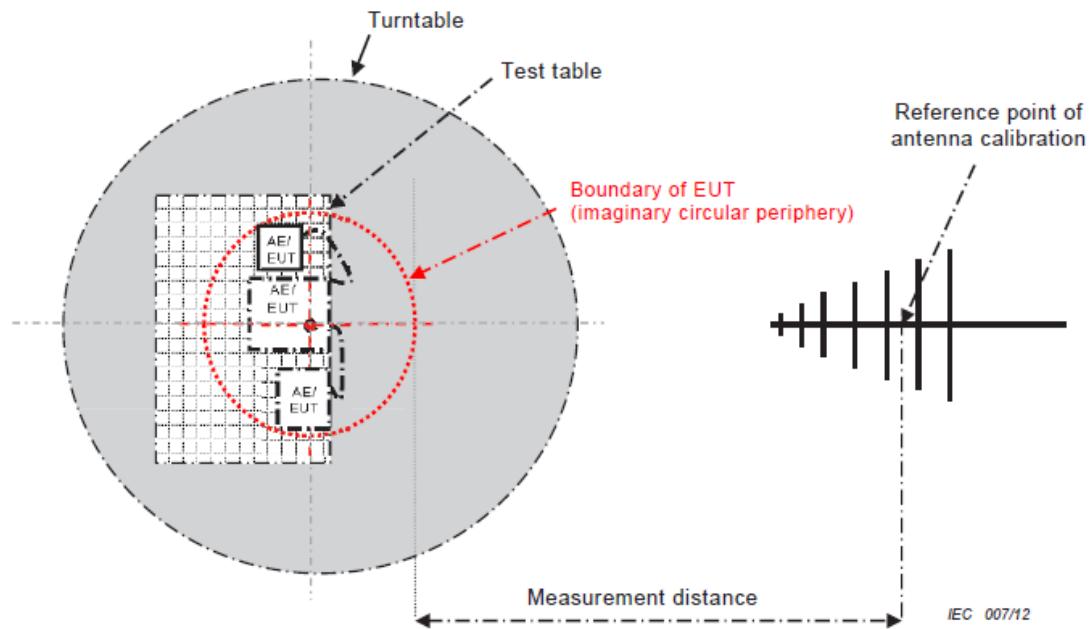

- 34 -

CISPR 32 © IEC:2012


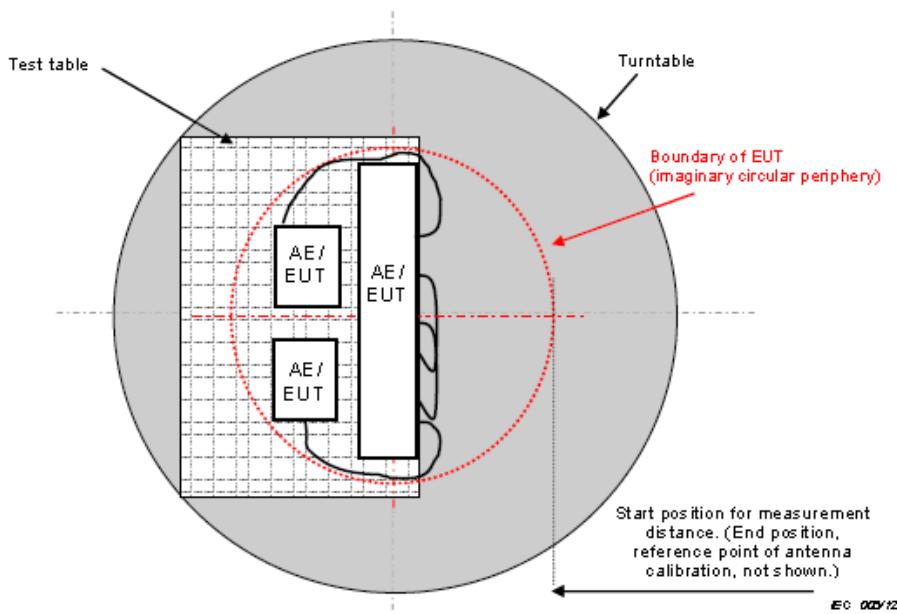


Figure C.2 – Boundary of EUT, Local AE and associated cabling


3.2.7 TEST RESULTS (ABOVE 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

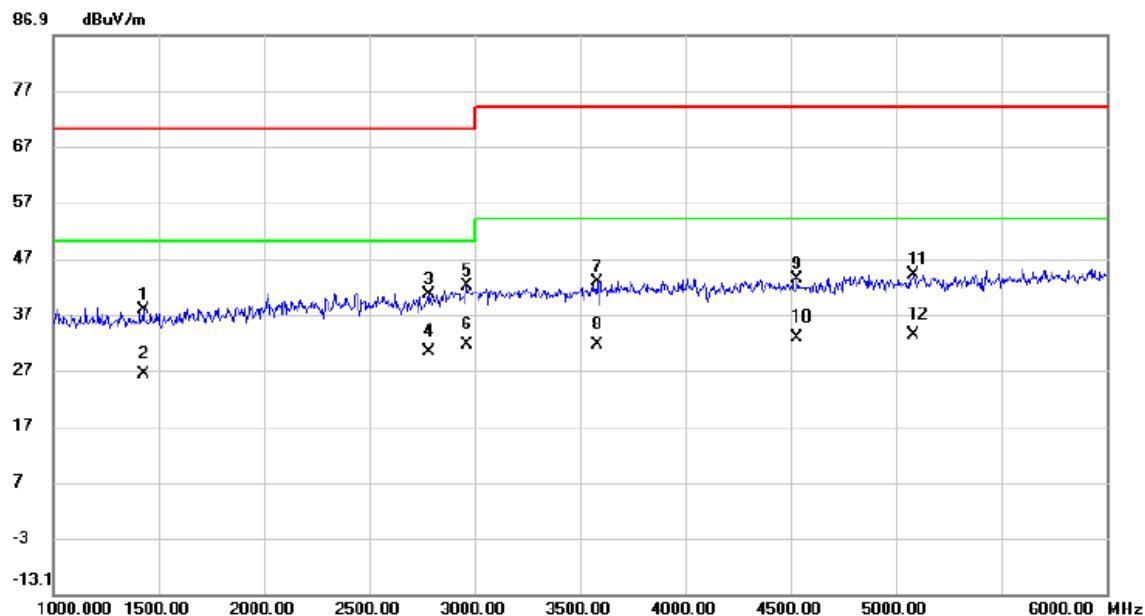


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
MHz		dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
1	1427.500	41.06	-3.31	37.75	70.00	-32.25	peak	
2	1427.500	29.66	-3.31	26.35	50.00	-23.65	AVG	
3	2780.000	37.26	3.34	40.60	70.00	-29.40	peak	
4	2780.000	26.91	3.34	30.25	50.00	-19.75	AVG	
5	2965.000	37.90	4.21	42.11	70.00	-27.89	peak	
6 *	2965.000	27.39	4.21	31.60	50.00	-18.40	AVG	
7	3580.000	36.59	6.28	42.87	74.00	-31.13	peak	
8	3580.000	25.35	6.28	31.63	54.00	-22.37	AVG	
9	4530.000	34.20	9.16	43.36	74.00	-30.64	peak	
10	4530.000	23.50	9.16	32.66	54.00	-21.34	AVG	
11	5085.000	33.65	10.38	44.03	74.00	-29.97	peak	
12	5085.000	22.98	10.38	33.36	54.00	-20.64	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

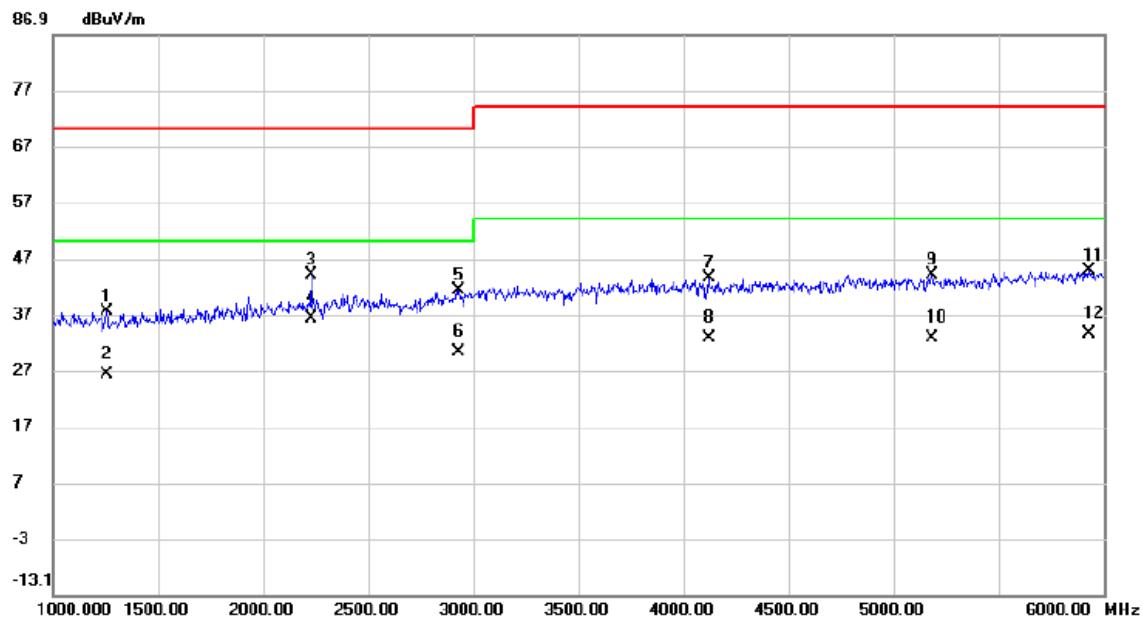


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		1255.000	41.57	-4.04	37.53	70.00	-32.47	peak	
2		1255.000	30.37	-4.04	26.33	50.00	-23.67	AVG	
3		2227.500	42.89	1.04	43.93	70.00	-26.07	peak	
4	*	2227.500	35.30	1.04	36.34	50.00	-13.66	AVG	
5		2930.000	37.36	4.04	41.40	70.00	-28.60	peak	
6		2930.000	26.21	4.04	30.25	50.00	-19.75	AVG	
7		4122.500	34.99	8.46	43.45	74.00	-30.55	peak	
8		4122.500	24.23	8.46	32.69	54.00	-21.31	AVG	
9		5182.500	33.30	10.63	43.93	74.00	-30.07	peak	
10		5182.500	22.22	10.63	32.85	54.00	-21.15	AVG	
11		5927.500	31.80	12.91	44.71	74.00	-29.29	peak	
12		5927.500	20.57	12.91	33.48	54.00	-20.52	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 3		

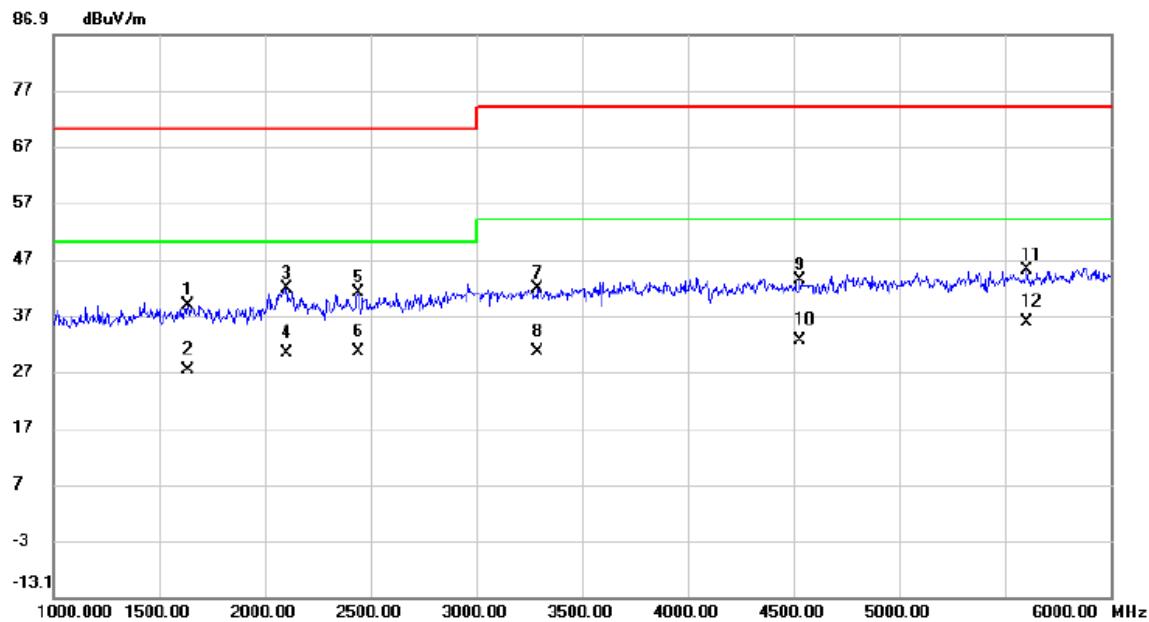


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1635.000	40.81	-2.12	38.69	70.00	-31.31	peak
2		1635.000	29.50	-2.12	27.38	50.00	-22.62	AVG
3		2102.500	41.18	0.60	41.78	70.00	-28.22	peak
4		2102.500	29.66	0.60	30.26	50.00	-19.74	AVG
5		2442.500	39.12	1.81	40.93	70.00	-29.07	peak
6		2442.500	28.77	1.81	30.58	50.00	-19.42	AVG
7		3290.000	36.48	5.26	41.74	74.00	-32.26	peak
8		3290.000	25.33	5.26	30.59	54.00	-23.41	AVG
9		4530.000	34.20	9.16	43.36	74.00	-30.64	peak
10		4530.000	23.48	9.16	32.64	54.00	-21.36	AVG
11		5600.000	33.22	11.78	45.00	74.00	-29.00	peak
12	*	5600.000	24.11	11.78	35.89	54.00	-18.11	AVG

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 3		

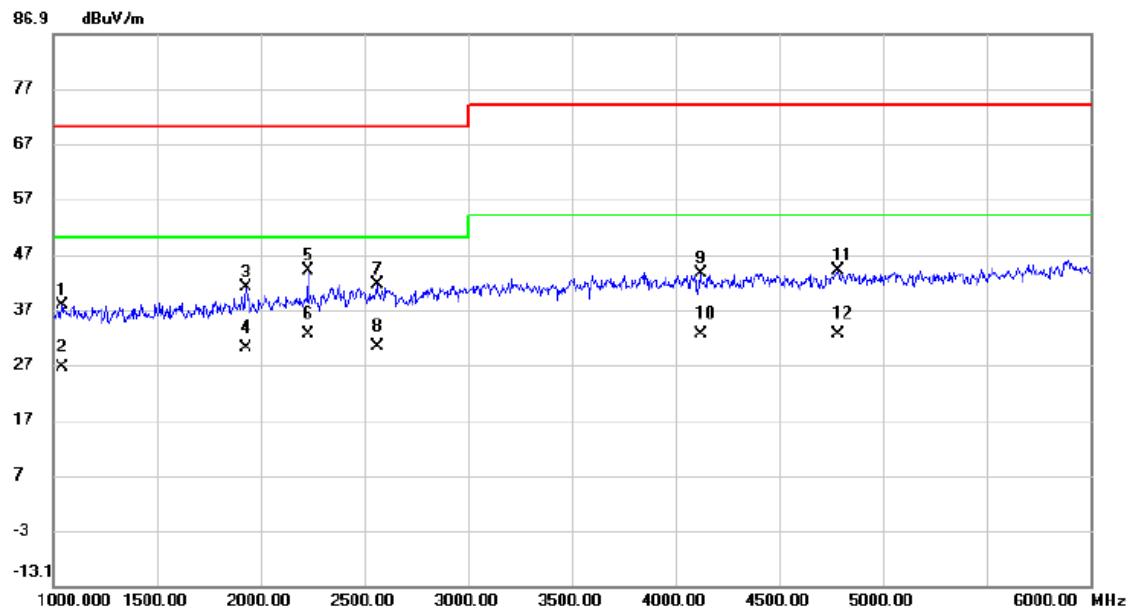


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1040.000	42.62	-4.96	37.66	70.00	-32.34	peak
2		1040.000	31.55	-4.96	26.59	50.00	-23.41	AVG
3		1930.000	41.20	-0.22	40.98	70.00	-29.02	peak
4		1930.000	30.37	-0.22	30.15	50.00	-19.85	AVG
5		2227.500	42.89	1.04	43.93	70.00	-26.07	peak
6	*	2227.500	31.48	1.04	32.52	50.00	-17.48	AVG
7		2560.000	39.26	2.30	41.56	70.00	-28.44	peak
8		2560.000	28.06	2.30	30.36	50.00	-19.64	AVG
9		4122.500	34.99	8.46	43.45	74.00	-30.55	peak
10		4122.500	24.17	8.46	32.63	54.00	-21.37	AVG
11		4785.000	34.20	9.71	43.91	74.00	-30.09	peak
12		4785.000	22.77	9.71	32.48	54.00	-21.52	AVG

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 4		

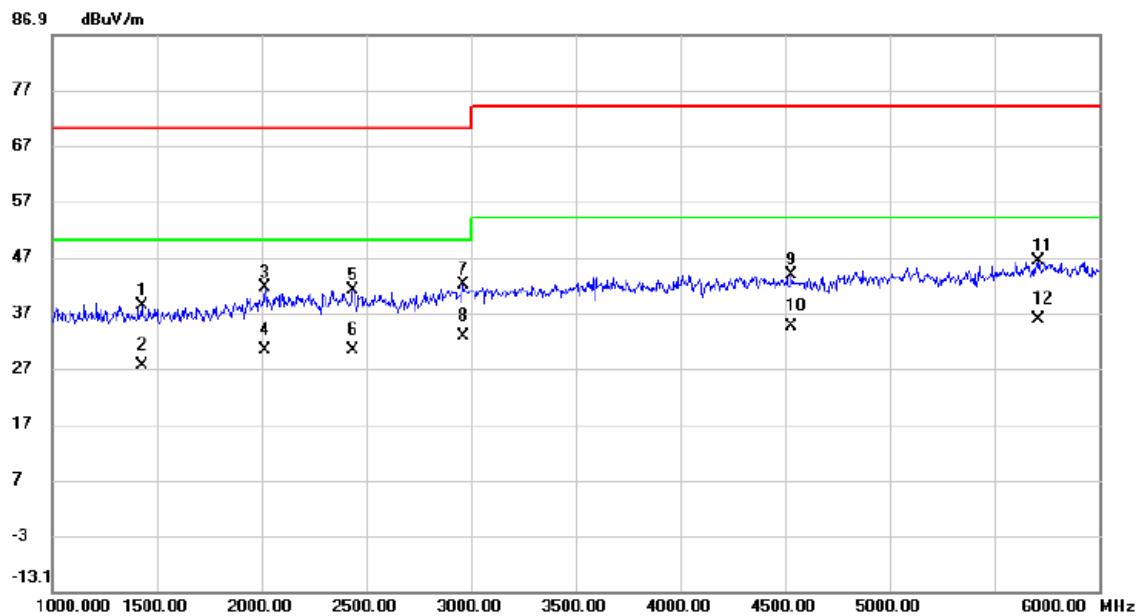


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1427.500	41.56	-3.31	38.25	70.00	-31.75	peak
2		1427.500	30.77	-3.31	27.46	50.00	-22.54	AVG
3		2015.000	41.32	0.28	41.60	70.00	-28.40	peak
4		2015.000	29.98	0.28	30.26	50.00	-19.74	AVG
5		2435.000	39.32	1.79	41.11	70.00	-28.89	peak
6		2435.000	28.46	1.79	30.25	50.00	-19.75	AVG
7		2965.000	37.90	4.21	42.11	70.00	-27.89	peak
8	*	2965.000	28.45	4.21	32.66	50.00	-17.34	AVG
9		4530.000	34.70	9.16	43.86	74.00	-30.14	peak
10		4530.000	25.43	9.16	34.59	54.00	-19.41	AVG
11		5710.000	34.24	12.15	46.39	74.00	-27.61	peak
12		5710.000	23.71	12.15	35.86	54.00	-18.14	AVG

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 4		

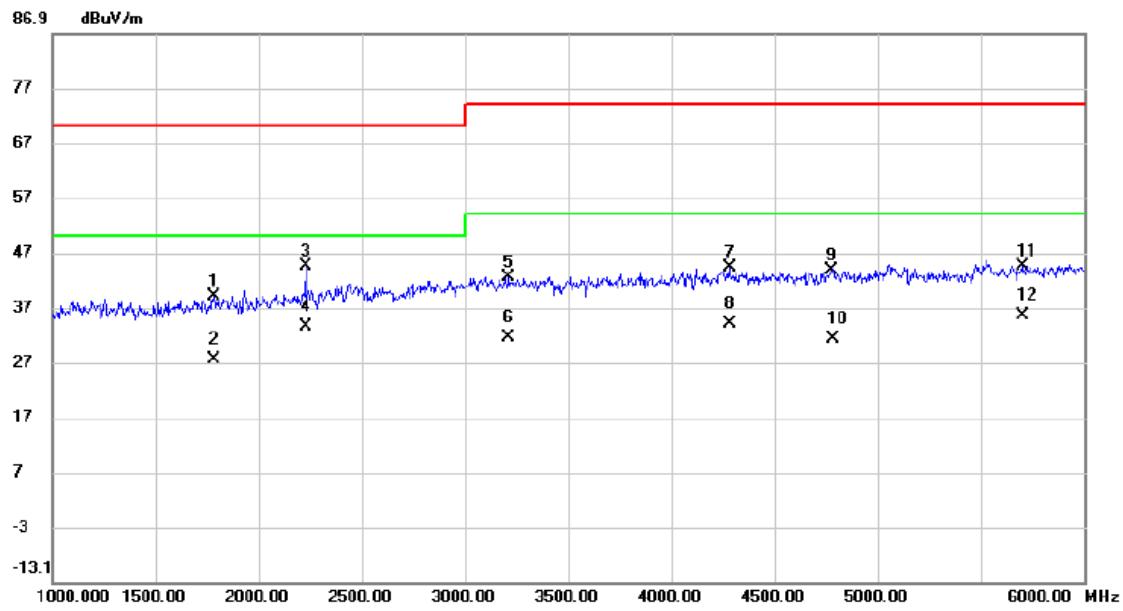


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1780.000	40.12	-1.18	38.94	70.00	-31.06	peak	
2		1780.000	28.82	-1.18	27.64	50.00	-22.36	AVG	
3		2227.500	43.39	1.04	44.43	70.00	-25.57	peak	
4	*	2227.500	32.60	1.04	33.64	50.00	-16.36	AVG	
5		3210.000	37.58	5.01	42.59	74.00	-31.41	peak	
6		3210.000	26.57	5.01	31.58	54.00	-22.42	AVG	
7		4282.500	35.53	8.74	44.27	74.00	-29.73	peak	
8		4282.500	25.21	8.74	33.95	54.00	-20.05	AVG	
9		4777.500	34.00	9.70	43.70	74.00	-30.30	peak	
10		4785.000	21.54	9.71	31.25	54.00	-22.75	AVG	
11		5702.500	32.48	12.13	44.61	74.00	-29.39	peak	
12		5702.500	23.51	12.13	35.64	54.00	-18.36	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 10		

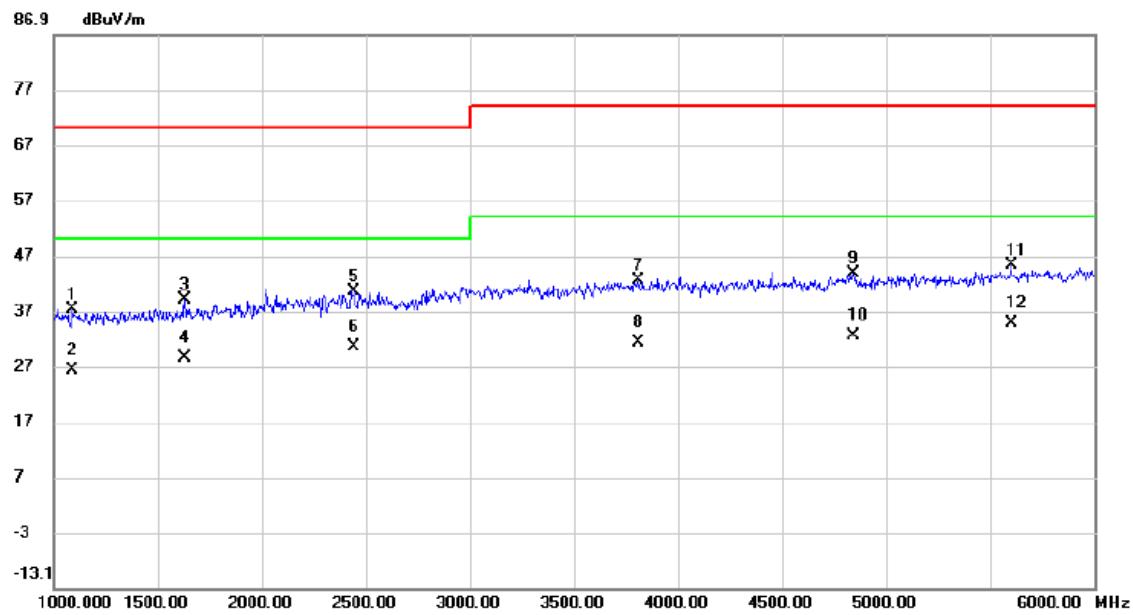


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1090.000	42.12	-4.75	37.37	70.00	-32.63	peak
2		1090.000	31.10	-4.75	26.35	50.00	-23.65	AVG
3		1632.500	41.22	-2.14	39.08	70.00	-30.92	peak
4		1632.500	30.73	-2.14	28.59	50.00	-21.41	AVG
5		2445.000	38.83	1.82	40.65	70.00	-29.35	peak
6		2445.000	28.79	1.82	30.61	50.00	-19.39	AVG
7		3807.500	35.17	7.35	42.52	74.00	-31.48	peak
8		3807.500	23.90	7.35	31.25	54.00	-22.75	AVG
9		4842.500	33.89	9.83	43.72	74.00	-30.28	peak
10		4842.500	22.73	9.83	32.56	54.00	-21.44	AVG
11		5602.500	33.56	11.78	45.34	74.00	-28.66	peak
12 *		5602.500	22.91	11.78	34.69	54.00	-19.31	AVG

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 10		

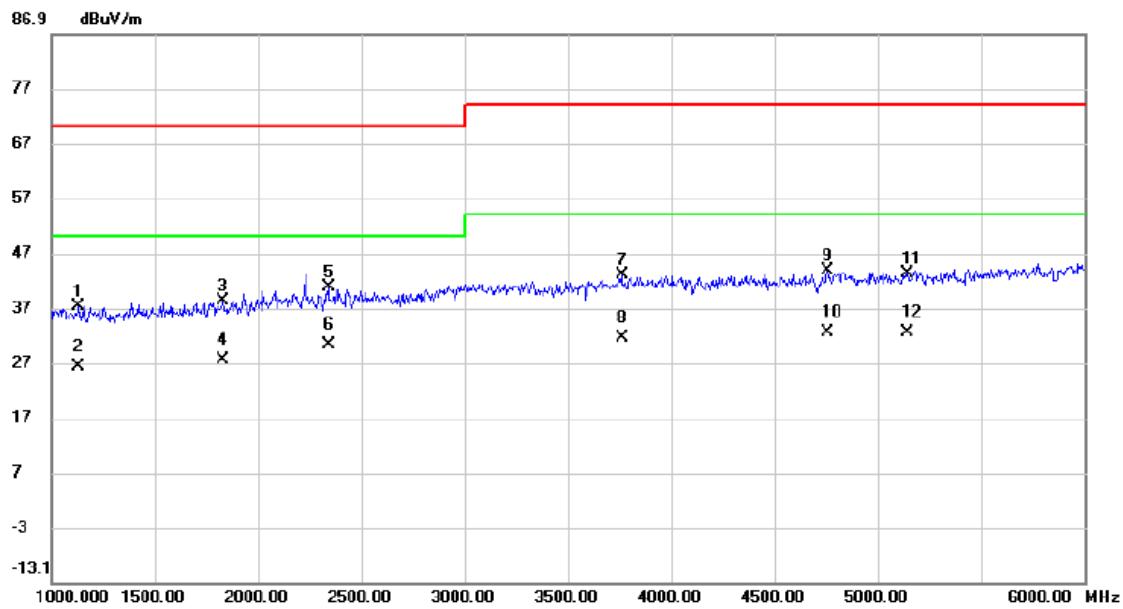


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	1	1130.000	41.80	-4.58	37.22	70.00	-32.78	peak	
2	2	1130.000	30.91	-4.58	26.33	50.00	-23.67	AVG	
3	3	1832.500	39.01	-0.85	38.16	70.00	-31.84	peak	
4	4	1832.500	28.26	-0.85	27.41	50.00	-22.59	AVG	
5	5	2342.500	39.23	1.45	40.68	70.00	-29.32	peak	
6	*	2342.500	28.81	1.45	30.26	50.00	-19.74	AVG	
7	7	3762.500	35.81	7.14	42.95	74.00	-31.05	peak	
8	8	3762.500	24.38	7.14	31.52	54.00	-22.48	AVG	
9	9	4757.500	34.11	9.66	43.77	74.00	-30.23	peak	
10	10	4757.500	22.86	9.66	32.52	54.00	-21.48	AVG	
11	11	5142.500	32.87	10.52	43.39	74.00	-30.61	peak	
12	12	5142.500	22.07	10.52	32.59	54.00	-21.41	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 2		

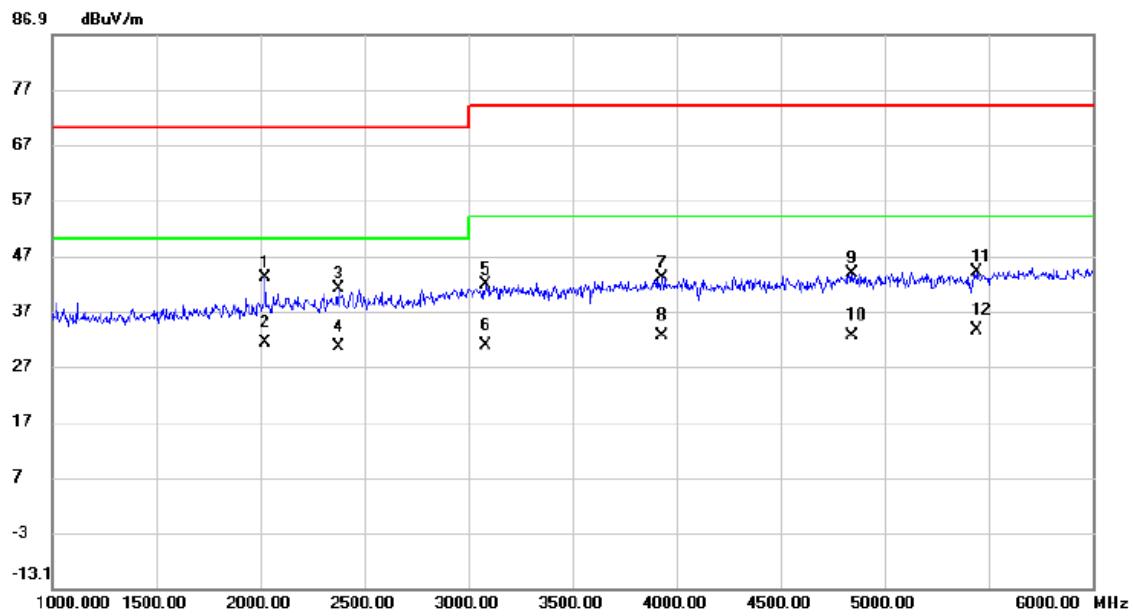

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2025.000	42.68	0.31	42.99	70.00	-27.01	peak
2	*	2025.000	30.94	0.31	31.25	50.00	-18.75	AVG
3		2375.000	39.44	1.58	41.02	70.00	-28.98	peak
4		2375.000	29.05	1.58	30.63	50.00	-19.37	AVG
5		3085.000	37.12	4.63	41.75	74.00	-32.25	peak
6		3085.000	26.06	4.63	30.69	54.00	-23.31	AVG
7		3930.000	35.16	7.93	43.09	74.00	-30.91	peak
8		3930.000	24.65	7.93	32.58	54.00	-21.42	AVG
9		4842.500	33.99	9.83	43.82	74.00	-30.18	peak
10		4842.500	22.59	9.83	32.42	54.00	-21.58	AVG
11		5442.500	32.82	11.28	44.10	74.00	-29.90	peak
12		5442.500	22.35	11.28	33.63	54.00	-20.37	AVG

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 2		

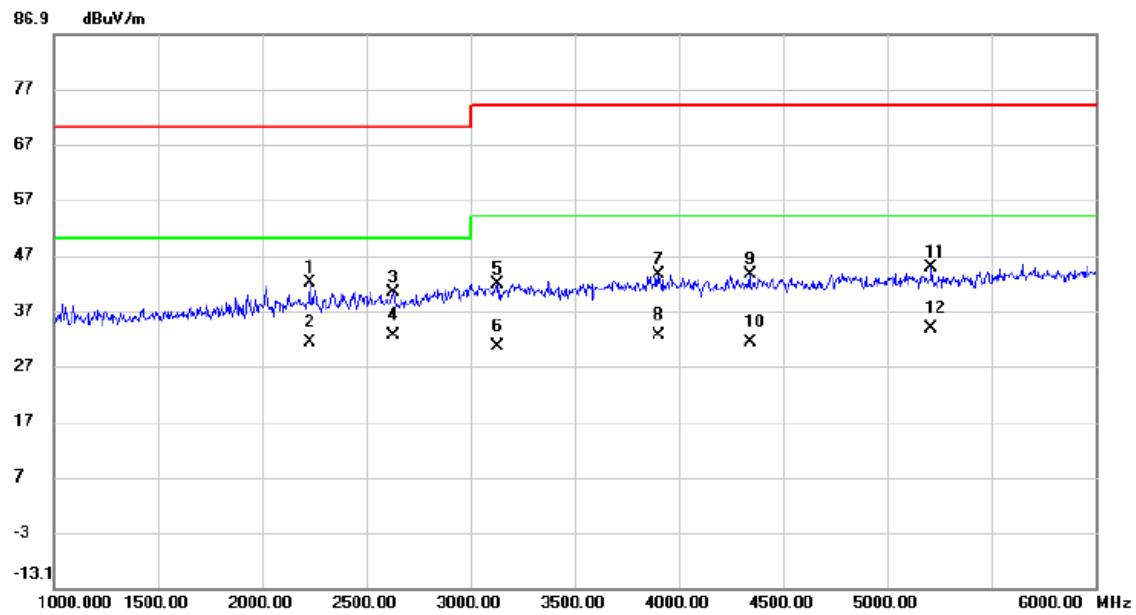

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2227.500	41.09	1.04	42.13	70.00	-27.87	peak	
2		2227.500	30.21	1.04	31.25	50.00	-18.75	AVG	
3		2630.000	37.71	2.63	40.34	70.00	-29.66	peak	
4	*	2630.000	30.00	2.63	32.63	50.00	-17.37	AVG	
5		3130.000	37.11	4.77	41.88	74.00	-32.12	peak	
6		3130.000	25.81	4.77	30.58	54.00	-23.42	AVG	
7		3900.000	35.84	7.79	43.63	74.00	-30.37	peak	
8		3900.000	24.84	7.79	32.63	54.00	-21.37	AVG	
9		4340.000	34.69	8.83	43.52	74.00	-30.48	peak	
10		4340.000	22.33	8.83	31.16	54.00	-22.84	AVG	
11		5212.500	34.00	10.70	44.70	74.00	-29.30	peak	
12		5212.500	22.99	10.70	33.69	54.00	-20.31	AVG	

3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	50Ω Terminator	SHX	TF2-3G-A	8122901	Feb. 27, 2022
2	TWO-LINE V-NETWORK	R&S	ENV216	100526	Nov. 04, 2021
3	EMI Test Receiver	R&S	ESR3	101862	Jul. 25, 2021
4	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Feb. 28, 2022
5	Cable	N/A	RG400	N/A(12m)	Mar. 09, 2022
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


3.3.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.4 DEVIATION FROM TEST STANDARD


No deviation

3.3.5 TEST SETUP

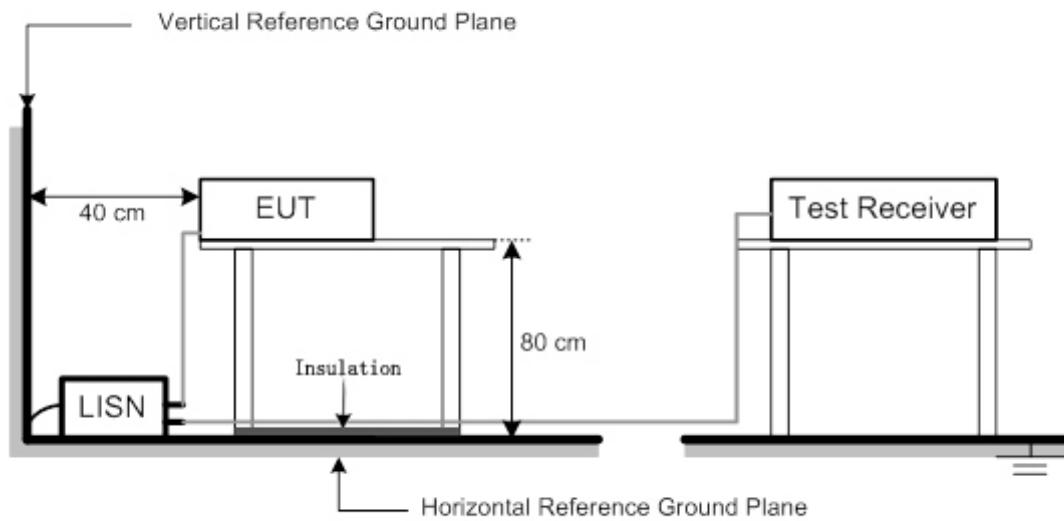


3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 2		

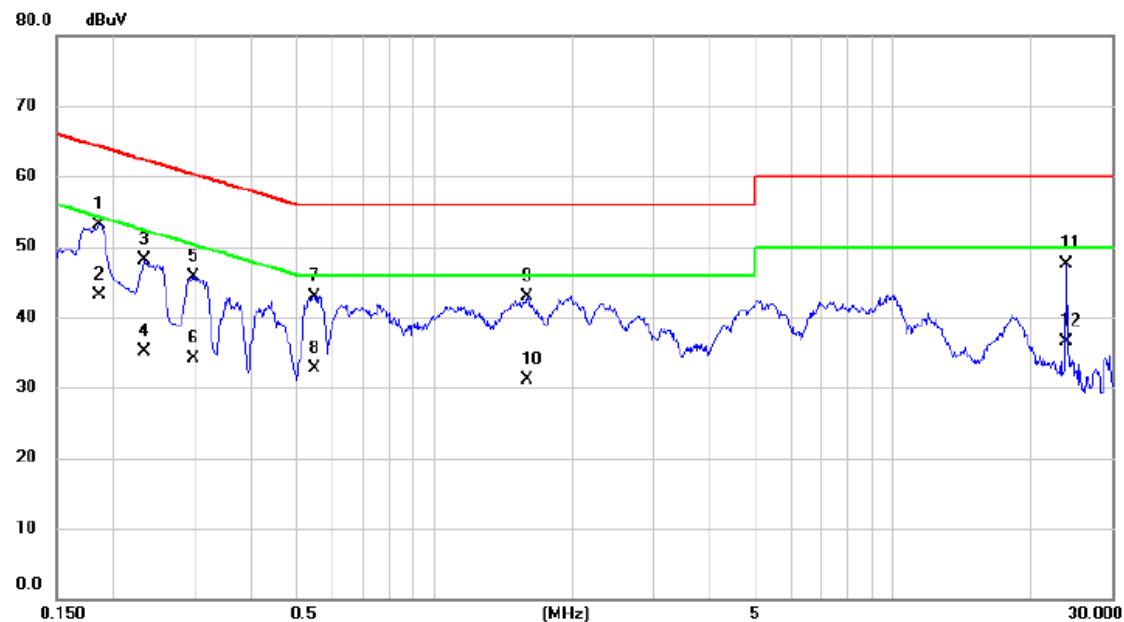


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1860	43.42	9.65	53.07	64.21	-11.14	QP	
2 *		0.1860	33.50	9.65	43.15	54.21	-11.06	AVG	
3		0.2332	38.54	9.65	48.19	62.33	-14.14	QP	
4		0.2332	25.40	9.65	35.05	52.33	-17.28	AVG	
5		0.2983	36.09	9.66	45.75	60.29	-14.54	QP	
6		0.2983	24.40	9.66	34.06	50.29	-16.23	AVG	
7		0.5482	33.28	9.68	42.96	56.00	-13.04	QP	
8		0.5482	23.10	9.68	32.78	46.00	-13.22	AVG	
9		1.5900	33.12	9.77	42.89	56.00	-13.11	QP	
10		1.5900	21.40	9.77	31.17	46.00	-14.83	AVG	
11		23.8131	36.65	10.84	47.49	60.00	-12.51	QP	
12		23.8131	25.70	10.84	36.54	50.00	-13.46	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 2		

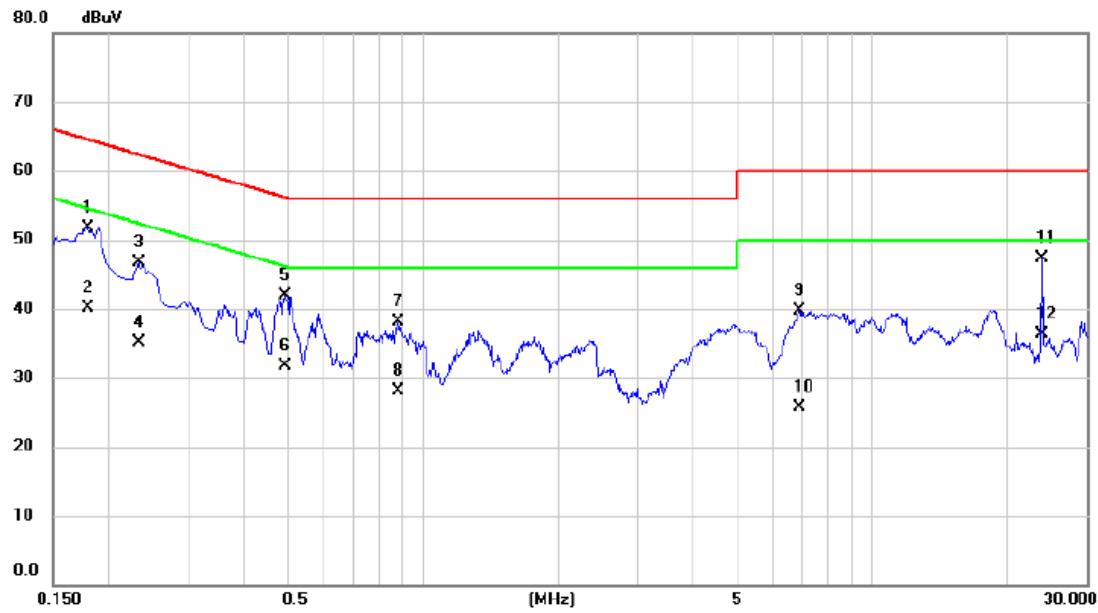


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1792	42.11	9.65	51.76	64.52	-12.76	QP	
2		0.1792	30.40	9.65	40.05	54.52	-14.47	AVG	
3		0.2332	36.98	9.65	46.63	62.33	-15.70	QP	
4		0.2332	25.40	9.65	35.05	52.33	-17.28	AVG	
5		0.4920	32.26	9.68	41.94	56.13	-14.19	QP	
6		0.4920	22.10	9.68	31.78	46.13	-14.35	AVG	
7		0.8834	28.36	9.72	38.08	56.00	-17.92	QP	
8		0.8834	18.40	9.72	28.12	46.00	-17.88	AVG	
9		6.8730	29.56	10.09	39.65	60.00	-20.35	QP	
10		6.8730	15.70	10.09	25.79	50.00	-24.21	AVG	
11	*	23.8131	36.40	10.91	47.31	60.00	-12.69	QP	
12		23.8131	25.40	10.91	36.31	50.00	-13.69	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 3		

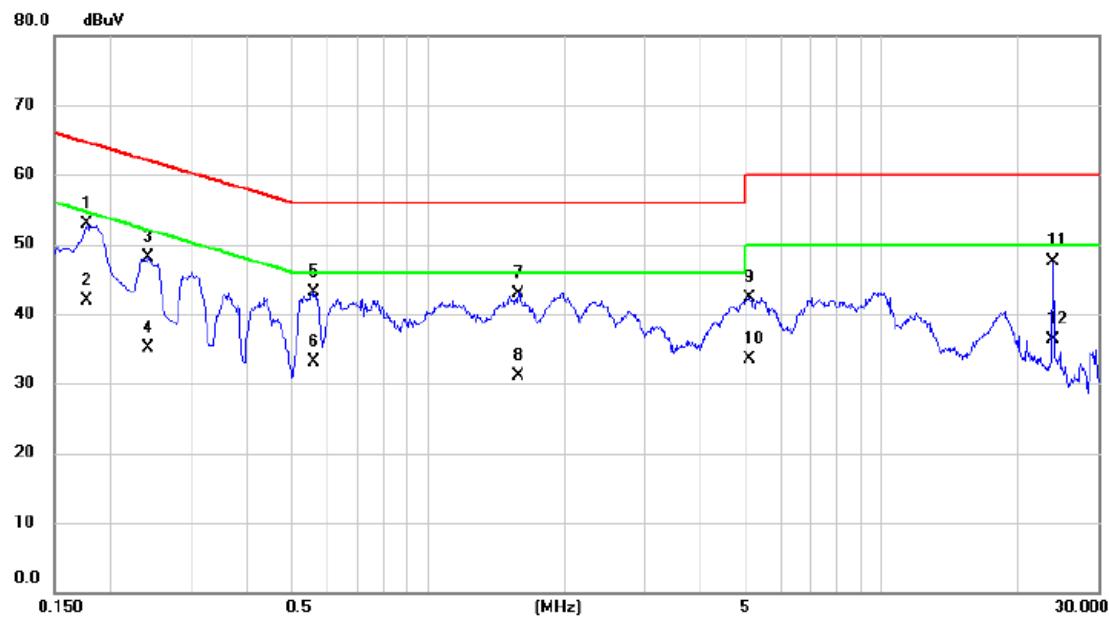


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	0.1770	43.27	9.65	52.92	64.63	-11.71	QP	
2		0.1770	32.33	9.65	41.98	54.63	-12.65	AVG	
3		0.2422	38.50	9.65	48.15	62.02	-13.87	QP	
4		0.2422	25.40	9.65	35.05	52.02	-16.97	AVG	
5		0.5617	33.32	9.69	43.01	56.00	-12.99	QP	
6		0.5617	23.40	9.69	33.09	46.00	-12.91	AVG	
7		1.5810	33.20	9.77	42.97	56.00	-13.03	QP	
8		1.5810	21.40	9.77	31.17	46.00	-14.83	AVG	
9		5.1157	32.36	9.99	42.35	60.00	-17.65	QP	
10		5.1157	23.50	9.99	33.49	50.00	-16.51	AVG	
11		23.8131	36.60	10.84	47.44	60.00	-12.56	QP	
12		23.8131	25.40	10.84	36.24	50.00	-13.76	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 3		

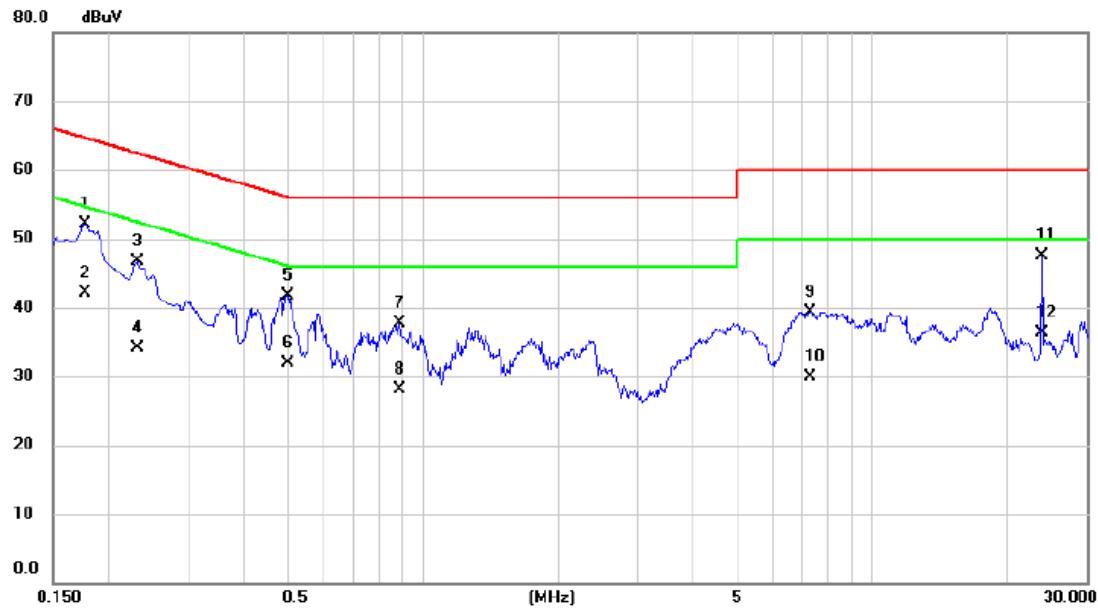


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1770	42.48	9.65	52.13	64.63	-12.50	QP	
2	*	0.1770	32.50	9.65	42.15	54.63	-12.48	AVG	
3		0.2310	37.02	9.65	46.67	62.41	-15.74	QP	
4		0.2310	24.40	9.65	34.05	52.41	-18.36	AVG	
5		0.4987	32.10	9.68	41.78	56.02	-14.24	QP	
6		0.4987	22.30	9.68	31.98	46.02	-14.04	AVG	
7		0.8857	28.01	9.72	37.73	56.00	-18.27	QP	
8		0.8857	18.40	9.72	28.12	46.00	-17.88	AVG	
9		7.2622	29.29	10.11	39.40	60.00	-20.60	QP	
10		7.2622	19.70	10.11	29.81	50.00	-20.19	AVG	
11		23.8131	36.57	10.91	47.48	60.00	-12.52	QP	
12		23.8131	25.40	10.91	36.31	50.00	-13.69	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 4		

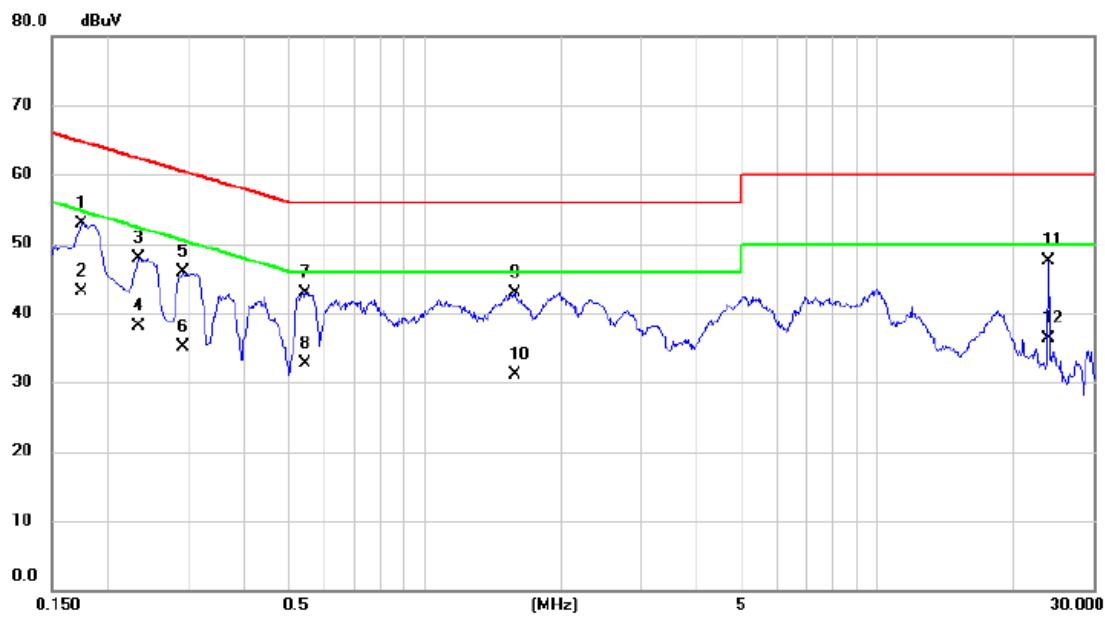


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1748	43.18	9.65	52.83	64.73	-11.90	QP	
2	*	0.1748	33.50	9.65	43.15	54.73	-11.58	AVG	
3		0.2333	38.28	9.65	47.93	62.33	-14.40	QP	
4		0.2333	28.40	9.65	38.05	52.33	-14.28	AVG	
5		0.2917	36.19	9.66	45.85	60.48	-14.63	QP	
6		0.2917	25.40	9.66	35.06	50.48	-15.42	AVG	
7		0.5460	33.24	9.68	42.92	56.00	-13.08	QP	
8		0.5460	23.10	9.68	32.78	46.00	-13.22	AVG	
9		1.5788	33.08	9.77	42.85	56.00	-13.15	QP	
10		1.5788	21.40	9.77	31.17	46.00	-14.83	AVG	
11		23.8133	36.68	10.84	47.52	60.00	-12.48	QP	
12		23.8133	25.40	10.84	36.24	50.00	-13.76	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 4		

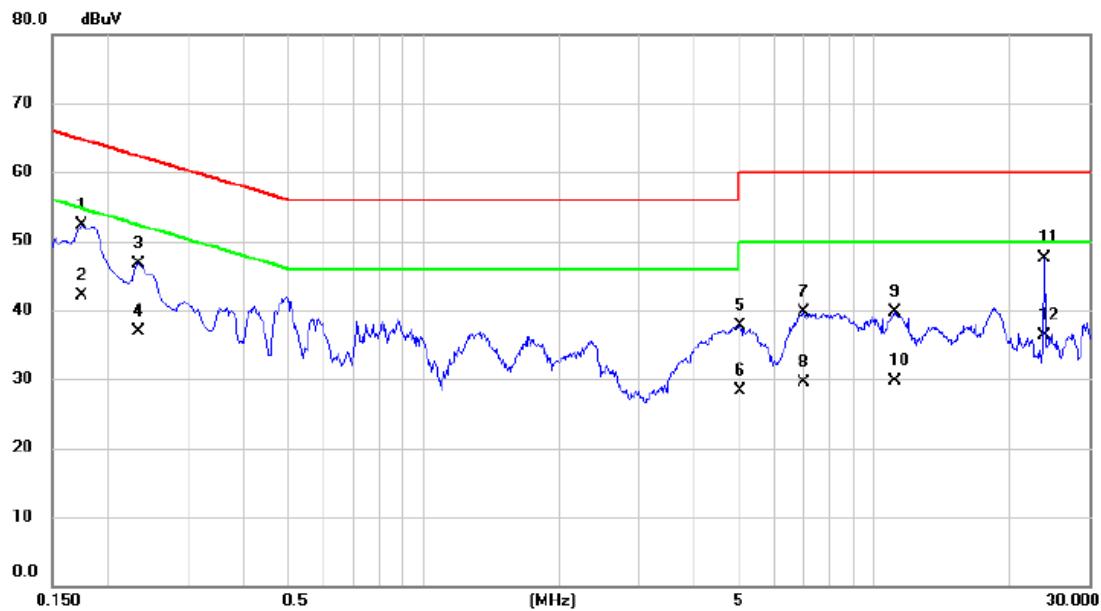


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	0.1748	42.65	9.65	52.30	64.73	-12.43	QP	
2		0.1748	32.40	9.65	42.05	54.73	-12.68	AVG	
3		0.2333	37.15	9.65	46.80	62.33	-15.53	QP	
4		0.2333	27.20	9.65	36.85	52.33	-15.48	AVG	
5		5.0460	27.70	9.99	37.69	60.00	-22.31	QP	
6		5.0460	18.40	9.99	28.39	50.00	-21.61	AVG	
7		6.9608	29.65	10.09	39.74	60.00	-20.26	QP	
8		6.9608	19.40	10.09	29.49	50.00	-20.51	AVG	
9		11.0873	29.36	10.29	39.65	60.00	-20.35	QP	
10		11.0873	19.40	10.29	29.69	50.00	-20.31	AVG	
11		23.8133	36.51	10.91	47.42	60.00	-12.58	QP	
12		23.8133	25.40	10.91	36.31	50.00	-13.69	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 2		

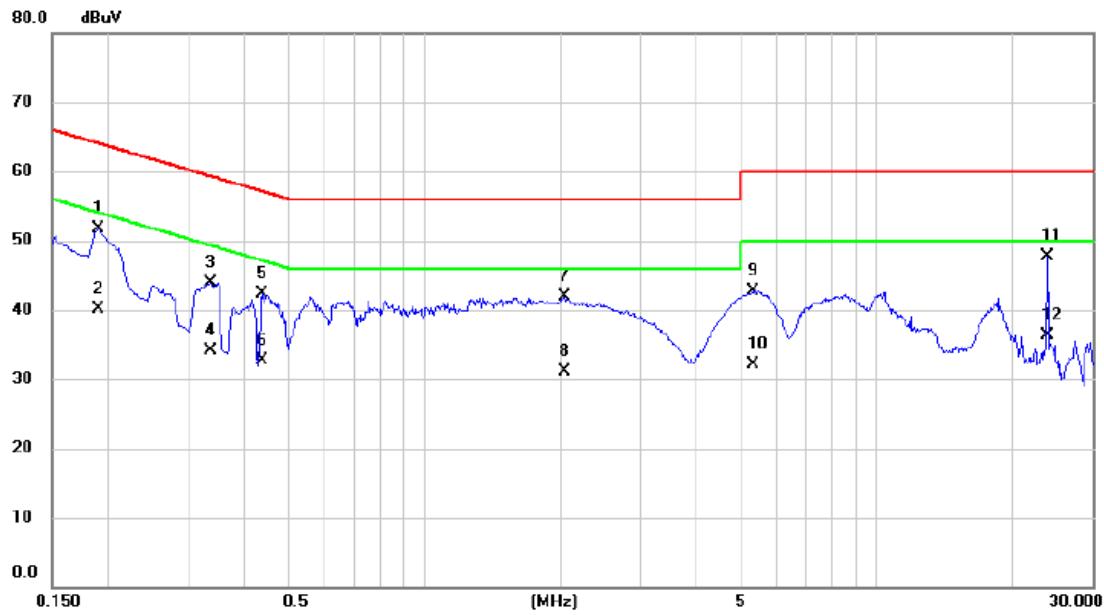

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1905	42.03	9.65	51.68	64.01	-12.33	QP	
2		0.1905	30.40	9.65	40.05	54.01	-13.96	AVG	
3		0.3367	34.24	9.67	43.91	59.28	-15.37	QP	
4		0.3367	24.50	9.67	34.17	49.28	-15.11	AVG	
5		0.4380	32.72	9.68	42.40	57.10	-14.70	QP	
6		0.4380	23.10	9.68	32.78	47.10	-14.32	AVG	
7		2.0377	32.07	9.80	41.87	56.00	-14.13	QP	
8		2.0377	21.40	9.80	31.20	46.00	-14.80	AVG	
9		5.3340	32.70	10.01	42.71	60.00	-17.29	QP	
10		5.3340	22.10	10.01	32.11	50.00	-17.89	AVG	
11	*	23.8131	36.96	10.84	47.80	60.00	-12.20	QP	
12		23.8131	25.40	10.84	36.24	50.00	-13.76	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 2		

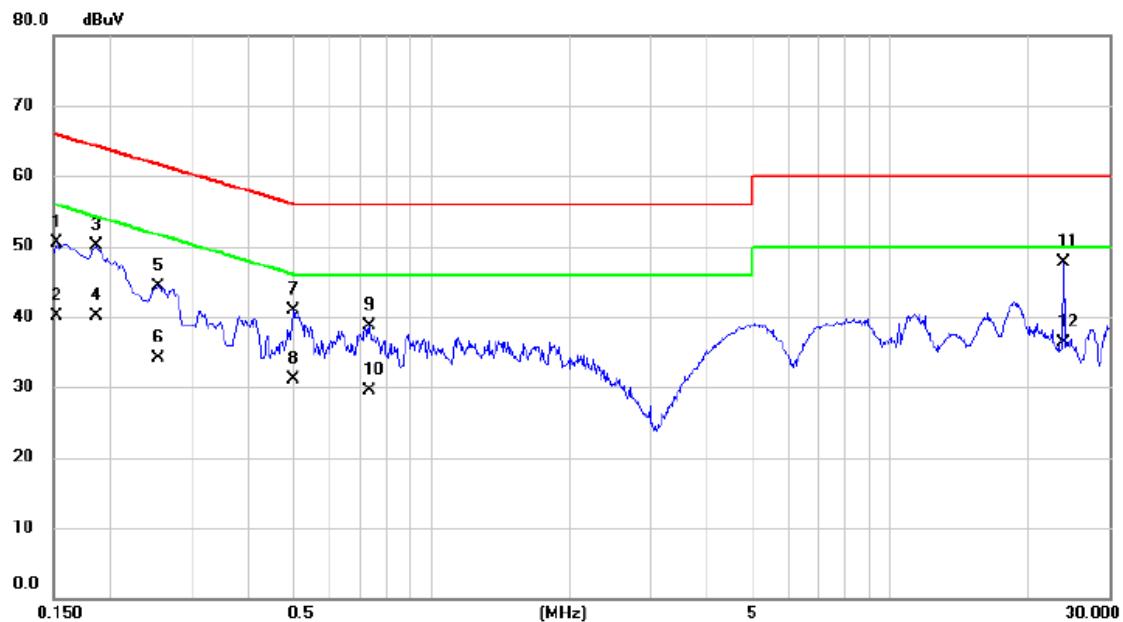

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	40.78	9.66	50.44	65.88	-15.44	QP	
2		0.1522	30.40	9.66	40.06	55.88	-15.82	AVG	
3		0.1860	40.48	9.65	50.13	64.21	-14.08	QP	
4		0.1860	30.50	9.65	40.15	54.21	-14.06	AVG	
5		0.2535	34.71	9.66	44.37	61.64	-17.27	QP	
6		0.2535	24.40	9.66	34.06	51.64	-17.58	AVG	
7		0.5010	31.25	9.68	40.93	56.00	-15.07	QP	
8		0.5010	21.40	9.68	31.08	46.00	-14.92	AVG	
9		0.7304	29.00	9.70	38.70	56.00	-17.30	QP	
10		0.7304	19.80	9.70	29.50	46.00	-16.50	AVG	
11	*	23.8131	36.85	10.91	47.76	60.00	-12.24	QP	
12		23.8131	25.40	10.91	36.31	50.00	-13.69	AVG	

4. EMC EMISSION TEST- EN 55032:2015+AC:2016

4.1 RADIATED EMISSIONS UP TO 1 GHZ

4.1.1 LIMITS

Class B equipment up to 1000MHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jul. 25, 2021
2	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	Dec. 13, 2021
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	Dec. 13, 2021
4	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	946	Oct. 16, 2021
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 09, 2021
6	Cable	emci	LMR-400 (5m+8m+8m)	N/A	Jan. 06, 2022
7	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
8	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
9	Attenuator	EMCI	EMCI-N-6-06	N0670	Nov. 09, 2021
10	Attenuator	EMCI	EMCI-N-6-06	N0671	Oct. 16, 2021

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.

4.1.3 TEST PROCEDURE


- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz).
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- e. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation


4.1.5 TEST SETUP

UP TO 1 GHZ

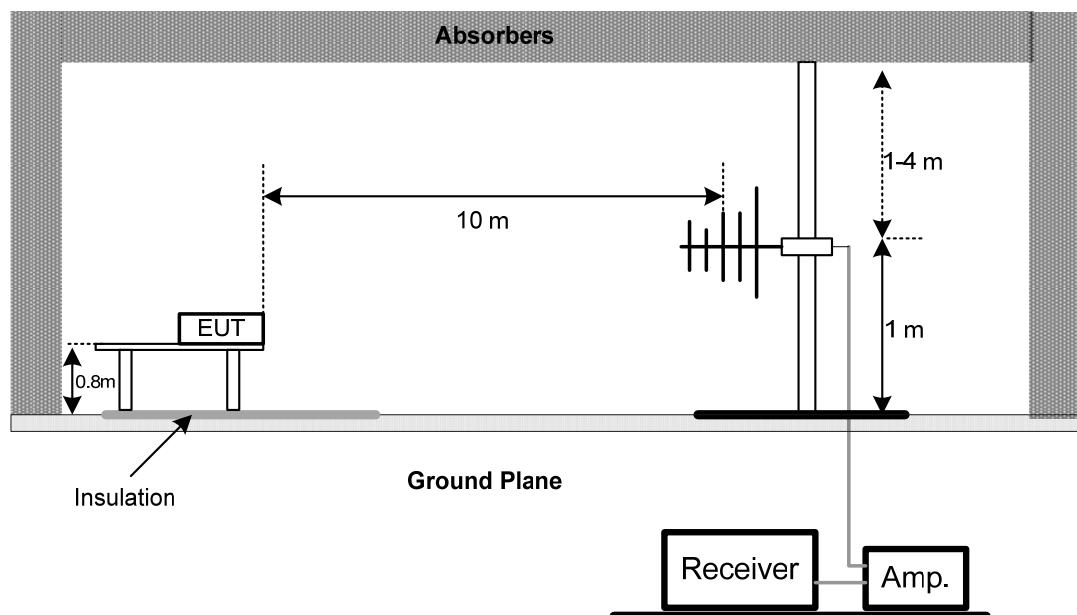

Note: The antenna can be moved between 1 to 4 meters above the ground.

4.1.6 MEASUREMENT DISTANCE

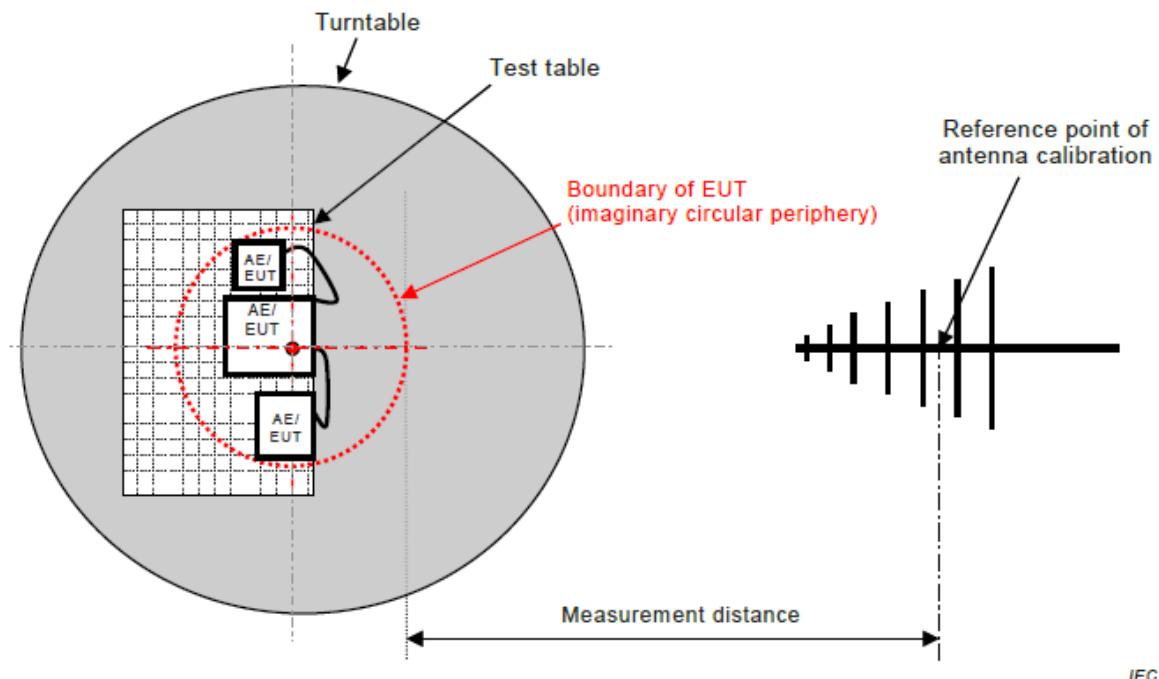

IEC

Figure C.1 – Measurement distance


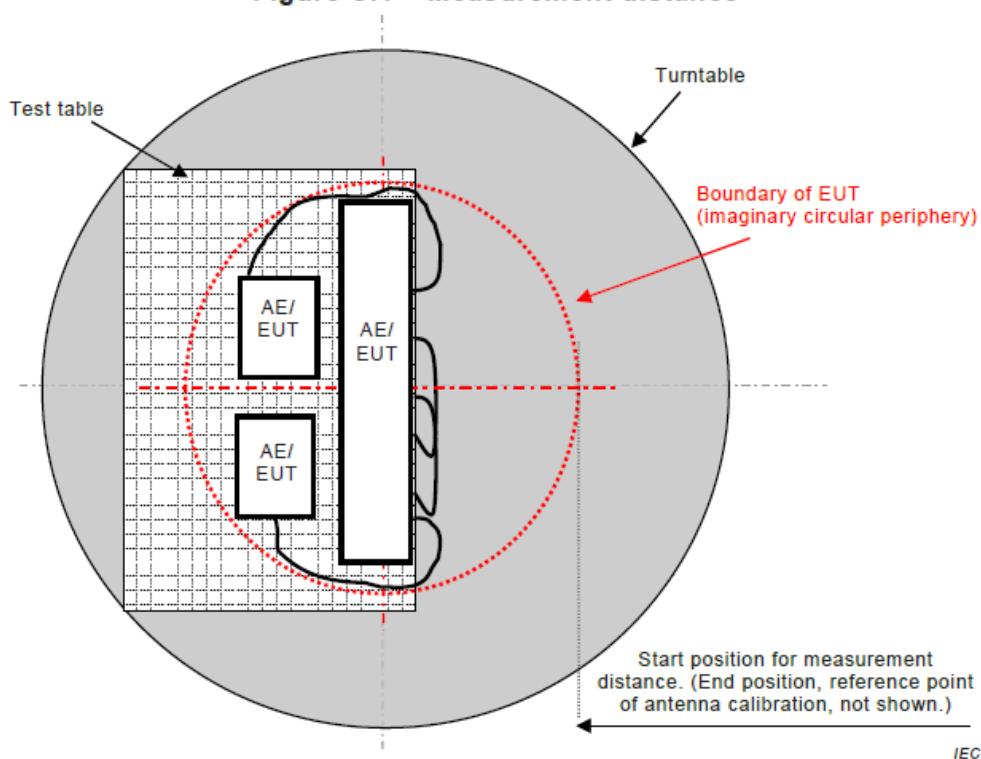


Figure C.2 – Boundary of EUT, Local AE and associated cabling


4.1.7 TEST RESULTS (UP TO 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

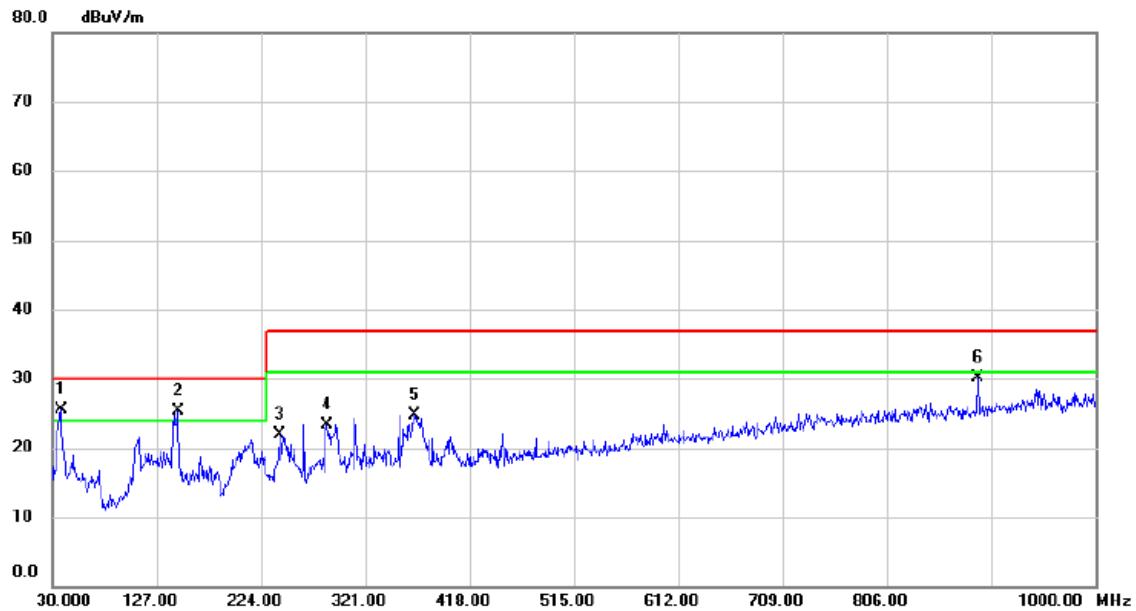

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	37.7600	44.22	-18.67	25.55	30.00	-4.45	QP	
2	!	146.4000	42.50	-17.15	25.35	30.00	-4.65	QP	
3		241.4600	39.27	-17.34	21.93	37.00	-15.07	QP	
4		285.1100	39.09	-15.70	23.39	37.00	-13.61	QP	
5		366.5900	38.64	-13.84	24.80	37.00	-12.20	QP	
6		890.3900	36.63	-6.43	30.20	37.00	-6.80	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

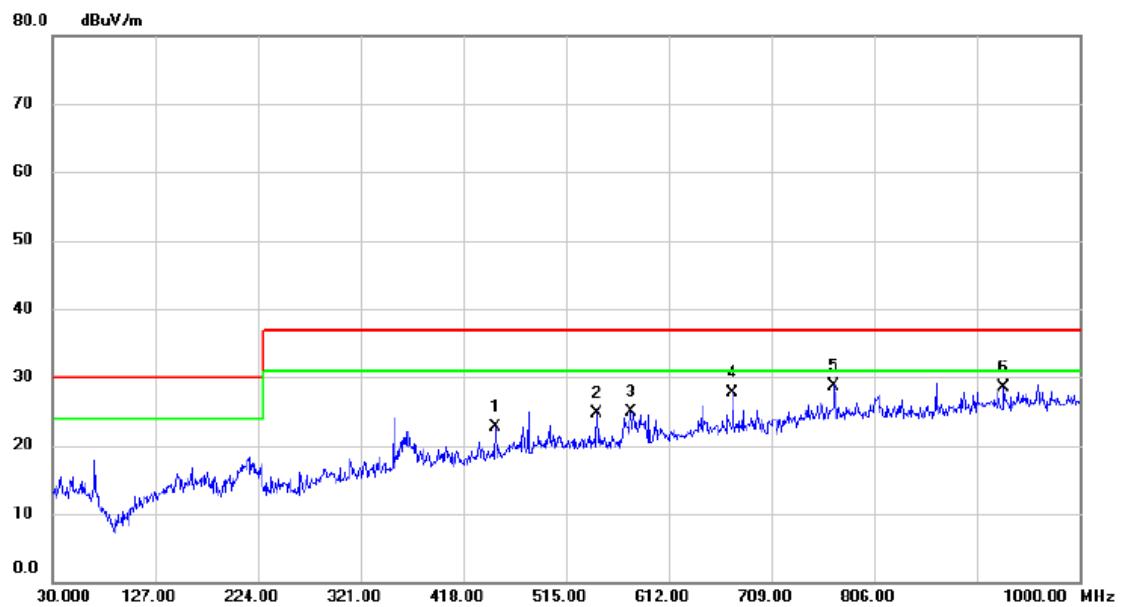

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		448.0700	34.06	-11.34	22.72	37.00	-14.28	QP	
2		544.1000	34.78	-10.02	24.76	37.00	-12.24	QP	
3		576.1100	34.13	-9.29	24.84	37.00	-12.16	QP	
4		672.1400	35.79	-8.01	27.78	37.00	-9.22	QP	
5	*	768.1700	35.60	-6.80	28.80	37.00	-8.20	QP	
6		928.2200	33.70	-5.28	28.42	37.00	-8.58	QP	

4.2 RADIATED EMISSIONS ABOVE 1 GHZ

4.2.1 LIMITS

Class B equipment above 1000MHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000			Peak / 1 MHz	54
1000 - 3000			Average / 1 MHz	70
3000 - 6000			Peak / 1 MHz	74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB_BuV/m) = 20log Emission level (uV/m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F _x) MHz	Highest measured frequency MHz
F _x ≤ 108	1000
108 < F _x ≤ 500	2000
500 < F _x ≤ 1000	5000
F _x > 1000	5 th up to a maximum 6 GHz,

Note for FM and TV broadcast receiver, F_x is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

4.2.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	May 12, 2021
2	Amplifier	Agilent	8449B	3008A02333	Feb. 28, 2022
3	MXE EMI Receiver	Agilent	N9038A	MY53220133	Feb. 28, 2022
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	Mlcable Inc.	B10-01-01-5M	18047123	Jan. 06, 2022
8	Cable	Mlcable Inc.	B10-01-01-12M	18072743	Jan. 06, 2022
9	Cable	RegalWay	RWLPS50-7.9A-SMSM-1M	20200102 001	Jan. 06, 2022

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.


4.2.1.1 TEST PROCEDURE



- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- e. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

4.2.1.2 DEVIATION FROM TEST STANDARD

No deviation


4.2.1.3 TEST SETUP

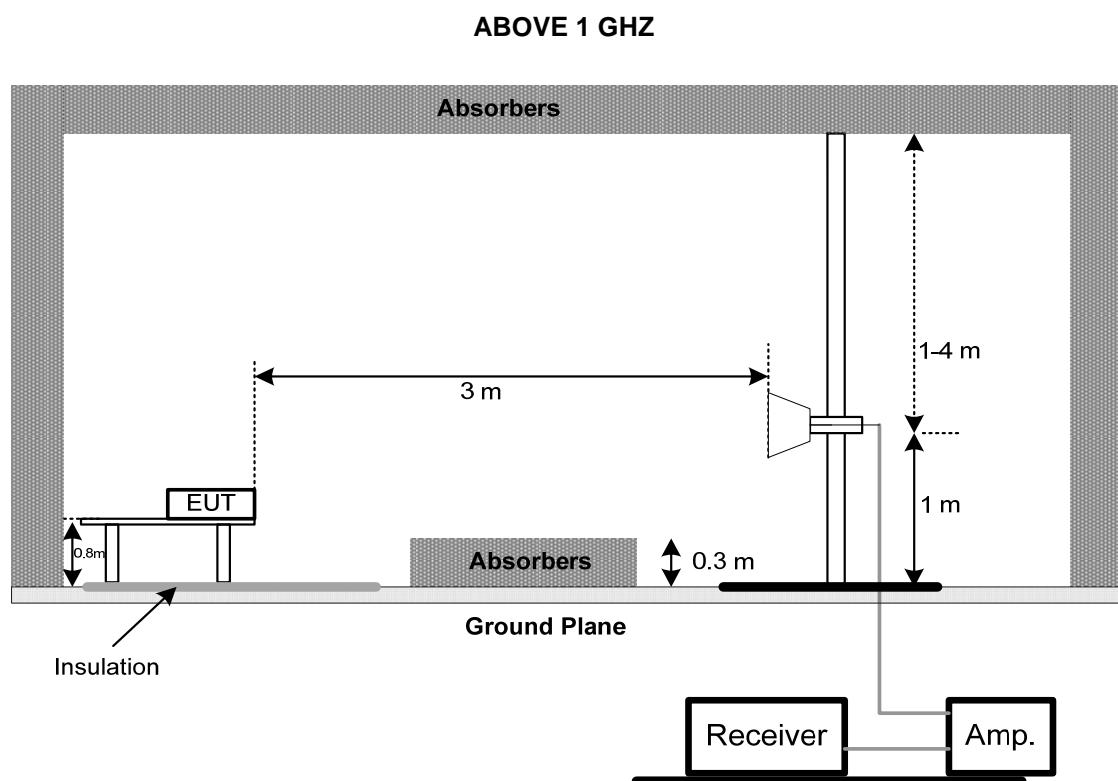

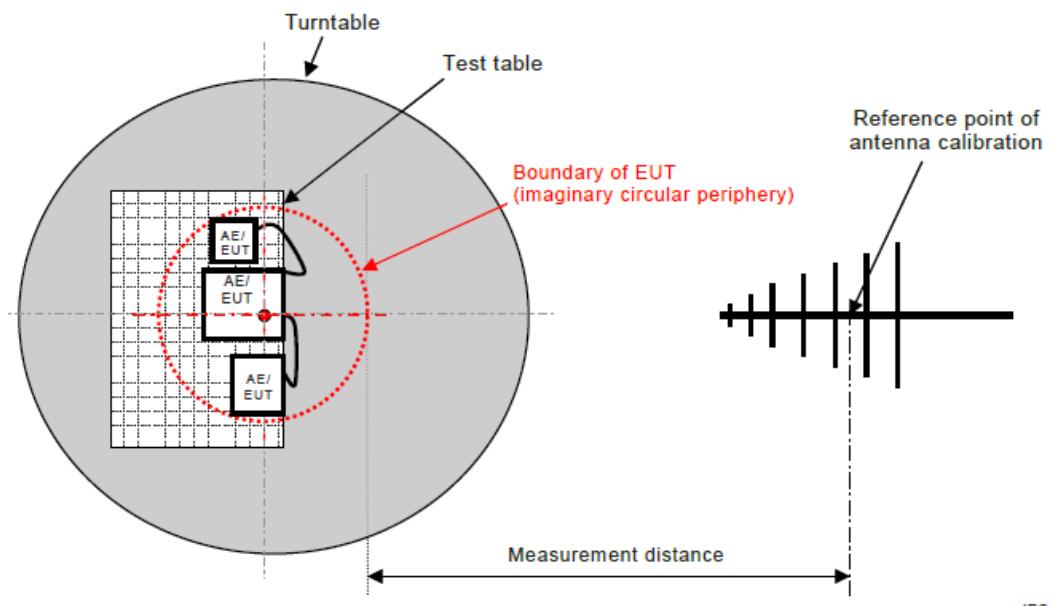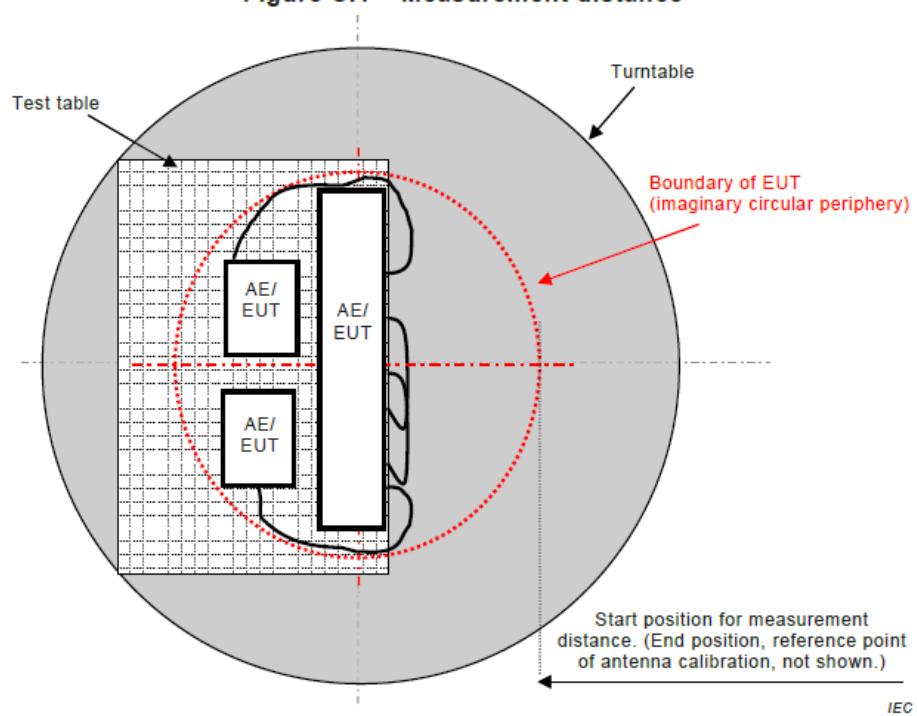4.2.1.4 MEASUREMENT DISTANCE**Figure C.1 – Measurement distance****Figure C.2 – Boundary of EUT, Local AE and associated cabling**


4.2.1.5 TEST RESULTS (ABOVE 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

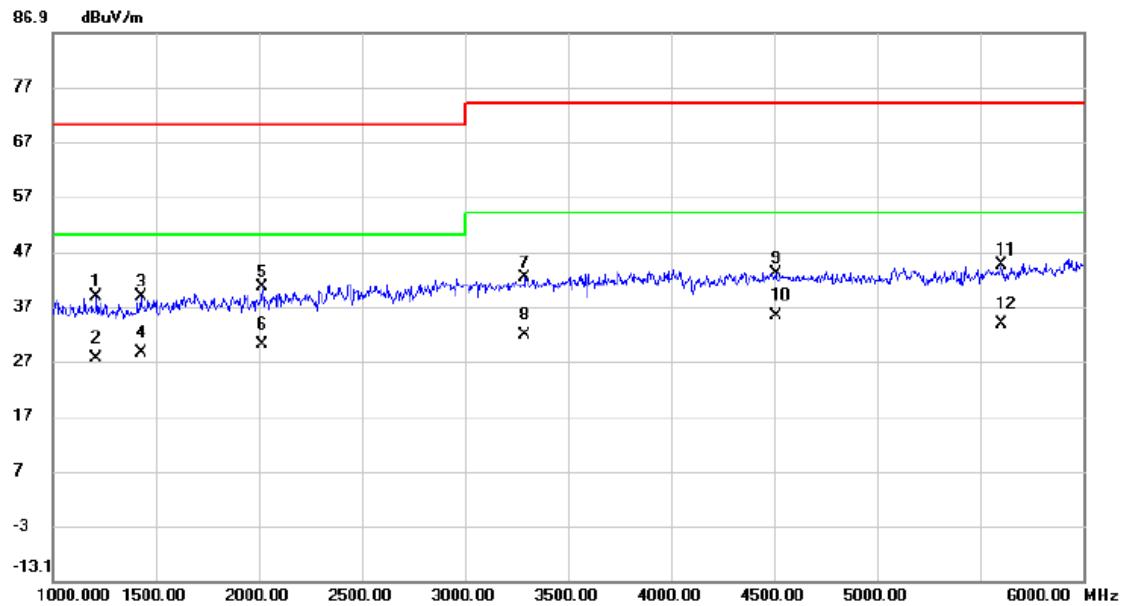

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1210.000	42.96	-4.24	38.72	70.00	-31.28	peak	
2		1210.000	31.65	-4.24	27.41	50.00	-22.59	AVG	
3		1427.500	42.06	-3.31	38.75	70.00	-31.25	peak	
4		1427.500	31.94	-3.31	28.63	50.00	-21.37	AVG	
5		2015.000	40.32	0.28	40.60	70.00	-29.40	peak	
6		2015.000	29.84	0.28	30.12	50.00	-19.88	AVG	
7		3290.000	36.98	5.26	42.24	74.00	-31.76	peak	
8		3290.000	26.43	5.26	31.69	54.00	-22.31	AVG	
9		4507.500	33.95	9.12	43.07	74.00	-30.93	peak	
10	*	4507.500	26.12	9.12	35.24	54.00	-18.76	AVG	
11		5600.000	32.72	11.78	44.50	74.00	-29.50	peak	
12		5600.000	22.07	11.78	33.85	54.00	-20.15	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

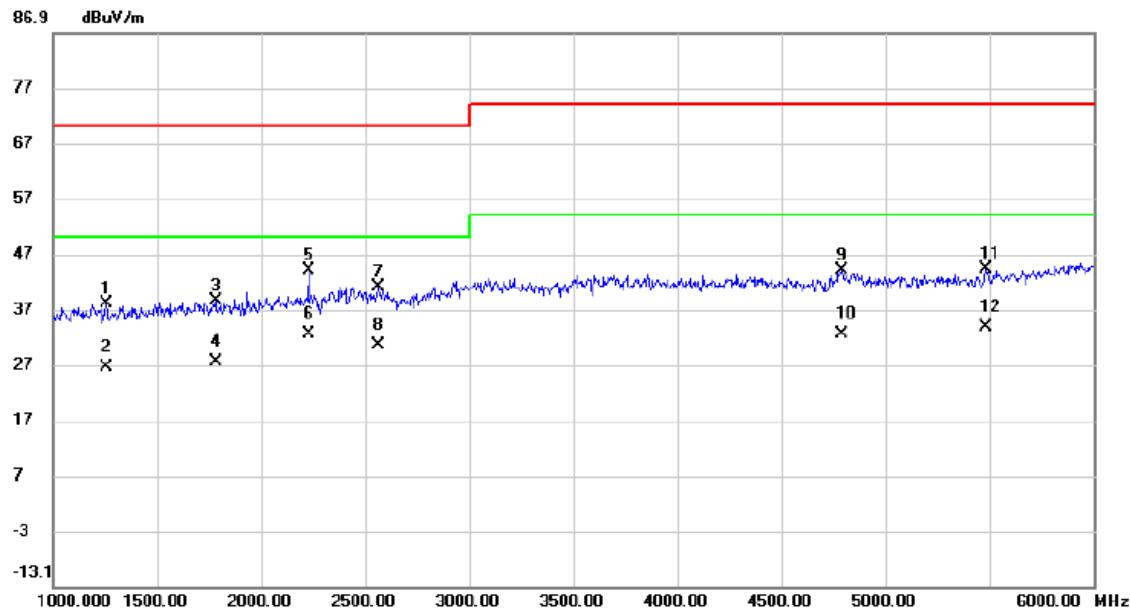

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	1255.511	42.07	-4.04	38.03	70.00	-31.97	peak		
2	1255.511	30.48	-4.04	26.44	50.00	-23.56	AVG		
3	1781.563	39.62	-1.18	38.44	70.00	-31.56	peak		
4	1781.563	28.67	-1.18	27.49	50.00	-22.51	AVG		
5	2227.455	42.89	1.04	43.93	70.00	-26.07	peak		
6 *	2227.455	31.47	1.04	32.51	50.00	-17.49	AVG		
7	2563.126	38.76	2.32	41.08	70.00	-28.92	peak		
8	2563.126	28.16	2.32	30.48	50.00	-19.52	AVG		
9	4792.585	34.20	9.73	43.93	74.00	-30.07	peak		
10	4792.585	22.91	9.73	32.64	54.00	-21.36	AVG		
11	5483.968	32.98	11.39	44.37	74.00	-29.63	peak		
12	5483.968	22.36	11.39	33.75	54.00	-20.25	AVG		

4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

4.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

4.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	50Ω Terminator	SHX	TF2-3G-A	8122901	Feb. 27, 2022
2	TWO-LINE V-NETWORK	R&S	ENV216	100526	Nov. 04, 2021
3	EMI Test Receiver	R&S	ESR3	101862	Jul. 25, 2021
4	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Feb. 28, 2022
5	Cable	N/A	RG400	N/A(12m)	Mar. 09, 2022
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

4.3.3 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3.4 TEST SETUP

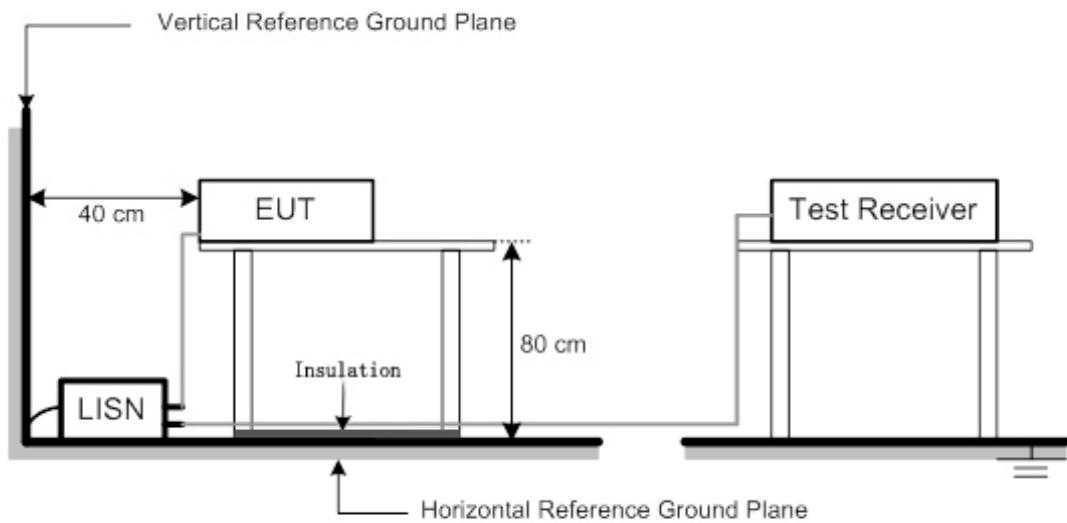


4.3.5 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 2		

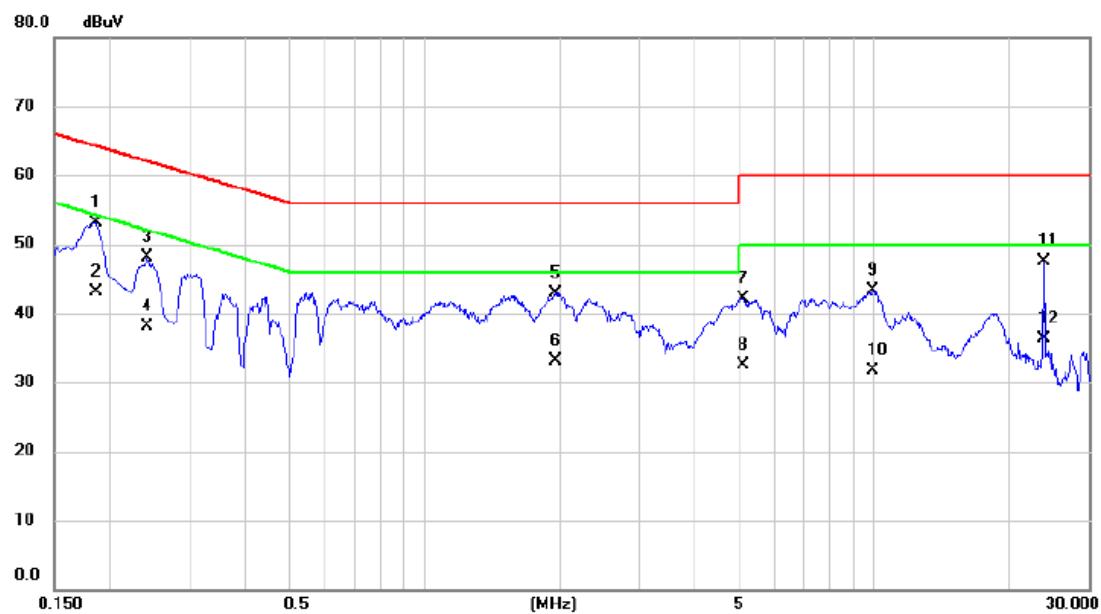

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit dB	Margin Detector	Comment
			Level dBuV	Factor dB	ment dBuV			
1		0.1860	43.40	9.65	53.05	64.21	-11.16	QP
2 *		0.1860	33.50	9.65	43.15	54.21	-11.06	AVG
3		0.2422	38.48	9.65	48.13	62.02	-13.89	QP
4		0.2422	28.40	9.65	38.05	52.02	-13.97	AVG
5		1.9590	33.12	9.80	42.92	56.00	-13.08	QP
6		1.9590	23.40	9.80	33.20	46.00	-12.80	AVG
7		5.1111	32.21	9.99	42.20	60.00	-17.80	QP
8		5.1111	22.50	9.99	32.49	50.00	-17.51	AVG
9		9.9420	33.01	10.21	43.22	60.00	-16.78	QP
10		9.9420	21.40	10.21	31.61	50.00	-18.39	AVG
11		23.8131	36.75	10.84	47.59	60.00	-12.41	QP
12		23.8131	25.40	10.84	36.24	50.00	-13.76	AVG

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 2		

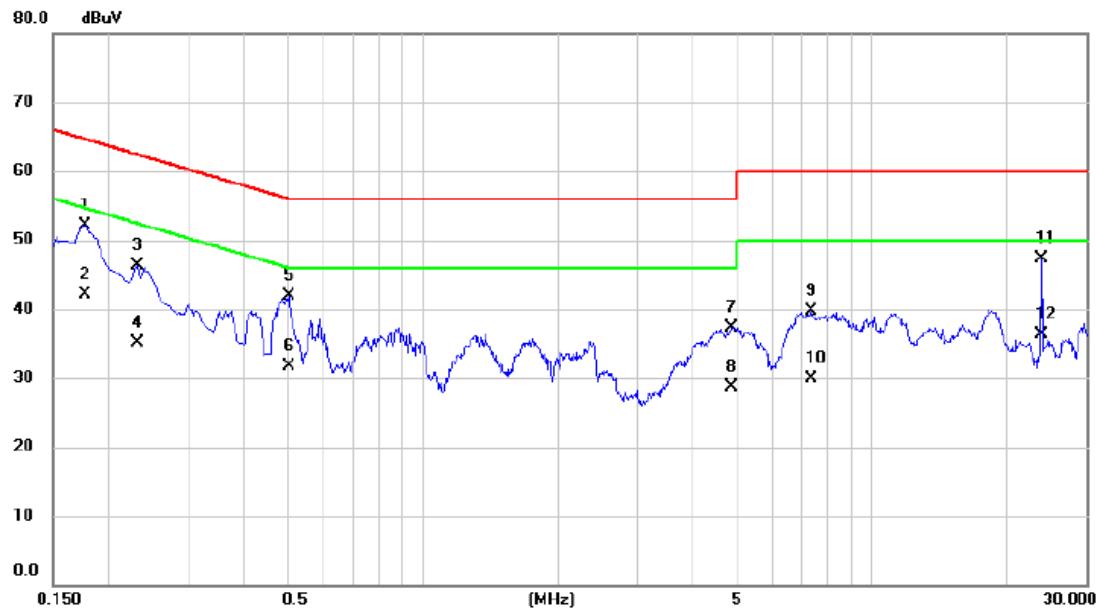

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1770	42.55	9.65	52.20	64.63	-12.43	QP	
2		0.1770	32.50	9.65	42.15	54.63	-12.48	AVG	
3		0.2310	36.67	9.65	46.32	62.41	-16.09	QP	
4		0.2310	25.40	9.65	35.05	52.41	-17.36	AVG	
5		0.5032	32.15	9.68	41.83	56.00	-14.17	QP	
6		0.5032	22.10	9.68	31.78	46.00	-14.22	AVG	
7		4.8772	27.37	9.99	37.36	56.00	-18.64	QP	
8		4.8772	18.70	9.99	28.69	46.00	-17.31	AVG	
9		7.3095	29.52	10.11	39.63	60.00	-20.37	QP	
10		7.3095	19.80	10.11	29.91	50.00	-20.09	AVG	
11		23.8131	36.46	10.91	47.37	60.00	-12.63	QP	
12		23.8131	25.40	10.91	36.31	50.00	-13.69	AVG	

5. HARMONIC AND FLICKER TEST

5.1 HARMONIC CURRENT EMISSIONS

5.1.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

5.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 25, 2021
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 25, 2021
3	Measurement Software	California	CTS4.0 Version 4.23	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.


5.1.3 TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation


5.1.5 TEST SETUP

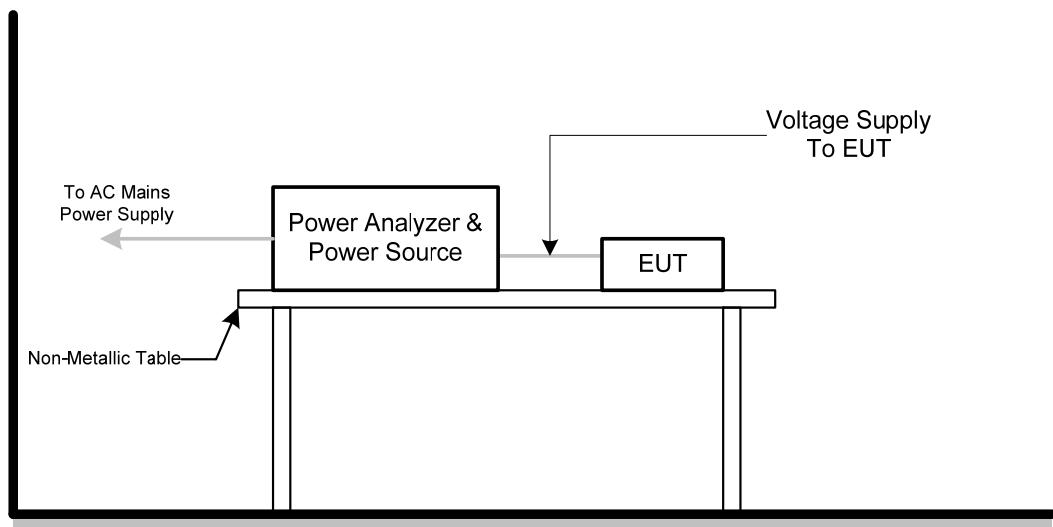

5.1.6 TEST RESULTS


Harmonic - Class D	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2

Current & voltage waveforms

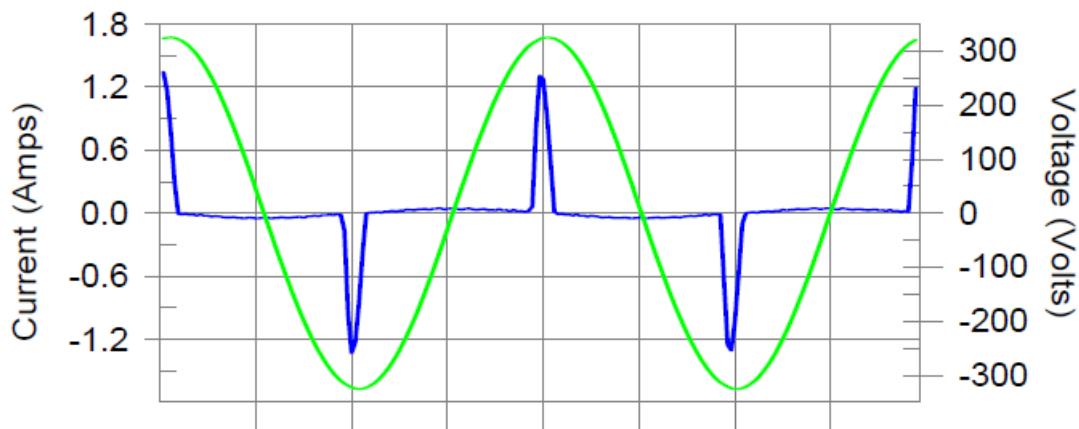

Harmonics and Class D limit line

European Limits

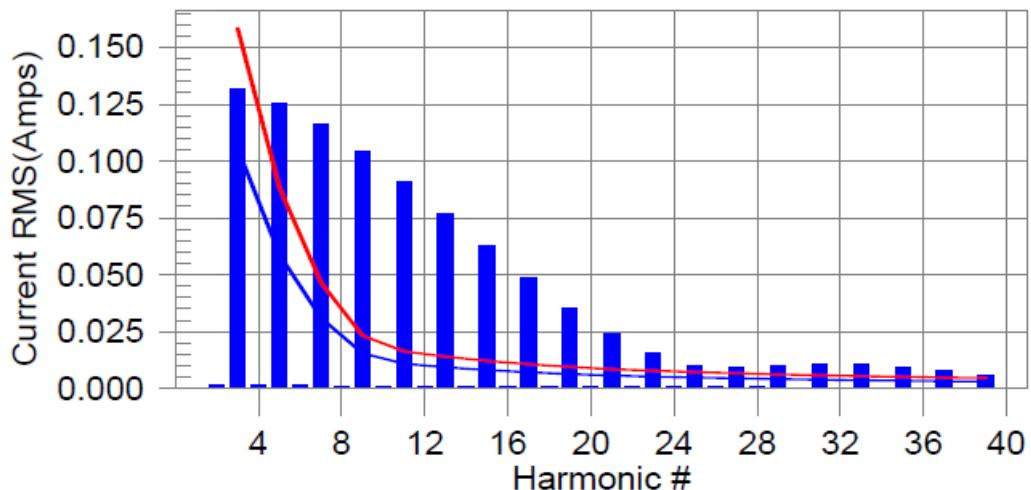

Test result: N/L Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

Current Test Result Summary (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2

Highest parameter values during test:

V_RMS (Volts): 229.94 Frequency(Hz): 50.00
I_Peak (Amps): 1.372 I_RMS (Amps): 0.318
I_Fund (Amps): 0.141 Crest Factor: 4.328
Power (Watts): 31.1 Power Factor: 0.428

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.002	0.000	N/A	N/L
3	0.132	0.106	N/A	0.133	0.158	N/A	N/L
4	0.001	0.000	N/A	0.002	0.000	N/A	N/L
5	0.125	0.059	N/A	0.126	0.089	N/A	N/L
6	0.001	0.000	N/A	0.002	0.000	N/A	N/L
7	0.116	0.031	N/A	0.116	0.047	N/A	N/L
8	0.001	0.000	N/A	0.001	0.000	N/A	N/L
9	0.104	0.016	N/A	0.105	0.023	N/A	N/L
10	0.001	0.000	N/A	0.001	0.000	N/A	N/L
11	0.091	0.011	N/A	0.091	0.016	N/A	N/L
12	0.001	0.000	N/A	0.001	0.000	N/A	N/L
13	0.077	0.009	N/A	0.077	0.014	N/A	N/L
14	0.001	0.000	N/A	0.001	0.000	N/A	N/L
15	0.062	0.008	N/A	0.063	0.012	N/A	N/L
16	0.001	0.000	N/A	0.001	0.000	N/A	N/L
17	0.048	0.007	N/A	0.049	0.011	N/A	N/L
18	0.001	0.000	N/A	0.001	0.000	N/A	N/L
19	0.035	0.006	N/A	0.036	0.009	N/A	N/L
20	0.001	0.000	N/A	0.001	0.000	N/A	N/L
21	0.024	0.006	N/A	0.024	0.009	N/A	N/L
22	0.001	0.000	N/A	0.001	0.000	N/A	N/L
23	0.015	0.005	N/A	0.016	0.008	N/A	N/L
24	0.001	0.000	N/A	0.001	0.000	N/A	N/L
25	0.010	0.005	N/A	0.010	0.007	N/A	N/L
26	0.001	0.000	N/A	0.001	0.000	N/A	N/L
27	0.009	0.004	N/A	0.009	0.007	N/A	N/L
28	0.001	0.000	N/A	0.001	0.000	N/A	N/L
29	0.010	0.004	N/A	0.010	0.006	N/A	N/L
30	0.000	0.000	N/A	0.001	0.000	N/A	N/L
31	0.011	0.004	N/A	0.011	0.006	N/A	N/L
32	0.000	0.000	N/A	0.001	0.000	N/A	N/L
33	0.011	0.004	N/A	0.011	0.005	N/A	N/L
34	0.000	0.000	N/A	0.000	0.000	N/A	N/L
35	0.010	0.003	N/A	0.010	0.005	N/A	N/L
36	0.000	0.000	N/A	0.000	0.000	N/A	N/L
37	0.008	0.003	N/A	0.008	0.005	N/A	N/L
38	0.000	0.000	N/A	0.000	0.000	N/A	N/L
39	0.006	0.003	N/A	0.006	0.005	N/A	N/L
40	0.000	0.000	N/A	0.000	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2

Highest parameter values during test:

Voltage (Vrms):	229.94	Frequency(Hz):	50.00
I_Peak (Amps):	1.372	I_RMS (Amps):	0.318
I_Fund (Amps):	0.141	Crest Factor:	4.328
Power (Watts):	31.1	Power Factor:	0.428

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.106	0.460	23.03	OK
3	0.531	2.069	25.67	OK
4	0.066	0.460	14.30	OK
5	0.034	0.920	3.74	OK
6	0.036	0.460	7.88	OK
7	0.080	0.690	11.60	OK
8	0.024	0.460	5.19	OK
9	0.043	0.460	9.28	OK
10	0.017	0.460	3.61	OK
11	0.065	0.230	28.20	OK
12	0.017	0.230	7.51	OK
13	0.049	0.230	21.34	OK
14	0.019	0.230	8.42	OK
15	0.051	0.230	22.26	OK
16	0.016	0.230	7.02	OK
17	0.039	0.230	17.02	OK
18	0.012	0.230	5.26	OK
19	0.044	0.230	19.16	OK
20	0.017	0.230	7.48	OK
21	0.018	0.230	7.74	OK
22	0.013	0.230	5.78	OK
23	0.024	0.230	10.49	OK
24	0.005	0.230	2.33	OK
25	0.014	0.230	6.28	OK
26	0.008	0.230	3.36	OK
27	0.012	0.230	5.32	OK
28	0.008	0.230	3.69	OK
29	0.020	0.230	8.57	OK
30	0.005	0.230	2.35	OK
31	0.015	0.230	6.50	OK
32	0.006	0.230	2.42	OK
33	0.024	0.230	10.58	OK
34	0.003	0.230	1.29	OK
35	0.014	0.230	5.99	OK
36	0.003	0.230	1.45	OK
37	0.016	0.230	6.86	OK
38	0.004	0.230	1.54	OK
39	0.011	0.230	4.68	OK
40	0.007	0.230	2.95	OK

5.2 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST

5.2.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	≤ 1.0 , Tp= 10 min.	Short Term Flicker Indicator
Plt	≤ 0.65 , Tp=2 hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Chang
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	≤ 500 ms	Relative V-change characteristic

5.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 25, 2021
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 25, 2021
3	Measurement Software	California	CTS4.0 Version 4.23	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.


5.2.3 TEST PROCEDURE

- Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

5.2.4 DEVIATION FROM TEST STANDARD


No deviation

5.2.5 TEST SETUP

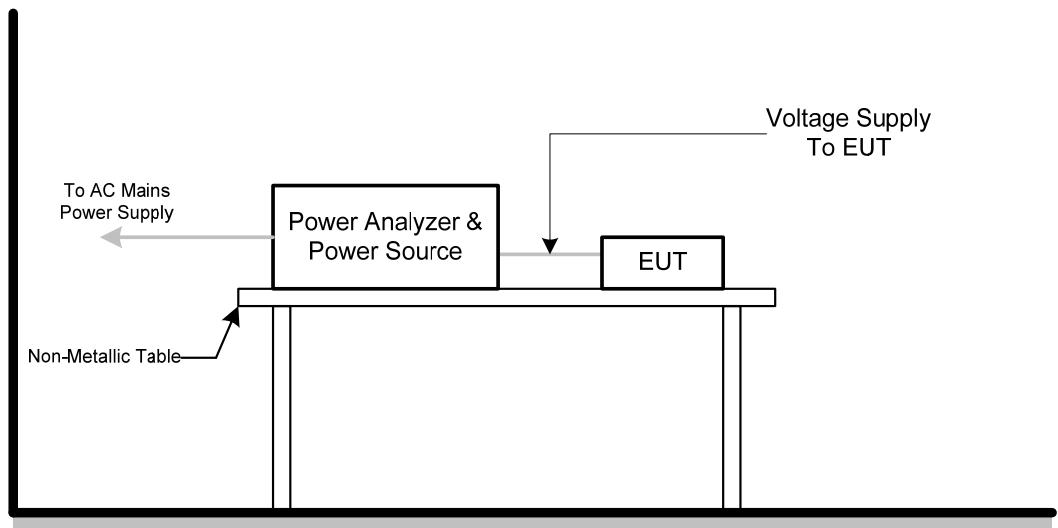

5.2.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 2

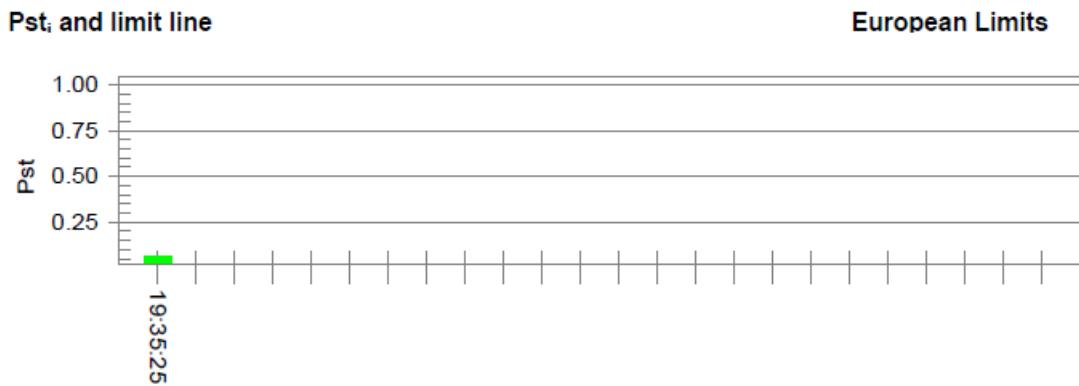

Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.88		
T-max (mS):	0	Test limit (mS):	500.0
Highest dc (%):	0.00	Test limit (%):	3.30
Highest dmax (%):	0.00	Test limit (%):	4.00
Highest Pst (10 min. period):	0.064	Test limit:	1.000
Highest Plt (2 hr. period):	0.028	Test limit:	0.650

6. EMC IMMUNITY TEST

6.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports (NOTE 2)	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports (NOTE 2)	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	Port Type: unshielded symmetrical Apply: lines to ground		
	Primary protection is Intended ±1 kV 10/700(5/320)Tr/Th μ s		C
	Primary protection is not Intended ±1 kV 10/700(5/320) Tr/Th μ s	Analogue/digital data ports (NOTE 1) & (NOTE 2)	C
	Port type: coaxial or shielded Apply: shield to ground		
	±0.5 kV 1.2/50(8/20) Tr/Th μ s	Analogue/digital data ports (NOTE 1) & (NOTE 2)	B
	line to reference ground for each individual line: ±0.5 kV(peak) 1.2/50(8/20) Tr/Th μ s (line to line)	DC network power ports (NOTE 2)	B
	±1 kV(peak) 1.2/50(8/20) Tr/Th μ s (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th μ s (line to earth or ground)	AC mains power ports	B
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 Ω source impedance	Analogue/digital data ports (NOTE 2)	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 Ω source impedance	DC network power ports (NOTE 2)	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150 Ω source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage < 5% 0.5 cycle Residual voltage < 70% 25 cycle (50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage < 5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances, repetitive (BIN-R)	0.15MHz to 0.5 MHz 107dBuV 0.5 MHz to 10 MHz 107dBuV to 36dBuV 10 MHz to 30 MHz 36dBuV to 30 dBuV	Analogue/digital data ports (Applicable only to CPE xDSL ports)	A
	0.70 ms 8.3 ms (for 60Hz) 10 ms (for 50Hz)	Analogue/digital data ports (Apply period based on the AC mains frequency)	A
Broadband impulse noise disturbances, isolated (BIN-I)	0.15MHz to 30 MHz 110dBuV	Analogue/digital data ports (Applicable only to CPE xDSL ports)	B
	0.24 ms 10 ms 300 ms	Analogue/digital data ports (Apply all burst durations)	B

Note.

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

6.2 GENERAL PERFORMANCE CRITERIA

According to **EN55035** standard, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

6.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION

6.3.1 PERFORMANCE CRITERIA

Performance criterion A

for continuous radiated and conducted disturbances tests:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA. Additionally, an increase in any degradation greater than

just perceptible by observation of the image shall not occur as a consequence of the application of the test. Examples of such degradations are:

- superimposed patterning;
- positional disturbances due to synchronisation errors;
- geometric distortion;
- change of contrast or brightness;
- picture artefacts;
- freezing or disturbance of motion;
- image loss;
- video data or decoding errors.

Performance criterion A

for the power frequency magnetic field tests:

Alternative 1: A continuous magnetic field of 1 A/m:

The jitter (in mm) shall not exceed the value
$$\frac{(\text{character height in mm} + 0,3) \times 2,5}{33,3}$$

Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA.

Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

6.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION

6.4.1 PERFORMANCE CRITERIA

Performance criterion A:

For devices that support telephony functions the limits of Table G.3 shall apply.

With respect to Table G.3:

- the interference ratio (electrical or acoustic) shall meet the limits in column 3; or,
- the acoustic level of the demodulated audio shall be less than the limits in column 4; or,
- the digitally coded level of demodulated audio shall be less than limits in column 5; or,
- the analogue level of the demodulated audio shall be less than the limits in column 6.

Table G.3 – Performance criterion A – Limits for devices supporting telephony

Type of immunity test	Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
			dB (SPL)	Digital dBm0	Analogue dBm
Conducted	0,15 to 30	-20 dB	55	-50	-50
	30 to 80	-10 dB	65	-40	-40
Radiated	80 to 1000	0 dB	75	-30	-30

For terminals connected to digital wired network ports (such as Ethernet, ISDN), measurements of the demodulated 1 kHz may be performed on a remote AE, ideally of the same design.

For all other devices:

The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be -20 dB or better.

Performance criterion B:

Use the general performance criterion B. See GENERAL PERFORMANCE CRITERIA.

Performance criterion C:

Use the general performance criterion C. See GENERAL PERFORMANCE CRITERIA.

6.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

6.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ Contact Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

6.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Dec. 03, 2021

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

6.5.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- For TABLE-TOP equipment:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

6.5.4 DEVIATION FROM TEST STANDARD

No deviation

6.5.5 TEST SETUP

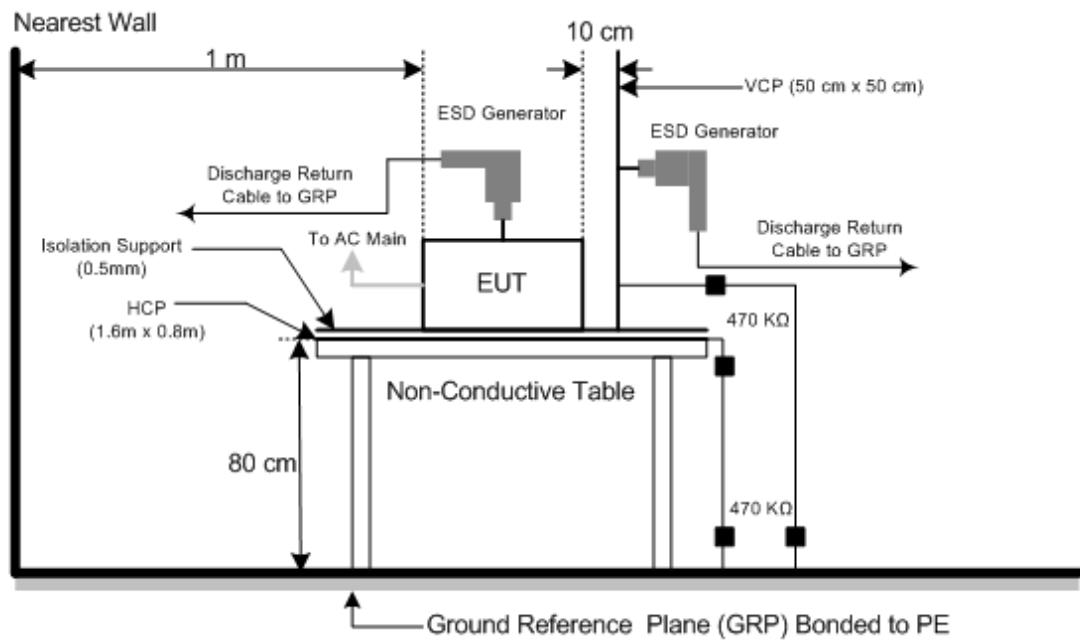

6.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz											
Test Mode	Mode 1-5, Mode 8											



Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		2kV		4kV		- kV	
Test Level	P	N	P	N	P	N	P	N	P	N	P	N	P	N
Location	A	A	A	A	B	B	-	-	A	A	B	B	-	-
1	A	A	A	A	A	A	-	-	-	-	-	-	-	-
2	A	A	A	A	A	A	-	-	-	-	-	-	-	-
3	A	A	A	A	A	A	-	-	-	-	-	-	-	-
4	A	A	A	A	A	A	-	-	-	-	-	-	-	-
Criteria	B				-				B				-	-
Result	B				-				B				-	-



Mode	HCP Contact Discharge						VCP Contact Discharge						
	2kV		4kV		- kV		2kV		4kV		- kV		
Test Level	P	N	P	N	P	N	P	N	P	N	P	N	
Location	A	A	B	B	-	-	A	A	B	B	-	-	
Left side	A	A	B	B	-	-	A	A	B	B	-	-	
Right side	A	A	B	B	-	-	A	A	B	B	-	-	
Front side	A	A	B	B	-	-	A	A	B	B	-	-	
Rear side	A	A	B	B	-	-	A	A	B	B	-	-	
Criteria	B				-				B				-
Result	B				-				B				-

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

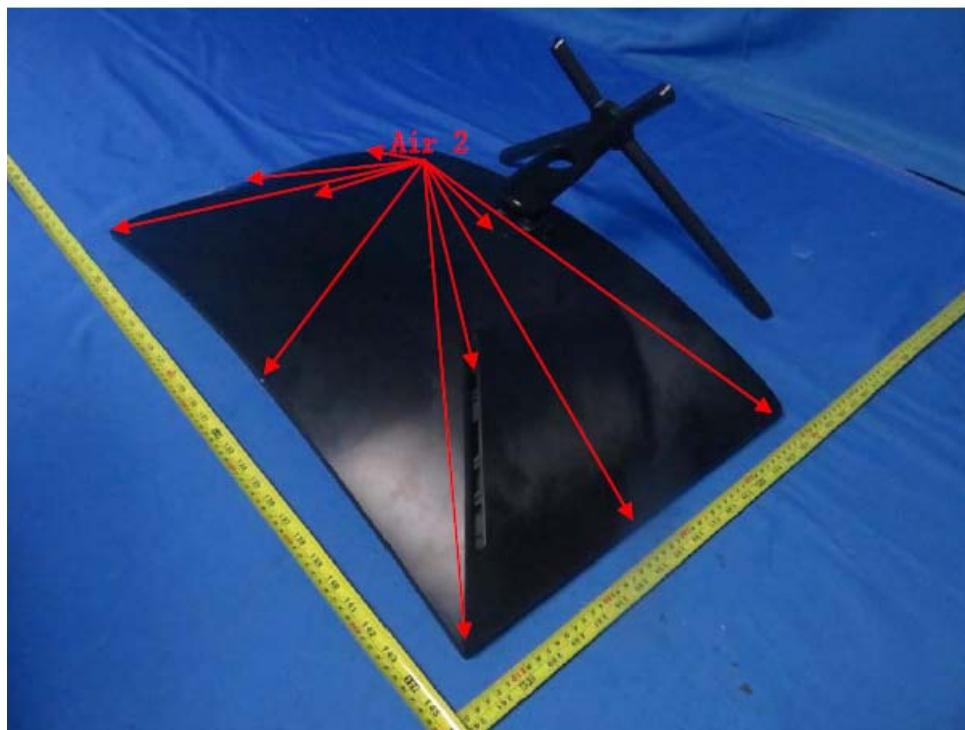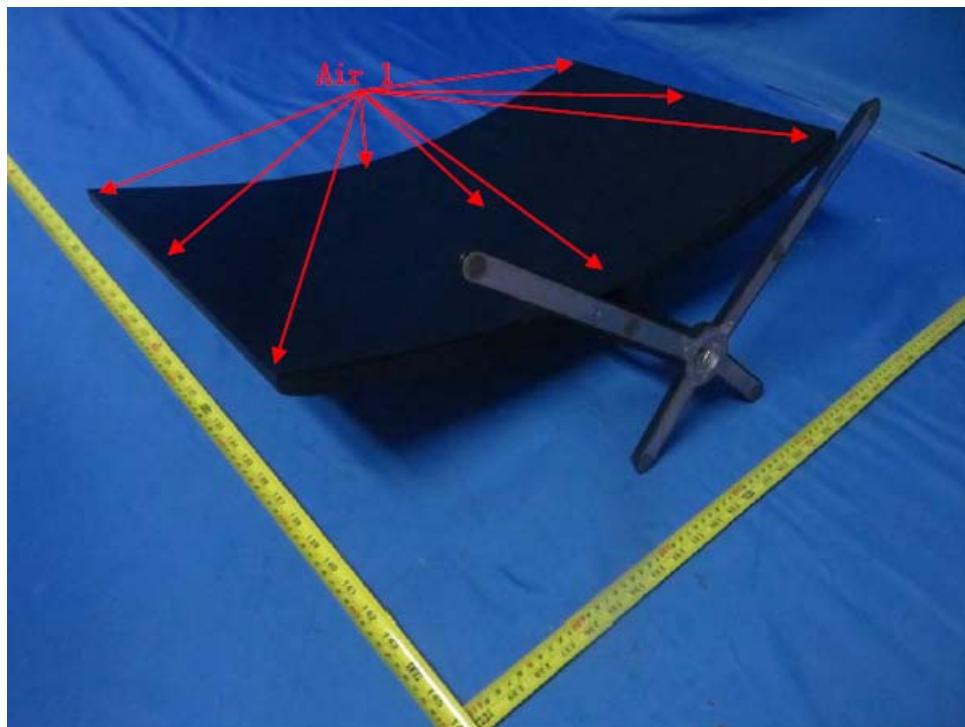

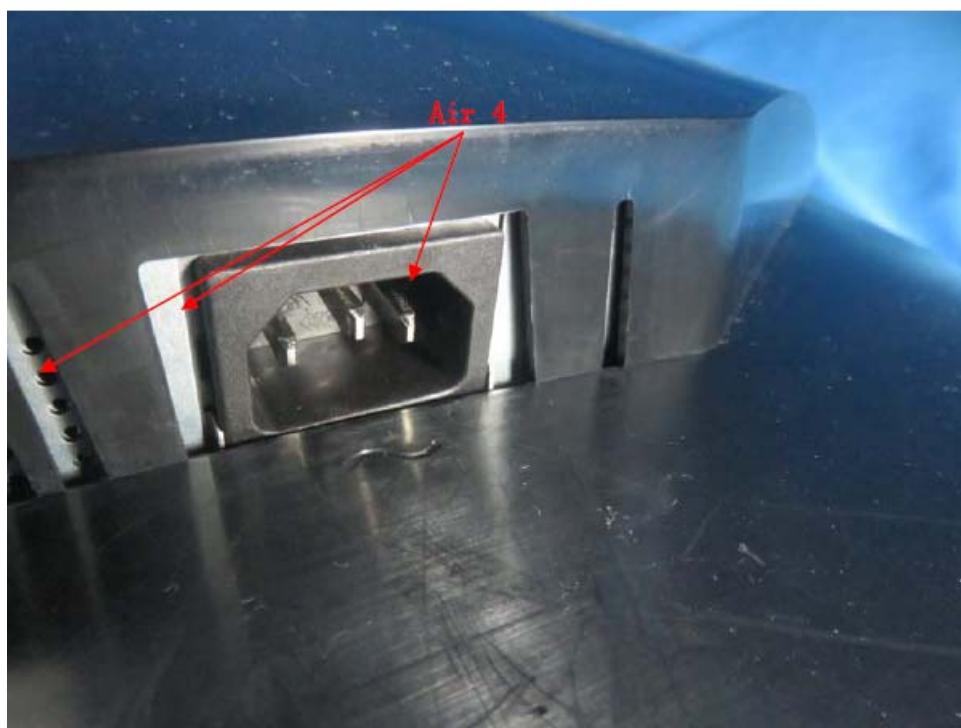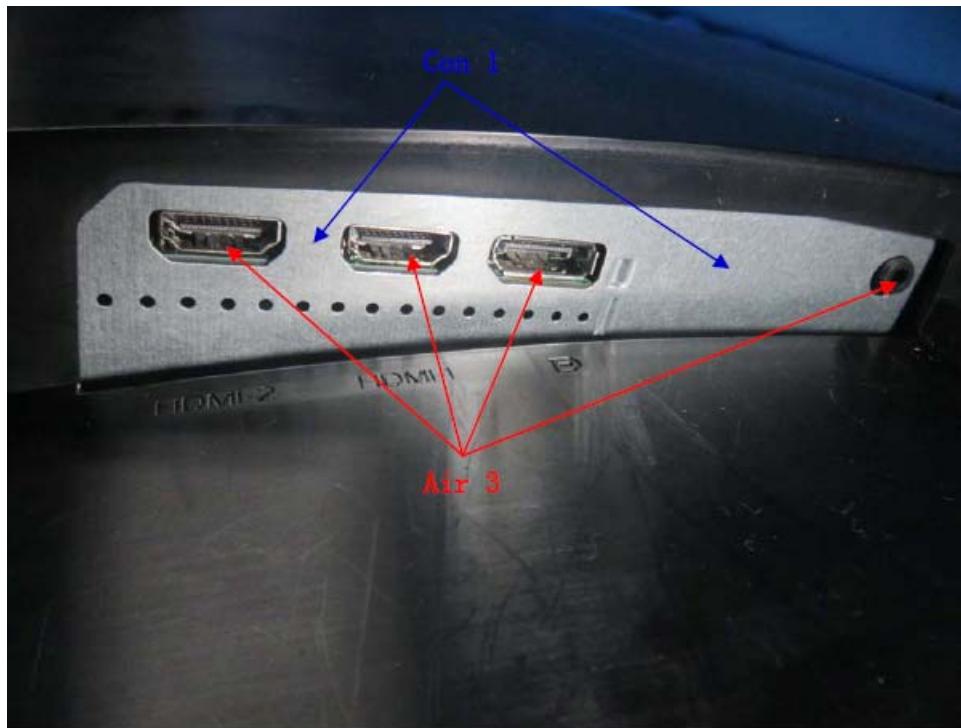

6.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

6.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

6.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Antenna	ETS	3142C	66462	Mar. 24, 2022
2*	Amplifier	AR	50S1G4A	326720	Feb. 28, 2024
3	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Jul. 25, 2021
4	Power amplifier	MILMEGA	AS1860-50	1064834	Feb. 28, 2022
5	Microwave Log.-Per. Antenna	TESEQ	STLP 9149	9149-277	Apr. 14, 2021
6	Power amplifier	MILMEGA	80RF1000-250	1064833	Feb. 28, 2022
7	Measurement Software	TOYO	IM5/RS Ver 3.8.050	N/A	N/A
8	Conditioning Amplifier	B&K	_2690_OF2_	2723746	Jun. 18, 2021
9	Free-field 1/2``Microphone	B&K	4190-L-001	2878077	Jun. 17, 2021
10	UPV Audio Analyzer	R&S	UPV	104259	Feb. 27, 2022

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

"*" calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.

6.6.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

The other condition as following manner:

- a. The field strength level was 3 V/m(unmodulated, r.m.s).
- b. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed 1.5x 10-3 decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

For Display and display output functions:

- a. The display quality evaluated by direct observation.
- b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output. The diagonal screen size shall be at least 0,50 m.
- c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

For Acoustic measurements:


- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of L_0 .
(BTL lab uses the software to take L_0 as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of L_1 .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:
Acoustic interference ratio = $L_1 - L_0$.
(For step e-g, BTL lab proceeds the test with software and calculate Acoustic interference ratio = $L_1 - L_0$).

6.6.4 DEVIATION FROM TEST STANDARD

No deviation


6.6.5 TEST SETUP

a) For Continuous induced RF disturbances

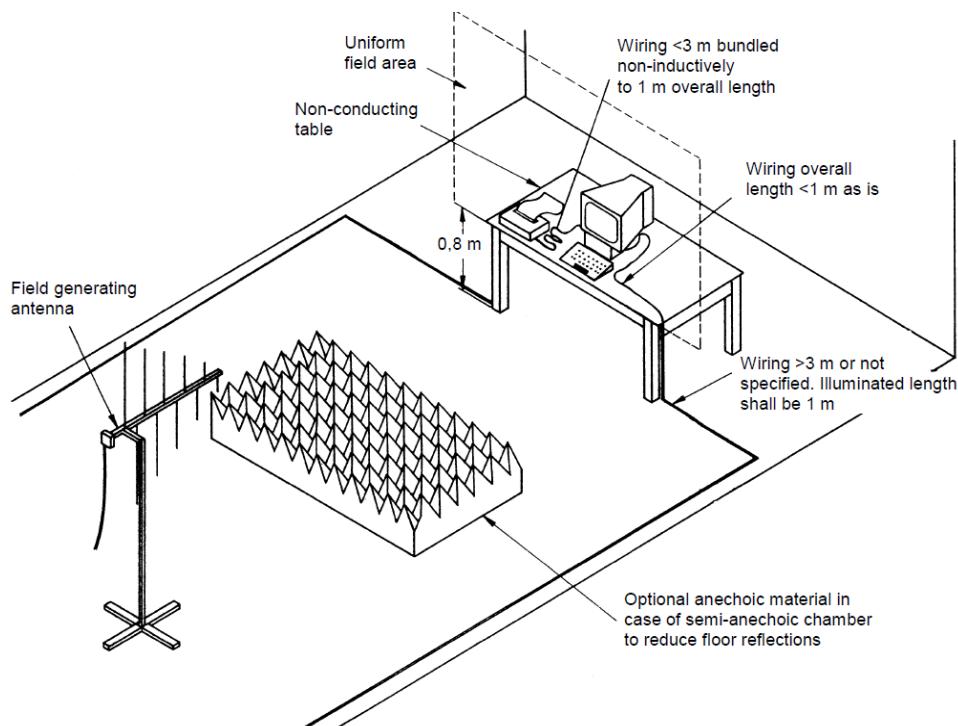

For Audio output function

(1) Audio output port

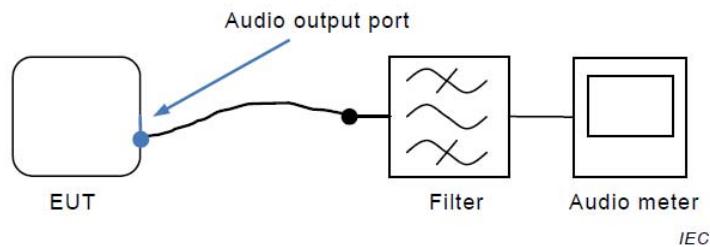

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

6.6.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, Mode 8

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		


For Audio output function

(1) Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Vertical_Front

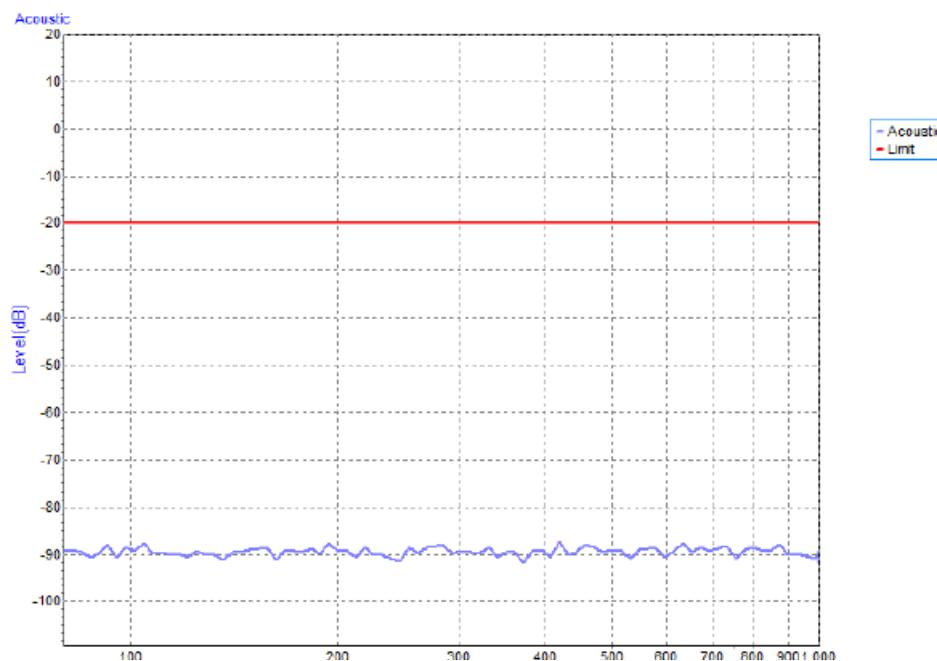

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Horizonttal_Front

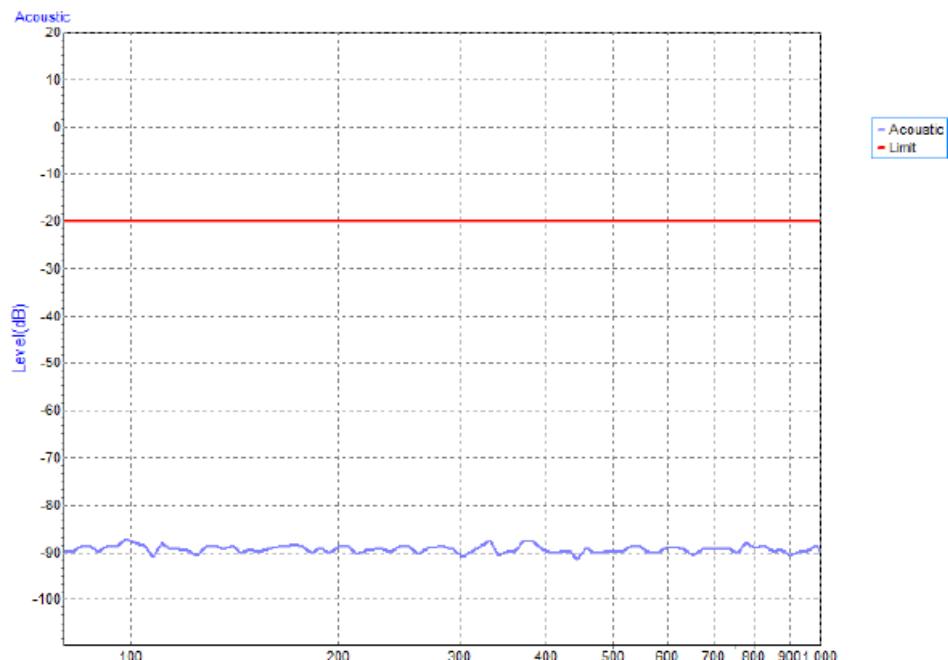

6.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)

6.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC Power Ports: ± 1 kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz: except for xDSL ports.
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

6.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	Jul. 25, 2021

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

6.7.3 TEST PROCEDURE

For TABLE-TOP equipment:

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m+/- 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.


The other condition as following manner:

- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute.

6.7.4 DEVIATION FROM TEST STANDARD

No deviation

6.7.5 TEST SETUP

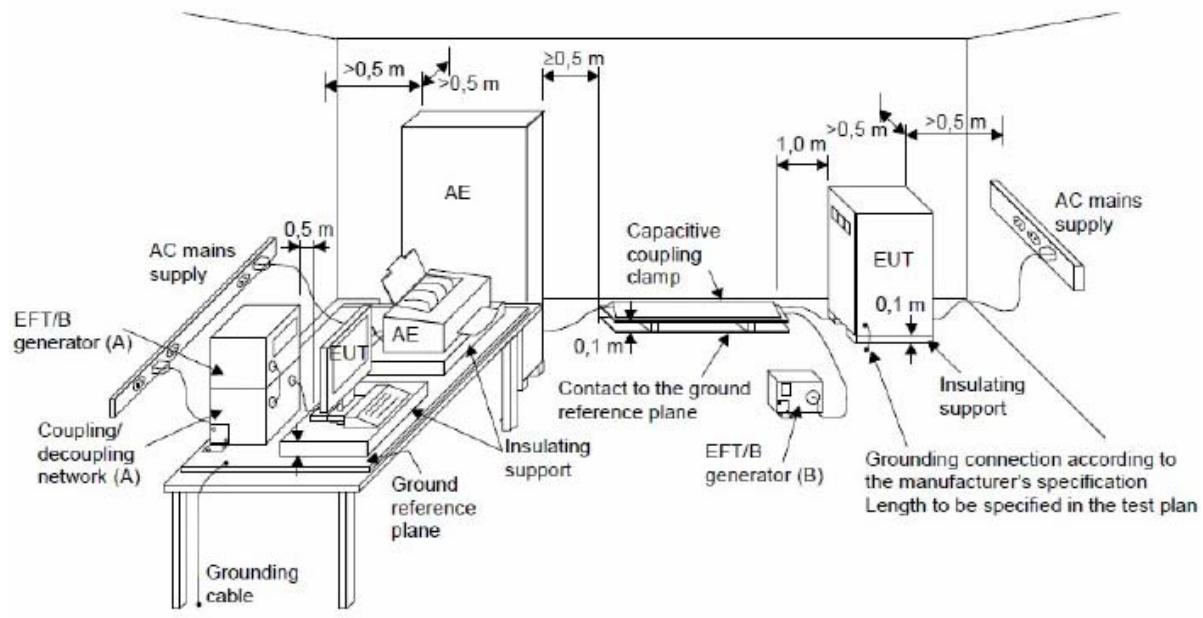

6.7.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, Mode 8

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result
				1kV		
AC Power Port	Line (L)	+	5 kHz	A	B	A
		-	5 kHz	A		
	Neutral (N)	+	5 kHz	A	B	A
		-	5 kHz	A		
	Ground (PE)	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+N	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+PE	+	5 kHz	A	B	A
		-	5 kHz	A		
	N+PE	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+N+PE	+	5 kHz	A	B	A
		-	5 kHz	A		

6.8 SURGE IMMUNITY TEST

6.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B
Wave-Shape	1.2/50(8/20) Tr/Th μ s combination wave
Test Voltage	AC Power Port: ± 0.5 kV, ± 1 kV, ± 2 kV
Generator Source Impedance	2 Ω of the low-voltage power supply network. 12 Ω (10 Ω +2 Ω) of the low-voltage power supply network and ground.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90° phase Five negative pulses line-to-neutral at 270° phase Five positive pulses line-to-earth at 90° phase Five negative pulses line-to-earth at 270° phase Five negative pulses neutral-to-earth at 90° phase Five positive pulses neutral-to-earth at 270° phase
Pulse Repetition Rate	1 time / min.

6.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	Jul. 25, 2021

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

6.8.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

6.8.4 DEVIATION FROM TEST STANDARD

No deviation

6.8.5 TEST SETUP

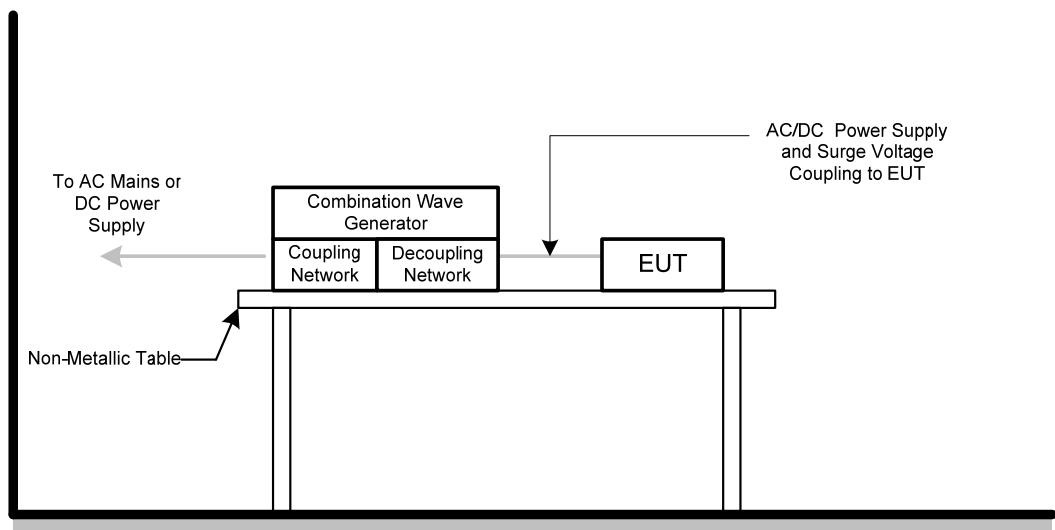

6.8.6 TEST RESULTS

Test Voltage	AC 230V/50Hz					
Test Mode	Mode 1-5, Mode 8					

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Th μ s						Criterion	Result		
		Polarity	Phase	Voltage							
				0.5kV	1kV	-- kV	-- kV				
AC	L - N	+	90°	A	A	-	-	B	A		
		-	270°	A	A	-	-				

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Th μ s						Criterion	Result		
		Polarity	Phase	Voltage							
				0.5kV	1kV	2kV	-- kV				
AC	L - PE	+	90°	A	A	A	-	B	A		
		-	270°	A	A	A	-				
	N - PE	-	90°	A	A	A	-	B	A		
		+	270°	A	A	A	-				

6.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

6.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Dwell Time	3 seconds

6.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Power CDN	FCC	FCC-801-M2/M3-16A	100270	Feb. 27, 2022
2	TEST SYSTEM FOR CONDUCTED AND RADIATED IMMUNITY	TESEQ	NSG 4070B	37513	Jul. 25, 2021
3	Measurement Software	Farad	EZ-CS(V2.0.1.2)	N/A	N/A
4	Conditioning Amplifier	B&K	2690_OF2	2723746	Jun. 18, 2021
5	Free-field 1/2``Microphone	B&K	4190-L-001	2878077	Jun. 17, 2021
6	UPV Audio Analyzer	R&S	UPV	104259	Feb. 27, 2022

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

6.9.3 TEST PROCEDURE

The equipment to be tested is placed on an insulating support of 0.1m height above a reference ground plane. All cables exiting the EUT shall be supported at a height of at least 30 mm above the reference ground plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

The other condition as following manner:

- a. The field strength level was 3 V (unmodulated, r.m.s.)
- b. The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed 1.5x 10-3 decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

For Display and display output functions:

- a. The display quality evaluated by direct observation.
- b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output.the diagonal screen size shall be at least 0,50 m.
- c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.


For Acoustic measurements:

- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of L_0 .
(BTL lab uses the software to take L_0 as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of L_1 .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:
Acoustic interference ratio = $L_1 - L_0$.
(For step e-g, BTL lab proceeds the test with software and calculate Acoustic interference ratio = $L_1 - L_0$).

6.9.4 DEVIATION FROM TEST STANDARD


No deviation

6.9.5 TEST SETUP

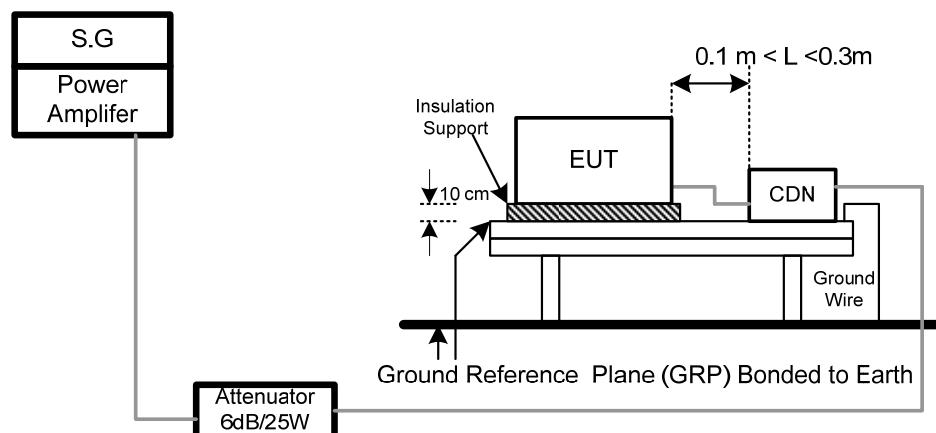

For Audio output function

(1) Audio output port

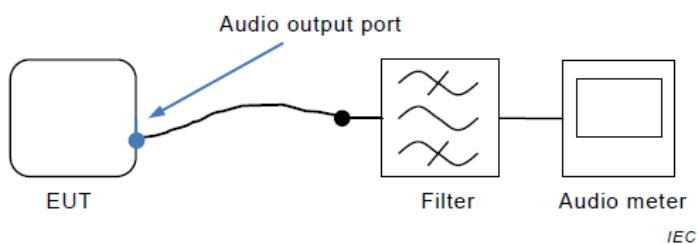

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

6.9.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, Mode 8

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			

For Audio output function

(1) Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CDN M3

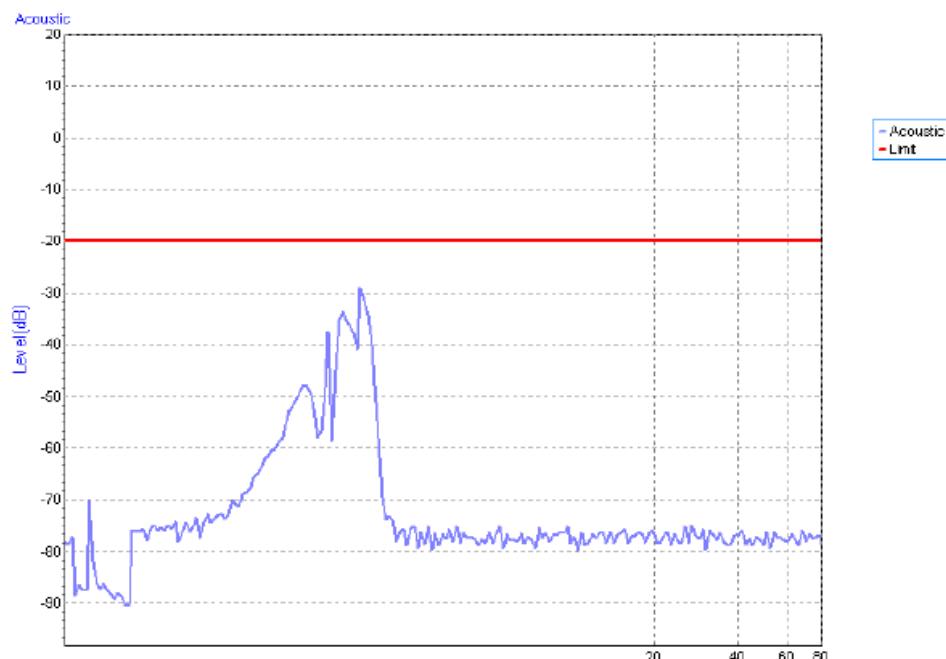

6.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

6.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60 Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

6.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	4032	Feb. 28, 2022
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9 /10-L-1M	4024	Feb. 28, 2022

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

6.10.3 TEST PROCEDURE

For TABLE-TOP equipment:


The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

The other condition as following manner:

- a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

6.10.4 DEVIATION FROM TEST STANDARD

No deviation

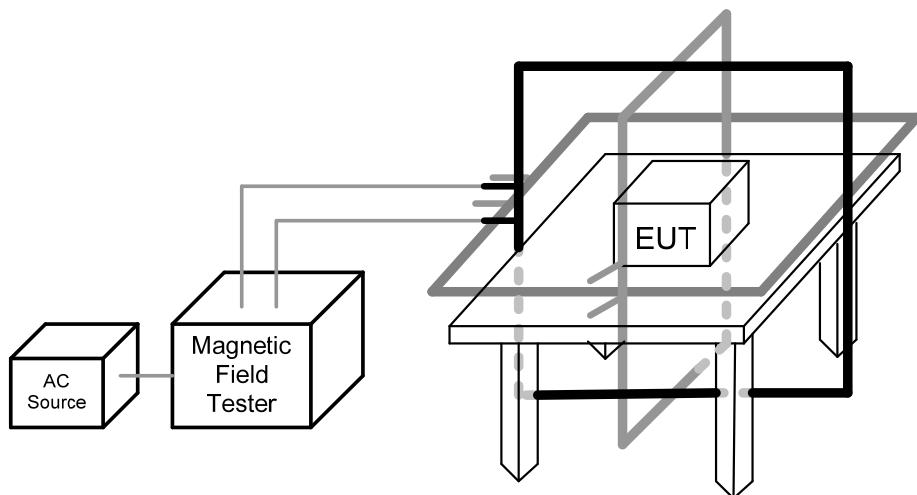6.10.5 TEST SETUP

6.10.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, Mode 8

50Hz

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results
Enclosure	1 A/m	X	60	A	A
Enclosure	1 A/m	Y	60	A	A
Enclosure	1 A/m	Z	60	A	A

60Hz

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results
Enclosure	1 A/m	X	60	A	A
Enclosure	1 A/m	Y	60	A	A
Enclosure	1 A/m	Z	60	A	A

6.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

6.11.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

6.11.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	Dec. 03, 2021

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.


6.11.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

6.11.4 DEVIATION FROM TEST STANDARD

No deviation

6.11.5 TEST SETUP

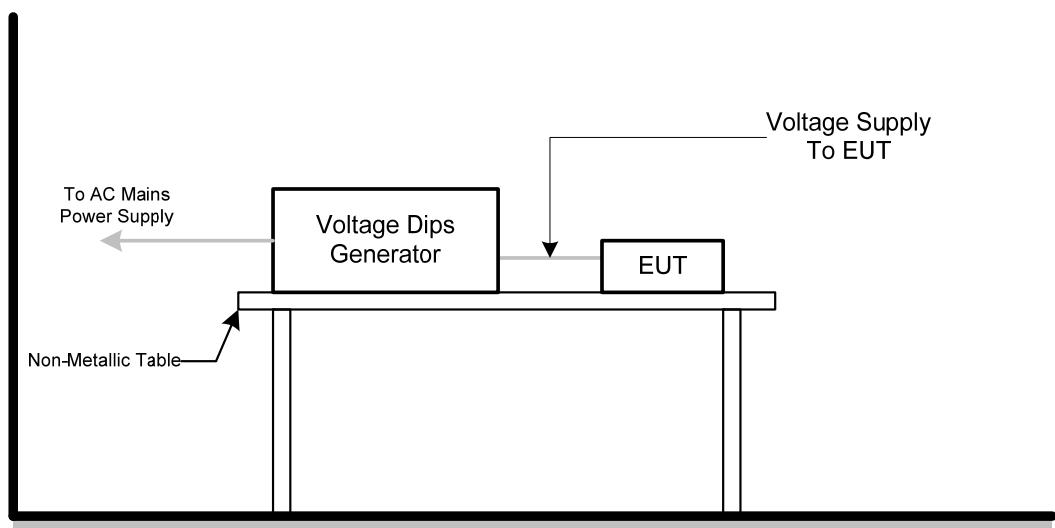

6.11.6 TEST RESULTS

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode	Mode 1-5, Mode 8

AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



7. EUT TEST PHOTO

EN 55032:2015


Radiated emissions up to 1 GHz



Radiated emissions above 1 GHz

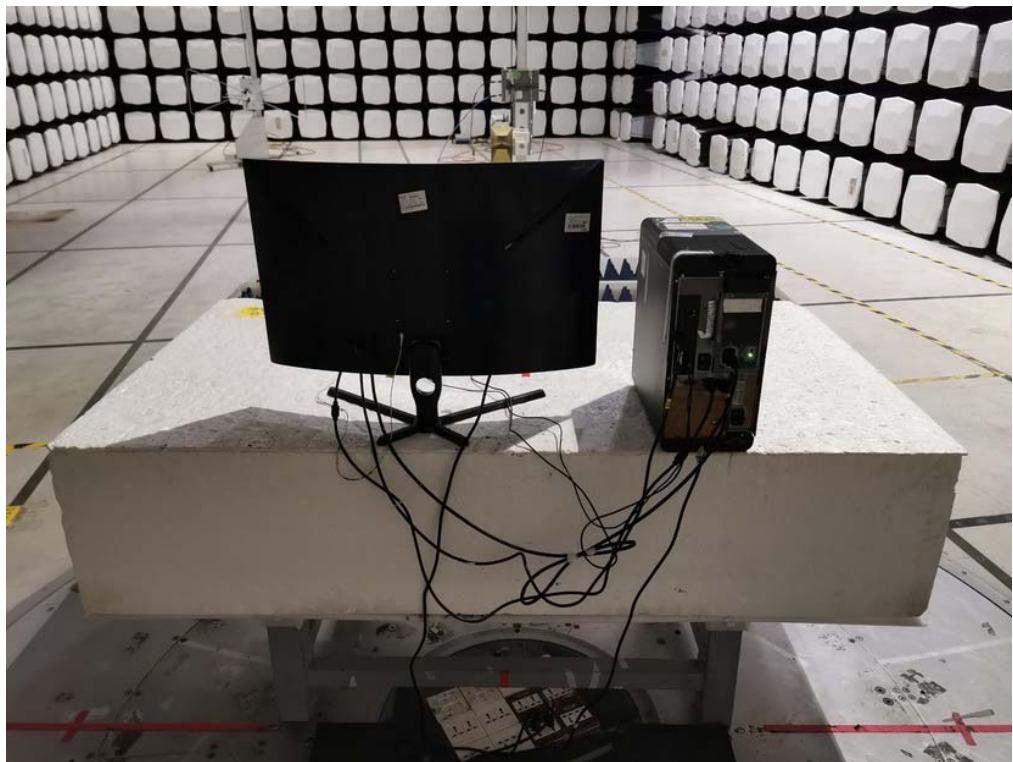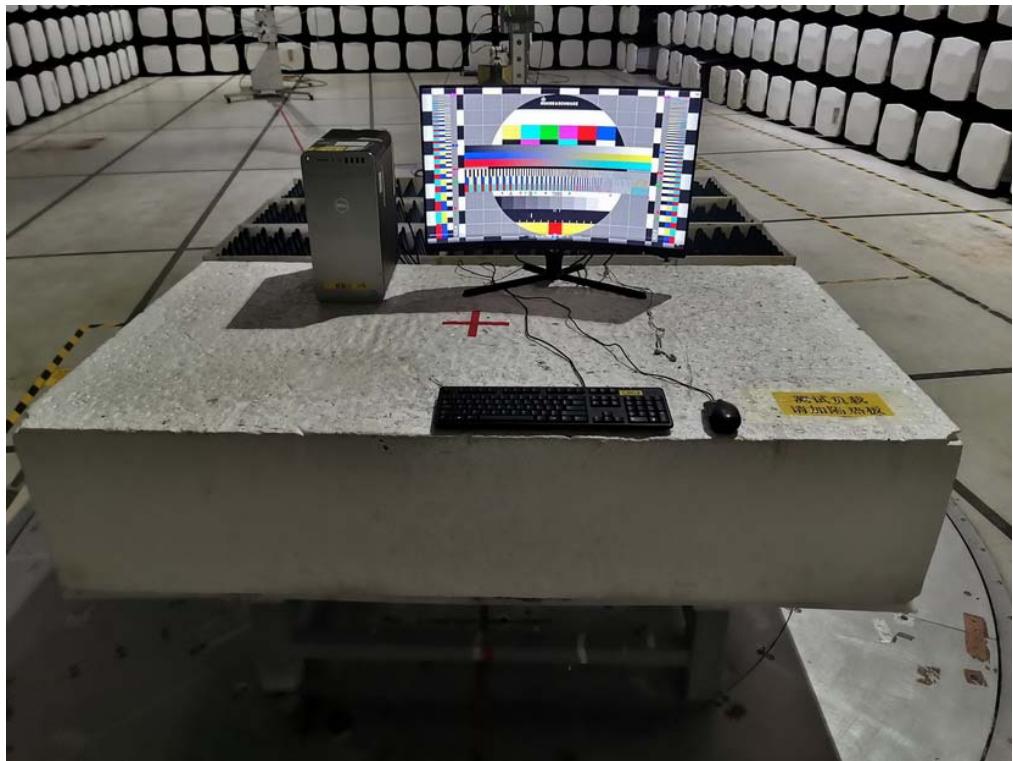

Conducted emissions AC mains power port

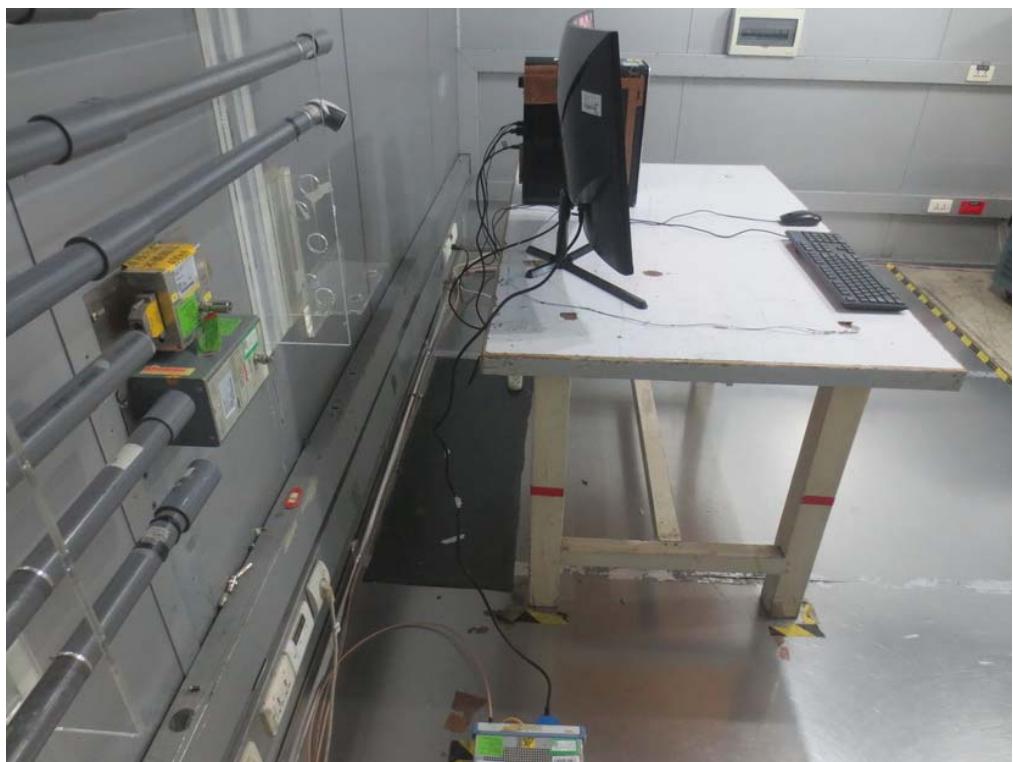


EN 55032:2015+AC:2016

Radiated emissions up to 1 GHz



Radiated emissions above 1 GHz

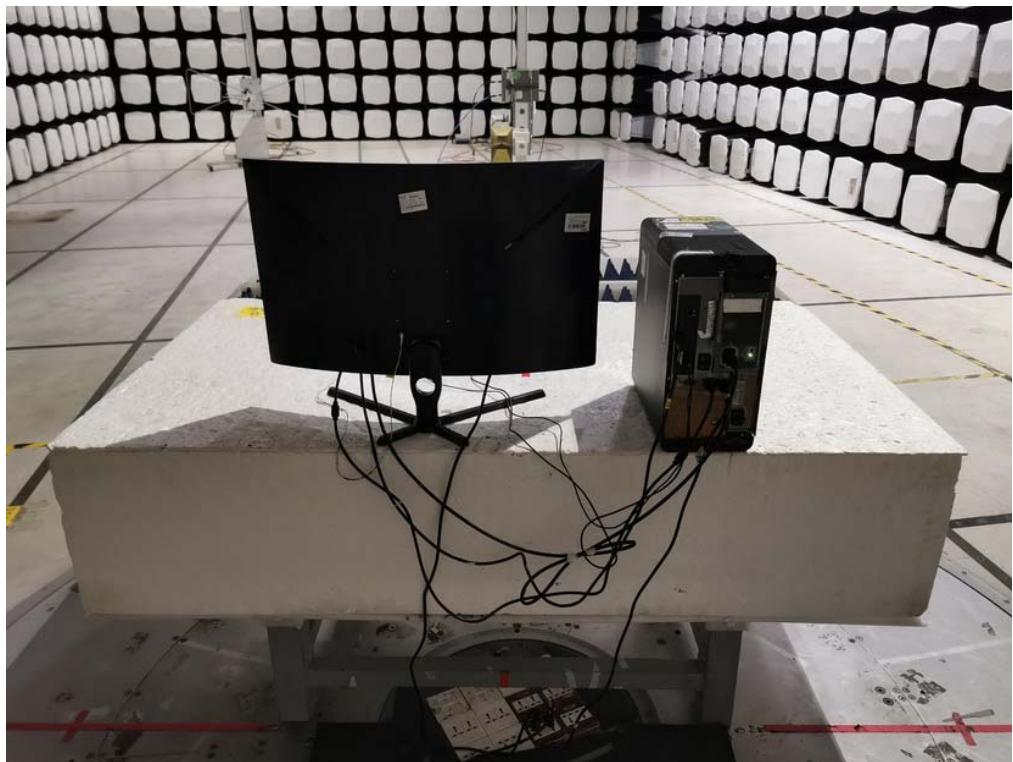

Conducted emissions AC mains power port



Harmonic current emissions




Voltage fluctuations (Flicker)



Electrostatic discharge immunity



Radiated, radio-frequency, electromagnetic field immunity – up to 1GHz

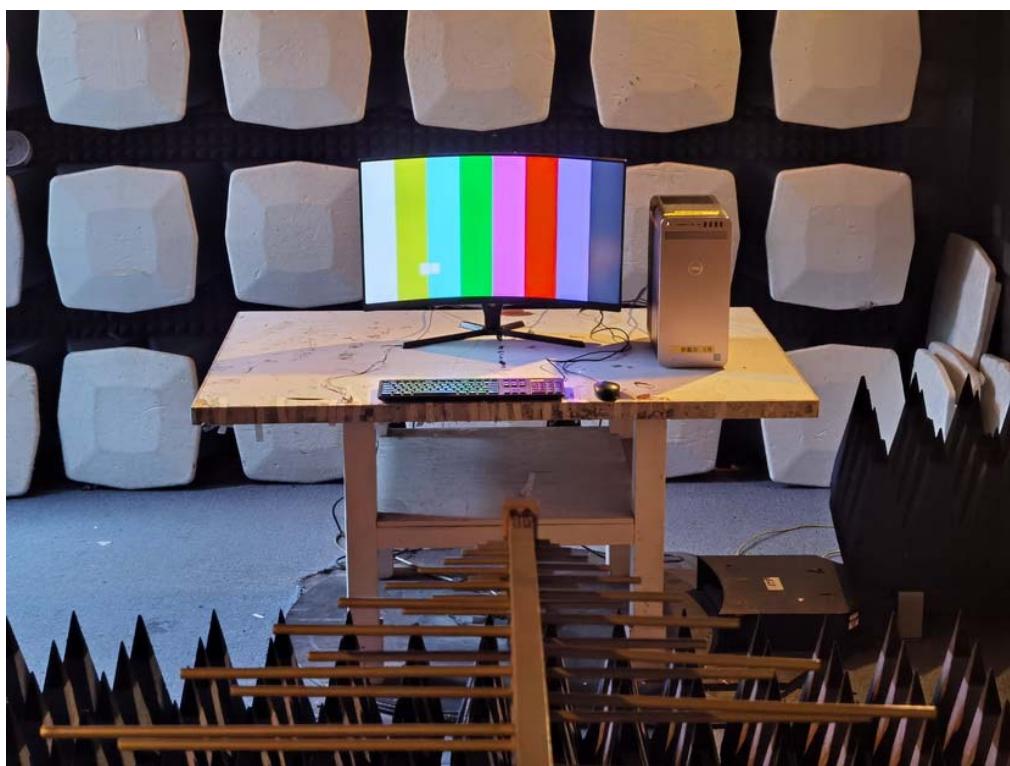

Radiated, radio-frequency, electromagnetic field immunity – above 1GHz



Electrical fast transient/burst immunity



Surge immunity



Immunity to conducted disturbances, induced by radio-frequency fields



Power frequency magnetic field immunity



Voltage dips, short interruptions and voltage variations immunity



End of Test Report