



Report No. 317773/En02

ENERGY SAVING CHARACTERISTICS

Product: **LCD Monitor**

Name/address of the applicant: **Taiwan BOE Vision-electronic Technology Co., Ltd.
7F, 2, Rei Kuang Road, Nei Hu, Taipei, Taiwan, R.O.C.**

Name/address of the manufacturer: **Taiwan BOE Vision-electronic Technology Co., Ltd.
7F, 2, Rei Kuang Road, Nei Hu, Taipei, Taiwan, R.O.C.**

Trade mark: **AOC**

Model number: **240LM00017**

Model name: **I2475PRQU**


Testing Standards: **ENERGY STAR Program Requirements for Displays Eligibility Criteria (Version 7.0)**
ENERGY STAR Program Requirements for Displays - Final Test Method Rev. Sep. 2015

Reference standards: **ICDM Version 1.03**
CEA-2037-A
IEC 62087 Ed. 3.0
VESA FPDM Standard 2.0
IEC 62301 Ed. 2.0

Test period: **2016/12/9**

Test results: **The UUT compliance with criterion specification specified in this test report.**

Signature:

Tested by

Name: **Lisa Chen** Date: **2016/12/9**
Engineer

Reviewed by

Name: **Jeff Chuang** Date: **2016/12/9**
Senior Manager

Test facility: **Nemko AS Taiwan Branch (Lab. Code: 1105429)**
5F, No. 409, Section 2, Tiding Blvd., Neihu, Taipei 11469, Taiwan

This report may not be reproduced other than in full, except with the prior written approval of Nemko.
Laboratories are accredited by the Taiwan Accreditation Foundation (TAF) under the terms of TAF legislation. The activities of accredited laboratory meet the requirements in ISO 17025 (2005). This report apply only to the sample(s) tested. It is manufacturer's responsibility to assure the additional production units of this product are manufactured with identical electrical and mechanical components. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.



Report No. 317773/En02

Test Equipment's / Power Supply Unit Information

Test Equipment's						
Ref. No	Equipment's	Manufacturer	Model	Series No	Cal. Date	Due Date
NTW033	Digital power meter	YOKOGAWA	WT210	91F223219	2016/03	2017/03
NTW008	AC source	APC	AFC-1102	F101110011	N/A	N/A
NTW034	Display Analysis system	Microvision	SS320	11-340	2016/08	2017/09
NTW048	Hot Wire Anemometer	Lutron	YK-2005AH	Q587292	2016/03	2017/03
NTWPC008	Lab NB_008	Nemko TW	-	-	N/A	N/A
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-

Power Supply Unit (PSU), Ambient, Supply voltage, UUT information.	
Items:	Contents:
Power Type	Ac power supply
UUT Input	Voltage: 100~240Vac Current: 1.5A Frequency: 50/60Hz
PSU Information	AC-DC/AC-AC: N/A Output Type: N/A Efficiency Level (EPS only): N/A EPS manufacture name: N/A EPS manufacture type: N/A EPS Input rating: N/A EPS Output rating: N/A
Test supply voltage	fluctuation: ≤ 0.5% harmonic: ≤ 2% crest facto: Selectable for 3 or 6 (≥ 3) for difference range. accuracy (V): ≤ 2% wattmeter: ≤ 0.5% resolution: 0.00001W (≤ 10W), 0.001W (10W < W ≤ 100W), 0.01W(>100W) Scanning freq.: 100kHz
Level of confidence at:	95%, K=2
Coverage factor:	UC ≤ 2% (Power > 0.5 W) or 0.01W (≤ 0.5W)
Ambient	Temperature(°C): 26.0°C Humidity(%): 51.0 % Air Speed(m/s): 0.2 m/s
Sample series no.	NTE-1610010
Model Difference	N/A
Additional Information	N/A



Report No. 317773/En02

Product Feature

Product Information	
UUT test voltage	115Vac/60Hz, 230Vac/50Hz, 100Vac/50Hz, 100Vac/60Hz
Display signal ports	Test used: DisplayPort 1.2 Ports: DisplayPort 1.2, DVI, HDMI, USB, D-Sub
Display bridge capability	Test used: USB(3.x) Ports: USB(3.x)
Display network capability	Test used: UUT without network capability. Ports: N/A
Display ABC feature	Available: Without ABC control Default Setting: N/A ABC Switch function: N/A
Display adjustability	Brightness: Yes Contrast: Yes
Display information	Display type: Panel Tech.:IPS LCD, Panel Type:TFT, Back Light:LED Panel supplier: BOE(MV240WUM-N10) Area (inch ²): 260.3 Size: 518.4 mm/324 mm/24.1 Inch Resolution: 1920 x 1200 (Horizontal x Vertical) Frequency: 75 kHz/60 Hz(Horizontal / Vertical) Aspect ratio: 8:5 H:V MegaPixels: 2.30
UUT default	Brightness: 90/100 Contrast: 50/100 CCT: Warm LMAX_Reported: 250.0 cd/m ² LMAX_Measured: 271.9 cd/m ² LAS_Shipped: 174.8 cd/m ² L _{On_Specified} (200 cd/m ² or 65% of Reported Max. L): 200.0 cd/m ²
Test condition	L _{On_Measured} : 203.9 cd/m ² Brightness: 67/100 Contrast: 100/100
UUT warm up time	> 20min. till luminance stable within 2% of reading.
Test pattern	IEC 62087 dynamic broadcast-content video signal 3 bar for luminance and On-Average for On mode testing.
Sequence of mode	On Mode: The on mode driving normally, signal support from ordinary personal computer. Sleep Mode: The display into sleep mode by received a signal from computer, and also can be wake up from sleep mode by received a signal from computer. Off Mode: the display during off mode did not provide with any function, the user must actuate a function/secondary switch to bring display out of off mode.



Report No. 317773/En02

Certification criterion and test data

3 CERTIFICATION CRITERIA <small>(Sub-clause refer to Energy Star Program Requirements for Displays Version 7.0 for detail requirement)</small>	
3.1 Significant Digits and Rounding	
3.1.1 All calculations shall be carried out with directly measured values.	Directly measured values used for all calculation.
3.1.2 Requirements shall be evaluated using directly measured values without any benefit from rounding.	All calculation use directly measured value.
3.1.3 Reported result shall be rounded to the nearest significant digit as specification criterion.	Report result rounded as specification criterion.
3.2 General Requirements for Monitors and Signage Displays	
3.2.1 External power Supplies (EPSs)	Not applicable for build-in internal power supply.
3.2.2 Power Management	
3.2.2 i Power management enabled by default.	The display design with power management system which enabled by default and capable to transit display amount On/Sleep/Off modes automatically.
3.2.2 ii If internal source exist, UUT shall have a sensor or timer enabled by default.	The display didn't design with internal signal source.
3.2.2 iii If display design with default delay time, the delay time shall be reported.	Display design without default delay time.
3.2.2 iv Display shall automatically enter Sleep or Off Mode within 5 minutes of being disconnected from host computer.	Display can into sleep/off mode ≤ 1 min. min. after disconnected from host computer.
3.2.3 Signage display shall have PF in On mode ≥ 0.7 .	Not applicable for computer monitor.
3.3 Energy Requirements for Computer Monitors	
3.3.1 Total Energy Consumption ETC:	Calculation result refer to test table below.
3.3.2 Maximum TEC ETEC_MAX:	Calculation result refer to test table below.
3.3.3 Total Energy Consumption Requirement for Monitors	Calculation result refer to test table below.
3.3.4 Enhanced performance display (EPD)	Display meet EPD criterion.
Contrast Ratio(Left):	60:1 at (85° for flat screen, 83° for curved screen)
Contrast Ratio(Right):	60:1 at (85° for flat screen, 83° for curved screen)
Native resolution ≥ 2.3 MP:	2.30
Color Gamut $\geq 32.9\%$ of CIE LUV.:	33.2
E _{EP} :	Refer to test table below.
3.3.5 Automatic Brightness Control (ABC) Available:	Without ABC control
Default Setting:	N/A
ABC Switch function:	N/A
E _{ABC} :	Refer to test table below.
3.3.6 Full network connectivity E _N :	Refer to test table below.
3.3.7 Occupancy sensor E _{OS} :	Refer to test table below.
3.4 On mode requirement for Signage display	Not applicable for computer monitor.
3.5 Sleep mode requirement for Signage display	Not applicable for computer monitor.
3.6 Off mode requirement for all display	$\leq 0.5W$ (Test result refer to test table below.)
3.7 Luminance reporting requirements	Detail result refer to product information.



Report No. 317773/En02

Test Data Table							
Mode		T1	T2	T3	T4	T5	T6
PON	230Vac/50Hz	16.4W	-	-	-	-	-
	115Vac/60Hz	16.4W	-	-	-	-	-
	100Vac/50Hz	16.4W	-	-	-	-	-
	100Vac/60Hz	16.4W	-	-	-	-	-
PF	230Vac/50Hz	0.47	-	-	-	-	-
	115Vac/60Hz	0.58	-	-	-	-	-
	100Vac/50Hz	0.58	-	-	-	-	-
	100Vac/60Hz	0.59	-	-	-	-	-
PSLEEP	230Vac/50Hz	0.3W	-	-	-	-	-
	115Vac/60Hz	0.2W	-	-	-	-	-
	100Vac/50Hz	0.2W	-	-	-	-	-
	100Vac/60Hz	0.2W	-	-	-	-	-
POFF	230Vac/50Hz	0.2W	-	-	-	-	-
	115Vac/60Hz	0.1W	-	-	-	-	-
	100Vac/50Hz	0.1W	-	-	-	-	-
	100Vac/60Hz	0.1W	-	-	-	-	-
PDisconnect	230Vac/50Hz	0.2W	-	-	-	-	-
	115Vac/60Hz	0.2W	-	-	-	-	-
	100Vac/50Hz	0.2W	-	-	-	-	-
	100Vac/60Hz	0.2W	-	-	-	-	-
P12	230Vac/50Hz	-	-	-	-	-	-
	115Vac/60Hz	-	-	-	-	-	-
	100Vac/50Hz	-	-	-	-	-	-
	100Vac/60Hz	-	-	-	-	-	-
P300	230Vac/50Hz	-	-	-	-	-	-
	115Vac/60Hz	-	-	-	-	-	-
	100Vac/50Hz	-	-	-	-	-	-
	100Vac/60Hz	-	-	-	-	-	-
RABC	230Vac/50Hz	-	-	-	-	-	-
	115Vac/60Hz	-	-	-	-	-	-
	100Vac/50Hz	-	-	-	-	-	-
	100Vac/60Hz	-	-	-	-	-	-
ETEC	230Vac/50Hz	51.8 kWh	-	-	-	-	-
	115Vac/60Hz	51.5 kWh	-	-	-	-	-
	100Vac/50Hz	51.6 kWh	-	-	-	-	-
	100Vac/60Hz	51.4 kWh	-	-	-	-	-
ETEC_MAX		59.2 kWh	-	-	-	-	-
EEP		6.76	-	-	-	-	-
EABC		-	-	-	-	-	-
EN		-	-	-	-	-	-
EOS		-	-	-	-	-	-
ET		-	-	-	-	-	-
EffAC_DC		1.00	-	-	-	-	-
ETEC_MAX_Total		66.0 kWh	-	-	-	-	-
Result	230Vac/50Hz	PASS	-	-	-	-	-
	115Vac/60Hz	PASS	-	-	-	-	-
	100Vac/50Hz	PASS	-	-	-	-	-
	100Vac/60Hz	PASS	-	-	-	-	-

$$E_{TEC} = 8.76 \times (0.35 \times P_{ON} + 0.65 \times P_{SLEEP})$$

$$E_{TEC} \leq (E_{TEC_{MAX}} + E_{EP} + E_{ABC} + E_N + E_{OS} + E_T) \times eff_{AC_DC}$$

$$ETEC_MAX = (6.13 \times r) + (0.2 \times A) - 7$$

$$EEP = 0.15 \times (ETEC_MAX - 6.13 \times r) (\geq 32.9\% \text{ of CIE LUV})$$

Test ID identification

T1: Basic configuration. T4: N/A
 T2: N/A T5: N/A
 T3: N/A T6: N/A


No EABC adder No ET adder
 No EN adder EffAC_DC = 1
 No EOS adder




Report No. 31773/En02

Test Configuration Illustration and Nameplate

Test Configuration

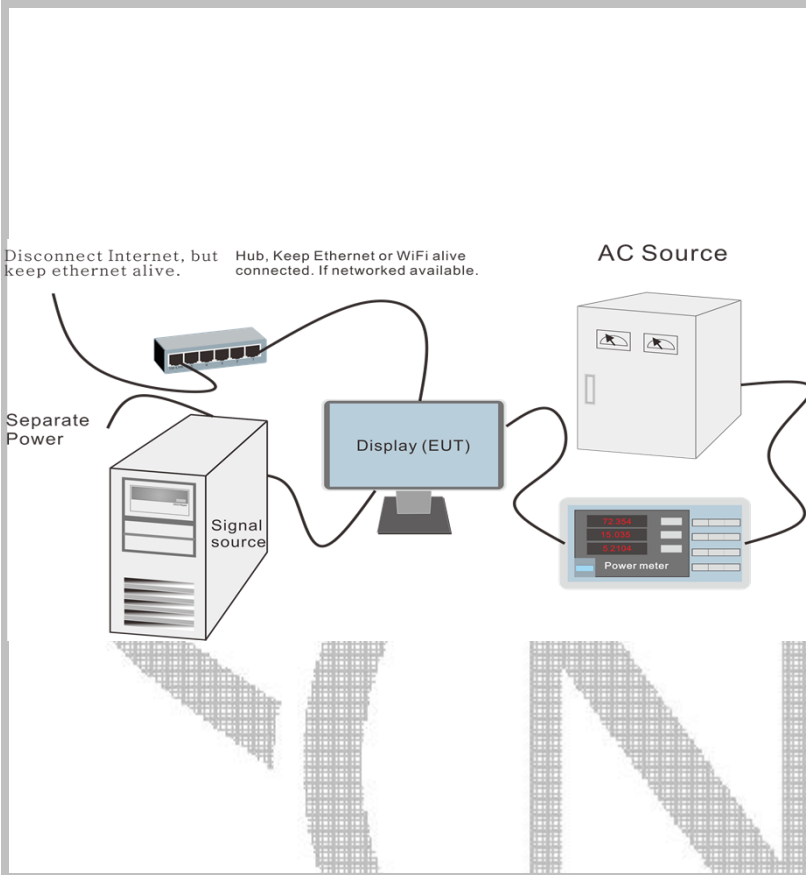

Power Meter Configuration for Load

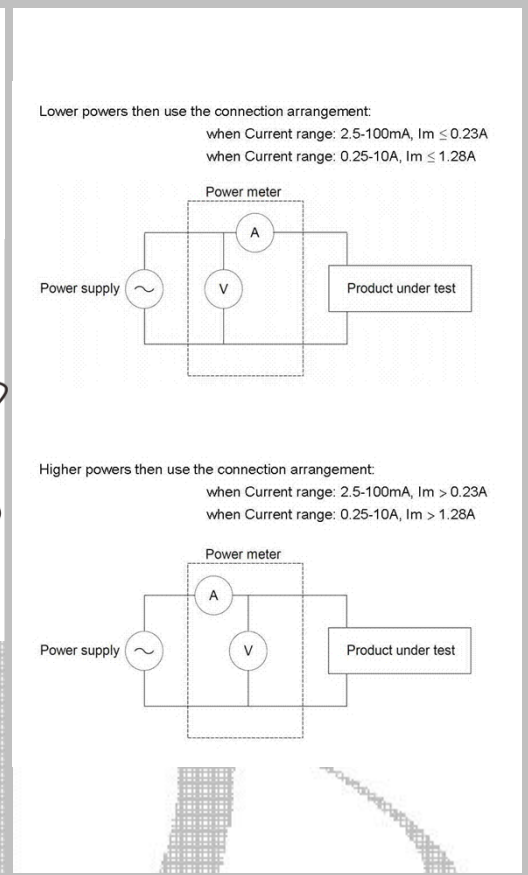

Product Nameplate

AOC LCD monitor (LED Backlight)
 Product Name: I2475PRQU
 Model No.: 240LM00017
 Power Rating: 100-240V~50/60Hz 1.5A

www.aoc.com Made in China

AOC International Europe B.V.
 Amstelgebouw, 6th floor
 Prins Bernhardplein 200
 1097 JB Amsterdam
 The Netherlands

L24CSBHMB5P0
 Serial No.: E28E2QA000001

MFD D514

www.aoc.com Made in China

Energy Star
 Nemko GS
 TCO Certified
 40 WATT
 CE
 EAC



Report No. 317773/En02

Front/Rear View of Product





Report No. 31773/En02

Photo of inside panel

