



# TEST REPORT IEC 62368-1

# Audio/video, information and communication technology equipment Part 1: Safety requirements

 Report Number .......
 60435819 001

 Date of issue .......
 09.Mar.2021

 Total number of pages ......
 67 pages

Applicant's name...... TPV Electronics (Fujian) Co., Ltd.

Address ...... Rongqiao Economic and Technological Development Zone, Fuqing

City, Fujian, P.R. China

**Test specification:** 

Standard .....: IEC 62368-1:2014 (Second Edition)

Test procedure ...... CB Scheme

Non-standard test method.....: N/A

Test Report Form No. ..... IEC62368\_1B

# Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

# General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test Item description:	LCD MONITOR	
Trade Mark:	AOC	
Manufacturer:	Same as applicant.	
Model/Type reference:	AG274******* (* can be 0-9, A-Z, a-z, -,  /, + or blank, represent different sales region and enclosure colour for marketing purpose)	
Ratings ::	I/P: 19.5Vdc, 11.79A or 9.23A	
Testing procedure and testing location:		
☐ CB Testing Laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.	
Testing location/ address:	1601 R&D Room, 1602-1604, 17-18F, Building 7 Site C, Vanke Cloud City Phase I, Xingke First Street, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, P.R. China	
Associated CB Testing Laboratory:		
Testing location/ address:		
Tested by (name + signature):	Anderson Wang Senior Project Manager	Soul
Approved by (name + signature):	Steven Lin Technical Reviewer	San C
☐ Testing procedure: TMP/CTF Stage 1		
Testing location/ address:		
Tested by (name + signature):		
Approved by (name + signature):		
☐ Testing procedure: WMT/CTF Stage 2		
Testing location/ address:		
Tested by (name + signature):		
Witnessed by (name + signature):		
Approved by (name + signature):		
Testing procedure: SMT/CTF Stage 3 or 4		
Testing location/ address:		
Tested by (name + signature):		
Approved by (name + signature):		
Supervised by (name + signature):		

#### List of Attachments (including a total number of pages in each attachment):

- Photo documentation (9 Pages)
- National Differences (34 Pages)

#### Summary of testing:

#### Tests performed (name of test and test clause):

The tests were carried out under the most unfavorable combination within the manufacturer's operating specifications of the following parameters:

- -supply voltage 19.5Vdc
- -operating temperature, Max. ambient temperature 40°C declared by the client
- -operating mode: continuous
- -operating load:

The equipment operated under full screen with three vertical bar signal according IEC60107-1 with max. brightness and contrast; with 1KHz sinusoidal signal and turned to maximum volume; each USB 3.0 port loaded with 5V/0.9A, each USB 3.0 port with fast charging loaded with 5V/1.5A, and each USB type C port loaded with 20V/3.25A.

name of test	test clause number
Classification of electrical energy sources	5.2
Maximum operating temperature test (Heating test)	5.4.1.4, 6.3.2, 9.0, B.2.6
Electrical Power Source (PS) measurements for classification	6.2.2
Stability	8.6
Equipment mounted to wall or ceiling	8.7
Simulated abnormal operating and single fault conditions	B.3, B.4
Input test	Annex B.2.5
Test for permanence of markings	Annex F.3.10
Limited power source test (LPS)	Annex Q.1

# **Testing location:**

All tests as described in Test Case and Measurement Sections were performed at the laboratory described on page 2.

### **Summary of compliance with National Differences:**

#### List of countries addressed:

Summary of compliance with National Differences to IEC 62368-1:2014 (Second Edition) and EN 62368-1:2014+ A11: 2017 (for explanation of codes see below):

EU Group Differences, EU Special National Conditions, AU, CA, DE, DK, FI, IT, JP, NO, NZ, SE, US Explanation of used codes: AU=Australia, CA=Canada, DE=Germany, DK=Demark, FI=Finland, IT=Italy, JP=Japan, NO=Norway, NZ=New Zealand, SE=Sweden, US=United States of America

#### The product fulfils the requirements of EN 62368-1:2014+ A11:2017


For National Differences see corresponding Attachment.

#### Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.



19.5V === 11.79A

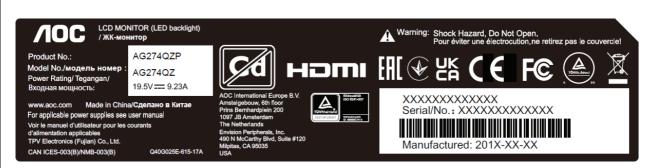

19.5V <del>---</del> 9.23A

The above label represents labels for model names other than above covered by the model name.