

# CE&UKCA EMC Test Report

**Project No.** : 2103C141  
**Equipment** : LCD Monitor  
**Brand Name** : 274QX  
**Test Model** : \*\*274QX\*\*\*\*\*(\*=0-9,A-Z,a-z,+,-,/,\ or blank)  
**Series Model** : N/A  
**Applicant** : TPV Electronics (Fujian) Co., Ltd.  
**Address** : Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China  
**Date of Receipt** : Mar. 17, 2021  
**Date of Test** : Mar. 18, 2021 ~ Apr. 21, 2021  
**Issued Date** : Apr. 28, 2021  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG2021031832  
**Standard(s)** : EN 55032:2015 / AS/NZS CISPR 32:2015 / CISPR 32:2015, Class B  
EN 55032:2015+AC:2016 / CISPR 32:2015+COR1:2016, Class B  
EN 55032:2015+A11:2020 / AS/NZS CISPR 32:2020, Class B  
EN 55035:2017/ CISPR 35:2016  
EN 55035:2017+A11:2020  
IEC 61000-3-2:2014 / EN 61000-3-2:2014, Class D  
IEC 61000-3-2:2018 / EN IEC 61000-3-2:2019, Class D  
IEC 61000-3-3:2013 / EN 61000-3-3:2013  
IEC 61000-3-3:2013+A1:2017 / EN 61000-3-3:2013+A1:2019

BS EN 55032:2015+A11:2020, Class B  
BS EN IEC 61000-3-2:2019, Class D  
BS EN 61000-3-3:2013+A1:2019  
BS EN 55035:2017+A11:2020

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

*Derek Tong*

Prepared by : Derek Tong

*Kevin Li*

Approved by : Kevin Li



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>7</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>8</b>
1.1 TEST FACILITY	10
1.2 MEASUREMENT UNCERTAINTY	10
1.3 TEST ENVIRONMENT CONDITIONS	12
<b>2 . GENERAL INFORMATION</b>	<b>13</b>
2.1 GENERAL DESCRIPTION OF EUT	13
2.2 DESCRIPTION OF TEST MODES	14
2.3 EUT OPERATING CONDITIONS	15
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
2.5 DESCRIPTION OF SUPPORT UNITS	16
<b>3 . EMC EMISSION TEST- EN55032: 2015</b>	<b>18</b>
3.1 RADIATED EMISSION UP TO 1 GHZ	18
3.1.1 LIMITS	18
3.1.2 MEASUREMENT INSTRUMENTS LIST	18
3.1.3 TEST PROCEDURE	19
3.1.4 DEVIATION FROM TEST STANDARD	19
3.1.5 TEST SETUP	19
3.1.6 MEASUREMENT DISTANCE	20
3.1.7 TEST RESULTS (UP TO 1 GHZ)	21
3.2 RADIATED EMISSION ABOVE 1 GHZ	31
3.2.1 LIMITS	31
3.2.2 MEASUREMENT INSTRUMENTS LIST	31
3.2.3 TEST PROCEDURE	32
3.2.4 DEVIATION FROM TEST STANDARD	32
3.2.5 TEST SETUP	32
3.2.6 MEASUREMENT DISTANCE	33
3.2.7 TEST RESULTS (ABOVE 1 GHZ)	34
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	44
3.3.1 LIMITS	44
3.3.2 MEASUREMENT INSTRUMENTS LIST	44
3.3.3 TEST PROCEDURE	44
3.3.4 DEVIATION FROM TEST STANDARD	44
3.3.5 TEST SETUP	45
3.3.6 TEST RESULTS	46
<b>4 . EMC EMISSION TEST- EN 55032:2015+A11:2020</b>	<b>54</b>
4.1 RADIATED EMISSIONS UP TO 1 GHZ	54

<b>Table of Contents</b>	<b>Page</b>
4.1.1 LIMITS	54
4.1.2 MEASUREMENT INSTRUMENTS LIST	54
4.1.3 TEST PROCEDURE	55
4.1.4 DEVIATION FROM TEST STANDARD	55
4.1.5 TEST SETUP	55
4.1.6 MEASUREMENT DISTANCE	56
4.1.7 TEST RESULTS (UP TO 1 GHZ)	57
<b>4.2 RADIATED EMISSIONS ABOVE 1 GHZ</b>	<b>59</b>
4.2.1 LIMITS	59
4.2.1 MEASUREMENT INSTRUMENTS LIST	59
4.2.1.1 TEST PROCEDURE	60
4.2.1.2 DEVIATION FROM TEST STANDARD	60
4.2.1.3 TEST SETUP	60
4.2.1.4 MEASUREMENT DISTANCE	61
4.2.1.5 TEST RESULTS (ABOVE 1 GHZ)	62
<b>4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS</b>	<b>64</b>
4.3.1 LIMITS	64
4.3.2 MEASUREMENT INSTRUMENTS LIST	64
4.3.3 TEST PROCEDURE	64
4.3.4 TEST SETUP	65
4.3.5 TEST RESULTS	66
<b>5 . HARMONIC AND FLICKER TEST</b>	<b>68</b>
5.1 HARMONIC CURRENT EMISSIONS	68
5.1.1 LIMITS	68
5.1.2 MEASUREMENT INSTRUMENTS LIST	68
5.1.3 TEST PROCEDURE	68
5.1.4 DEVIATION FROM TEST STANDARD	68
5.1.5 TEST SETUP	68
5.1.6 TEST RESULTS	69
5.2 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST	72
5.2.1 LIMITS	72
5.2.2 MEASUREMENT INSTRUMENTS LIST	72
5.2.3 TEST PROCEDURE	72
5.2.4 DEVIATION FROM TEST STANDARD	72
5.2.5 TEST SETUP	73
5.2.6 TEST RESULTS	74
<b>6 . EMC IMMUNITY TEST</b>	<b>75</b>
6.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	75
6.2 GENERAL PERFORMANCE CRITERIA	78
6.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION	79
6.3.1 PERFORMANCE CRITERIA	79

<b>Table of Contents</b>	<b>Page</b>
<b>6.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION</b>	<b>80</b>
6.4.1 PERFORMANCE CRITERIA	80
<b>6.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)</b>	<b>81</b>
6.5.1 TEST SPECIFICATION	81
6.5.2 MEASUREMENT INSTRUMENTS	81
6.5.3 TEST PROCEDURE	81
6.5.4 DEVIATION FROM TEST STANDARD	82
6.5.5 TEST SETUP	82
6.5.6 TEST RESULTS	83
<b>6.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)</b>	<b>87</b>
6.6.1 TEST SPECIFICATION	87
6.6.2 MEASUREMENT INSTRUMENTS	87
6.6.3 TEST PROCEDURE	87
6.6.4 DEVIATION FROM TEST STANDARD	88
6.6.5 TEST SETUP	88
6.6.6 TEST RESULTS	90
<b>6.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)</b>	<b>93</b>
6.7.1 TEST SPECIFICATION	93
6.7.2 MEASUREMENT INSTRUMENTS	93
6.7.3 TEST PROCEDURE	93
6.7.4 DEVIATION FROM TEST STANDARD	93
6.7.5 TEST SETUP	94
6.7.6 TEST RESULTS	95
<b>6.8 SURGE IMMUNITY TEST</b>	<b>96</b>
6.8.1 TEST SPECIFICATION	96
6.8.2 MEASUREMENT INSTRUMENTS	96
6.8.3 TEST PROCEDURE	96
6.8.4 DEVIATION FROM TEST STANDARD	97
6.8.5 TEST SETUP	97
6.8.6 TEST RESULTS	98
<b>6.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY</b>	
<b>FIELDS TEST (CS)</b>	<b>99</b>
6.9.1 TEST SPECIFICATION	99
6.9.2 MEASUREMENT INSTRUMENTS	99
6.9.3 TEST PROCEDURE	99
6.9.4 DEVIATION FROM TEST STANDARD	100
6.9.5 TEST SETUP	100
6.9.6 TEST RESULTS	102
<b>6.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)</b>	<b>104</b>
6.10.1 TEST SPECIFICATION	104
6.10.2 MEASUREMENT INSTRUMENTS	104
6.10.3 TEST PROCEDURE	104

<b>Table of Contents</b>	<b>Page</b>
<b>6.10.4 DEVIATION FROM TEST STANDARD</b>	<b>104</b>
<b>6.10.5 TEST SETUP</b>	<b>105</b>
<b>6.10.6 TEST RESULTS</b>	<b>106</b>
<b>6.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY</b>	
<b>TEST (DIPS)</b>	<b>107</b>
<b>6.11.1 TEST SPECIFICATION</b>	<b>107</b>
<b>6.11.2 MEASUREMENT INSTRUMENTS</b>	<b>107</b>
<b>6.11.3 TEST PROCEDURE</b>	<b>107</b>
<b>6.11.4 DEVIATION FROM TEST STANDARD</b>	<b>107</b>
<b>6.11.5 TEST SETUP</b>	<b>107</b>
<b>6.11.6 TEST RESULTS</b>	<b>108</b>
<b>7 . EUT TEST PHOTO</b>	<b>109</b>

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	Apr. 28, 2021

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission			
Standard(s)	Test Item	Result	
EN 55032:2015 / AS/NZS CISPR 32:2015 / CISPR 32:2015 EN 55032:2015+AC:2016/ CISPR 32:2015+COR1:2016 EN 55032:2015+A11:2020 / AS/NZS CISPR 32:2020 BS EN 55032:2015+A11:2020	Radiated emissions up to 1 GHz	PASS	
	Radiated emissions above 1 GHz	PASS	
	Radiated emissions from FM receivers	N/A	
	Conducted emissions AC mains power port	PASS	
	Asymmetric mode conducted emissions	AAN	N/A
		Current Probe	N/A
		CP+CVP	N/A
Conducted differential voltage emissions	N/A		

Standard(s)	Test Item	Result
IEC 61000-3-2:2014 / EN 61000-3-2:2014 IEC 61000-3-2:2018 / EN IEC 61000-3-2:2019 BS EN IEC 61000-3-2:2019	Harmonic current	PASS
IEC 61000-3-3:2013 / EN 61000-3-3:2013 IEC 61000-3-3:2013+A1:2017 / EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A1:2019	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017/ CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017+A11:2020	IEC 61000-4-2:2008 / EN 61000-4-2:2009	ESD	PASS
	IEC 61000-4-3:2006+A1:2007+A2:2010 EN 61000-4-3:2006+A1:2008+A2:2010	RS	PASS
	IEC 61000-4-4:2012 / EN 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+A1:2017 EN 61000-4-5:2014+A1:2017	Surge	PASS
	IEC 61000-4-6:2013 EN 61000-4-6:2014+AC:2015	CS	PASS
	IEC 61000-4-8:2009 / EN 61000-4-8:2010	PFMF	PASS
	IEC 61000-4-11:2004+A1:2017 EN 61000-4-11:2004+A1:2017	Dips	PASS



EN 55035:2017/ CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017+A11:2020	4.2.7	Broadband impulse noise disturbances, repetitive	N/A
	4.2.7	Broadband impulse noise disturbances, isolated	N/A

## NOTE:

- (1) "N/A" denotes test is not applicable to this device.

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

### 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

#### A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.44
		30MHz ~ 200MHz	H	3.44
		200MHz ~ 1,000MHz	V	4.28
		200MHz ~ 1,000MHz	H	3.52

#### B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB08 (3m)	CISPR	1GHz ~ 6GHz	4.36

#### C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C01	CISPR	150kHz ~ 30MHz	3.18

#### D. Harmonic/ Flicker Measurement:

Test Site	Method	Item	U (%)
DG-C01	EN IEC 61000-3-2	Current	0.593
	EN 61000-3-3	Voltage	0.595

## E. Immunity Measurement:

Test Site	Method	Item	U
DG-SR02	IEC 61000-4-2	Rise time $t_r$	6.80%
		Peak current $I_p$	6.30%
		Current at 30 ns	6.50%
		Current at 60 ns	6.90%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.38dB
		On-ear acoustic & Acoustic measurements on loudspeakers	2.40dB
		Electrical measurements	2.40dB
DG-SR05	IEC 61000-4-4	Peak voltage ( $V_p$ )	3.7%
		Rise time ( $t_r$ )	4.4%
		Pulse width( $t_w$ )	4.1%
		Pulse Freq.(kHz)	0.8%
		Burst Duration(ms)	1.4%
		Burst Period(ms)	1.4%
DG-SR05	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	3.8%
		Open circuit front time (1.2/50us)	6.3%
		Open circuit time of half value (1.2/50us)	4.6%
DG-CB06	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.32dB
		EM clamp	3.16dB
		On-ear acoustic & Acoustic measurements on loudspeakers	1.36dB
		Electrical measurements	1.34dB
DG-SR05	IEC 61000-4-8	Magnetic Field Strength	2.38%
DG-SR05	IEC 61000-4-11	DIP Amplitude	0.5%
		DIP Time Event	3%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By
Radiated emissions up to 1 GHz	25°C	60%	Hawe Zhang
Radiated emissions above 1 GHz	25°C	60%	Hawe Zhang
Conducted emissions AC mains power port	25°C	53%	Hawe Zhang
Harmonic current	25°C	55%	Hawe Zhang
Voltage fluctuations (Flicker)	25°C	55%	Hawe Zhang

Test Item	Temperature	Humidity	Pressure	Tested By
ESD	22°C	45%	1010hPa	Rich Ye
RS	22°C	50%	/	Hunter Xu
EFT	22°C	50%	/	Celina Lai
Surge	22°C	50%	/	Celina Lai
CS	22°C	50%	/	Daniel Li
PFMF	22°C	50%	/	Daniel Li
Dips	22°C	50%	/	Daniel Li

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	LCD Monitor
Brand Name	N/A
Test Model	274QX
Series Model	**274QX*****(*=0-9,A-Z,a-z,+,-,/,\ or blank)
Model Difference(s)	Only differ in model name due to marketing purpose
Power Source	DC voltage supplied from AC/DC adapter. Model: ADPC20120
Power Rating	I/P: 100-240V~ 1.5A 50-60Hz O/P: 120.0W 20.0V --- 6.0A
Connecting I/O Port(s)	1* DC port 2* DP port 2* HDMI port 1* Earphone port 2* Micphone port 5* USB port 1* Micro USB port
Classification Of EUT	Class B
Highest Internal Frequency(Fx)	592MHz

Cable Type	Shielded Type	Ferrite Core	Length(m)	Note
AC Power Cord	Non-shielded	NO	1.8/1.5	1.8m is worst case Detachable
HDMI	Shielded	NO	1.8/1.5	-
DP	Shielded	NO	1.8/1.5	-
USB	Shielded	NO	1.8/1.5	-

**Note:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Power cable 1.8m, 1.5m length, worst case is Power cable 1.8m with HDMI+DP+USB length testing and recording in test report.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	HDMI 1 2560*1440/144Hz 1.8m
Mode 2	HDMI 2 2560*1440/144Hz 1.8m
Mode 3	DP 1 2560*1440/170Hz 1.8m
Mode 4	DP 2 2560*1440/170Hz 1.8m
Mode 5	HDMI 1 1080P 1.8m
Mode 6	HDMI 2 1080P 1.8m
Mode 7	HDMI 1 1280*1024/75Hz 1.8m
Mode 8	HDMI 1 640*480/75Hz 1.8m
Mode 9	HDMI 1 2560*1440/144Hz 1.5m
Mode 10	HDMI 1 2560*1440/144Hz 1.8m without earphone

Radiated emissions up to 1 GHz test	
Final Test Mode	Description
Mode 1	HDMI 1 2560*1440/144Hz 1.8m
Mode 2	HDMI 2 2560*1440/144Hz 1.8m
Mode 5	HDMI 1 1080P 1.8m
Mode 10	HDMI 1 2560*1440/144Hz 1.8m without earphone

Radiated emissions Above 1 GHz test	
Final Test Mode	Description
Mode 1	HDMI 1 2560*1440/144Hz 1.8m
Mode 2	HDMI 2 2560*1440/144Hz 1.8m
Mode 5	HDMI 1 1080P 1.8m
Mode 10	HDMI 1 2560*1440/144Hz 1.8m without earphone

Conducted emissions AC mains power port test	
Final Test Mode	Description
Mode 1	HDMI 1 2560*1440/144Hz 1.8m
Mode 2	HDMI 2 2560*1440/144Hz 1.8m
Mode 5	HDMI 1 1080P 1.8m

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 1	HDMI 1 2560*1440/144Hz 1.8m

Immunity Test	
Final Test Mode	Description
Mode 1	HDMI 1 2560*1440/144Hz 1.8m
Mode 2	HDMI 2 2560*1440/144Hz 1.8m
Mode 3	DP 1 2560*1440/170Hz 1.8m
Mode 4	DP 2 2560*1440/170Hz 1.8m
Mode 5	HDMI 1 1080P 1.8m
Mode 6	HDMI 2 1080P 1.8m
Mode 9	HDMI 1 2560*1440/144Hz 1.5m

Evaluation description:


1. The maximum resolution is evaluated Mode 1-6. The worst case is Mode 1 and evaluated the middle and low resolution Mode 7 and Mode 8.
2. According to the client's requirement, choose Mode 1, Mode 2, Mode 5 and recorded in test report.
3. RS Acoudtic: The Front, Rear, Left and Right were evaluated. The worst placement direction is Front and recorded in this report.

### 2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. EUT connected to PC via HDMI&DP&USB cable.
2. EUT connected to Audio via Headset(A) cable.
3. EUT connected to Earphone via Headset(I) cable.
4. Mouse and Keyboard connected to PC via USB cable.
5. The HDD are plugged into the EUT.

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

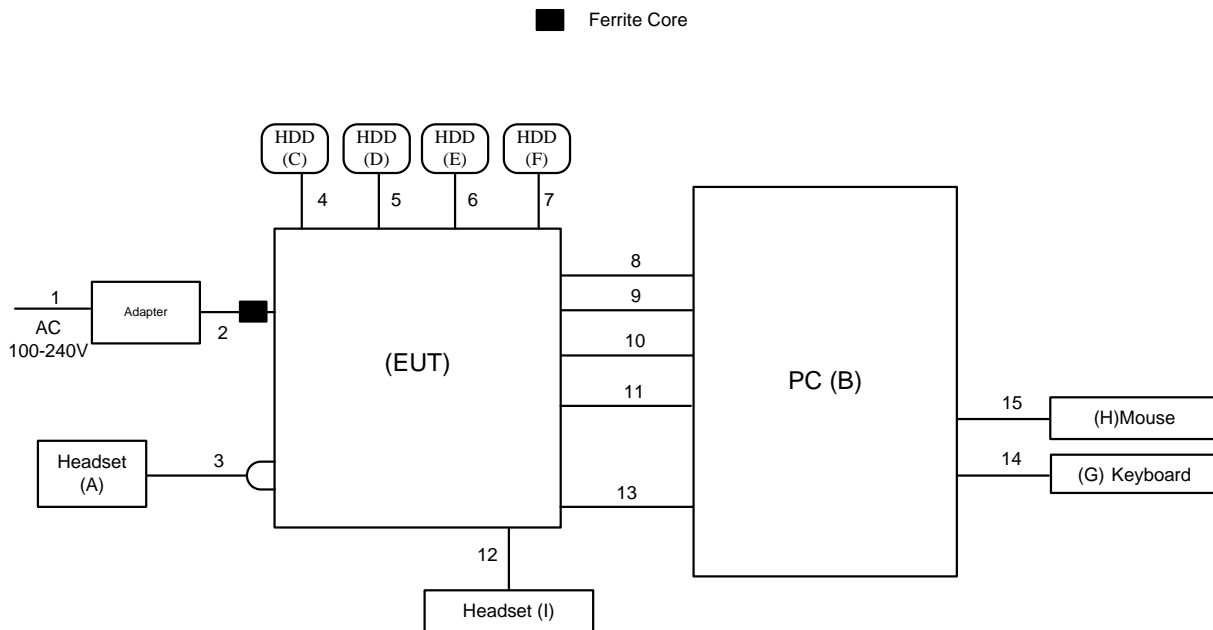

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Headset	PHILIPS	SHMI500	N/A
B	PC	DELL	Vostro 470	24454162837
C	HDD	LACIE	Lacie S.A	NL34BFER
D	HDD	LACIE	Lacie S.A	NL34BJSM
E	HDD	LACIE	Lacie S.A	NL33PVLS
F	HDD	LACIE	Lacie S.A	NL34BJRF
G	Keyboard	DELL	KB212-B	CN0HTXH97158125004DXA01
H	Mouse	DELL	MS111-P	CN011D3V71581279OLOT
I	Headset	PHILIPS	SHMI500	N/A



Item	Cable Type	Shielded Type	Ferrite Core	Length
1	AC Cable	NO	NO	1.8/1.5m
2	DC Cable	NO	YES	1m
3	Audio Cable	NO	NO	1.8m
4	USB Cable	YES	NO	1m
5	USB Cable	YES	NO	1m
6	USB Cable	YES	NO	1m
7	USB Cable	YES	NO	1m
8	HDMI Cable	YES	NO	1.8/1.5m
9	HDMI Cable	YES	NO	1.8/1.5m
10	DP Cable	YES	NO	1.8/1.5m
11	DP Cable	YES	NO	1.8/1.5m
12	Earphone Cable	YES	NO	1.2m
13	USB Cable	YES	NO	1.8/1.5m
14	USB Cable	YES	NO	1.8m
15	USB Cable	YES	NO	1.8m

### 3. EMC EMISSION TEST- EN55032: 2015

#### 3.1 RADIATED EMISSION UP TO 1 GHZ

##### 3.1.1 LIMITS

Class B equipment up to 1000MHz

Frequency MHz	Measurement		Class B limit dB(uV/m)
	Distance m	Detector type/bandwidth	SAC
30-230	10	Quasi peak / 120 kHz	30
230-1000			37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

##### 3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jul. 25, 2021
2	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	Dec. 13, 2021
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	Dec. 13, 2021
4	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	946	Oct. 16, 2021
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 09, 2021
6	Cable	emci	LMR-400 (5m+8m+8m)	N/A	Jan. 06, 2022
7	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
8	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
9	Attenuator	EMCI	EMCI-N-6-06	N0670	Nov. 09, 2021
10	Attenuator	EMCI	EMCI-N-6-06	N0671	Oct. 16, 2021

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.


### 3.1.3 TEST PROCEDURE

- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz).
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1GHz)
- g. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

### 3.1.4 DEVIATION FROM TEST STANDARD


No deviation

### 3.1.5 TEST SETUP

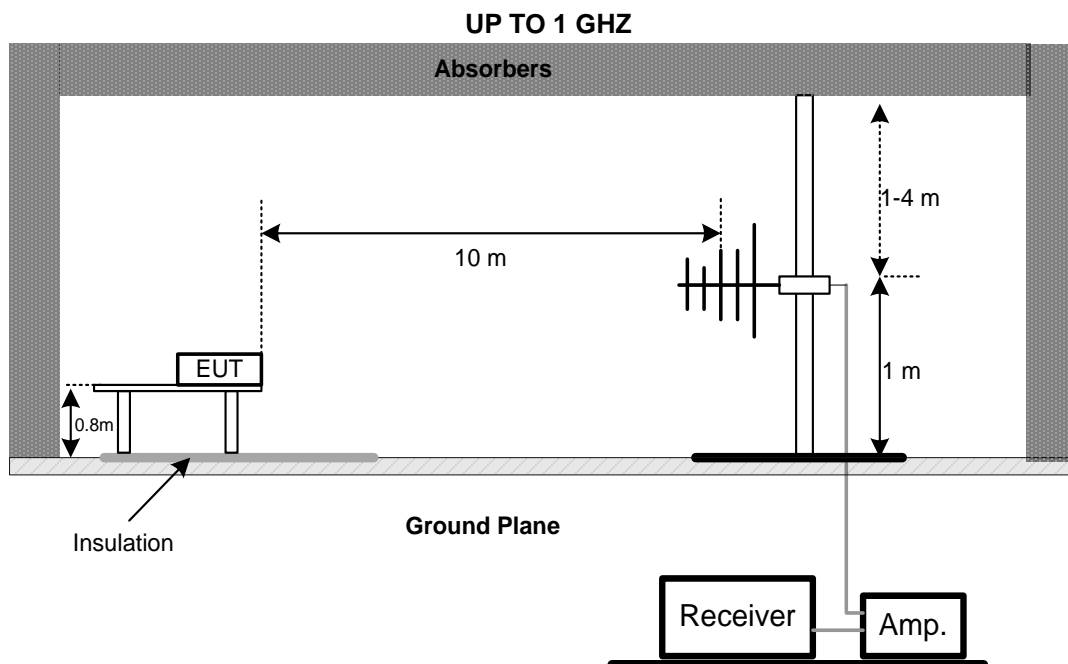

Note: The antenna can be moved between 1 to 4 meters above the ground.

### 3.1.6 MEASUREMENT DISTANCE

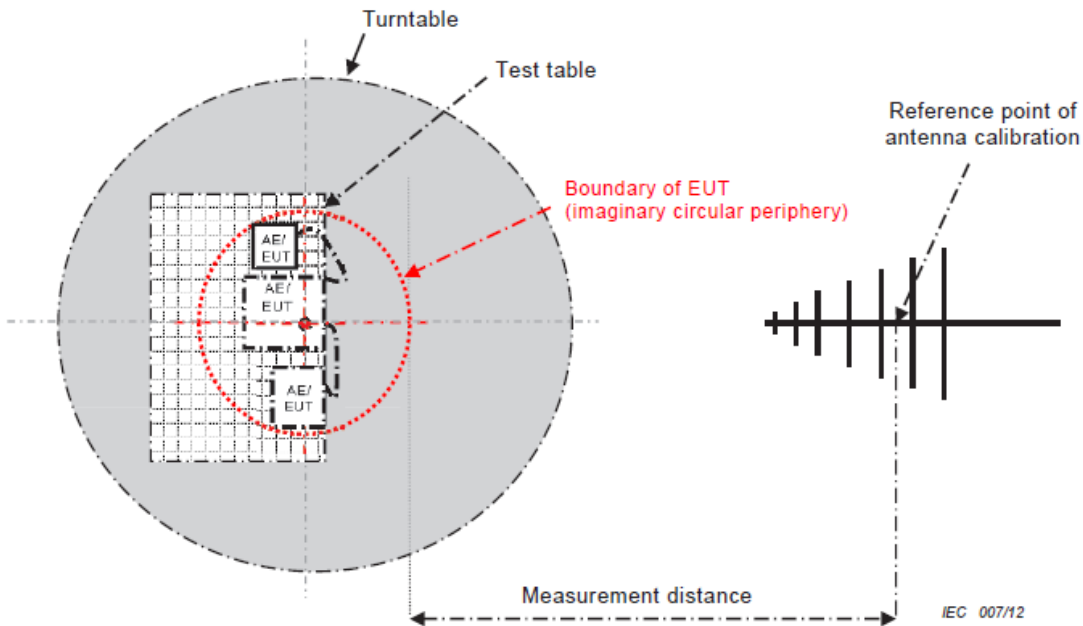

- 34 -

CISPR 32 © IEC:2012


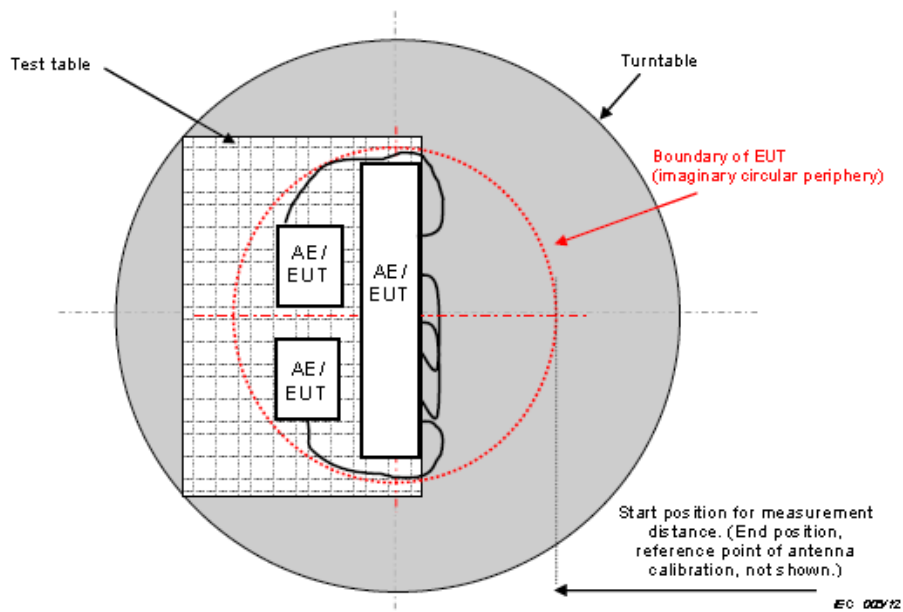


Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.1.7 TEST RESULTS (UP TO 1 GHz)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

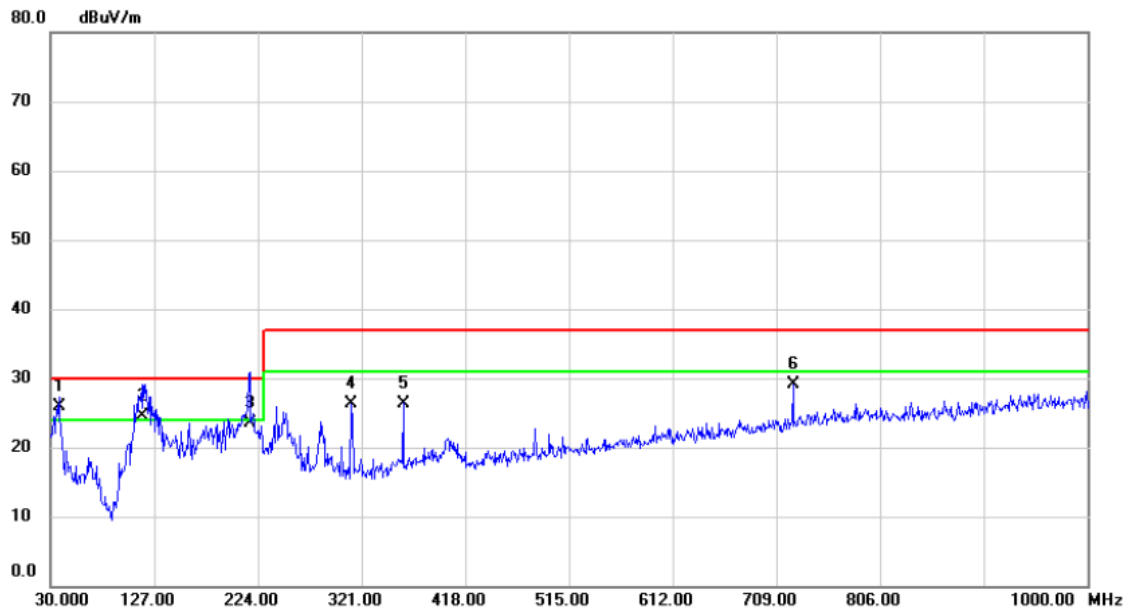


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	44.66	-18.67	25.99	30.00	-4.01	QP	
2	!	115.3600	44.62	-20.18	24.44	30.00	-5.56	QP	
3		216.2400	42.91	-19.38	23.53	30.00	-6.47	QP	
4		311.3000	41.33	-15.09	26.24	37.00	-10.76	QP	
5		359.8000	40.48	-14.08	26.40	37.00	-10.60	QP	
6		724.5200	36.61	-7.59	29.02	37.00	-7.98	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

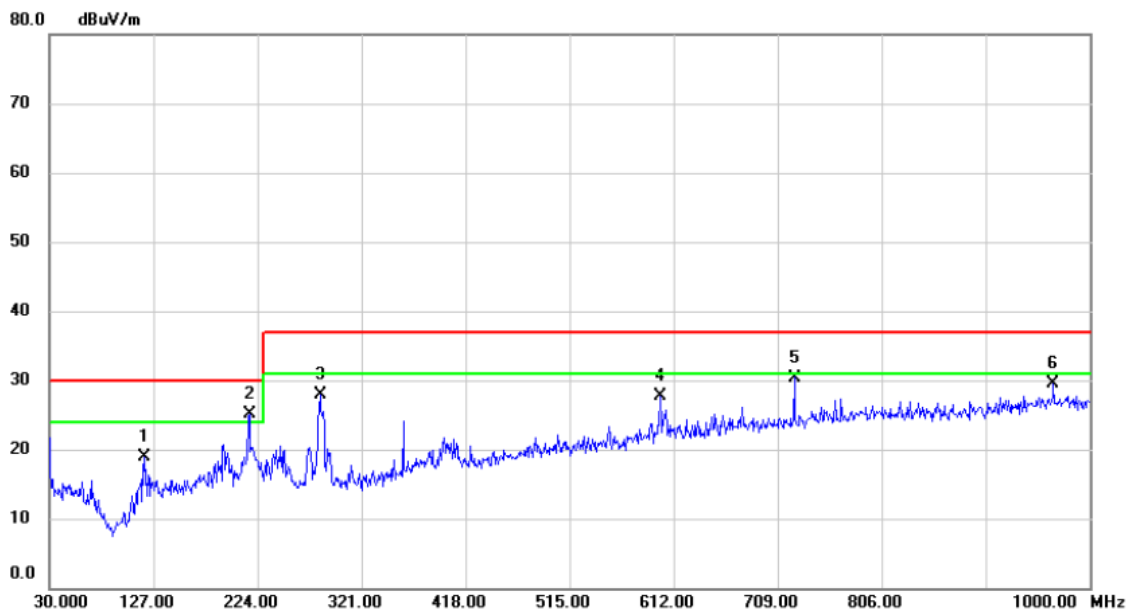


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		118.2700	38.30	-19.31	18.99	30.00	-11.01	QP	
2	*	216.2400	42.27	-17.25	25.02	30.00	-4.98	QP	
3		282.2000	43.47	-15.53	27.94	37.00	-9.06	QP	
4		599.3900	36.38	-8.69	27.69	37.00	-9.31	QP	
5		724.5200	37.80	-7.40	30.40	37.00	-6.60	QP	
6		966.0500	34.17	-4.67	29.50	37.00	-7.50	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

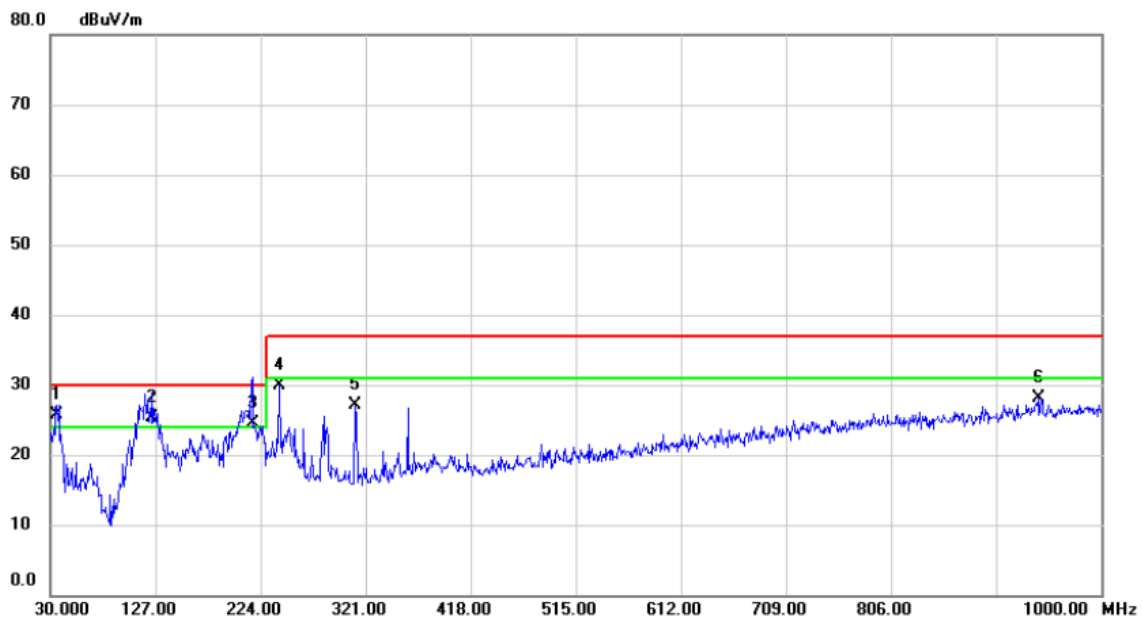

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	35.8200	44.53	-18.81	25.72	30.00	-4.28	QP	
2	!	124.0900	44.76	-19.41	25.35	30.00	-4.65	QP	
3	!	216.2400	43.88	-19.38	24.50	30.00	-5.50	QP	
4		241.4600	47.20	-17.34	29.86	37.00	-7.14	QP	
5		311.3000	42.13	-15.09	27.04	37.00	-9.96	QP	
6		941.8000	33.77	-5.66	28.11	37.00	-8.89	QP	


Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

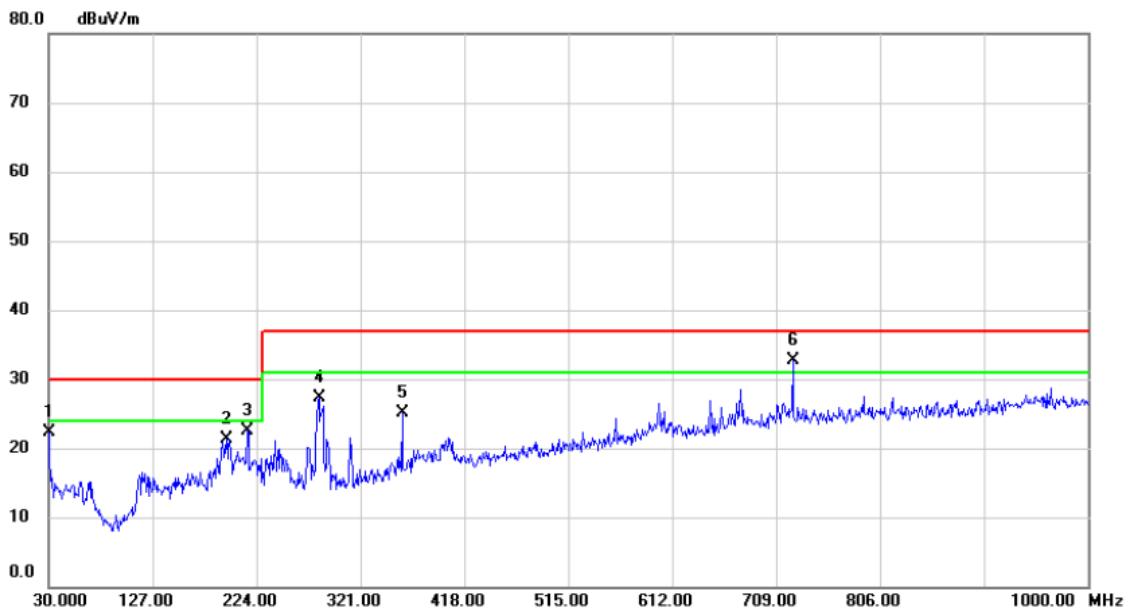

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	41.18	-18.97	22.21	30.00	-7.79	QP	
2		195.8700	40.06	-18.72	21.34	30.00	-8.66	QP	
3		215.2700	39.85	-17.34	22.51	30.00	-7.49	QP	
4		282.2000	42.84	-15.53	27.31	37.00	-9.69	QP	
5		359.8000	38.90	-13.70	25.20	37.00	-11.80	QP	
6	*	724.5200	40.05	-7.40	32.65	37.00	-4.35	QP	




Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 5		

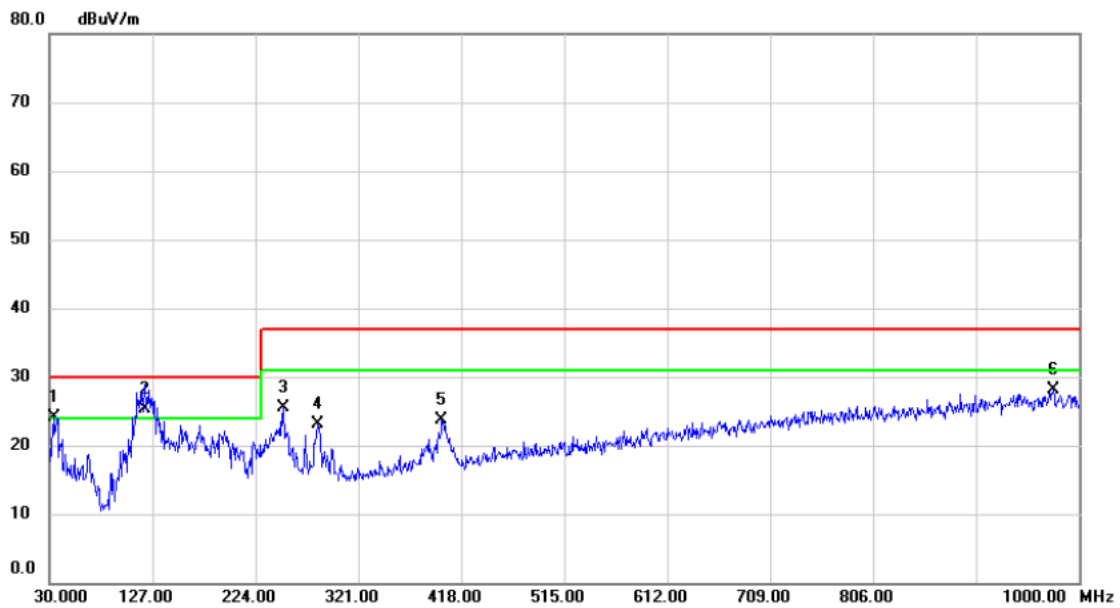


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	34.8500	43.07	-18.87	24.20	30.00	-5.80	QP	
2	*	119.2400	45.30	-19.95	25.35	30.00	-4.65	QP	
3		250.1900	42.75	-17.17	25.58	37.00	-11.42	QP	
4		282.2000	38.91	-15.75	23.16	37.00	-13.84	QP	
5		399.5700	36.70	-12.95	23.75	37.00	-13.25	QP	
6		975.7500	33.45	-5.34	28.11	37.00	-8.89	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 5		

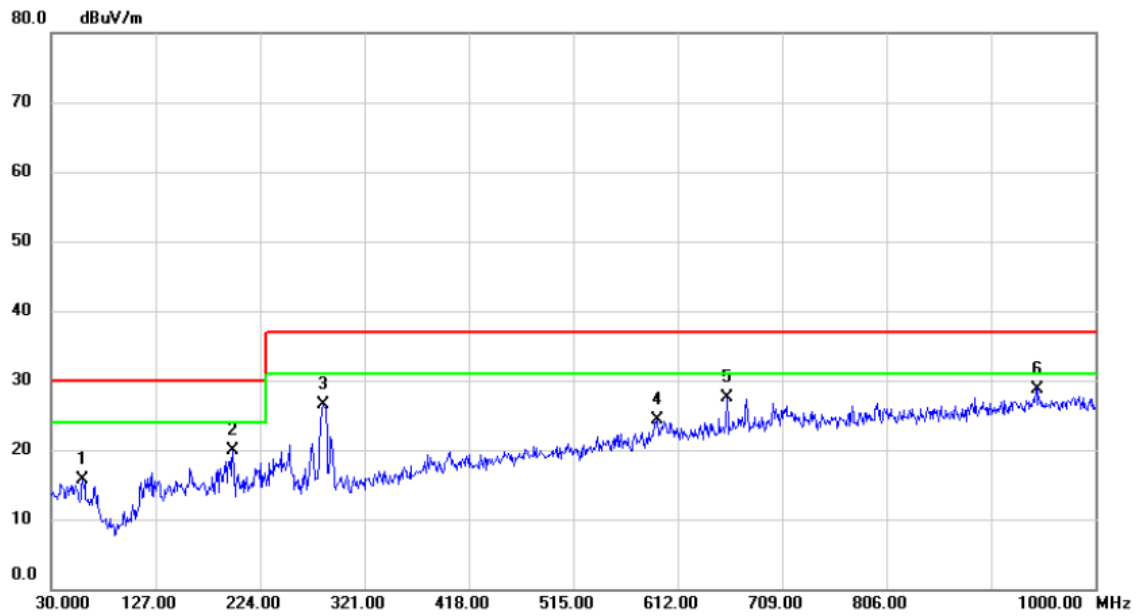


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		59.5850	33.78	-18.14	15.64	30.00	-14.36	QP	
2		198.7800	38.61	-18.78	19.83	30.00	-10.17	QP	
3		283.1700	42.02	-15.52	26.50	37.00	-10.50	QP	
4		592.6000	33.14	-8.86	24.28	37.00	-12.72	QP	
5		658.0750	35.71	-8.12	27.59	37.00	-9.41	QP	
6	*	945.6800	33.64	-4.84	28.80	37.00	-8.20	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 10		

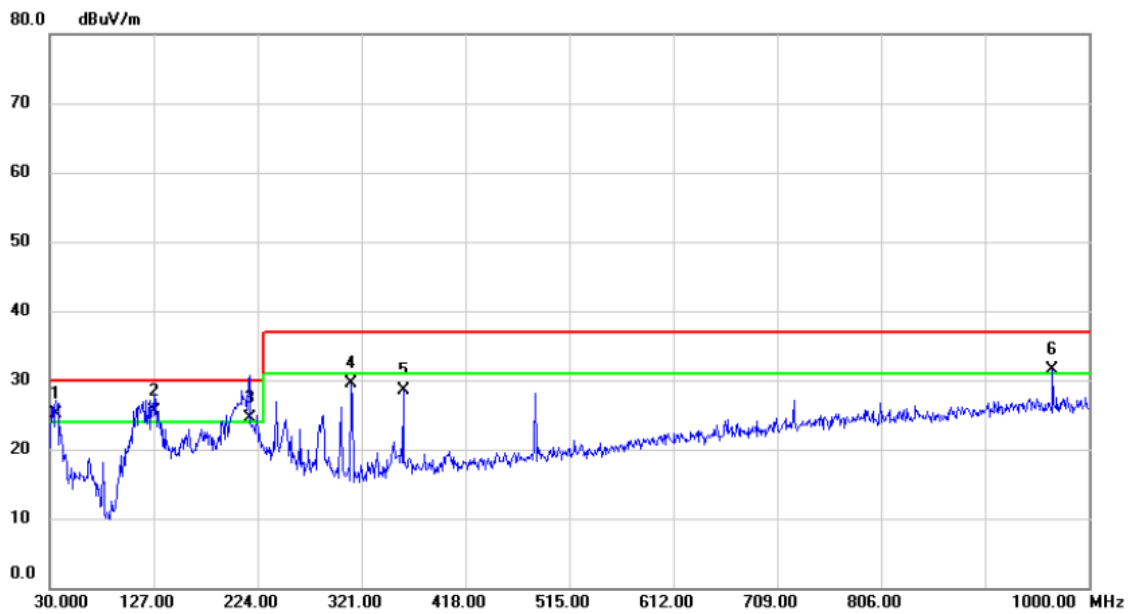


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	35.8200	43.96	-18.81	25.15	30.00	-4.85	QP	
2	*	127.9700	44.48	-18.95	25.53	30.00	-4.47	QP	
3	!	216.2400	43.91	-19.38	24.53	30.00	-5.47	QP	
4		311.3000	44.54	-15.09	29.45	37.00	-7.55	QP	
5		359.8000	42.55	-14.08	28.47	37.00	-8.53	QP	
6	!	966.0500	36.91	-5.41	31.50	37.00	-5.50	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 10		

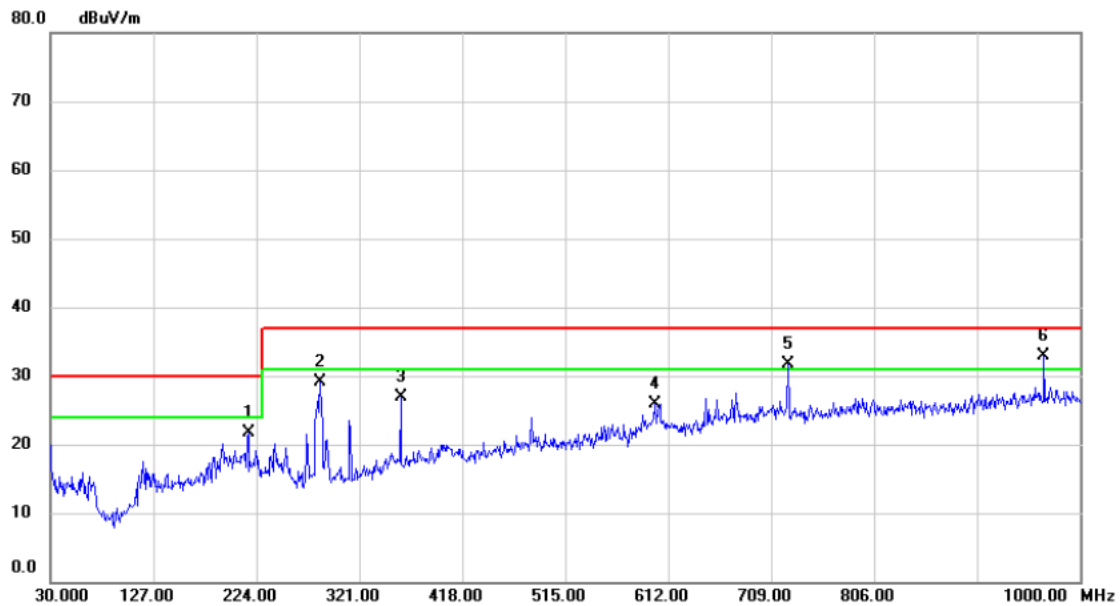


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		216.2400	39.03	-17.25	21.78	30.00	-8.22	QP	
2		284.1400	44.66	-15.52	29.14	37.00	-7.86	QP	
3		359.8000	40.61	-13.70	26.91	37.00	-10.09	QP	
4		599.3900	34.64	-8.69	25.95	37.00	-11.05	QP	
5	!	724.5200	39.01	-7.40	31.61	37.00	-5.39	QP	
6	*	966.0500	37.63	-4.67	32.96	37.00	-4.04	QP	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

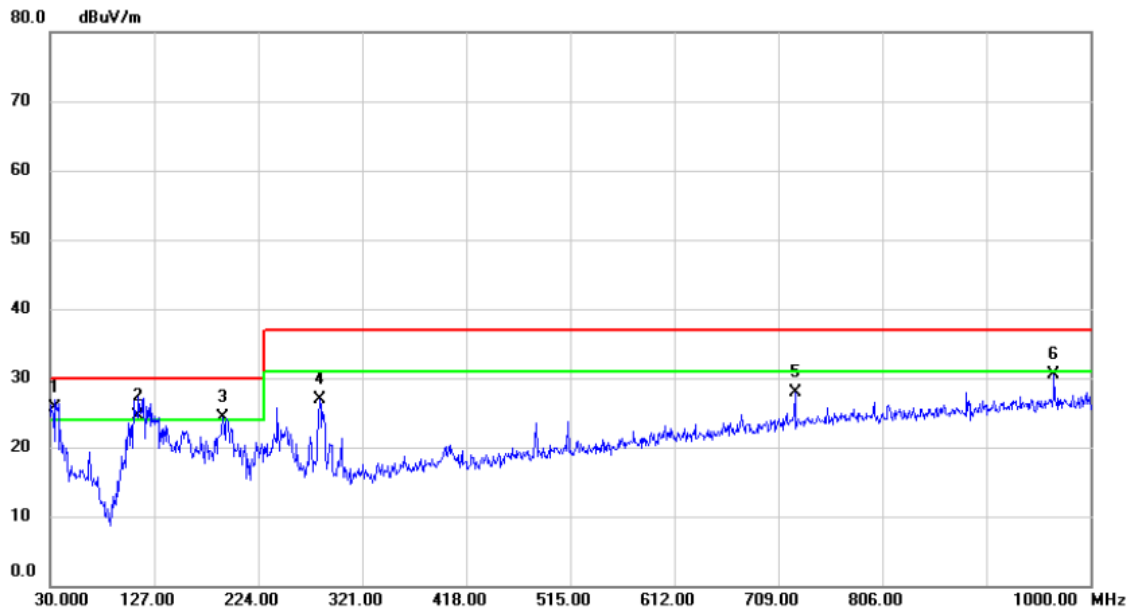

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	34.8500	44.61	-18.87	25.74	30.00	-4.26	QP	
2	!	112.4500	44.90	-20.37	24.53	30.00	-5.47	QP	
3	!	191.0200	43.40	-19.15	24.25	30.00	-5.75	QP	
4		281.2300	42.69	-15.78	26.91	37.00	-10.09	QP	
5		724.5200	35.50	-7.59	27.91	37.00	-9.09	QP	
6		966.0500	35.86	-5.41	30.45	37.00	-6.55	QP	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

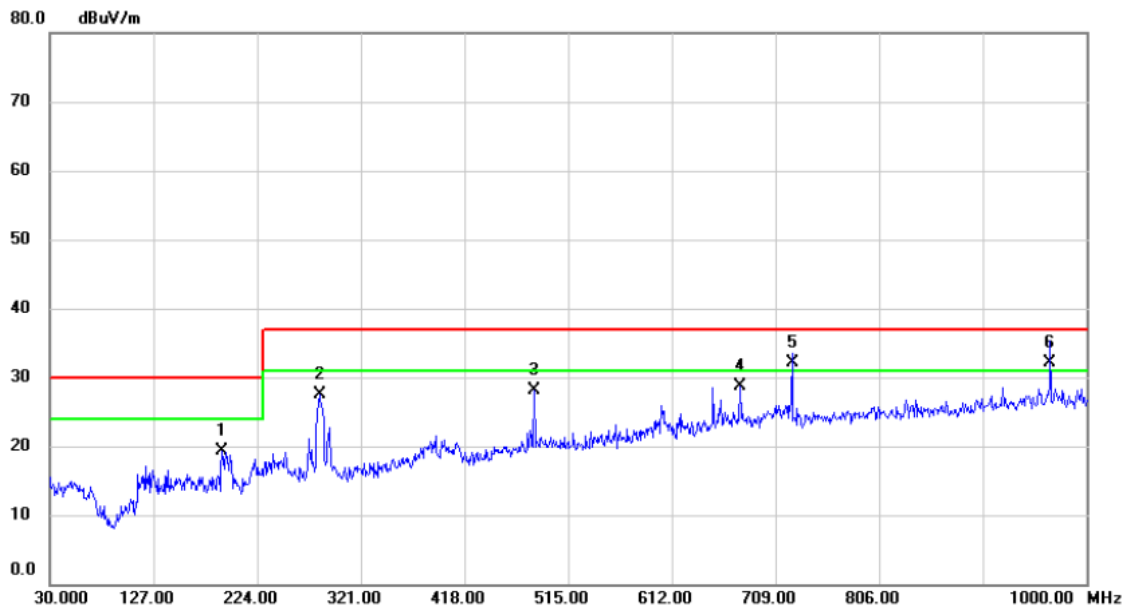

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		191.0200	37.93	-18.61	19.32	30.00	-10.68	QP	
2		282.2000	42.94	-15.53	27.41	37.00	-9.59	QP	
3		482.9900	38.82	-10.70	28.12	37.00	-8.88	QP	
4		676.0200	36.68	-7.99	28.69	37.00	-8.31	QP	
5	*	724.5200	39.58	-7.40	32.18	37.00	-4.82	QP	
6	!	966.0500	36.82	-4.67	32.15	37.00	-4.85	QP	

### 3.2 RADIATED EMISSION ABOVE 1 GHZ

#### 3.2.1 LIMITS

Class B equipment above 1000MHz

Frequency MHz	Measurement		Class B limit dB(uV/m)
	Distance m	Detector type/bandwidth	FSOATS
1000-3000	3	Average / 1 MHz	50
3000-6000			54
1000-3000		Peak / 1 MHz	70
3000-6000			74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency ( $F_x$ ) MHz	Highest measured frequency MHz
$F_x \leq 108$	1000
$108 < F_x \leq 500$	2000
$500 < F_x \leq 1000$	5000
$F_x > 1000$	5 <sup>th</sup> up to a maximum 6 GHz,

Note for FM and TV broadcast receiver,  $F_x$  is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

#### 3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	May 12, 2021
2	Amplifier	Agilent	8449B	3008A02333	Feb. 28, 2022
3	MXE EMI Receiver	Agilent	N9038A	MY53220133	Feb. 28, 2022
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	Micable Inc.	B10-01-01-5M	18047123	Jan. 06, 2022
8	Cable	Micable Inc.	B10-01-01-12M	18072743	Jan. 06, 2022
9	Cable	RegalWay	RWLPS50-7.9A- SMSM-1M	20200102 001	Jan. 06, 2022

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.


### 3.2.3 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- f. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

### 3.2.4 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.5 TEST SETUP

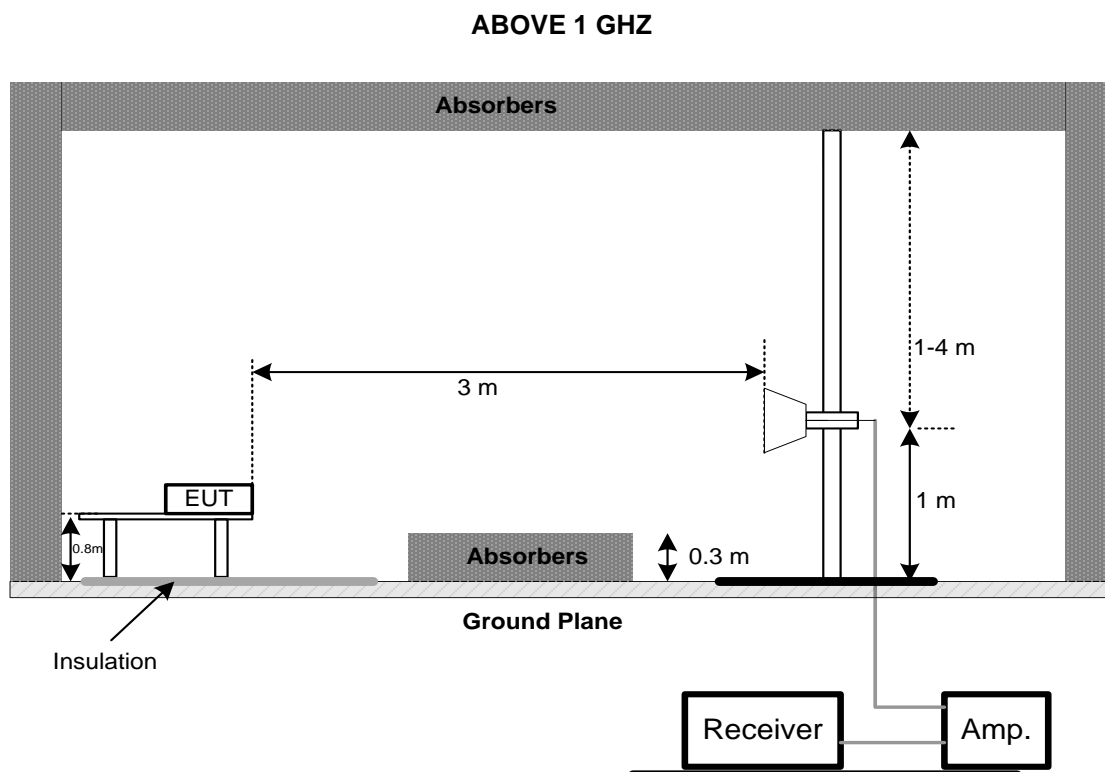



### 3.2.6 MEASUREMENT DISTANCE

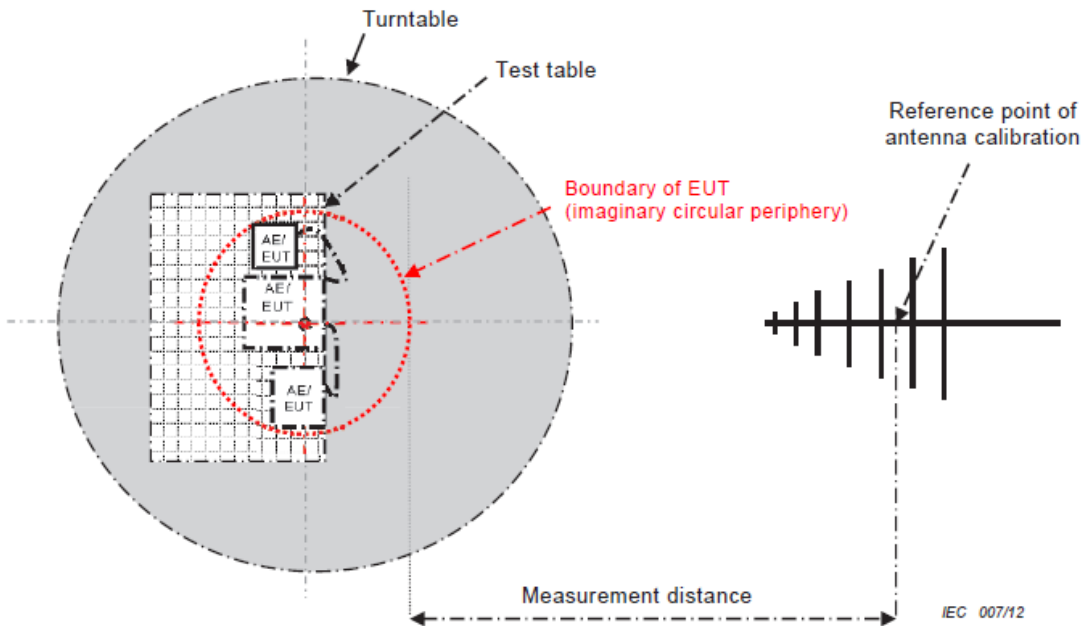

- 34 -

CISPR 32 © IEC:2012


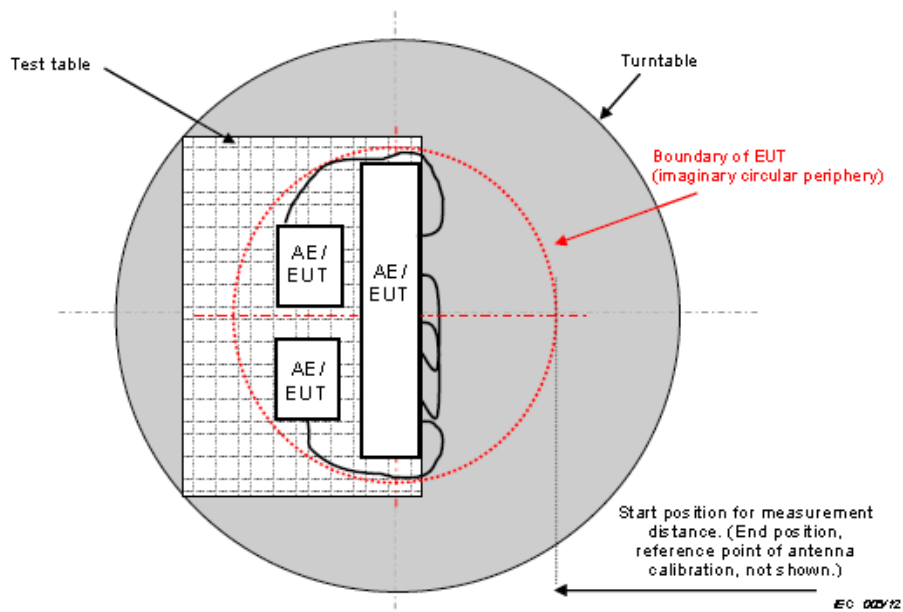


Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.2.7 TEST RESULTS (ABOVE 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

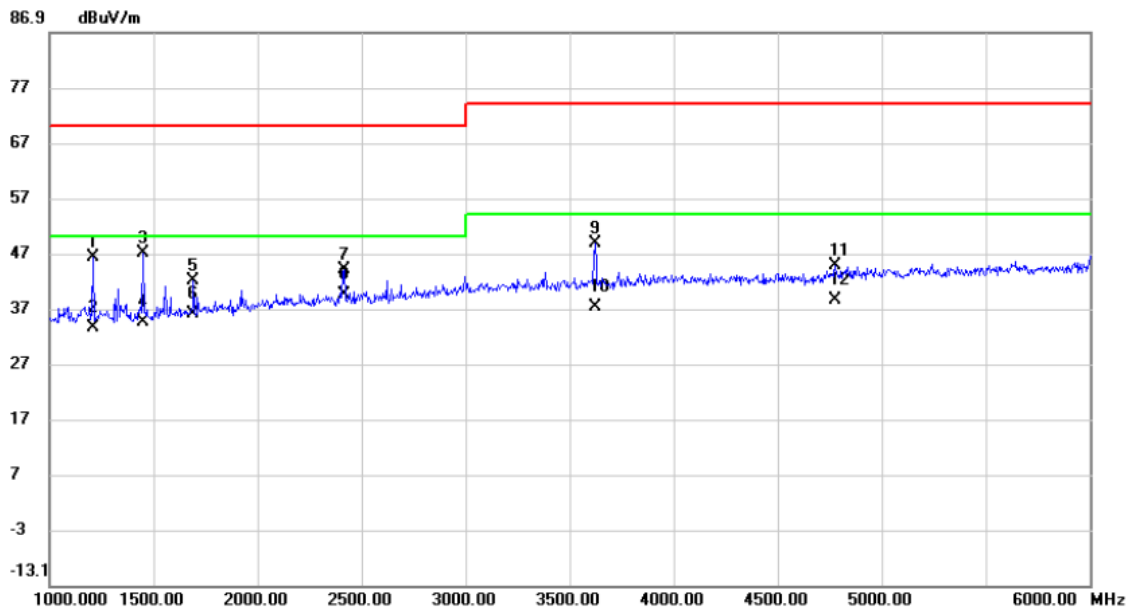


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	50.30	-4.10	46.20	70.00	-23.80	peak	
2		1207.500	37.68	-4.10	33.58	50.00	-16.42	AVG	
3		1450.000	50.34	-3.21	47.13	70.00	-22.87	peak	
4		1450.000	37.82	-3.21	34.61	50.00	-15.39	AVG	
5		1690.000	43.87	-1.80	42.07	70.00	-27.93	peak	
6		1690.000	37.73	-1.80	35.93	50.00	-14.07	AVG	
7		2417.500	42.21	1.72	43.93	70.00	-26.07	peak	
8	*	2417.500	37.81	1.72	39.53	50.00	-10.47	AVG	
9		3622.500	42.40	6.40	48.80	74.00	-25.20	peak	
10		3622.500	30.78	6.40	37.18	54.00	-16.82	AVG	
11		4775.000	35.31	9.47	44.78	74.00	-29.22	peak	
12		4775.000	29.05	9.47	38.52	54.00	-15.48	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

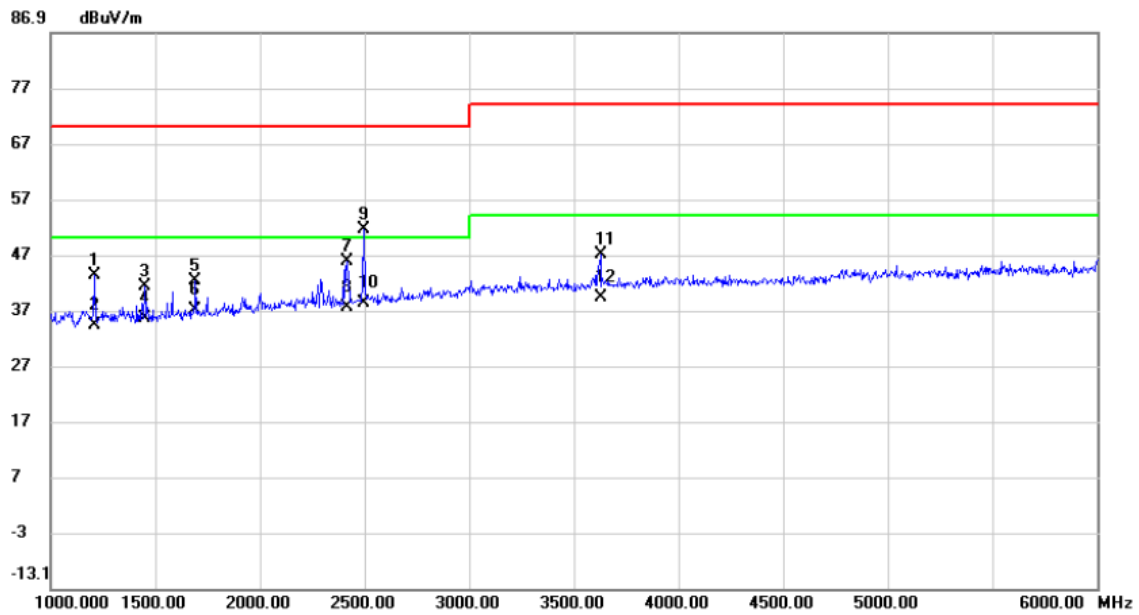


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	47.33	-4.10	43.23	70.00	-26.77	peak	
2		1207.500	38.28	-4.10	34.18	50.00	-15.82	AVG	
3		1450.000	44.45	-3.21	41.24	70.00	-28.76	peak	
4		1450.000	38.83	-3.21	35.62	50.00	-14.38	AVG	
5		1690.000	44.13	-1.80	42.33	70.00	-27.67	peak	
6		1690.000	38.73	-1.80	36.93	50.00	-13.07	AVG	
7		2415.000	44.04	1.70	45.74	70.00	-24.26	peak	
8		2415.000	35.74	1.70	37.44	50.00	-12.56	AVG	
9		2495.000	49.57	2.00	51.57	70.00	-18.43	peak	
10	*	2495.000	36.26	2.00	38.26	50.00	-11.74	AVG	
11		3627.500	40.67	6.43	47.10	74.00	-26.90	peak	
12		3627.500	32.88	6.43	39.31	54.00	-14.69	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

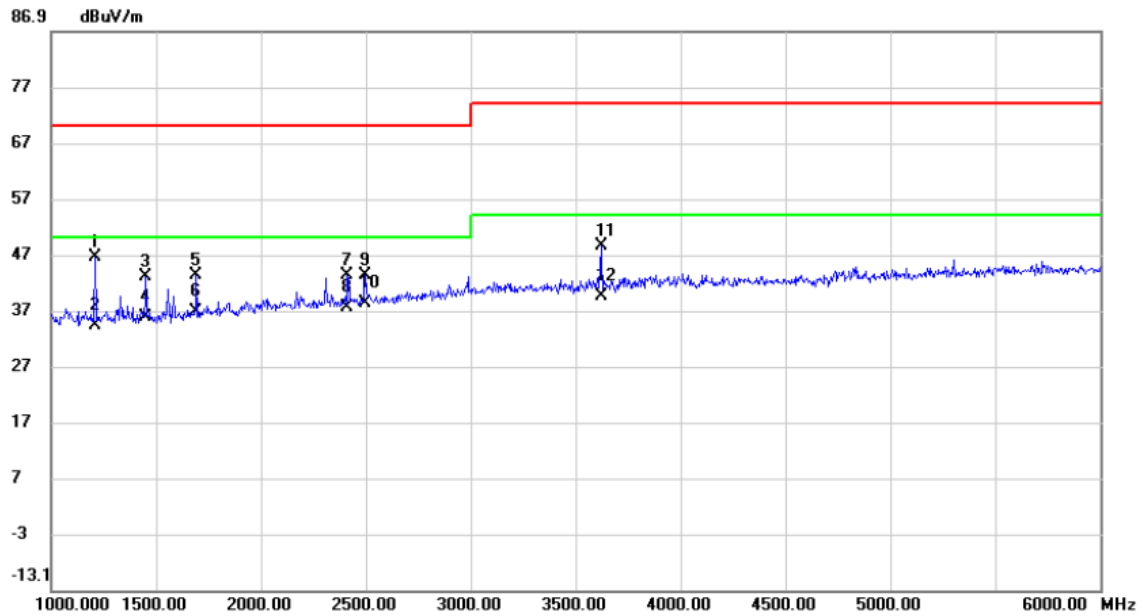


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	50.75	-4.10	46.65	70.00	-23.35	peak	
2		1207.500	38.28	-4.10	34.18	50.00	-15.82	AVG	
3		1450.000	46.32	-3.21	43.11	70.00	-26.89	peak	
4		1450.000	38.90	-3.21	35.69	50.00	-14.31	AVG	
5		1690.000	45.04	-1.80	43.24	70.00	-26.76	peak	
6		1690.000	38.63	-1.80	36.83	50.00	-13.17	AVG	
7		2412.500	41.68	1.70	43.38	70.00	-26.62	peak	
8		2412.500	35.75	1.70	37.45	50.00	-12.55	AVG	
9		2497.500	41.20	2.01	43.21	70.00	-26.79	peak	
10	*	2497.500	36.23	2.01	38.24	50.00	-11.76	AVG	
11		3622.500	42.08	6.40	48.48	74.00	-25.52	peak	
12		3622.500	33.21	6.40	39.61	54.00	-14.39	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

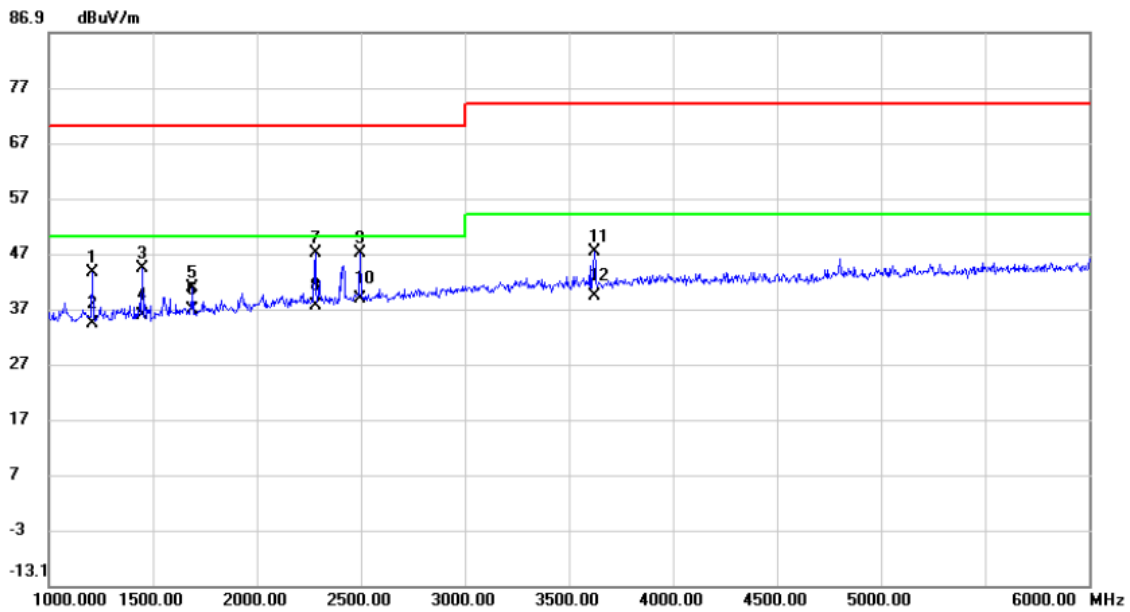


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	47.56	-4.10	43.46	70.00	-26.54	peak	
2		1207.500	38.28	-4.10	34.18	50.00	-15.82	AVG	
3		1450.000	47.50	-3.21	44.29	70.00	-25.71	peak	
4		1450.000	38.90	-3.21	35.69	50.00	-14.31	AVG	
5		1690.000	42.59	-1.80	40.79	70.00	-29.21	peak	
6		1690.000	38.62	-1.80	36.82	50.00	-13.18	AVG	
7		2280.000	45.72	1.21	46.93	70.00	-23.07	peak	
8		2280.000	36.21	1.21	37.42	50.00	-12.58	AVG	
9		2497.500	45.05	2.01	47.06	70.00	-22.94	peak	
10	*	2497.500	36.65	2.01	38.66	50.00	-11.34	AVG	
11		3622.500	40.79	6.40	47.19	74.00	-26.81	peak	
12		3622.500	32.91	6.40	39.31	54.00	-14.69	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 5		

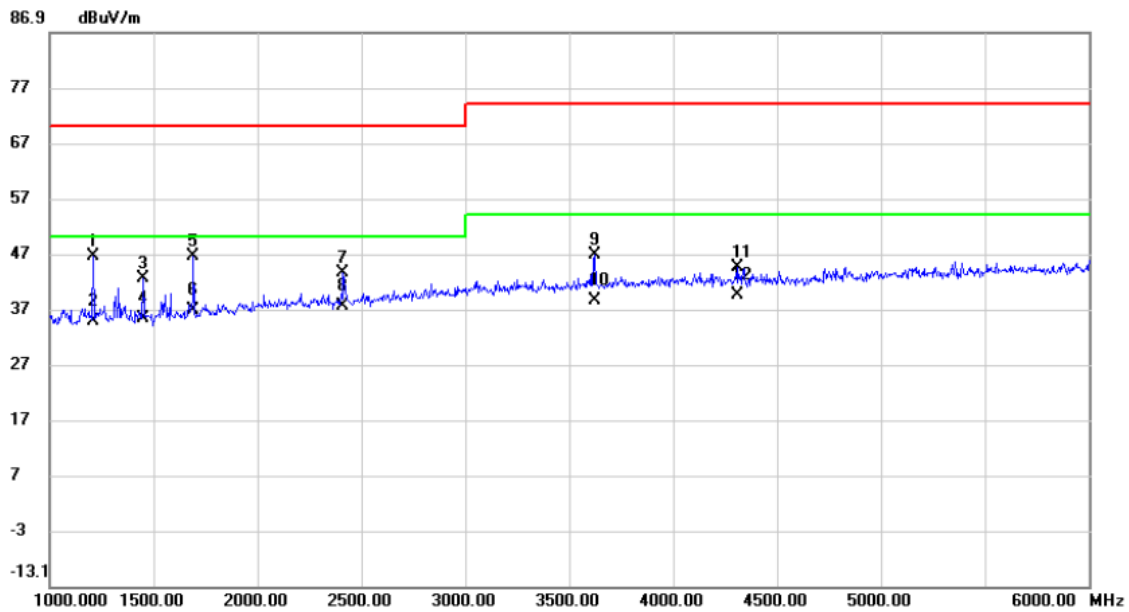


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	50.66	-4.10	46.56	70.00	-23.44	peak	
2		1207.500	38.95	-4.10	34.85	50.00	-15.15	AVG	
3		1450.000	45.66	-3.21	42.45	70.00	-27.55	peak	
4		1450.000	38.42	-3.21	35.21	50.00	-14.79	AVG	
5		1690.000	48.42	-1.80	46.62	70.00	-23.38	peak	
6		1690.000	38.59	-1.80	36.79	50.00	-13.21	AVG	
7		2412.500	41.72	1.70	43.42	70.00	-26.58	peak	
8	*	2412.500	35.72	1.70	37.42	50.00	-12.58	AVG	
9		3622.500	40.37	6.40	46.77	74.00	-27.23	peak	
10		3622.500	32.24	6.40	38.64	54.00	-15.36	AVG	
11		4312.500	36.12	8.46	44.58	74.00	-29.42	peak	
12		4312.500	31.07	8.46	39.53	54.00	-14.47	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 5		

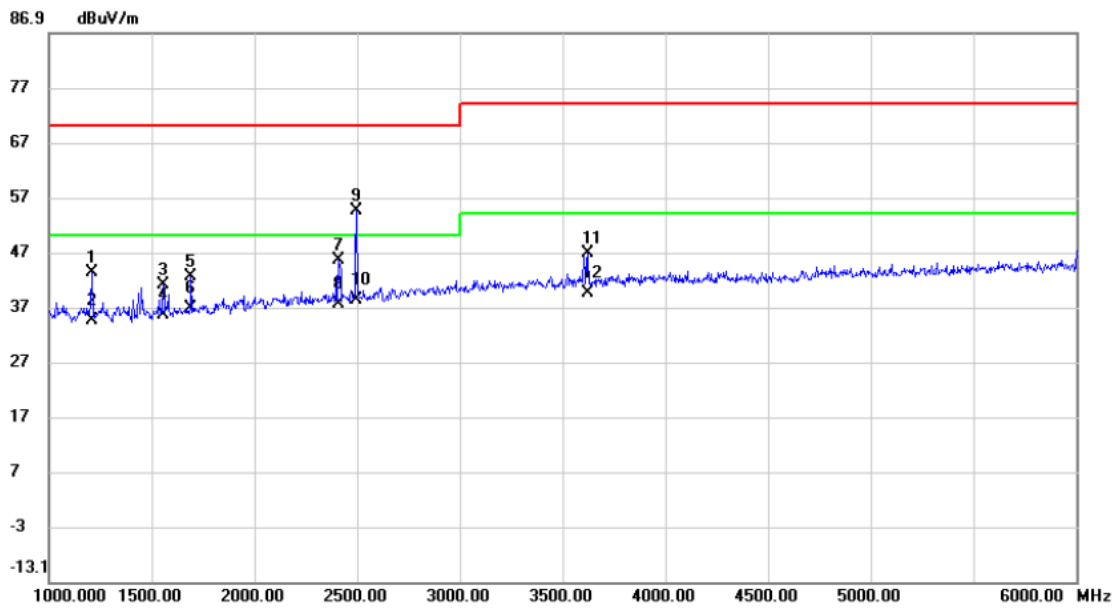

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	47.40	-4.10	43.30	70.00	-26.70	peak	
2		1207.500	38.69	-4.10	34.59	50.00	-15.41	AVG	
3		1557.500	43.61	-2.66	40.95	70.00	-29.05	peak	
4		1557.500	38.27	-2.66	35.61	50.00	-14.39	AVG	
5		1690.000	44.28	-1.80	42.48	70.00	-27.52	peak	
6		1690.000	38.63	-1.80	36.83	50.00	-13.17	AVG	
7		2412.500	43.74	1.70	45.44	70.00	-24.56	peak	
8		2412.500	35.78	1.70	37.48	50.00	-12.52	AVG	
9		2495.000	52.43	2.00	54.43	70.00	-15.57	peak	
10	*	2495.000	36.25	2.00	38.25	50.00	-11.75	AVG	
11		3622.500	40.31	6.40	46.71	74.00	-27.29	peak	
12		3622.500	33.15	6.40	39.55	54.00	-14.45	AVG	


Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 10		

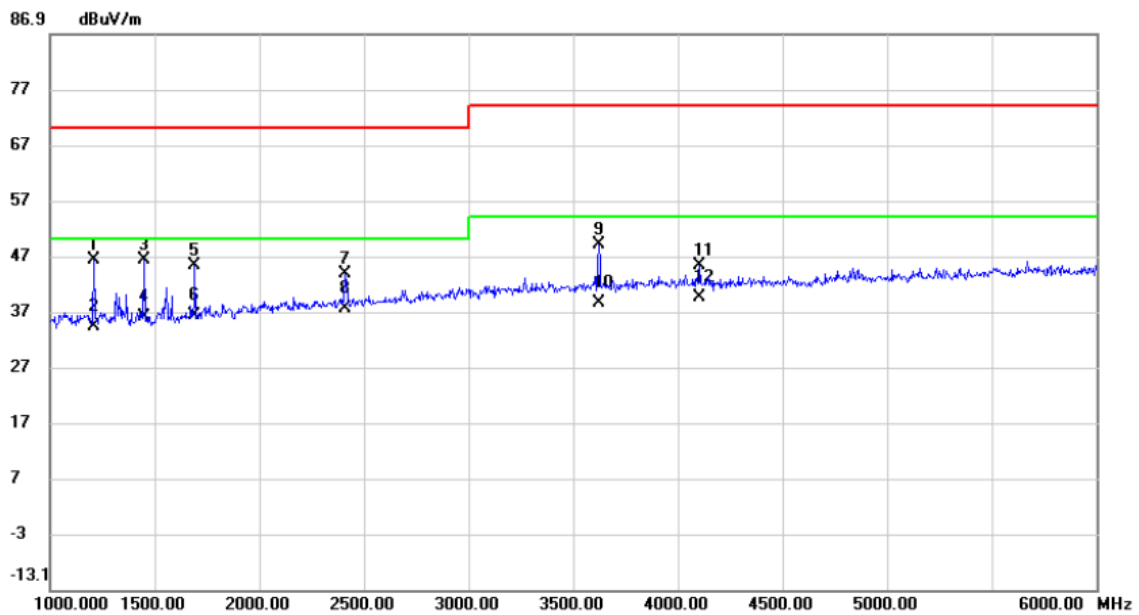

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	50.47	-4.10	46.37	70.00	-23.63	peak	
2		1207.500	38.32	-4.10	34.22	50.00	-15.78	AVG	
3		1450.000	49.43	-3.21	46.22	70.00	-23.78	peak	
4		1450.000	39.14	-3.21	35.93	50.00	-14.07	AVG	
5		1690.000	47.10	-1.80	45.30	70.00	-24.70	peak	
6		1690.000	37.98	-1.80	36.18	50.00	-13.82	AVG	
7		2412.500	42.13	1.70	43.83	70.00	-26.17	peak	
8	*	2412.500	35.72	1.70	37.42	50.00	-12.58	AVG	
9		3622.500	42.63	6.40	49.03	74.00	-24.97	peak	
10		3622.500	32.25	6.40	38.65	54.00	-15.35	AVG	
11		4105.000	36.97	8.19	45.16	74.00	-28.84	peak	
12		4105.000	31.34	8.19	39.53	54.00	-14.47	AVG	




Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 10		

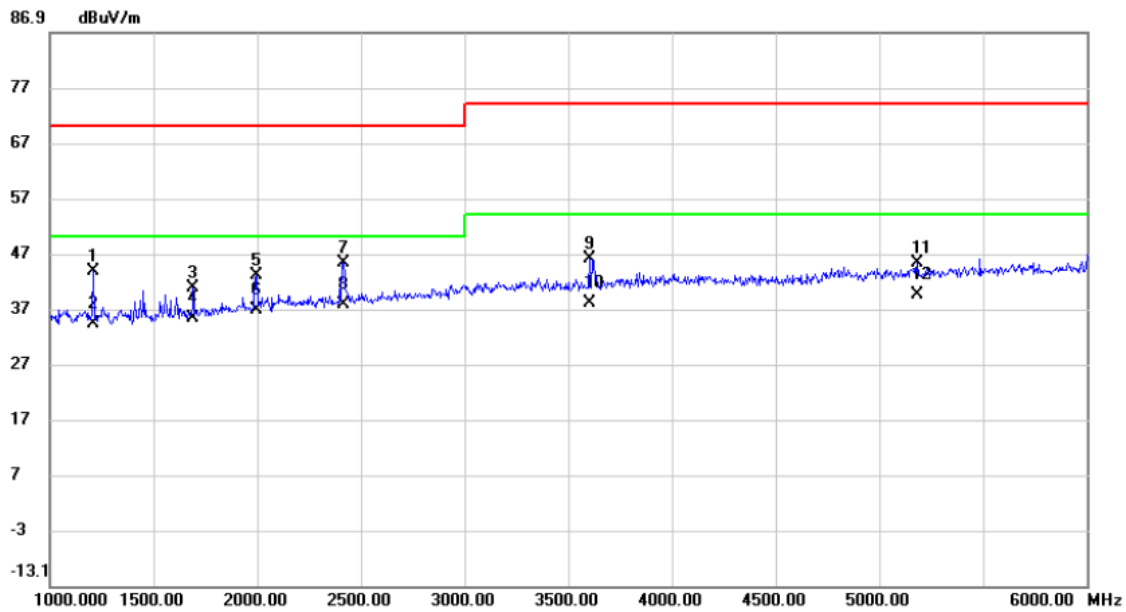


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	47.94	-4.10	43.84	70.00	-26.16	peak	
2		1207.500	38.28	-4.10	34.18	50.00	-15.82	AVG	
3		1690.000	42.52	-1.80	40.72	70.00	-29.28	peak	
4		1690.000	37.06	-1.80	35.26	50.00	-14.74	AVG	
5		1995.000	42.77	0.14	42.91	70.00	-27.09	peak	
6		1995.000	36.63	0.14	36.77	50.00	-13.23	AVG	
7		2415.000	43.62	1.70	45.32	70.00	-24.68	peak	
8	*	2415.000	36.14	1.70	37.84	50.00	-12.16	AVG	
9		3600.000	39.67	6.31	45.98	74.00	-28.02	peak	
10		3600.000	31.84	6.31	38.15	54.00	-15.85	AVG	
11		5185.000	34.80	10.59	45.39	74.00	-28.61	peak	
12		5185.000	29.03	10.59	39.62	54.00	-14.38	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

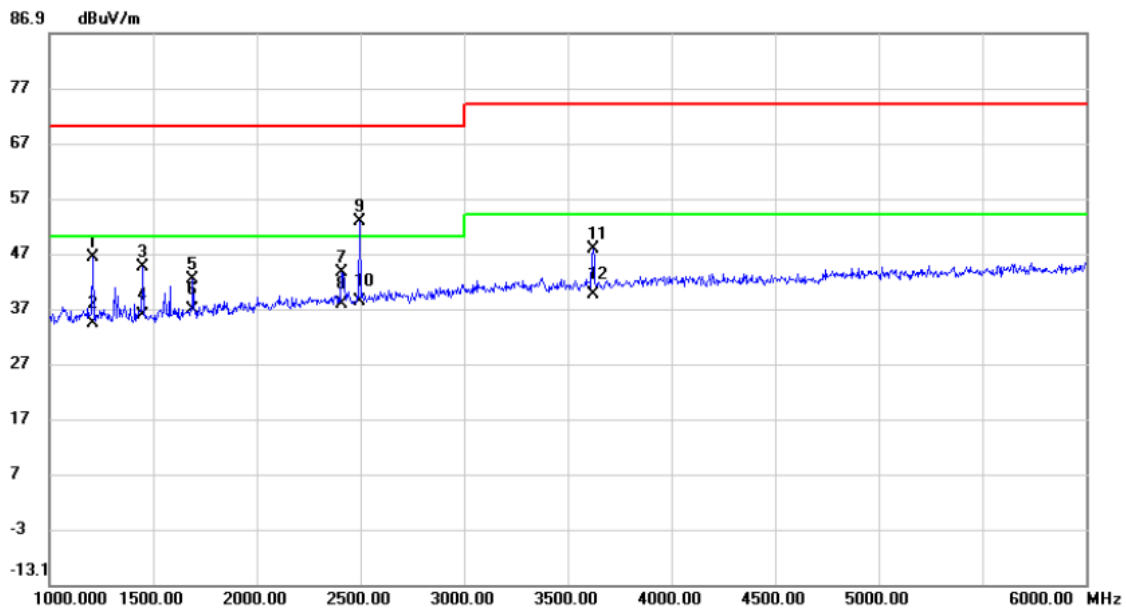

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	50.34	-4.10	46.24	70.00	-23.76	peak	
2		1207.500	38.28	-4.10	34.18	50.00	-15.82	AVG	
3		1450.000	47.76	-3.21	44.55	70.00	-25.45	peak	
4		1450.000	38.90	-3.21	35.69	50.00	-14.31	AVG	
5		1690.000	44.20	-1.80	42.40	70.00	-27.60	peak	
6		1690.000	38.52	-1.80	36.72	50.00	-13.28	AVG	
7		2412.500	41.71	1.70	43.41	70.00	-26.59	peak	
8		2412.500	36.14	1.70	37.84	50.00	-12.16	AVG	
9		2497.500	50.87	2.01	52.88	70.00	-17.12	peak	
10	*	2497.500	36.21	2.01	38.22	50.00	-11.78	AVG	
11		3622.500	41.39	6.40	47.79	74.00	-26.21	peak	
12		3622.500	33.21	6.40	39.61	54.00	-14.39	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

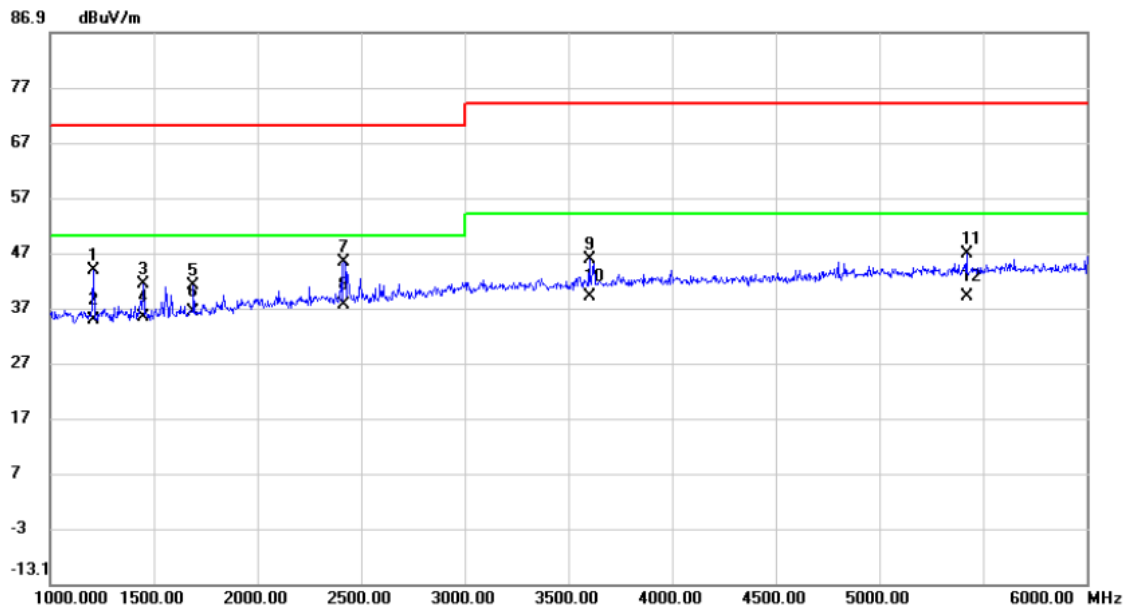

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	47.87	-4.10	43.77	70.00	-26.23	peak	
2		1207.500	38.95	-4.10	34.85	50.00	-15.15	AVG	
3		1450.000	44.42	-3.21	41.21	70.00	-28.79	peak	
4		1450.000	38.37	-3.21	35.16	50.00	-14.84	AVG	
5		1690.000	42.74	-1.80	40.94	70.00	-29.06	peak	
6		1690.000	38.07	-1.80	36.27	50.00	-13.73	AVG	
7		2417.500	43.50	1.72	45.22	70.00	-24.78	peak	
8	*	2417.500	35.71	1.72	37.43	50.00	-12.57	AVG	
9		3600.000	39.58	6.31	45.89	74.00	-28.11	peak	
10		3600.000	32.64	6.31	38.95	54.00	-15.05	AVG	
11		5422.500	35.49	11.23	46.72	74.00	-27.28	peak	
12		5422.500	27.91	11.23	39.14	54.00	-14.86	AVG	

### 3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

#### 3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV) )
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

**NOTE:**

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

#### 3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	50Ω Terminator	SHX	TF2-3G-A	8122901	Feb. 27, 2022
2	TWO-LINE V-NETWORK	R&S	ENV216	100526	Nov. 04, 2021
3	EMI Test Receiver	R&S	ESR3	101862	Jul. 25, 2021
4	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Feb. 28, 2022
5	Cable	N/A	RG400	N/A(12m)	Mar. 09, 2022
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


#### 3.3.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.3.4 DEVIATION FROM TEST STANDARD


No deviation

### 3.3.5 TEST SETUP

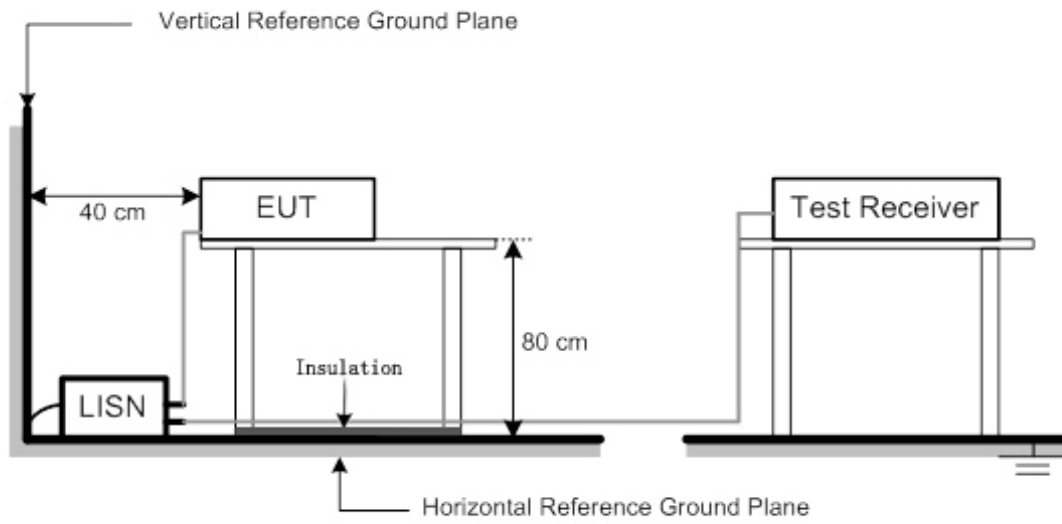


### 3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

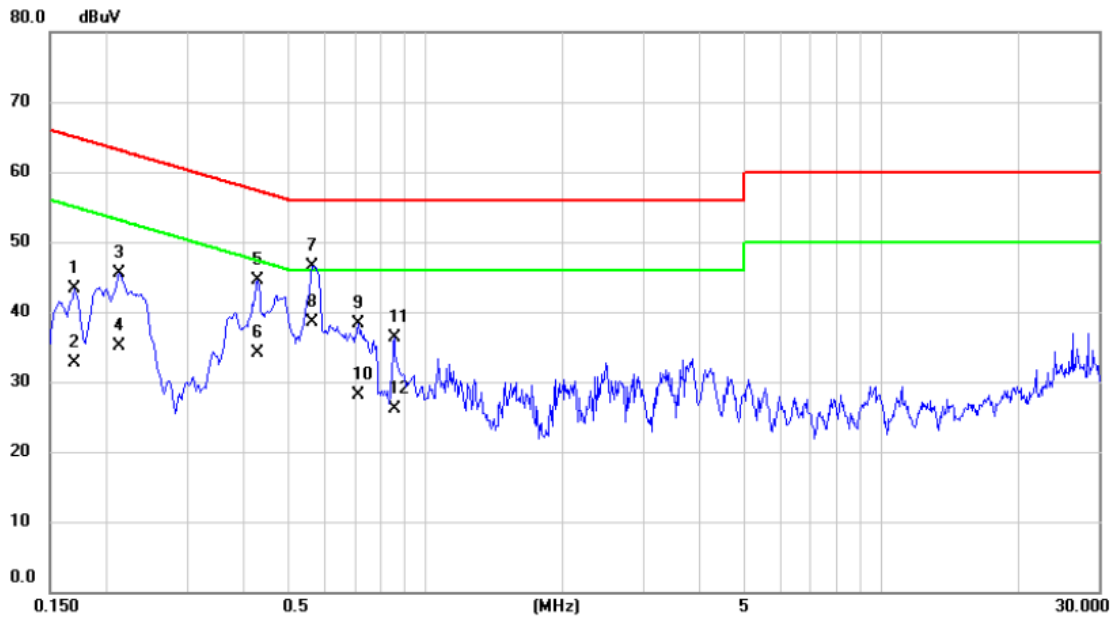


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	33.59	9.65	43.24	64.95	-21.71	QP	
2		0.1703	23.10	9.65	32.75	54.95	-22.20	AVG	
3		0.2130	35.94	9.65	45.59	63.09	-17.50	QP	
4		0.2130	25.40	9.65	35.05	53.09	-18.04	AVG	
5		0.4290	34.92	9.68	44.60	57.27	-12.67	QP	
6		0.4290	24.40	9.68	34.08	47.27	-13.19	AVG	
7		0.5640	36.86	9.69	46.55	56.00	-9.45	QP	
8	*	0.5640	28.84	9.69	38.53	46.00	-7.47	AVG	
9		0.7125	28.57	9.70	38.27	56.00	-17.73	QP	
10		0.7125	18.40	9.70	28.10	46.00	-17.90	AVG	
11		0.8542	26.63	9.72	36.35	56.00	-19.65	QP	
12		0.8542	16.40	9.72	26.12	46.00	-19.88	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

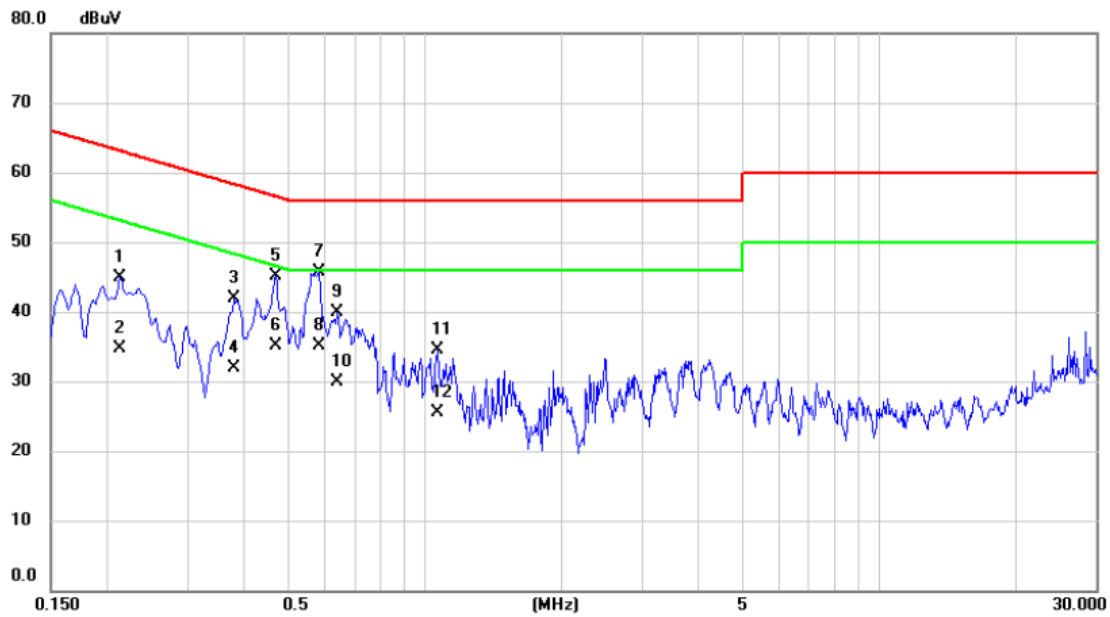

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	35.27	9.65	44.92	63.09	-18.17	QP	
2		0.2130	25.10	9.65	34.75	53.09	-18.34	AVG	
3		0.3794	32.30	9.67	41.97	58.29	-16.32	QP	
4		0.3794	22.30	9.67	31.97	48.29	-16.32	AVG	
5		0.4694	35.35	9.68	45.03	56.52	-11.49	QP	
6		0.4694	25.40	9.68	35.08	46.52	-11.44	AVG	
7	*	0.5842	36.10	9.70	45.80	56.00	-10.20	QP	
8		0.5842	25.40	9.70	35.10	46.00	-10.90	AVG	
9		0.6427	30.28	9.70	39.98	56.00	-16.02	QP	
10		0.6427	20.20	9.70	29.90	46.00	-16.10	AVG	
11		1.0680	24.78	9.73	34.51	56.00	-21.49	QP	
12		1.0680	15.80	9.73	25.53	46.00	-20.47	AVG	


Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 2		

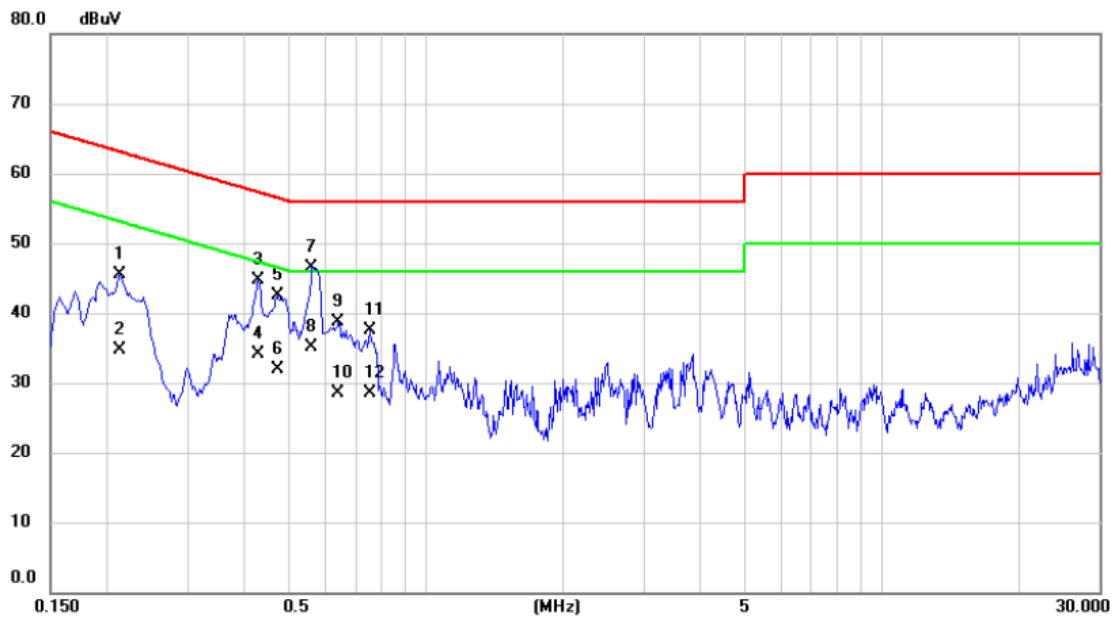

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	35.87	9.65	45.52	63.09	-17.57	QP	
2		0.2130	25.10	9.65	34.75	53.09	-18.34	AVG	
3		0.4290	34.94	9.68	44.62	57.27	-12.65	QP	
4		0.4290	24.40	9.68	34.08	47.27	-13.19	AVG	
5		0.4717	32.86	9.68	42.54	56.48	-13.94	QP	
6		0.4717	22.30	9.68	31.98	46.48	-14.50	AVG	
7	*	0.5617	36.81	9.69	46.50	56.00	-9.50	QP	
8		0.5617	25.40	9.69	35.09	46.00	-10.91	AVG	
9		0.6427	28.97	9.69	38.66	56.00	-17.34	QP	
10		0.6427	18.90	9.69	28.59	46.00	-17.41	AVG	
11		0.7552	27.81	9.71	37.52	56.00	-18.48	QP	
12		0.7552	18.70	9.71	28.41	46.00	-17.59	AVG	




Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 2		

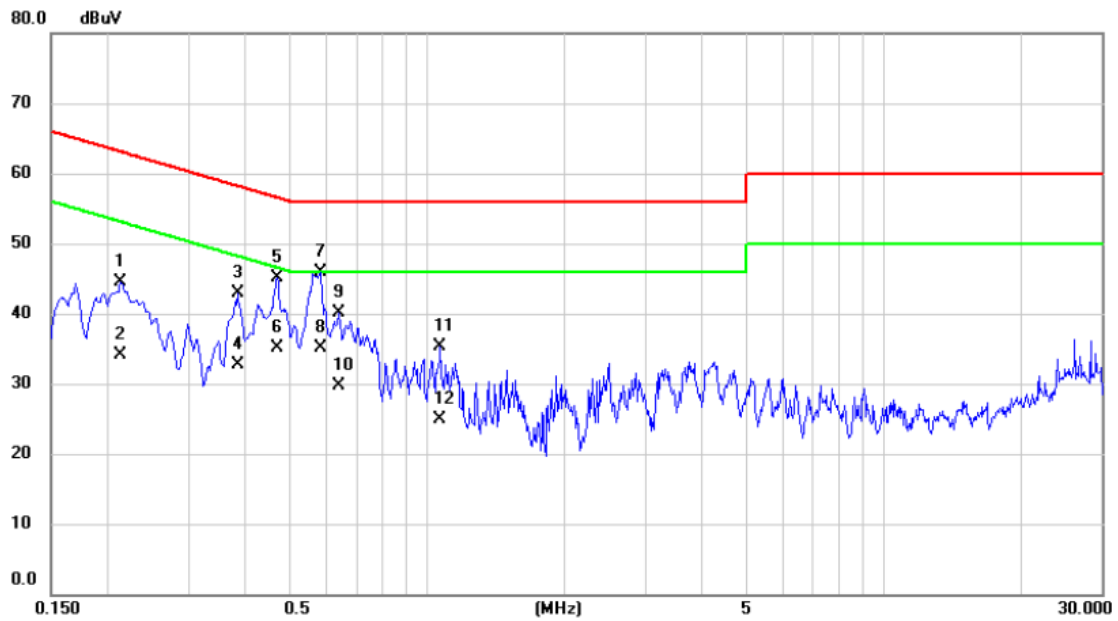


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	34.83	9.65	44.48	63.09	-18.61	QP	
2		0.2130	24.40	9.65	34.05	53.09	-19.04	AVG	
3		0.3840	33.15	9.68	42.83	58.19	-15.36	QP	
4		0.3840	23.10	9.68	32.78	48.19	-15.41	AVG	
5		0.4694	35.39	9.68	45.07	56.52	-11.45	QP	
6		0.4694	25.40	9.68	35.08	46.52	-11.44	AVG	
7	*	0.5842	36.30	9.70	46.00	56.00	-10.00	QP	
8		0.5842	25.40	9.70	35.10	46.00	-10.90	AVG	
9		0.6404	30.31	9.70	40.01	56.00	-15.99	QP	
10		0.6404	20.10	9.70	29.80	46.00	-16.20	AVG	
11		1.0680	25.50	9.73	35.23	56.00	-20.77	QP	
12		1.0680	15.20	9.73	24.93	46.00	-21.07	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 5		

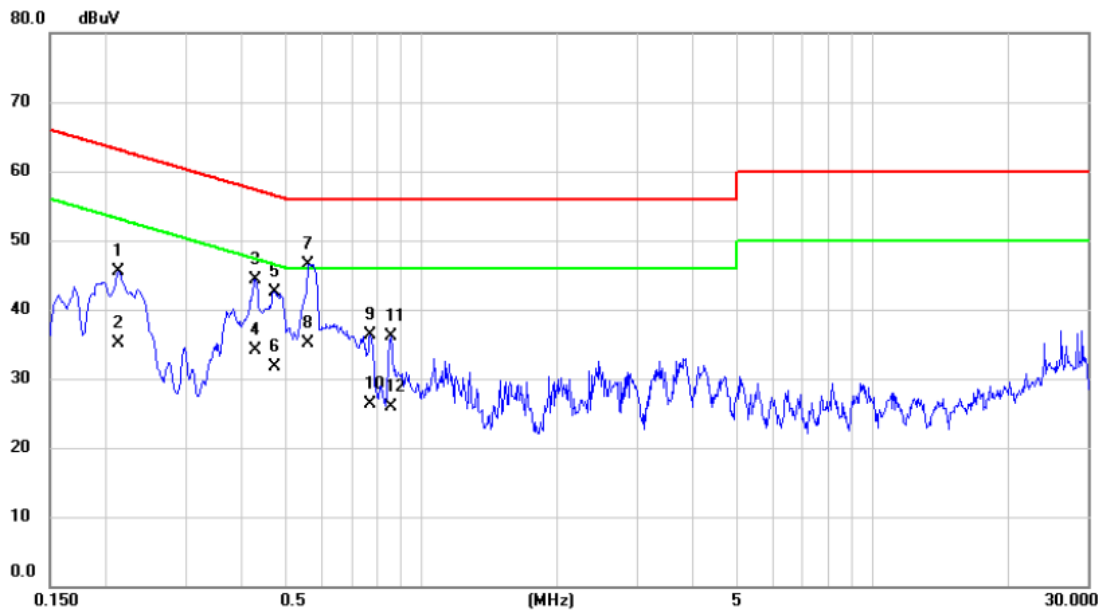


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	35.88	9.65	45.53	63.09	-17.56	QP	
2		0.2130	25.40	9.65	35.05	53.09	-18.04	AVG	
3		0.4290	34.69	9.68	44.37	57.27	-12.90	QP	
4		0.4290	24.40	9.68	34.08	47.27	-13.19	AVG	
5		0.4740	32.83	9.68	42.51	56.44	-13.93	QP	
6		0.4740	22.10	9.68	31.78	46.44	-14.66	AVG	
7	*	0.5617	36.84	9.69	46.53	56.00	-9.47	QP	
8		0.5617	25.40	9.69	35.09	46.00	-10.91	AVG	
9		0.7710	26.55	9.71	36.26	56.00	-19.74	QP	
10		0.7710	16.50	9.71	26.21	46.00	-19.79	AVG	
11		0.8542	26.30	9.72	36.02	56.00	-19.98	QP	
12		0.8542	16.20	9.72	25.92	46.00	-20.08	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 5		

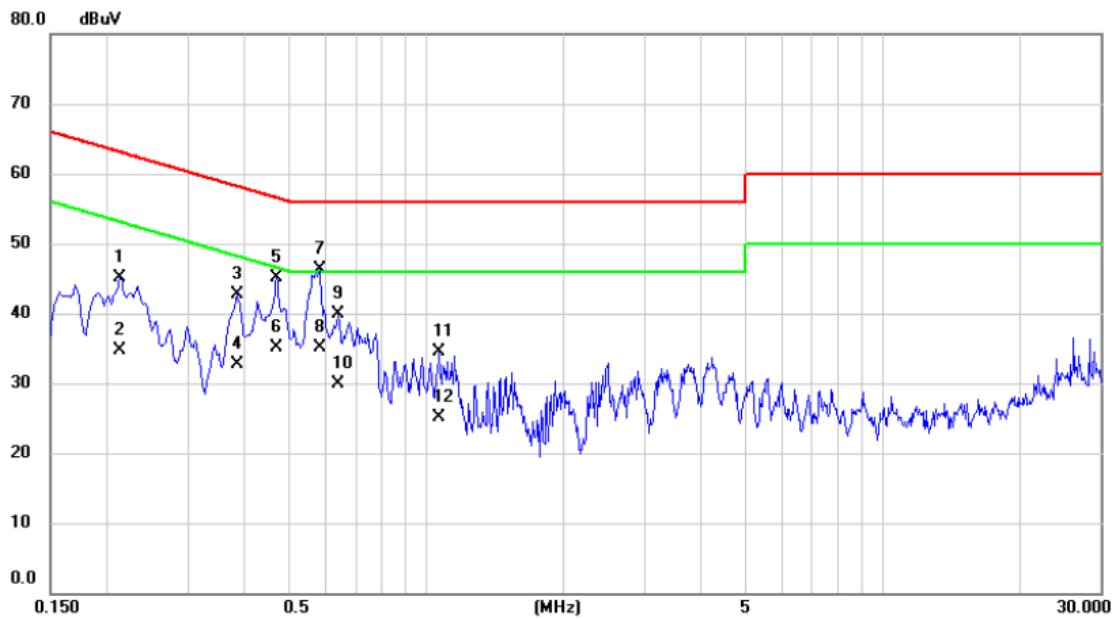


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2130	35.40	9.65	45.05	63.09	-18.04	QP	
2		0.2130	25.10	9.65	34.75	53.09	-18.34	AVG	
3		0.3840	33.03	9.68	42.71	58.19	-15.48	QP	
4		0.3840	23.10	9.68	32.78	48.19	-15.41	AVG	
5		0.4694	35.45	9.68	45.13	56.52	-11.39	QP	
6		0.4694	25.40	9.68	35.08	46.52	-11.44	AVG	
7	*	0.5842	36.65	9.70	46.35	56.00	-9.65	QP	
8		0.5842	25.40	9.70	35.10	46.00	-10.90	AVG	
9		0.6427	30.26	9.70	39.96	56.00	-16.04	QP	
10		0.6427	20.20	9.70	29.90	46.00	-16.10	AVG	
11		1.0680	24.82	9.73	34.55	56.00	-21.45	QP	
12		1.0680	15.40	9.73	25.13	46.00	-20.87	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 1		

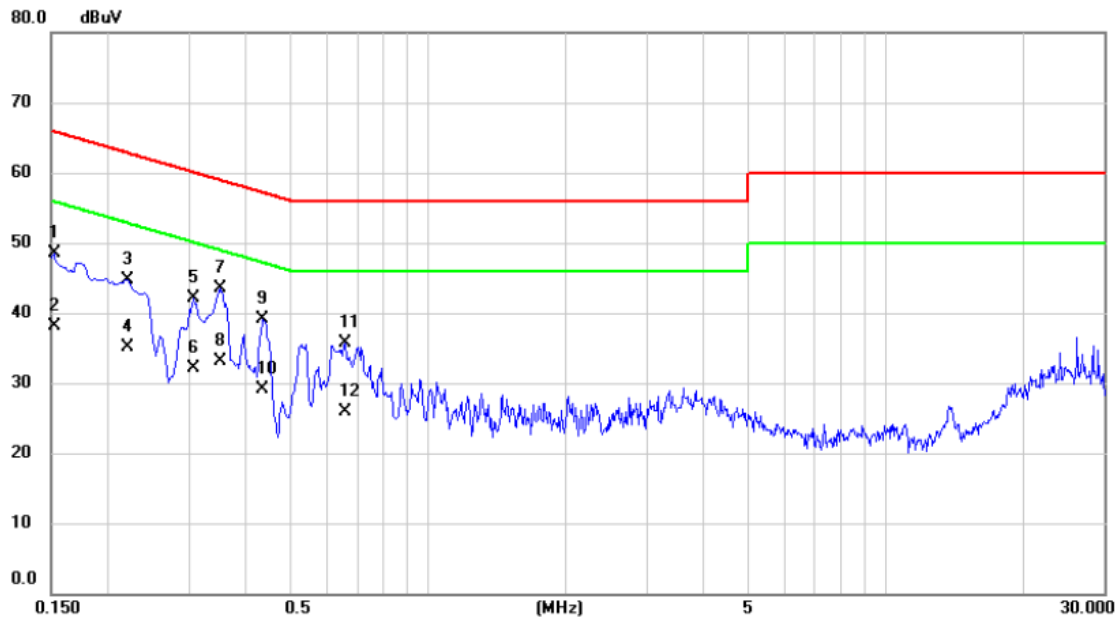

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	38.86	9.65	48.51	65.88	-17.37	QP	
2		0.1522	28.40	9.65	38.05	55.88	-17.83	AVG	
3		0.2197	35.12	9.65	44.77	62.83	-18.06	QP	
4		0.2197	25.40	9.65	35.05	52.83	-17.78	AVG	
5		0.3074	32.41	9.66	42.07	60.04	-17.97	QP	
6		0.3074	22.40	9.66	32.06	50.04	-17.98	AVG	
7	*	0.3502	33.83	9.68	43.51	58.96	-15.45	QP	
8		0.3502	23.40	9.68	33.08	48.96	-15.88	AVG	
9		0.4357	29.47	9.68	39.15	57.14	-17.99	QP	
10		0.4357	19.50	9.68	29.18	47.14	-17.96	AVG	
11		0.6584	26.09	9.70	35.79	56.00	-20.21	QP	
12		0.6584	16.20	9.70	25.90	46.00	-20.10	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 1		

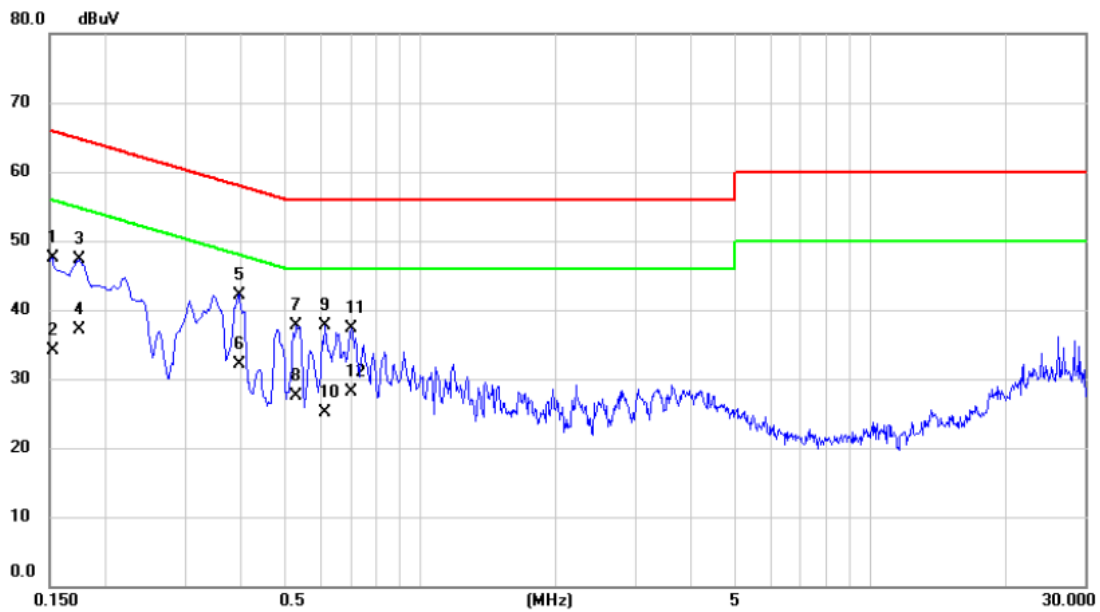

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	37.82	9.66	47.48	65.88	-18.40	QP	
2		0.1522	24.40	9.66	34.06	55.88	-21.82	AVG	
3		0.1747	37.59	9.65	47.24	64.73	-17.49	QP	
4		0.1747	27.40	9.65	37.05	54.73	-17.68	AVG	
5	*	0.3952	32.52	9.68	42.20	57.95	-15.75	QP	
6		0.3952	22.50	9.68	32.18	47.95	-15.77	AVG	
7		0.5302	27.94	9.68	37.62	56.00	-18.38	QP	
8		0.5302	17.90	9.68	27.58	46.00	-18.42	AVG	
9		0.6134	27.98	9.70	37.68	56.00	-18.32	QP	
10		0.6134	15.40	9.70	25.10	46.00	-20.90	AVG	
11		0.7034	27.56	9.70	37.26	56.00	-18.74	QP	
12		0.7034	18.40	9.70	28.10	46.00	-17.90	AVG	

#### 4. EMC EMISSION TEST- EN 55032:2015+A11:2020

##### 4.1 RADIATED EMISSIONS UP TO 1 GHZ

##### 4.1.1 LIMITS

Class B equipment up to 1000MHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

##### 4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jul. 25, 2021
2	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	Dec. 13, 2021
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	Dec. 13, 2021
4	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	946	Oct. 16, 2021
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 09, 2021
6	Cable	emci	LMR-400 (5m+8m+8m)	N/A	Jan. 06, 2022
7	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
8	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
9	Attenuator	EMCI	EMCI-N-6-06	N0670	Nov. 09, 2021
10	Attenuator	EMCI	EMCI-N-6-06	N0671	Oct. 16, 2021

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.


**4.1.3 TEST PROCEDURE**

- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz).
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- e. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

**4.1.4 DEVIATION FROM TEST STANDARD**

No deviation

**4.1.5 TEST SETUP**

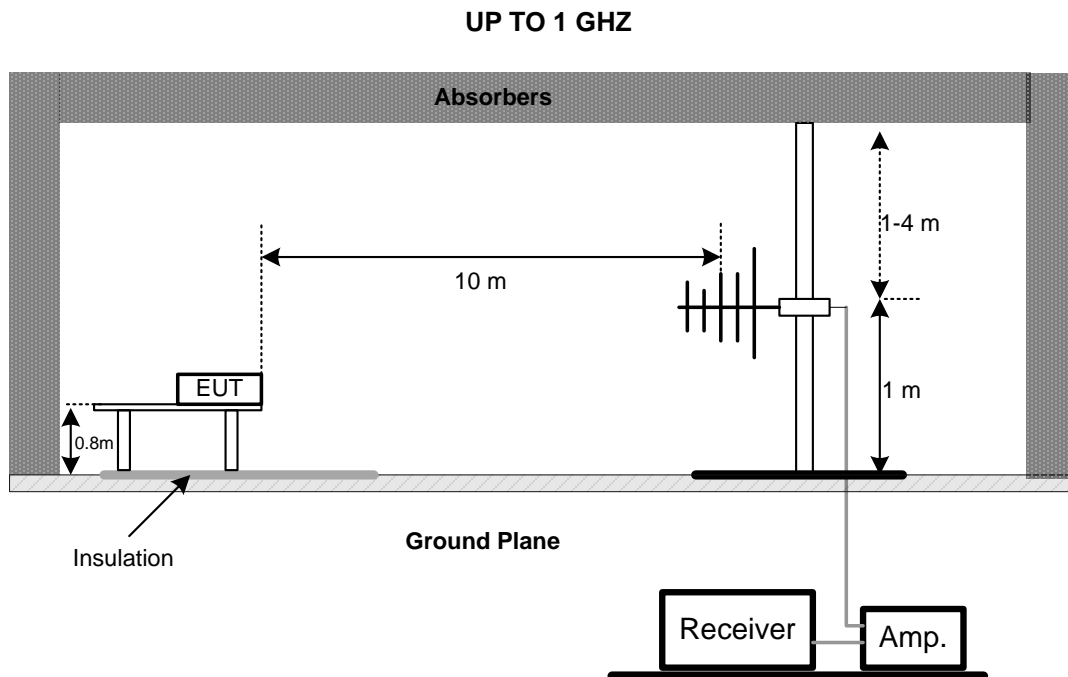

Note: The antenna can be moved between 1 to 4 meters above the ground.

## 4.1.6 MEASUREMENT DISTANCE

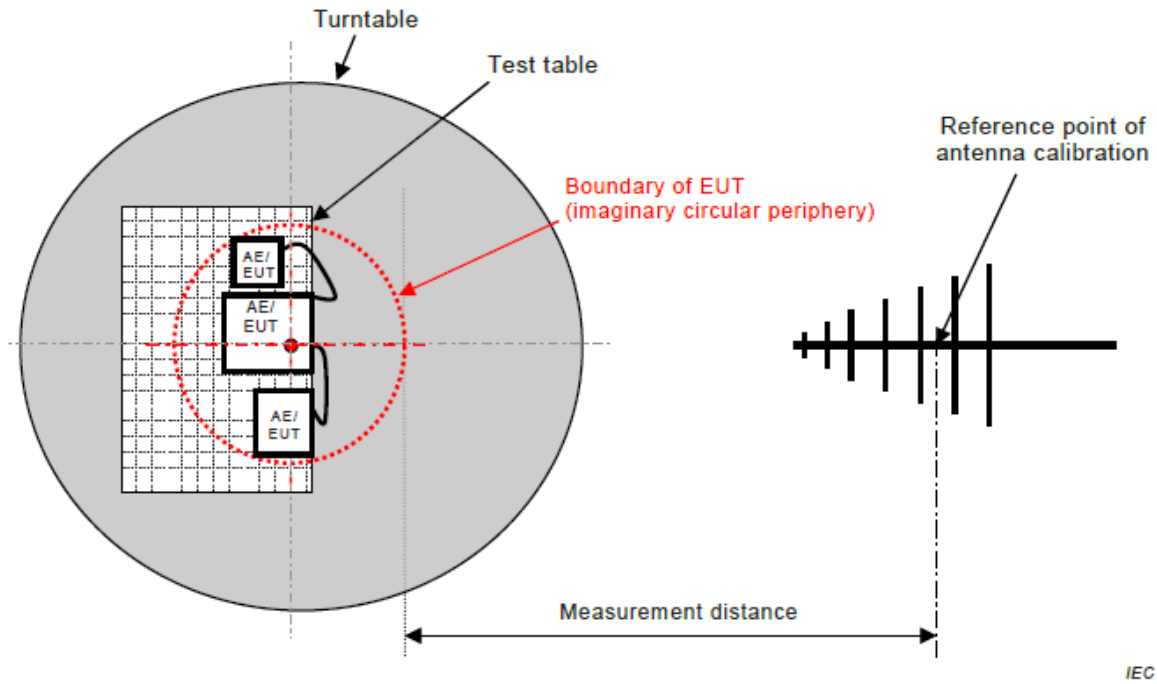


Figure C.1 – Measurement distance


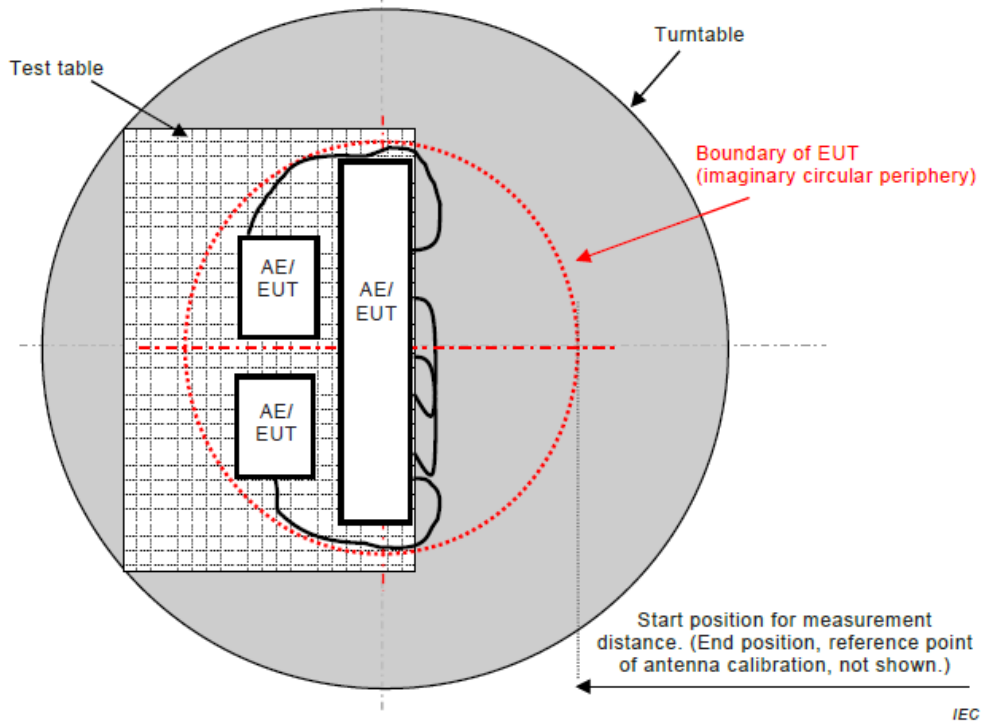


Figure C.2 – Boundary of EUT, Local AE and associated cabling




### 4.1.7 TEST RESULTS (UP TO 1 GHz)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

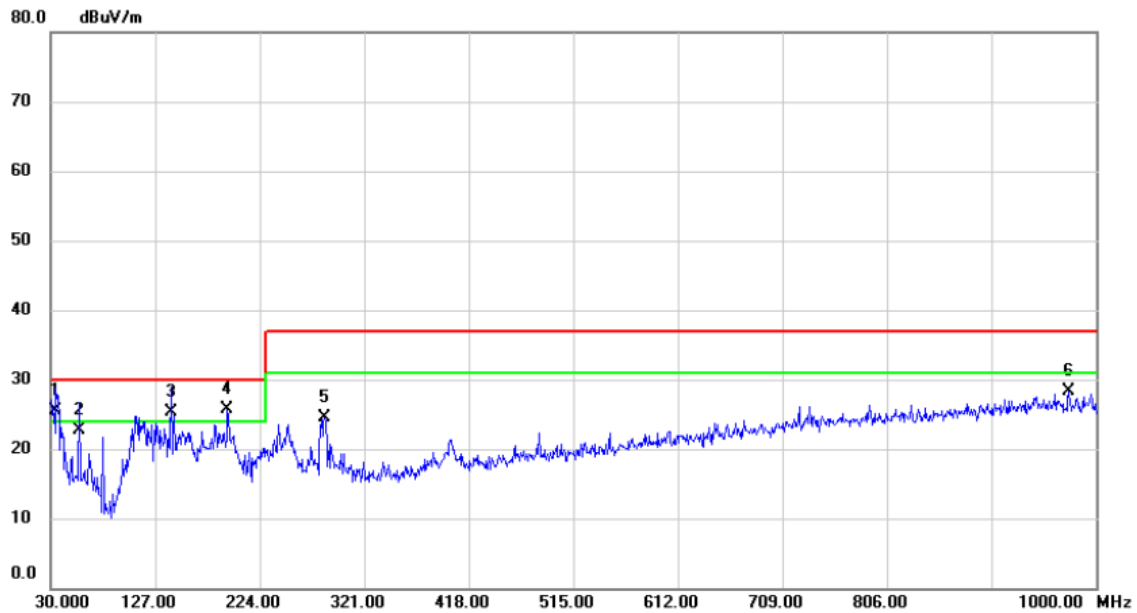

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	34.8500	44.30	-18.87	25.43	30.00	-4.57	QP	
2		56.1900	40.33	-17.72	22.61	30.00	-7.39	QP	
3	!	141.5500	42.79	-17.44	25.35	30.00	-4.65	QP	
4	*	193.9300	44.98	-19.21	25.77	30.00	-4.23	QP	
5		284.1400	40.20	-15.72	24.48	37.00	-12.52	QP	
6		974.7800	33.66	-5.35	28.31	37.00	-8.69	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

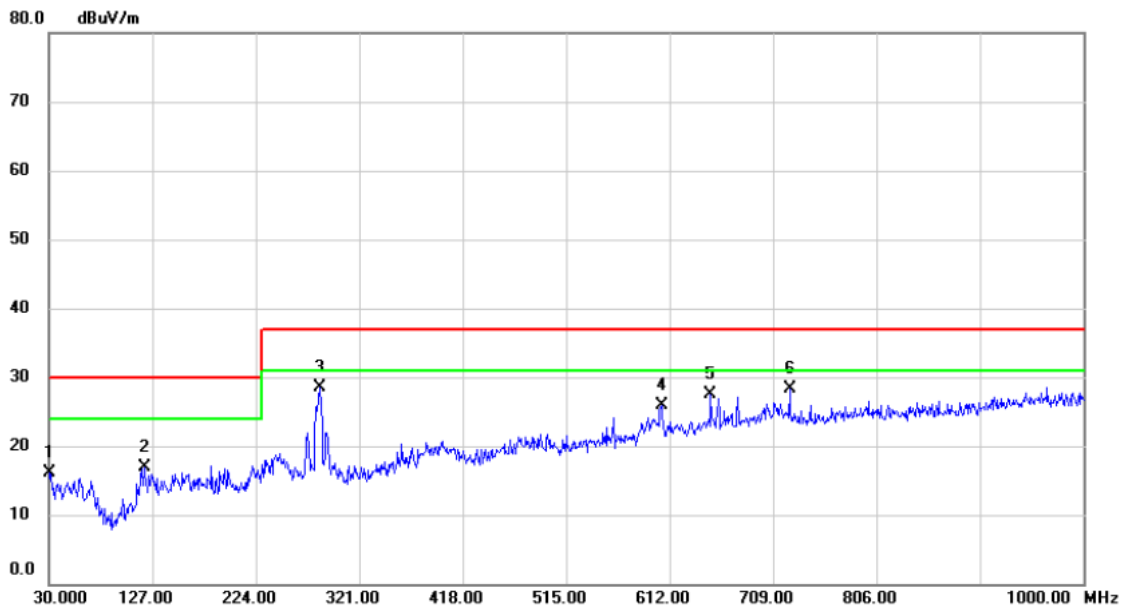

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	35.04	-18.97	16.07	30.00	-13.93	QP	
2		119.2400	36.14	-19.22	16.92	30.00	-13.08	QP	
3	*	284.6250	43.96	-15.51	28.45	37.00	-8.55	QP	
4		604.7250	34.57	-8.63	25.94	37.00	-11.06	QP	
5		650.8000	35.66	-8.16	27.50	37.00	-9.50	QP	
6		724.5200	35.70	-7.40	28.30	37.00	-8.70	QP	

## 4.2 RADIATED EMISSIONS ABOVE 1 GHZ

### 4.2.1 LIMITS

Class B equipment above 1000MHz

Frequency Range MHz	Measurement			Class B limits dB( $\mu$ V/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000				54
1000 - 3000			Peak / 1 MHz	70
3000 - 6000				74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency ( $F_x$ ) MHz	Highest measured frequency MHz
$F_x \leq 108$	1000
$108 < F_x \leq 500$	2000
$500 < F_x \leq 1000$	5000
$F_x > 1000$	5 <sup>th</sup> up to a maximum 6 GHz,

Note for FM and TV broadcast receiver,  $F_x$  is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

### 4.2.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	May 12, 2021
2	Amplifier	Agilent	8449B	3008A02333	Feb. 28, 2022
3	MXE EMI Receiver	Agilent	N9038A	MY53220133	Feb. 28, 2022
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	Mlcable Inc.	B10-01-01-5M	18047123	Jan. 06, 2022
8	Cable	Mlcable Inc.	B10-01-01-12M	18072743	Jan. 06, 2022
9	Cable	RegalWay	RWLPS50-7.9A- SMSM-1M	20200102 001	Jan. 06, 2022

Remark: "N/A" denotes no model no., no serial no. or no calibration specified.

All calibration period of equipment list is one year.


#### 4.2.1.1 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item - Block Diagram of system tested.


#### 4.2.1.2 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.1.3 TEST SETUP

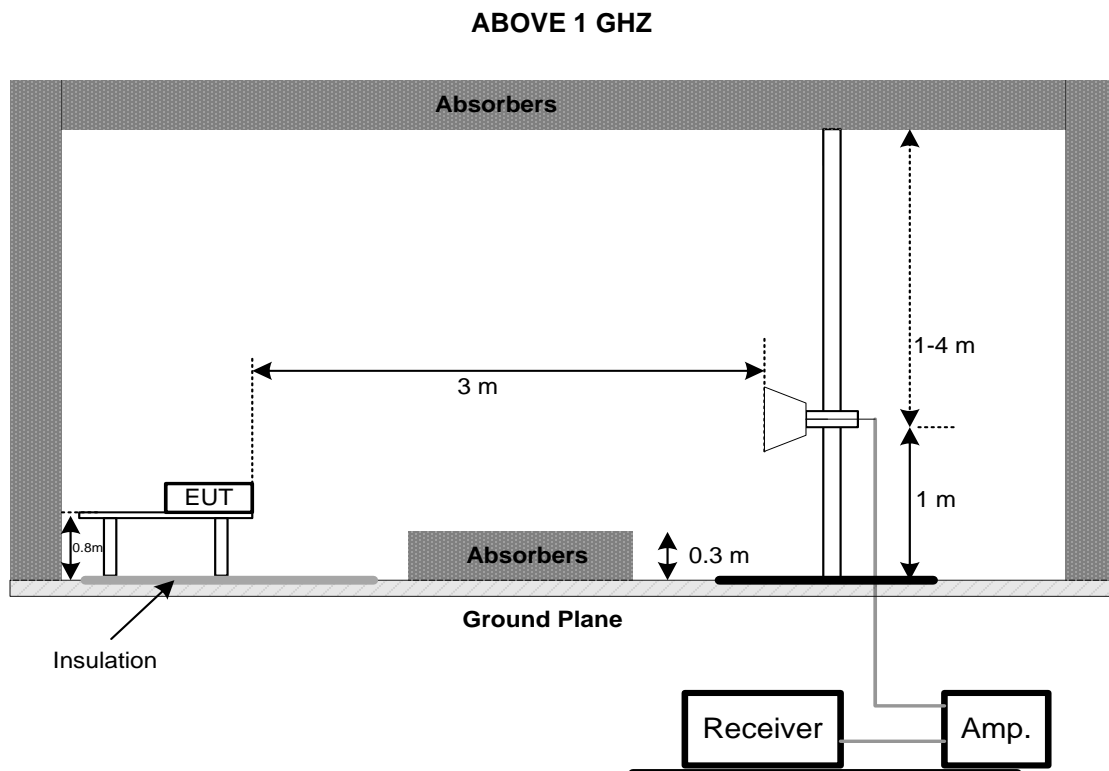


### 4.2.1.4 MEASUREMENT DISTANCE

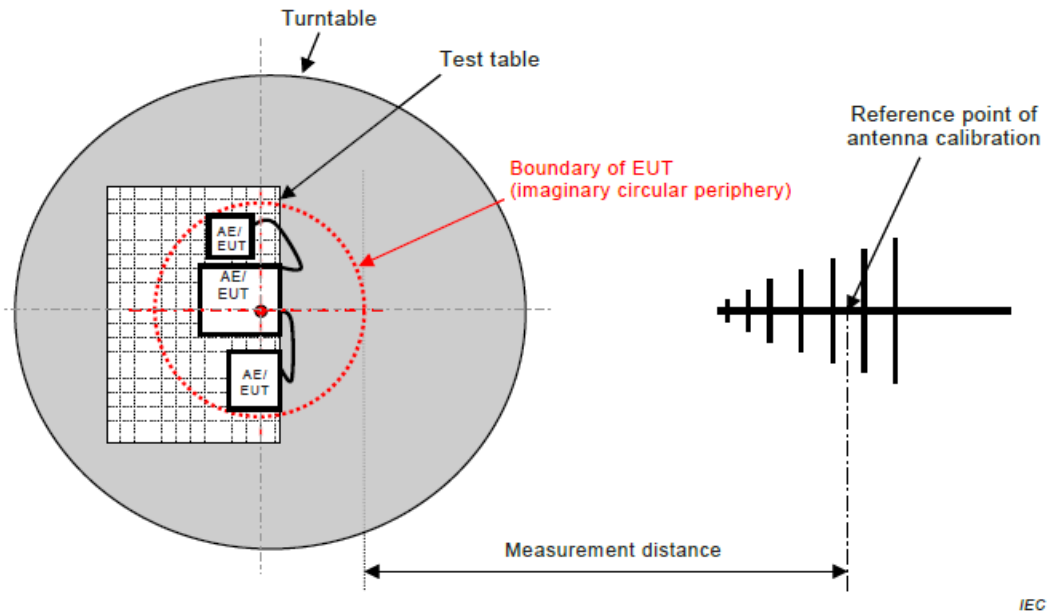

IEC

Figure C.1 – Measurement distance

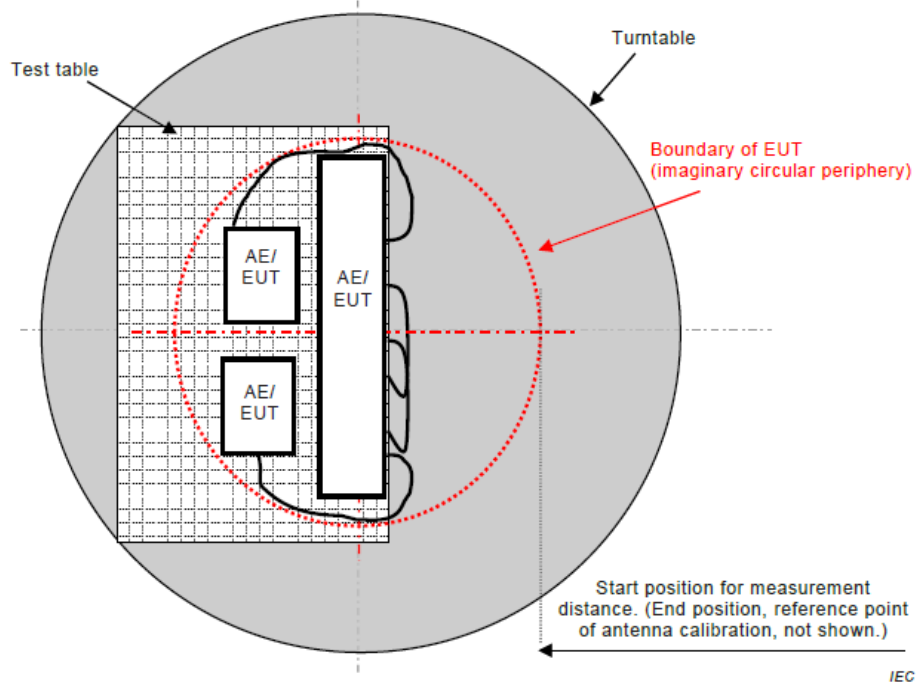


IEC

Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 4.2.1.5 TEST RESULTS (ABOVE 1 GHZ)

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

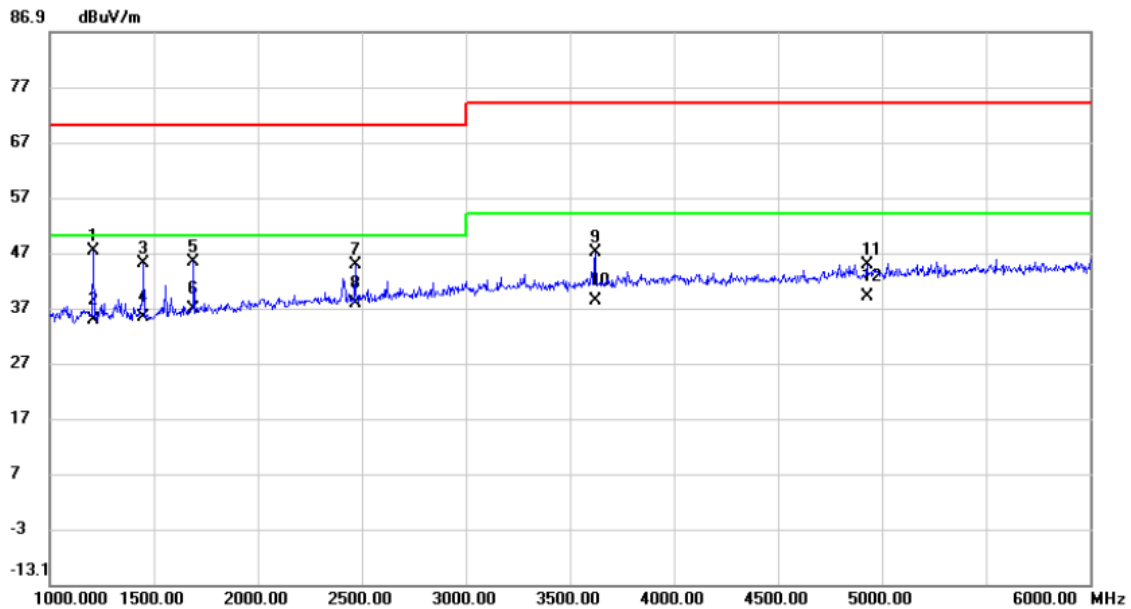

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	51.40	-4.10	47.30	70.00	-22.70	peak	
2		1207.500	38.95	-4.10	34.85	50.00	-15.15	AVG	
3		1450.000	48.13	-3.21	44.92	70.00	-25.08	peak	
4		1450.000	38.47	-3.21	35.26	50.00	-14.74	AVG	
5		1690.000	47.18	-1.80	45.38	70.00	-24.62	peak	
6		1690.000	38.53	-1.80	36.73	50.00	-13.27	AVG	
7		2467.500	43.00	1.90	44.90	70.00	-25.10	peak	
8	*	2467.500	35.94	1.90	37.84	50.00	-12.16	AVG	
9		3622.500	40.70	6.40	47.10	74.00	-26.90	peak	
10		3622.500	31.85	6.40	38.25	54.00	-15.75	AVG	
11		4927.500	35.00	9.88	44.88	74.00	-29.12	peak	
12		4927.500	29.25	9.88	39.13	54.00	-14.87	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

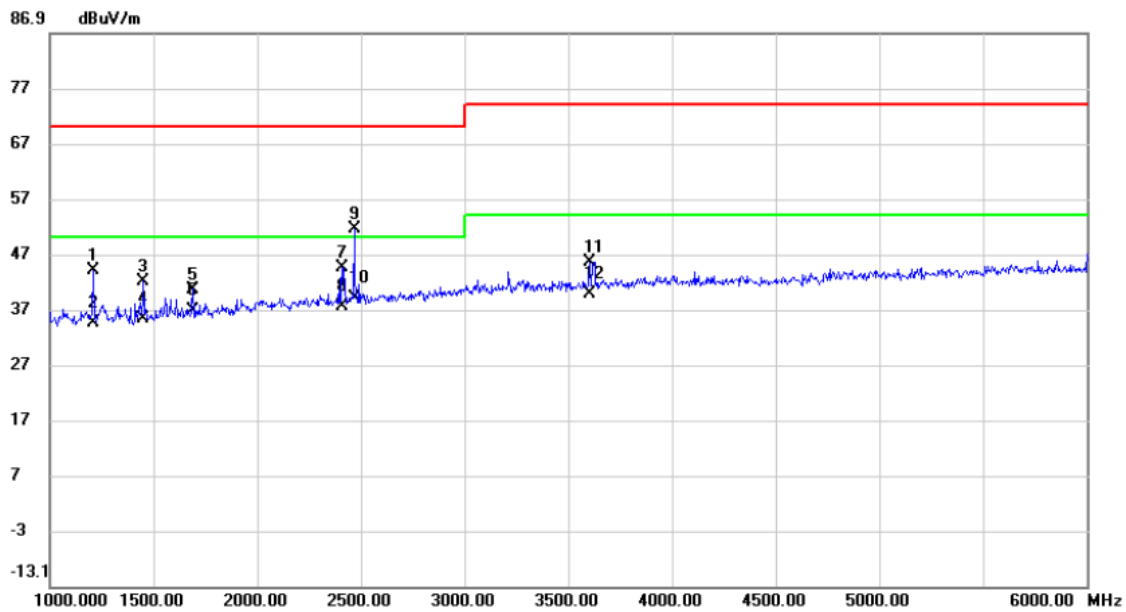

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1207.500	48.08	-4.10	43.98	70.00	-26.02	peak	
2		1207.500	38.65	-4.10	34.55	50.00	-15.45	AVG	
3		1450.000	45.34	-3.21	42.13	70.00	-27.87	peak	
4		1450.000	38.42	-3.21	35.21	50.00	-14.79	AVG	
5		1690.000	42.45	-1.80	40.65	70.00	-29.35	peak	
6		1690.000	38.63	-1.80	36.83	50.00	-13.17	AVG	
7		2412.500	42.94	1.70	44.64	70.00	-25.36	peak	
8		2412.500	35.78	1.70	37.48	50.00	-12.52	AVG	
9		2467.500	49.73	1.90	51.63	70.00	-18.37	peak	
10	*	2467.500	37.02	1.90	38.92	50.00	-11.08	AVG	
11		3600.000	39.23	6.31	45.54	74.00	-28.46	peak	
12		3600.000	33.39	6.31	39.70	54.00	-14.30	AVG	

### 4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

#### 4.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV) )
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

**NOTE:**

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

#### 4.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	50Ω Terminator	SHX	TF2-3G-A	8122901	Feb. 27, 2022
2	TWO-LINE V-NETWORK	R&S	ENV216	100526	Nov. 04, 2021
3	EMI Test Receiver	R&S	ESR3	101862	Jul. 25, 2021
4	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Feb. 28, 2022
5	Cable	N/A	RG400	N/A(12m)	Mar. 09, 2022
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of equipment list is one year.

#### 4.3.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.




#### 4.3.4 TEST SETUP

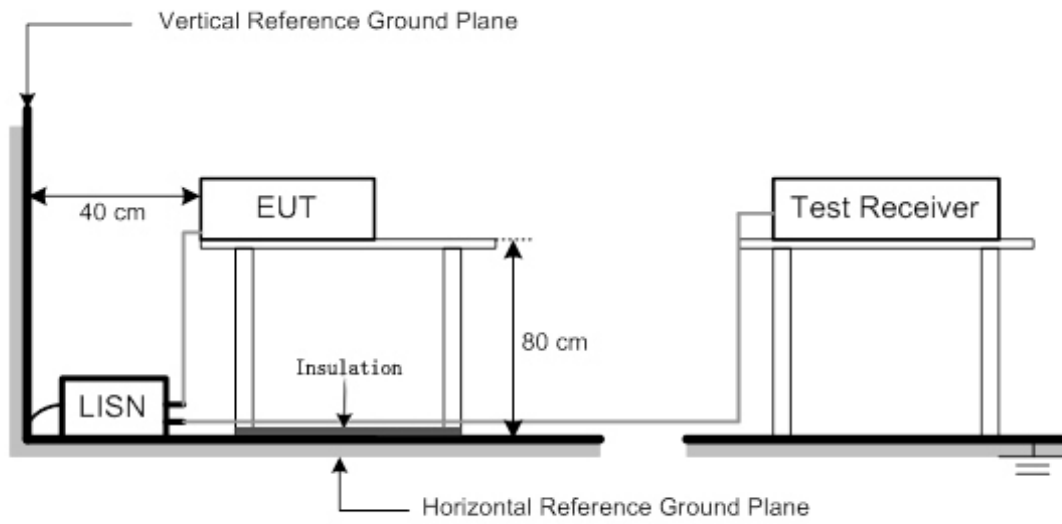


### 4.3.5 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

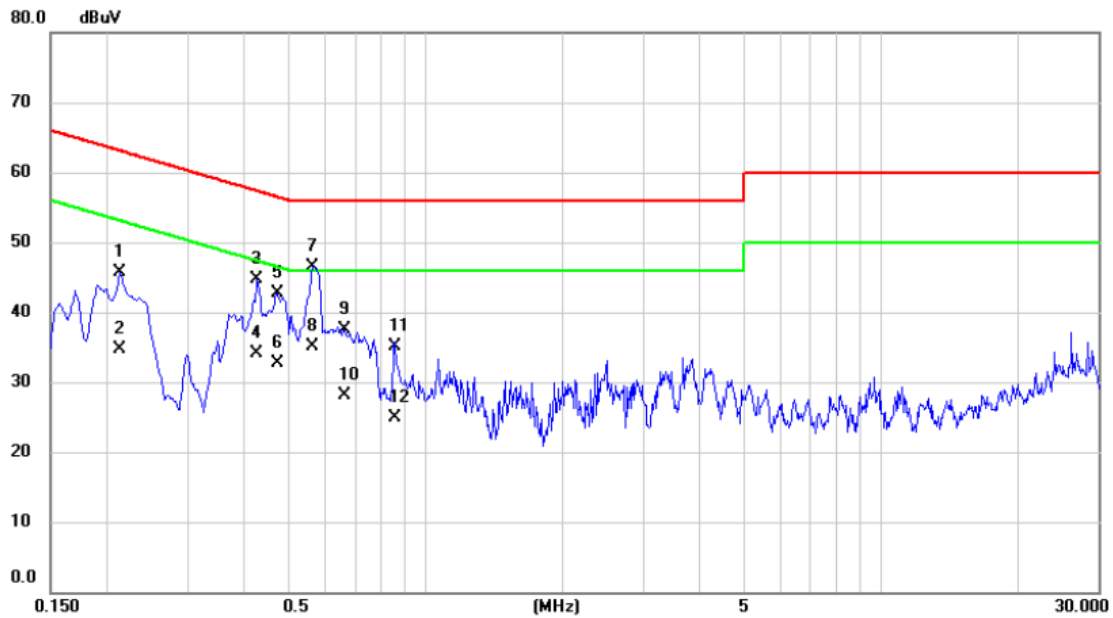

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2130	35.99	9.65	45.64	63.09	-17.45	QP	
2	0.2130	25.00	9.65	34.65	53.09	-18.44	AVG	
3	0.4267	34.95	9.68	44.63	57.32	-12.69	QP	
4	0.4267	24.50	9.68	34.18	47.32	-13.14	AVG	
5	0.4717	33.03	9.68	42.71	56.48	-13.77	QP	
6	0.4717	23.10	9.68	32.78	46.48	-13.70	AVG	
7 *	0.5640	36.89	9.69	46.58	56.00	-9.42	QP	
8	0.5640	25.40	9.69	35.09	46.00	-10.91	AVG	
9	0.6652	27.73	9.70	37.43	56.00	-18.57	QP	
10	0.6652	18.40	9.70	28.10	46.00	-17.90	AVG	
11	0.8587	25.29	9.72	35.01	56.00	-20.99	QP	
12	0.8587	15.20	9.72	24.92	46.00	-21.08	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

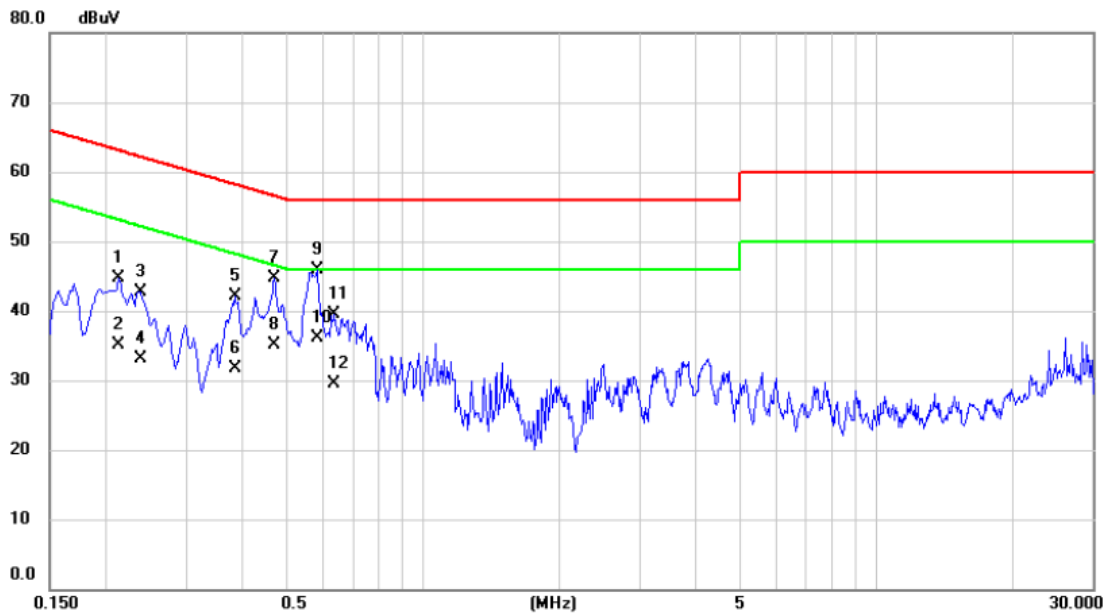

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	35.00	9.65	44.65	63.09	-18.44	QP	
2		0.2130	25.40	9.65	35.05	53.09	-18.04	AVG	
3		0.2377	33.13	9.65	42.78	62.18	-19.40	QP	
4		0.2377	23.40	9.65	33.05	52.18	-19.13	AVG	
5		0.3840	32.34	9.68	42.02	58.19	-16.17	QP	
6		0.3840	22.10	9.68	31.78	48.19	-16.41	AVG	
7		0.4694	35.00	9.68	44.68	56.52	-11.84	QP	
8		0.4694	25.40	9.68	35.08	46.52	-11.44	AVG	
9		0.5842	36.20	9.70	45.90	56.00	-10.10	QP	
10	*	0.5842	26.50	9.70	36.20	46.00	-9.80	AVG	
11		0.6382	29.74	9.70	39.44	56.00	-16.56	QP	
12		0.6382	19.80	9.70	29.50	46.00	-16.50	AVG	

## 5. HARMONIC AND FLICKER TEST

### 5.1 HARMONIC CURRENT EMISSIONS

#### 5.1.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

#### 5.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 25, 2021
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 25, 2021
3	Measurement Software	California	CTS4.0 Version 4.23	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.


#### 5.1.3 TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

#### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation


#### 5.1.5 TEST SETUP

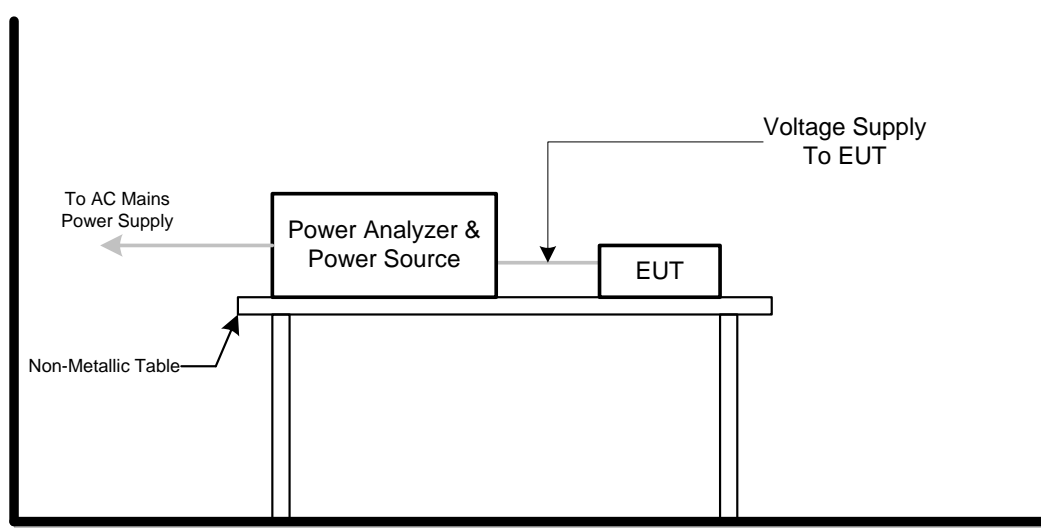


## 5.1.6 TEST RESULTS

Harmonic - Class D	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

### Current & voltage waveforms

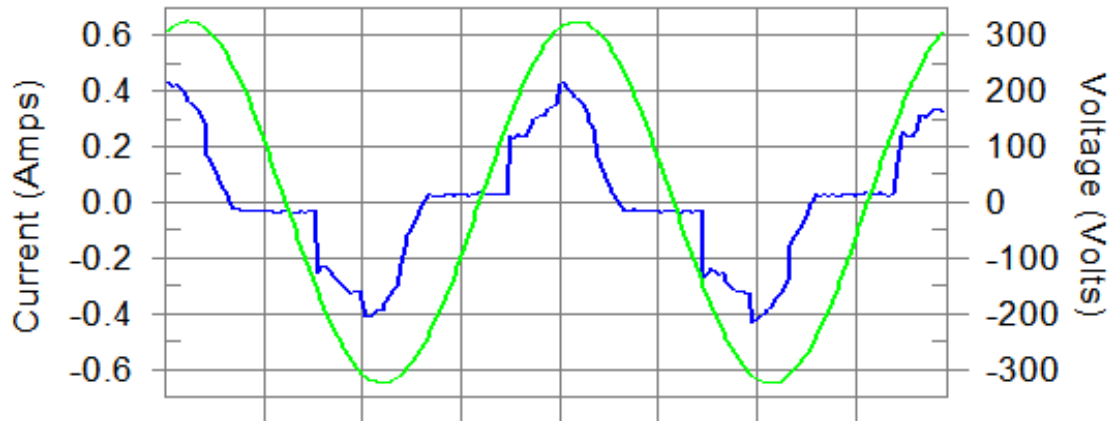

### Harmonics and Class D limit line      European Limits

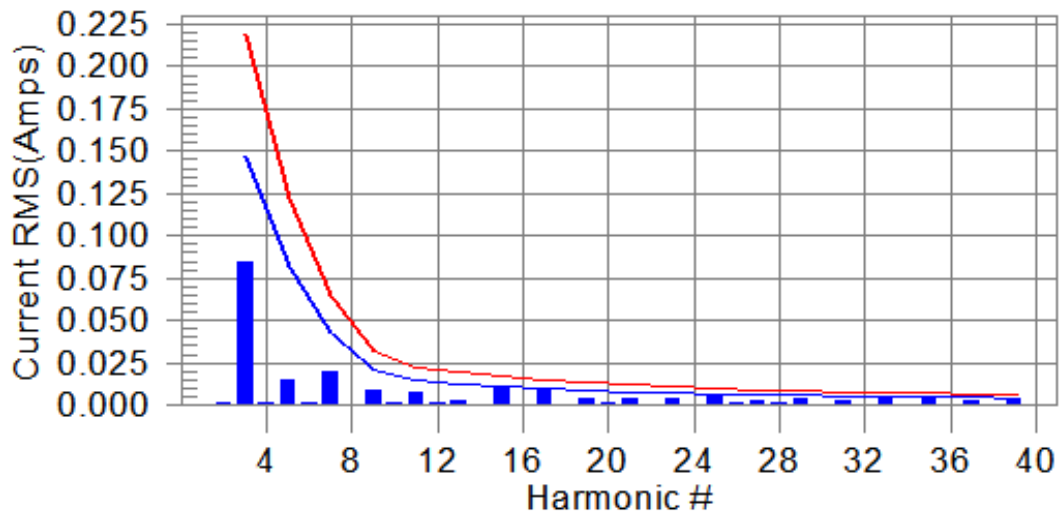

Test result: N/L      Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

## Current Test Result Summary (Run time)

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

## Highest parameter values during test:

V RMS (Volts): 229.95	Frequency(Hz): 50.00
I Peak (Amps): 0.467	I RMS (Amps): 0.222
I Fund (Amps): 0.202	Crest Factor: 2.117
Power (Watts): 43.0	Power Factor: 0.845

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	0.000	N/A	0.002	0.000	N/A	N/L
3	0.085	0.146	N/A	0.086	0.219	N/A	N/L
4	0.001	0.000	N/A	0.001	0.000	N/A	N/L
5	0.015	0.082	N/A	0.016	0.123	N/A	N/L
6	0.001	0.000	N/A	0.001	0.000	N/A	N/L
7	0.020	0.043	N/A	0.020	0.064	N/A	N/L
8	0.001	0.000	N/A	0.001	0.000	N/A	N/L
9	0.009	0.021	N/A	0.009	0.032	N/A	N/L
10	0.001	0.000	N/A	0.001	0.000	N/A	N/L
11	0.007	0.015	N/A	0.007	0.023	N/A	N/L
12	0.001	0.000	N/A	0.001	0.000	N/A	N/L
13	0.003	0.013	N/A	0.003	0.019	N/A	N/L
14	0.001	0.000	N/A	0.001	0.000	N/A	N/L
15	0.011	0.011	N/A	0.011	0.017	N/A	N/L
16	0.001	0.000	N/A	0.001	0.000	N/A	N/L
17	0.010	0.010	N/A	0.010	0.015	N/A	N/L
18	0.001	0.000	N/A	0.001	0.000	N/A	N/L
19	0.004	0.009	N/A	0.004	0.013	N/A	N/L
20	0.001	0.000	N/A	0.001	0.000	N/A	N/L
21	0.004	0.008	N/A	0.005	0.012	N/A	N/L
22	0.001	0.000	N/A	0.001	0.000	N/A	N/L
23	0.004	0.007	N/A	0.004	0.011	N/A	N/L
24	0.001	0.000	N/A	0.001	0.000	N/A	N/L
25	0.006	0.007	N/A	0.006	0.010	N/A	N/L
26	0.001	0.000	N/A	0.001	0.000	N/A	N/L
27	0.002	0.006	N/A	0.002	0.009	N/A	N/L
28	0.001	0.000	N/A	0.001	0.000	N/A	N/L
29	0.003	0.006	N/A	0.003	0.009	N/A	N/L
30	0.001	0.000	N/A	0.001	0.000	N/A	N/L
31	0.003	0.005	N/A	0.003	0.008	N/A	N/L
32	0.001	0.000	N/A	0.001	0.000	N/A	N/L
33	0.005	0.005	N/A	0.005	0.007	N/A	N/L
34	0.001	0.000	N/A	0.001	0.000	N/A	N/L
35	0.003	0.005	N/A	0.003	0.007	N/A	N/L
36	0.001	0.000	N/A	0.001	0.000	N/A	N/L
37	0.002	0.004	N/A	0.002	0.007	N/A	N/L
38	0.000	0.000	N/A	0.001	0.000	N/A	N/L
39	0.004	0.004	N/A	0.004	0.006	N/A	N/L
40	0.000	0.000	N/A	0.000	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Highest parameter values during test:**

Voltage (Vrms): 229.95	Frequency(Hz): 50.00
I Peak (Amps): 0.467	I RMS (Amps): 0.222
I Fund (Amps): 0.202	Crest Factor: 2.117
Power (Watts): 43.0	Power Factor: 0.845

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.124	0.460	27.06	OK
3	0.523	2.069	25.27	OK
4	0.068	0.460	14.81	OK
5	0.048	0.920	5.26	OK
6	0.037	0.460	8.03	OK
7	0.034	0.690	4.93	OK
8	0.024	0.460	5.18	OK
9	0.043	0.460	9.40	OK
10	0.021	0.460	4.60	OK
11	0.017	0.230	7.35	OK
12	0.017	0.230	7.61	OK
13	0.017	0.230	7.47	OK
14	0.016	0.230	6.79	OK
15	0.021	0.230	8.97	OK
16	0.015	0.230	6.40	OK
17	0.020	0.230	8.49	OK
18	0.011	0.230	4.73	OK
19	0.013	0.230	5.71	OK
20	0.017	0.230	7.23	OK
21	0.008	0.230	3.47	OK
22	0.012	0.230	5.39	OK
23	0.008	0.230	3.60	OK
24	0.007	0.230	3.11	OK
25	0.013	0.230	5.52	OK
26	0.009	0.230	3.74	OK
27	0.012	0.230	5.05	OK
28	0.008	0.230	3.57	OK
29	0.009	0.230	4.12	OK
30	0.006	0.230	2.47	OK
31	0.008	0.230	3.63	OK
32	0.006	0.230	2.77	OK
33	0.009	0.230	3.88	OK
34	0.004	0.230	1.58	OK
35	0.007	0.230	2.84	OK
36	0.004	0.230	1.61	OK
37	0.006	0.230	2.60	OK
38	0.004	0.230	1.53	OK
39	0.010	0.230	4.32	OK
40	0.006	0.230	2.67	OK

## 5.2 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST

### 5.2.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	$\leq 1.0$ , $T_p= 10$ min.	Short Term Flicker Indicator
Plt	$\leq 0.65$ , $T_p=2$ hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Chang
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	$\leq 500$ ms	Relative V-change characteristic

### 5.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 25, 2021
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 25, 2021
3	Measurement Software	California	CTS4.0 Version 4.23	N/A	N/A

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.


### 5.2.3 TEST PROCEDURE

- a. Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- b. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation

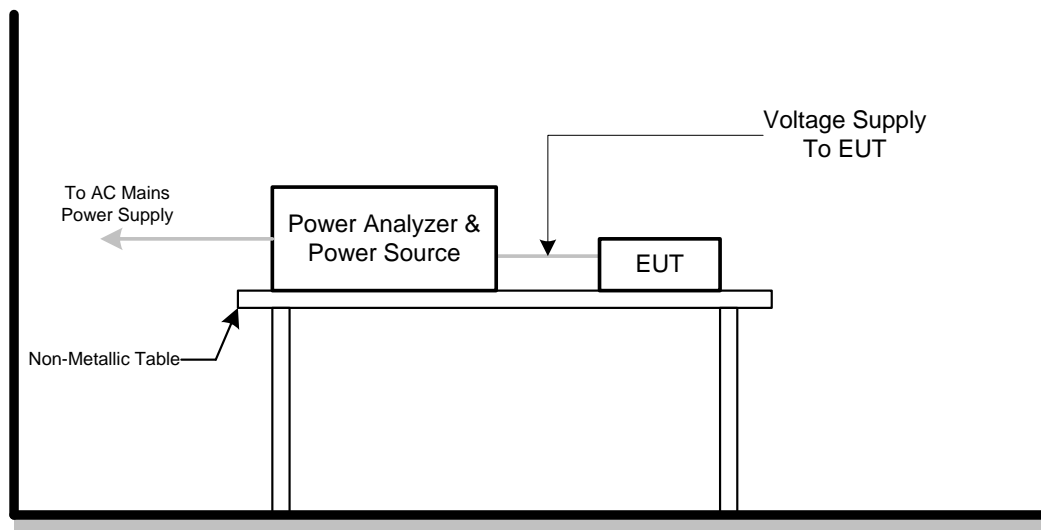

**5.2.5 TEST SETUP**

## 5.2.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

**Pst and limit line**

**European Limits**



**Plt and limit line**

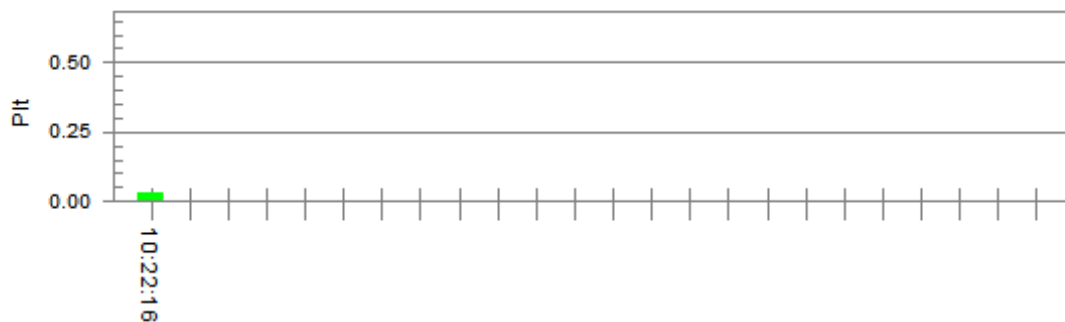

**Parameter values recorded during the test:**

Vrms at the end of test (Volt):	229.83		
T-max (mS):	0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.00	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650 Pass

## 6. EMC IMMUNITY TEST

### 6.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports <b>(NOTE 2)</b>	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports <b>(NOTE 2)</b>	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	<b>Port Type: unshielded symmetrical</b>		
	<b>Apply: lines to ground</b>		
	<b>Primary protection is Intended</b> ±1 kV 10/700(5/320)Tr/Th µs	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	C
	<b>Primary protection is not Intended</b> ±1 kV 10/700(5/320) Tr/Th µs		C
	<b>Port type: coaxial or shielded</b>		
	<b>Apply: shield to ground</b>		
±0.5 kV 1.2/50(8/20) Tr/Th µs	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	B	
<b>line to reference ground for each individual line:</b> ±0.5 kV(peak) 1.2/50(8/20) Tr/Th µs	DC network power ports <b>(NOTE 2)</b>	B	
±1 kV(peak) 1.2/50(8/20) Tr/Th µs (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th µs (line to earth or ground)	AC mains power ports	B	
Continuous induced RF disturbances IEC 61000-4-6 (CS)	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Analogue/digital data ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC network power ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage < 5% 0.5 cycle Residual voltage < 70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage < 5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances, repetitive (BIN-R)	0.15MHz to 0.5 MHz 107dBuV 0.5 MHz to 10 MHz 107dBuV to 36dBuV 10 MHz to 30 MHz 36dBuV to 30 dBuV	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	A
	0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports <b>(Apply period based on the AC mains frequency)</b>	A
Broadband impulse noise disturbances, isolated (BIN-I)	0.15MHz to 30 MHz 110dBuV	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	B
	0.24 ms 10 ms 300 ms	Analogue/digital data ports <b>(Apply all burst durations)</b>	B

**Note.**

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

## 6.2 GENERAL PERFORMANCE CRITERIA

According to **EN55035** standard, the general performance criteria as following:

<b>Criterion A</b>	<p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<b>Criterion B</b>	<p>During the application of the disturbance, degradation of performance is allowed. However, nonintended change of actual operating state or stored data is allowed to persist after the test.</p> <p>After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<b>Criterion C</b>	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Areboot or re-start operation is allowed.</p> <p>Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

## 6.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION

### 6.3.1 PERFORMANCE CRITERIA

#### Performance criterion A

##### for continuous radiated and conducted disturbances tests:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA. Additionally, an increase in any degradation greater than just perceptible by observation of the image shall not occur as a consequence of the application of the test. Examples of such degradations are:

- superimposed patterning;
- positional disturbances due to synchronisation errors;
- geometric distortion;
- change of contrast or brightness;
- picture artefacts;
- freezing or disturbance of motion;
- image loss;
- video data or decoding errors.

#### Performance criterion A

##### for the power frequency magnetic field tests:

Alternative 1: A continuous magnetic field of 1 A/m:

The jitter (in mm) shall not exceed the value 
$$\frac{(\text{character height in mm} + 0,3) \times 2,5}{33,3}$$

#### Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA.

#### Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

## 6.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION

### 6.4.1 PERFORMANCE CRITERIA

#### Performance criterion A:

For devices that support telephony functions the limits of Table G.3 shall apply.

With respect to Table G.3:

- the interference ratio (electrical or acoustic) shall meet the limits in column 3; or,
- the acoustic level of the demodulated audio shall be less than the limits in column 4; or,
- the digitally coded level of demodulated audio shall be less than limits in column 5; or,
- the analogue level of the demodulated audio shall be less than the limits in column 6.

**Table G.3 – Performance criterion A – Limits for devices supporting telephony**

Type of immunity test	Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
			dB (SPL)	Digital dBm0	Analogue dBm
Conducted	0,15 to 30	-20 dB	55	-50	-50
	30 to 80	-10 dB	65	-40	-40
Radiated	80 to 1000	0 dB	75	-30	-30

For terminals connected to digital wired network ports (such as Ethernet, ISDN), measurements of the demodulated 1 kHz may be performed on a remote AE, ideally of the same design.

For all other devices:

The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

#### Performance criterion B:

Use the general performance criterion B. See GENERAL PERFORMANCE CRITERIA.

#### Performance criterion C:

Use the general performance criterion C. See GENERAL PERFORMANCE CRITERIA.



## 6.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 6.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ , $\pm 8\text{kV}$ Contact Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

### 6.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Dec. 03, 2021

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.5.3 TEST PROCEDURE


The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.  
 NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.  
 For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.  
 NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.  
 Vertical Coupling Plane (VCP):  
 The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.  
 The four faces of the EUT will be performed with electrostatic discharge.  
 Horizontal Coupling Plane (HCP):  
 The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.  
 The four faces of the EUT will be performed with electrostatic discharge.
- b. For TABLE-TOP equipment:  
 The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### 6.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 6.5.5 TEST SETUP

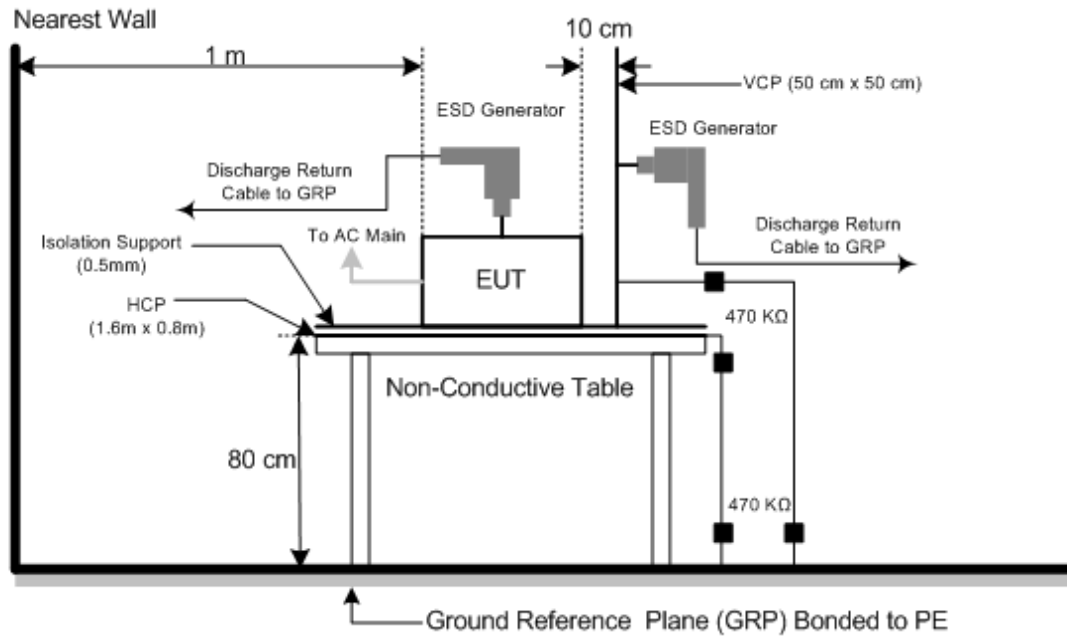

**6.5.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9



Mode	Air Discharge							Contact Discharge							
	2kV		4kV		8kV		- kV		2kV		4kV		- kV		
Test Level	P	N	P	N	P	N	P	N	P	N	P	N	P	N	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N	
1	A	A	A	A	B	B	-	-	A	A	B	B	-	-	
2	A	A	A	A	B	B	-	-	A	A	A	A	-	-	
3	A	A	A	A	B	B	-	-	A	A	B	B	-	-	
4	A	A	A	A	A	A	-	-	-	-	-	-	-	-	
5	A	A	A	A	A	A	-	-	-	-	-	-	-	-	
6	A	A	A	A	A	A	-	-	-	-	-	-	-	-	
Criteria	B							-		B				-	
Result	B							-		B				-	



Mode	HCP Contact Discharge						VCP Contact Discharge							
	2kV		4kV		- kV		2kV		4kV		- kV			
Test Level	P	N	P	N	P	N	P	N	P	N	P	N		
Location	P	N	P	N	P	N	P	N	P	N	P	N		
Left side	A	A	A	A	-	-	A	A	A	A	-	-		
Right side	A	A	A	A	-	-	A	A	A	A	-	-		
Front side	A	A	A	A	-	-	A	A	A	A	-	-		
Rear side	A	A	A	A	-	-	A	A	A	A	-	-		
Criteria	B						-		B				-	
Result	A						-		A				-	



Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

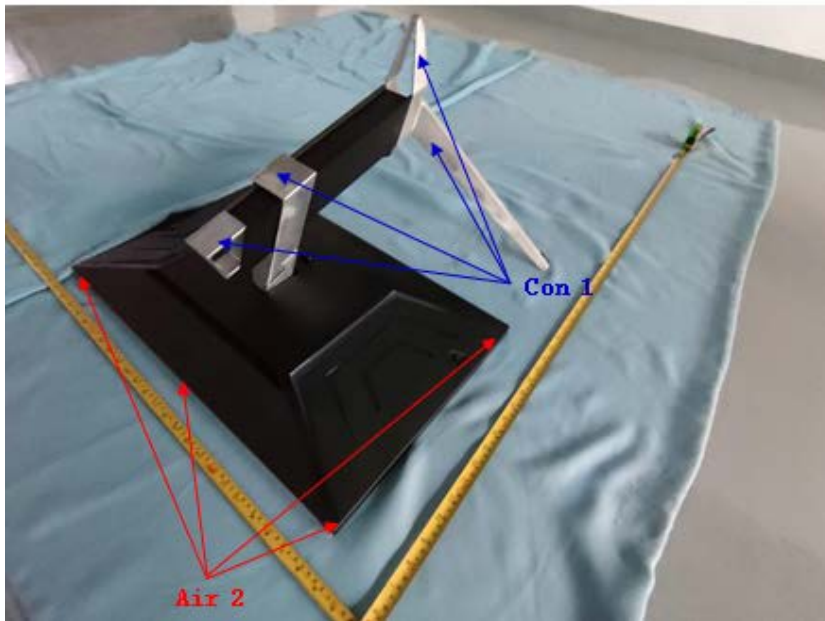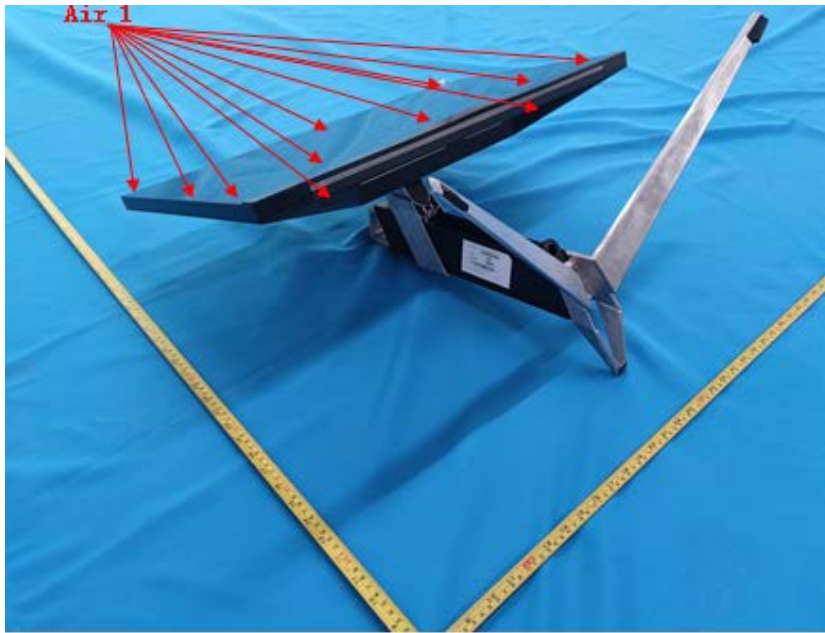

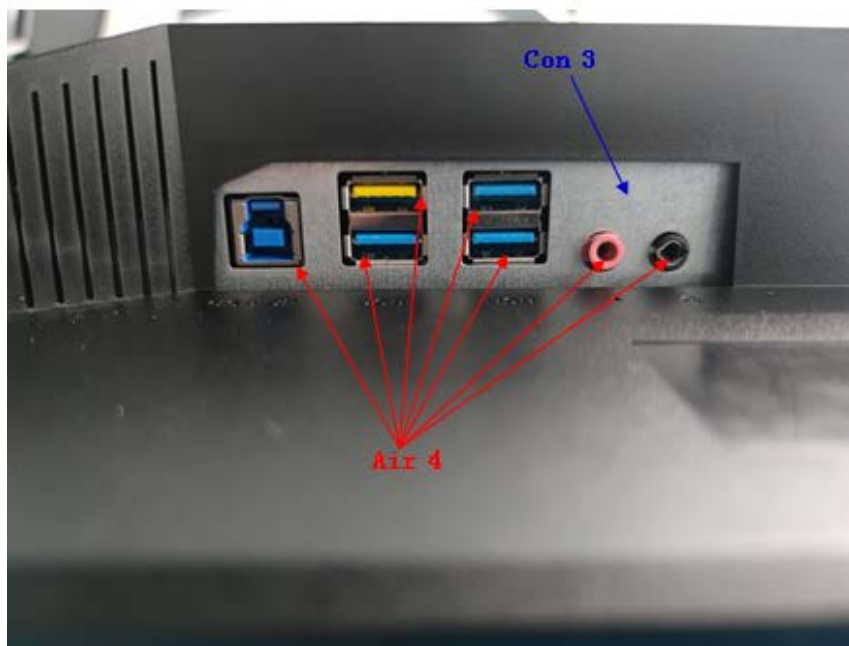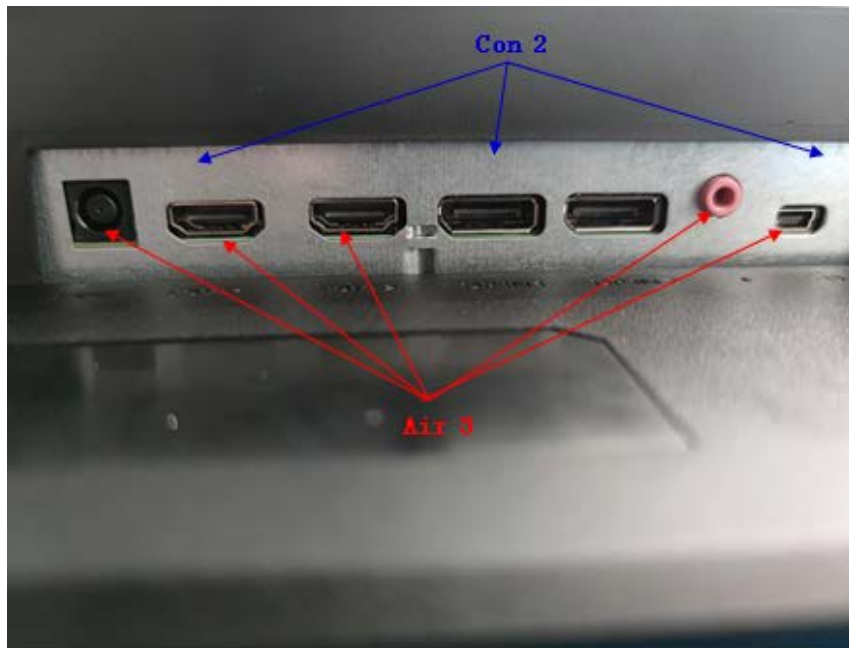

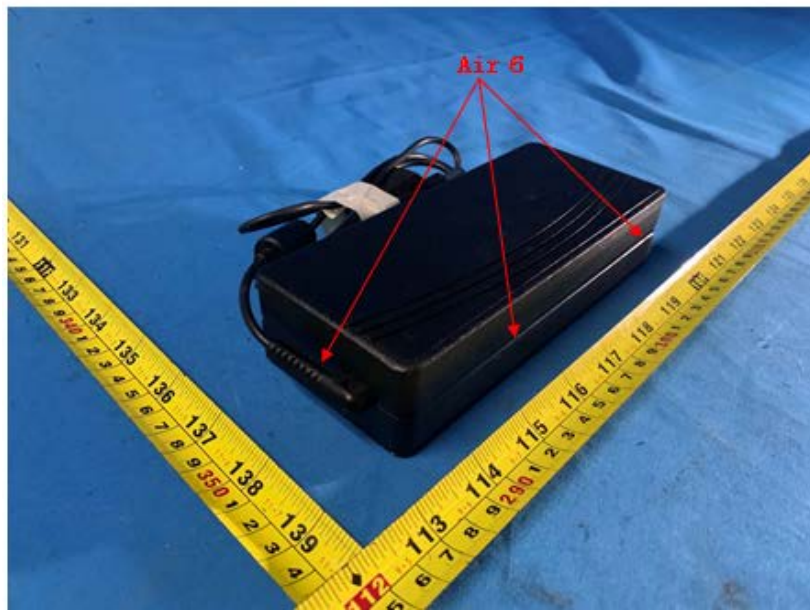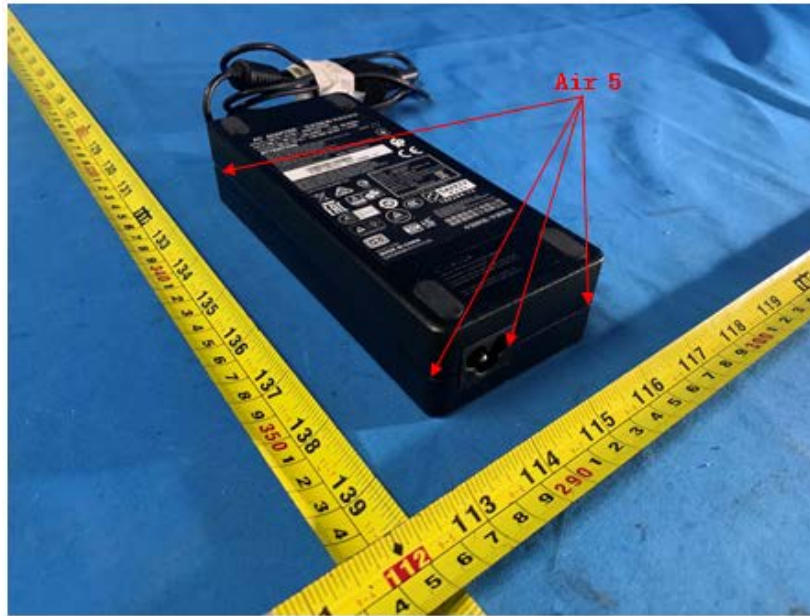



## 6.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

### 6.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

### 6.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Antenna	ETS	3142C	47662	Jun. 03, 2021
2*	Amplifier	AR	50S1G4A	326720	Feb. 28, 2024
3	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Jul. 25, 2021
4	Conditioning Amplifier	B&K	_2690__0F2_	2723746	Jun. 18, 2021
5	Power amplifier	MILMEGA	AS1860-50	1064834	Feb. 28, 2022
6	Broadband double ridged horn antenna	Regalway	RW10180-N	1911001	Jun. 12, 2021
7	Power amplifier	MILMEGA	80RF1000-250	1064833	Feb. 28, 2022
8	Measurement Software	TOYO	IM5/RS Ver 3.8.050	N/A	N/A
9	Free-field 1/2` Microphone	B&K	4190-L-001	2878077	Jun. 17, 2021
10	UPV Audio Analyzer	R&S	UPV	104259	Feb. 27, 2022

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

"\*" calibration period of equipment list is three year.

Except \* item, all calibration period of equipment list is one year.

### 6.6.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

The other condition as following manner:

- The field strength level was 3 V/m(unmodulated, r.m.s).
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

For Display and display output functions:

- a. The display quality evaluated by direct observation.
- b. For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output. the diagonal screen size shall be at least 0,50 m.
- c. The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

For Acoustic measurements:


- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of  $L_0$ .  
(BTL lab uses the software to take  $L_0$  as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of  $L_1$ .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:  
Acoustic interference ratio =  $L_1 - L_0$ .  
(For step e-g, BTL lab proceeds the test with software and calculate Acoustic interference ratio =  $L_1 - L_0$ ).

#### 6.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 6.6.5 TEST SETUP


- a) For Continuous induced RF disturbances

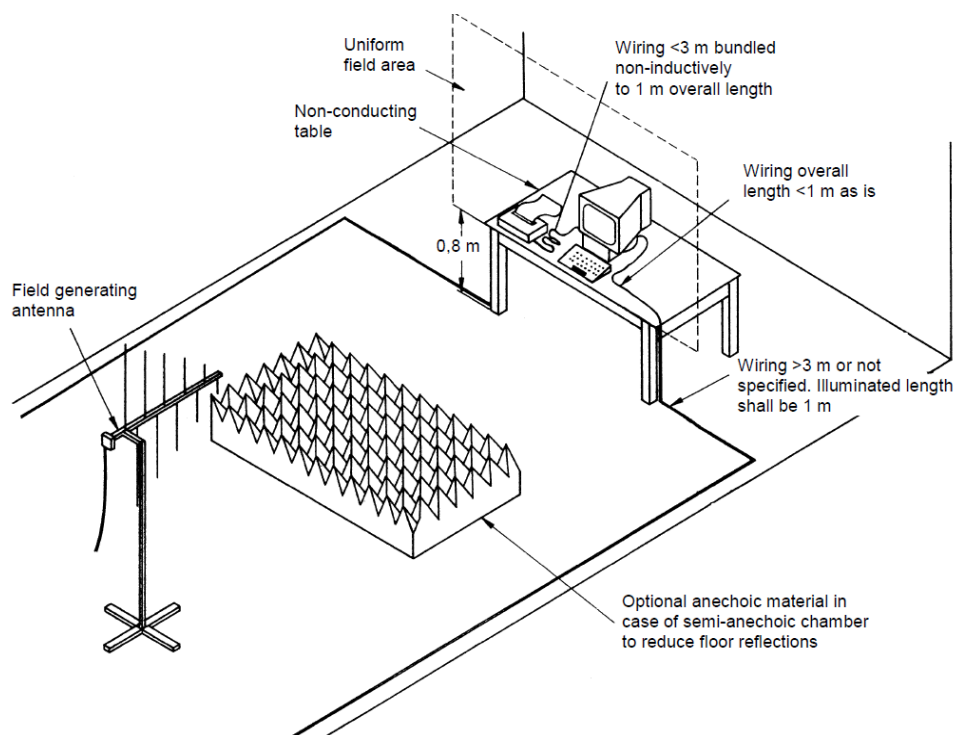




## For Audio output function

### (1) Audio output port

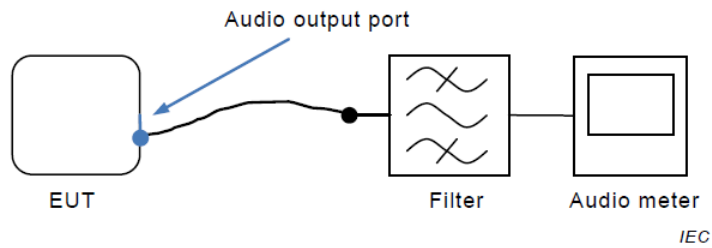

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

### (2) Loudspeaker

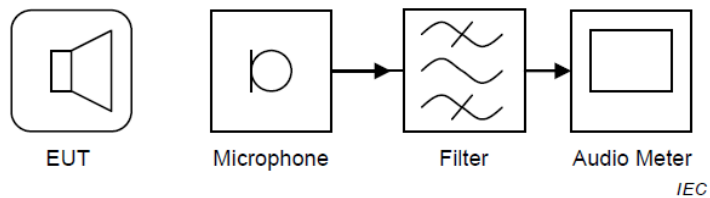

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

**6.6.6 TEST RESULTS**


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		


### For Audio output function

(1) Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Vertical_Rear

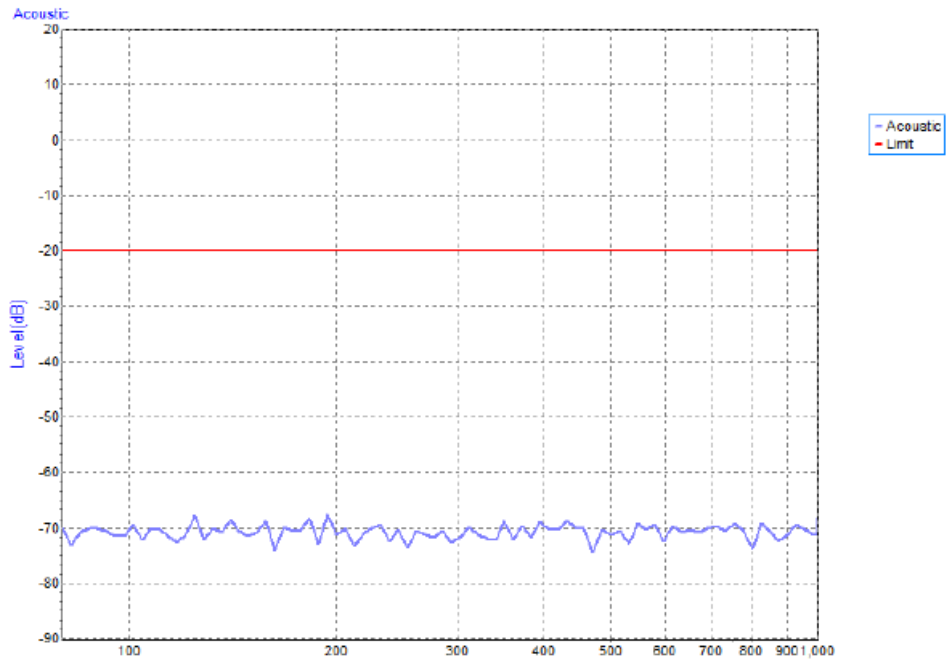


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Horiztontal_Rear

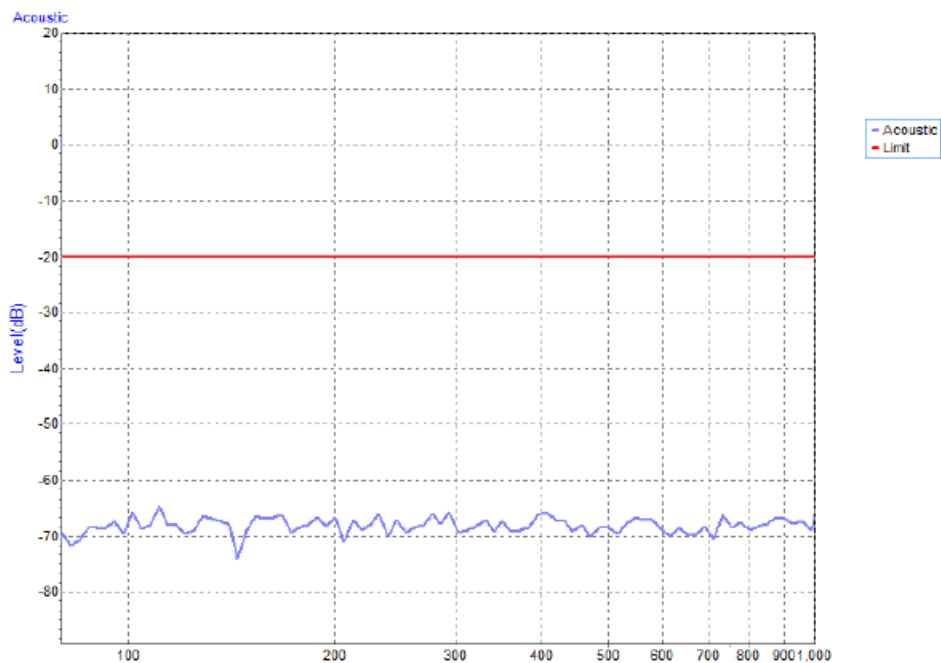


(2) Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Vertical_Rear

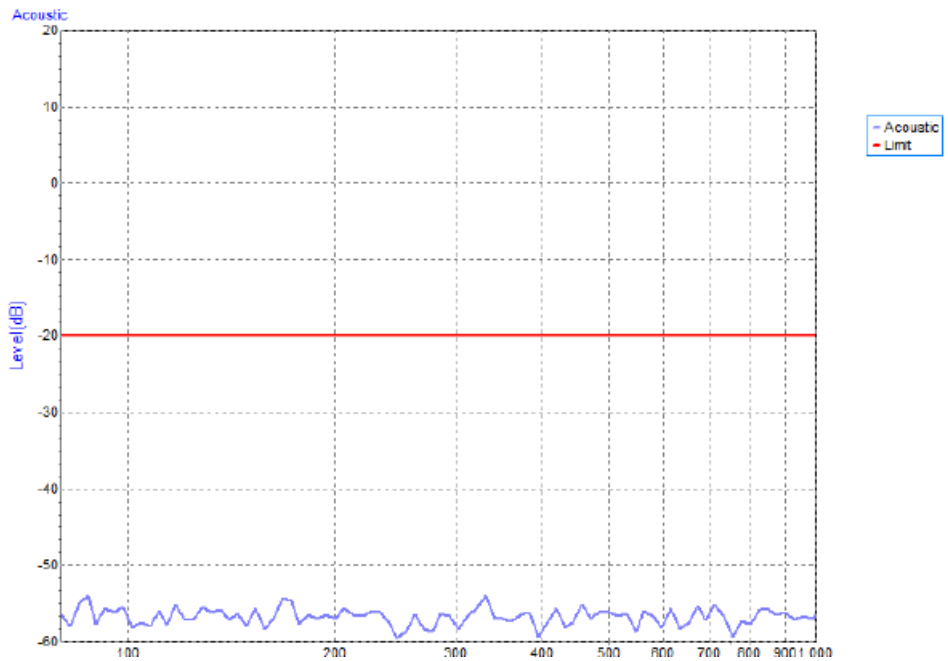

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Horizonttal_Rear

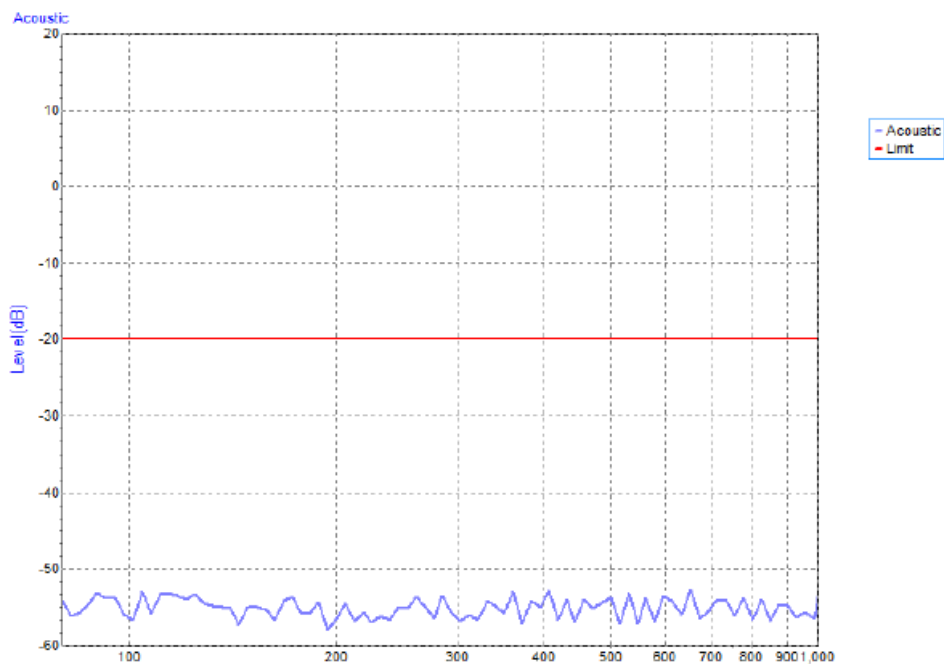

## 6.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)

### 6.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC Power Ports:±1 kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz: except for xDSL ports.
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

### 6.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	Jul. 25, 2021

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.7.3 TEST PROCEDURE

For TABLE-TOP equipment:

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m+/- 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.


The other condition as following manner:

- a. Both positive and negative polarity discharges were applied.
- b. The duration time of each test sequential was 1 minute.

### 6.7.4 DEVIATION FROM TEST STANDARD

No deviation

## 6.7.5 TEST SETUP

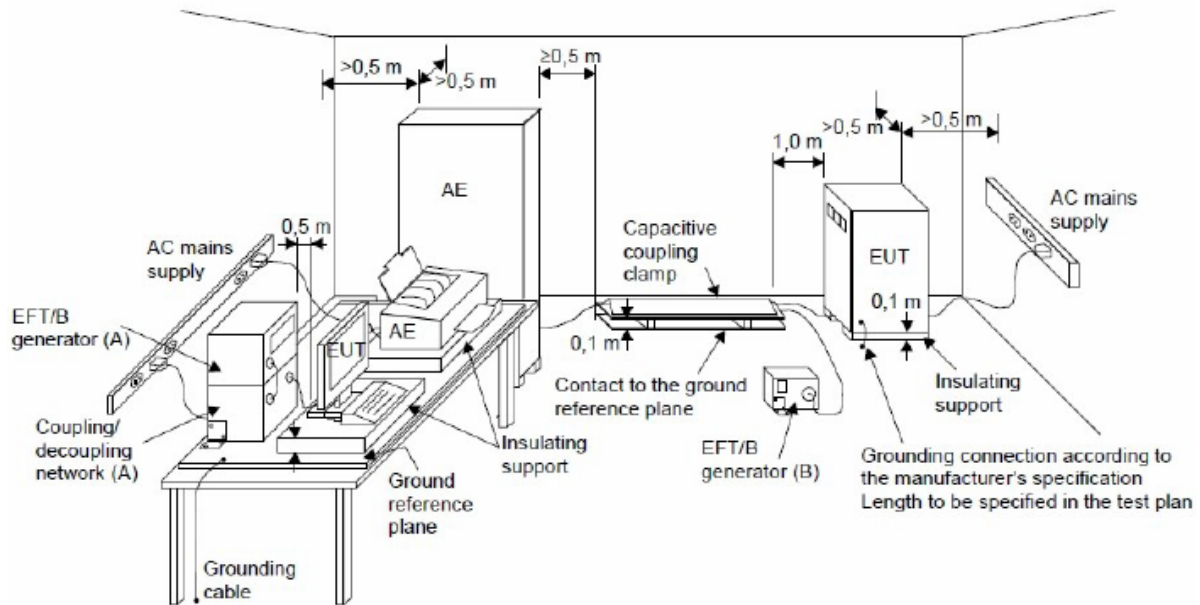

**6.7.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result
				1kV		
AC Power Port	Line (L)	+	5 kHz	A	B	A
		-	5 kHz	A		
	Neutral (N)	+	5 kHz	A	B	A
		-	5 kHz	A		
	Ground (PE)	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+N	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+PE	+	5 kHz	A	B	A
		-	5 kHz	A		
	N+PE	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+N+PE	+	5 kHz	A	B	A
		-	5 kHz	A		

## 6.8 SURGE IMMUNITY TEST

### 6.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B
Wave-Shape	1.2/50(8/20) Tr/Th $\mu$ s combination wave
Test Voltage	AC Power Port: $\pm 0.5$ kV, $\pm 1$ kV, $\pm 2$ kV
Generator Source Impedance	2 $\Omega$ of the low-voltage power supply network. 12 $\Omega$ (10 $\Omega$ +2 $\Omega$ ) of the low-voltage power supply network and ground.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90° phase Five negative pulses line-to-neutral at 270° phase Five positive pulses line-to-earth at 90° phase Five negative pulses line-to-earth at 270° phase Five negative pulses neutral-to-earth at 90° phase Five positive pulses neutral-to-earth at 270° phase
Pulse Repetition Rate	1 time / min.

### 6.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	Jul. 25, 2021

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.8.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrester cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).



**6.8.4 DEVIATION FROM TEST STANDARD**

No deviation

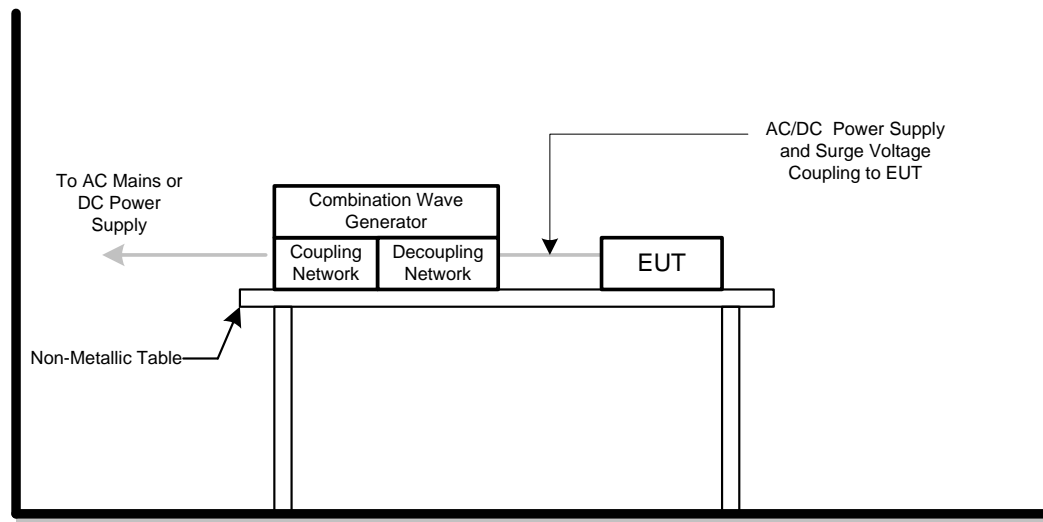**6.8.5 TEST SETUP**

**6.8.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Th $\mu$ s						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	-- kV	-- kV		
AC	L – N	+	90°	A	A	-	-	B	A
		-	270°	A	A	-	-		

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Th $\mu$ s						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	2kV	-- kV		
AC	L – PE	+	90°	A	A	A	-	B	A
		-	270°	A	A	A	-		
	N – PE	-	90°	A	A	A	-	B	A
		+	270°	A	A	A	-		

## 6.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

### 6.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Dwell Time	3 seconds

### 6.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Power CDN	FCC	FCC-801-M2/M3-16A	100270	Feb. 27, 2022
2	TEST SYSTEM FOR CONDUCTED AND RADIATED IMMUNITY	TESEQ	NSG 4070B	37513	Jul. 25, 2021
3	Measurement Software	Farad	EZ-CS(V2.0.1.2)	N/A	N/A
4	Conditioning Amplifier	B&K	2690_0F2_	2723746	Jun. 18, 2021
5	Free-field 1/2` Microphone	B&K	4190-L-001	2878077	Jun. 17, 2021
6	UPV Audio Analyzer	R&S	UPV	104259	Feb. 27, 2022

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.9.3 TEST PROCEDURE

The equipment to be tested is placed on an insulating support of 0.1m height above a reference ground plane. All cables exiting the EUT shall be supported at a height of at least 30 mm above the reference ground plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

The other condition as following manner:

- The field strength level was 3 V (unmodulated, r.m.s.)
- The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed 1.5x 10<sup>-3</sup> decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

For Display and display output functions:

- The display quality evaluated by direct observation.
- For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output.the diagonal screen size shall be at least 0,50 m.
- The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.


For Acoustic measurements:


- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of  $L_0$ . (BTL lab uses the software to take  $L_0$  as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of  $L_1$ .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:  
 Acoustic interference ratio =  $L_1 - L_0$ .  
 (For step e-g, BTL lab proceeds the test with software and calculate Acoustic interference ratio =  $L_1 - L_0$ ).

#### 6.9.4 DEVIATION FROM TEST STANDARD


No deviation

#### 6.9.5 TEST SETUP

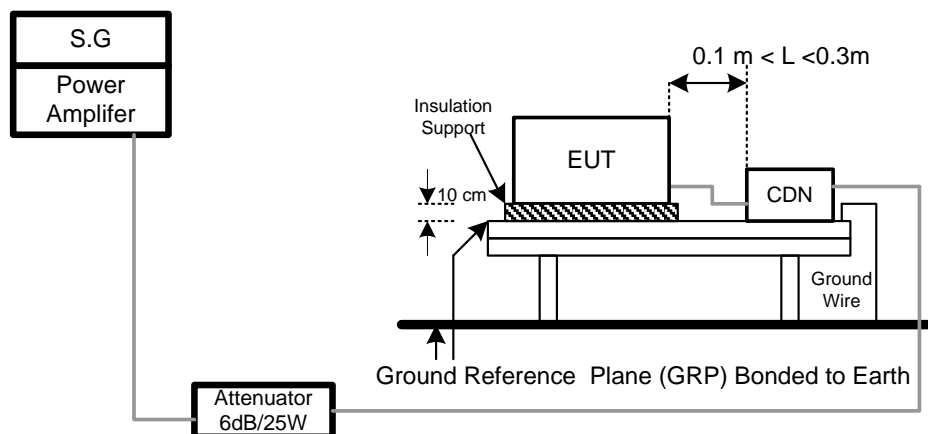

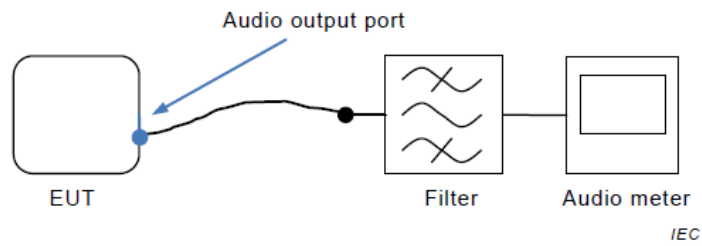**For Audio output function****(1) Audio output port**

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

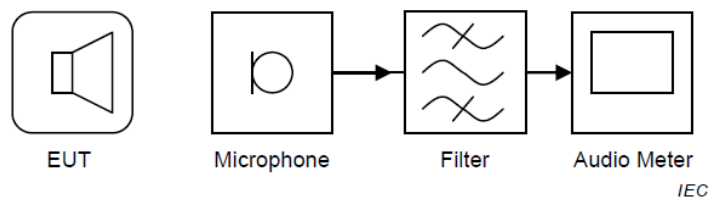**(2) Loudspeaker**

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

**6.9.6 TEST RESULTS**


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			

### For Audio output function


(1) Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CD N M3

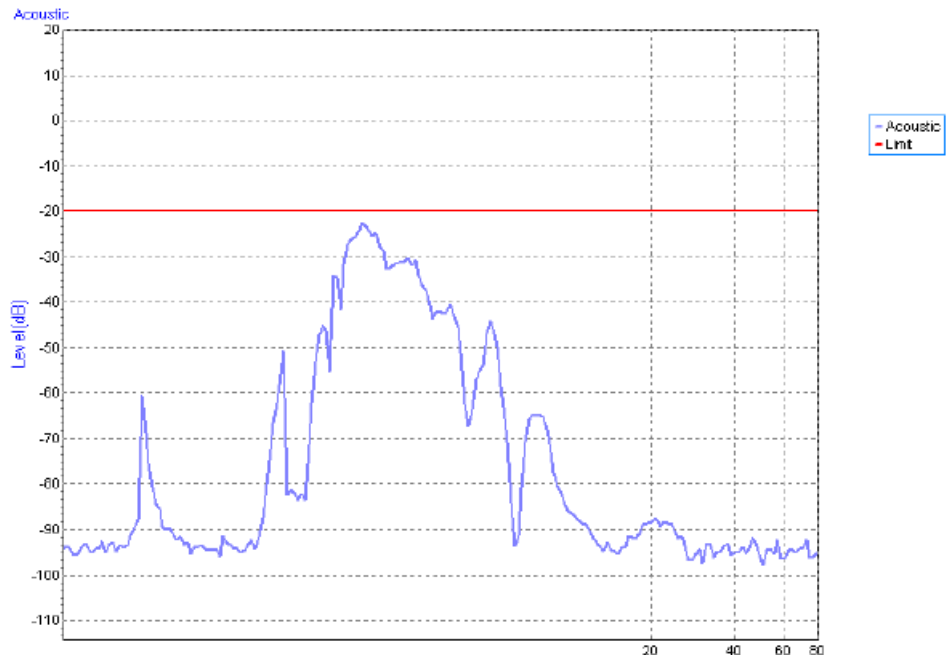

(2) Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CD N M3

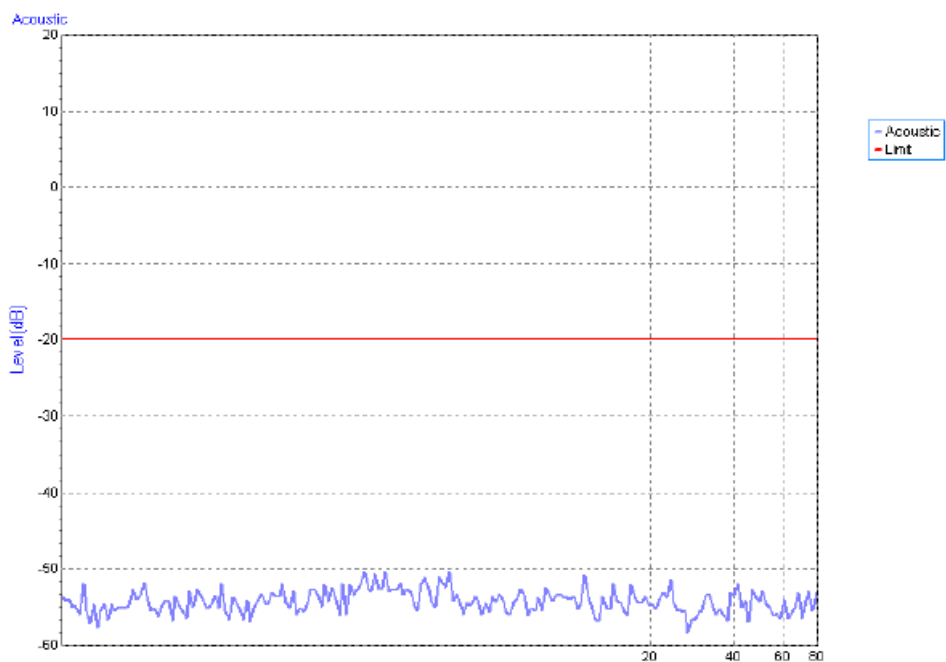

## 6.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

### 6.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60 Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

### 6.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	4032	Feb. 28, 2022
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	4024	Feb. 28, 2022

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 6.10.3 TEST PROCEDURE

For TABLE-TOP equipment:

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.


The other condition as following manner:

- a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 6.10.4 DEVIATION FROM TEST STANDARD

No deviation

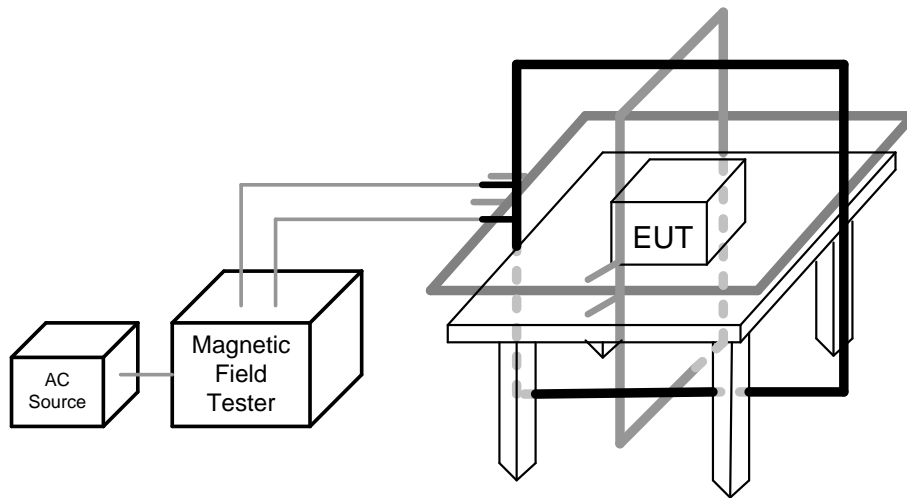

**6.10.5 TEST SETUP**

**6.10.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-6, Mode 9

**50Hz**

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results
Enclosure	1 A/m	X	60	A	A
Enclosure	1 A/m	Y	60	A	A
Enclosure	1 A/m	Z	60	A	A

**60Hz**

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results
Enclosure	1 A/m	X	60	A	A
Enclosure	1 A/m	Y	60	A	A
Enclosure	1 A/m	Z	60	A	A

## 6.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

### 6.11.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

### 6.11.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Series Model	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	Dec. 03, 2021

Remark: "N/A" denotes no model no., no serial No. or no calibration specified.

All calibration period of equipment list is one year.


### 6.11.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

### 6.11.4 DEVIATION FROM TEST STANDARD

No deviation

### 6.11.5 TEST SETUP

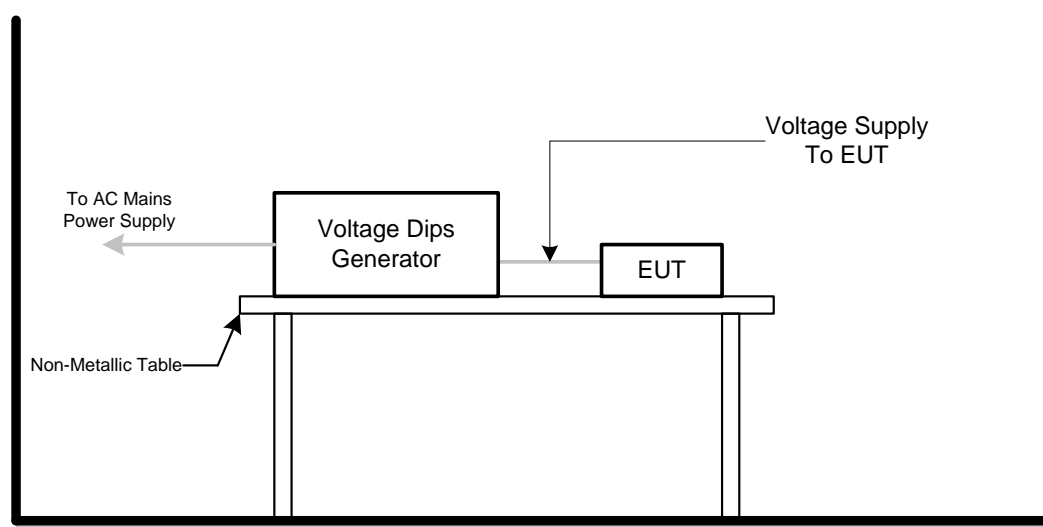

**6.11.6 TEST RESULTS**

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode	Mode 1-6, Mode 9

AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

**7. EUT TEST PHOTO**



EN 55032:2015

Radiated emissions up to 1 GHz

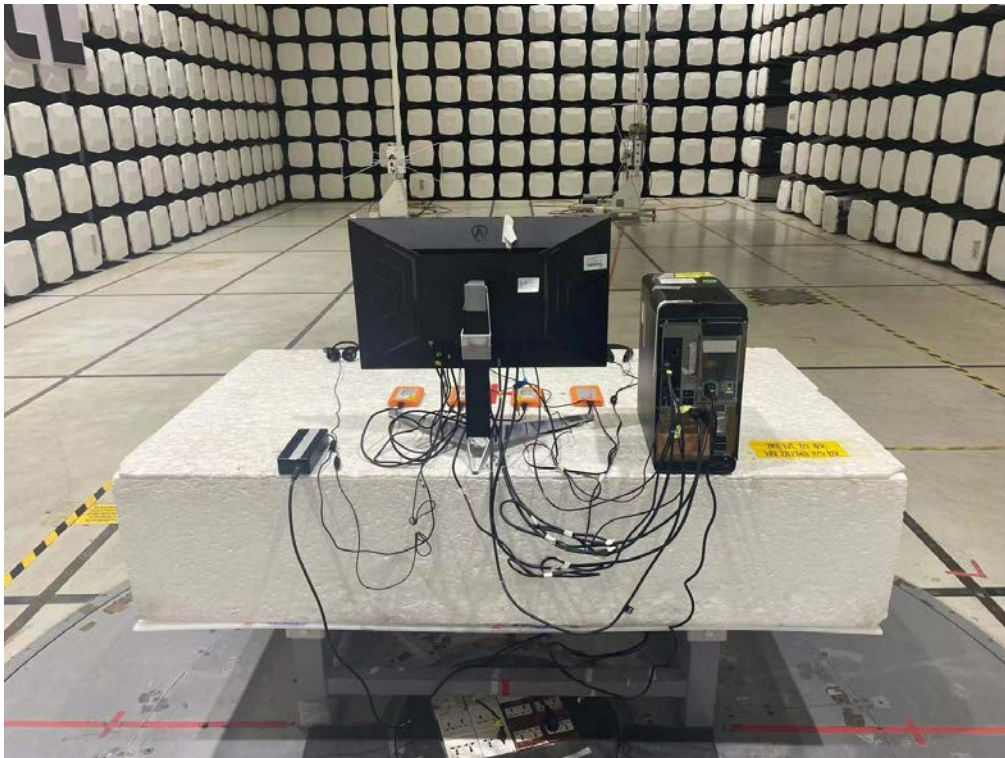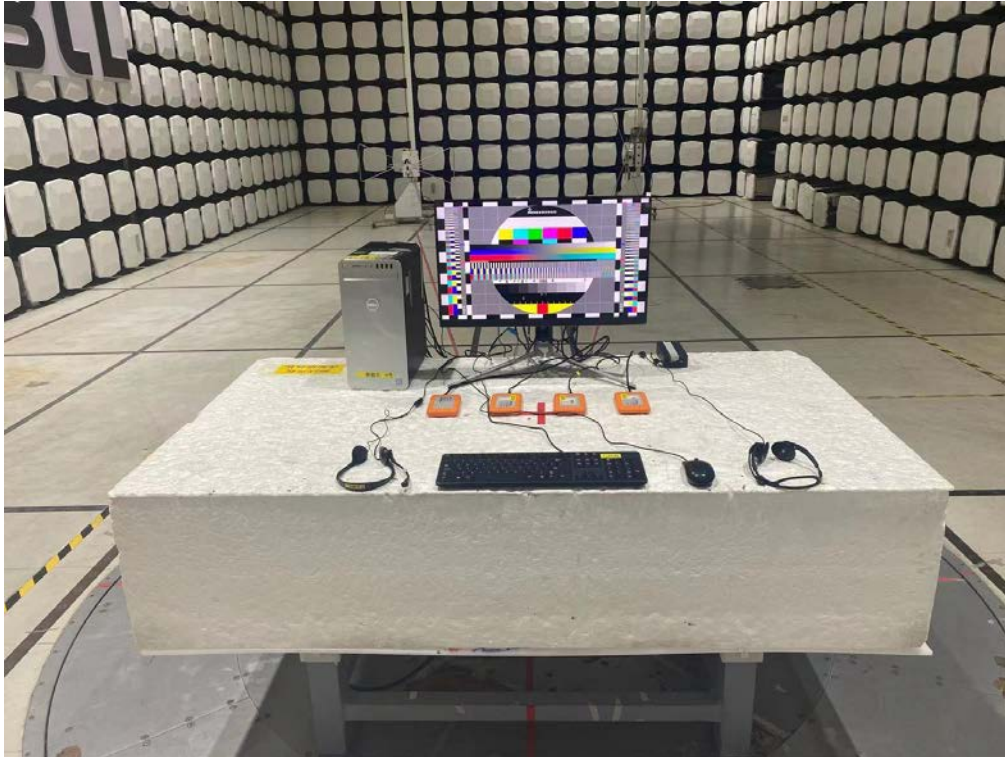



Radiated emissions above 1 GHz

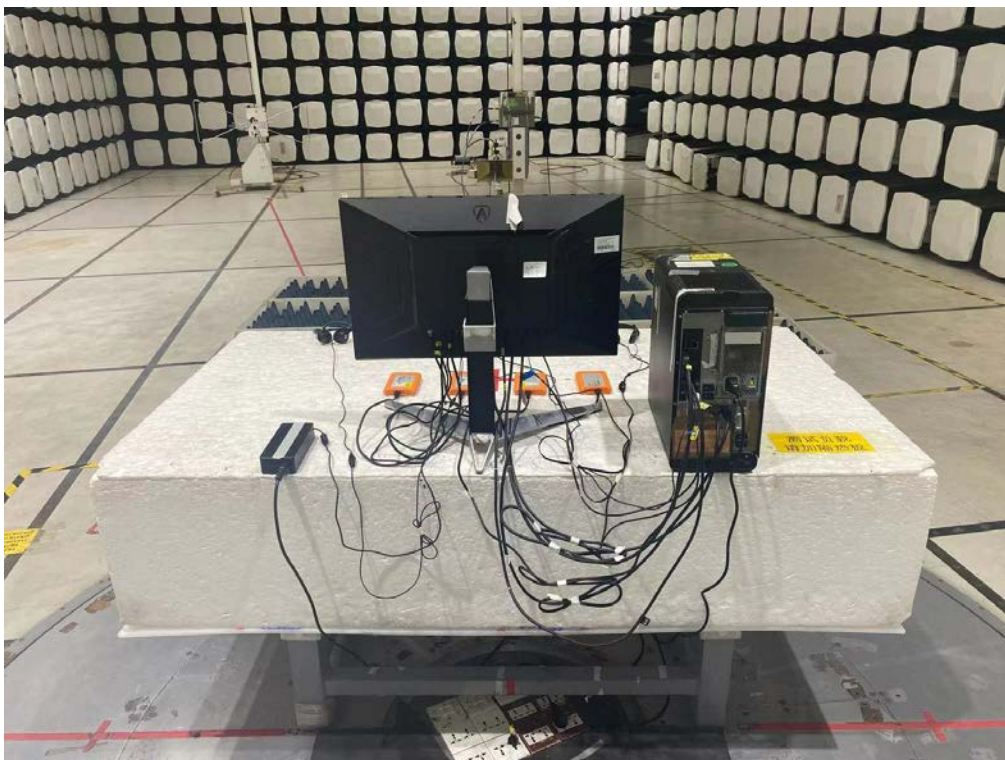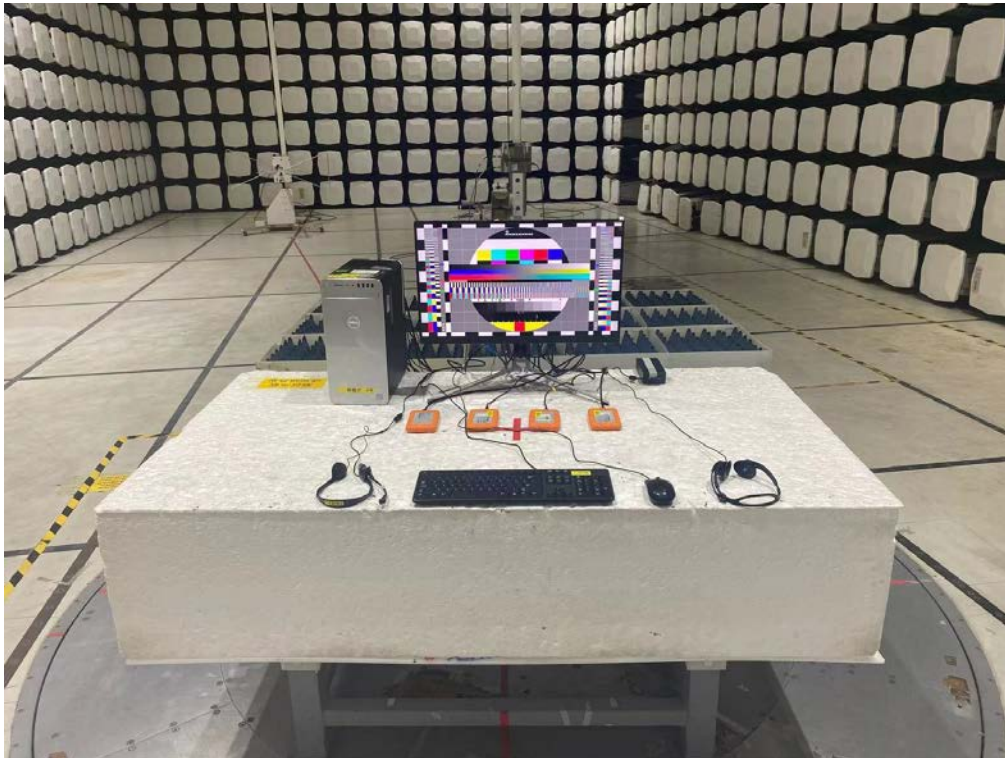


Conducted emissions AC mains power port







EN 55032:2015+A11:2020

Radiated emissions up to 1 GHz

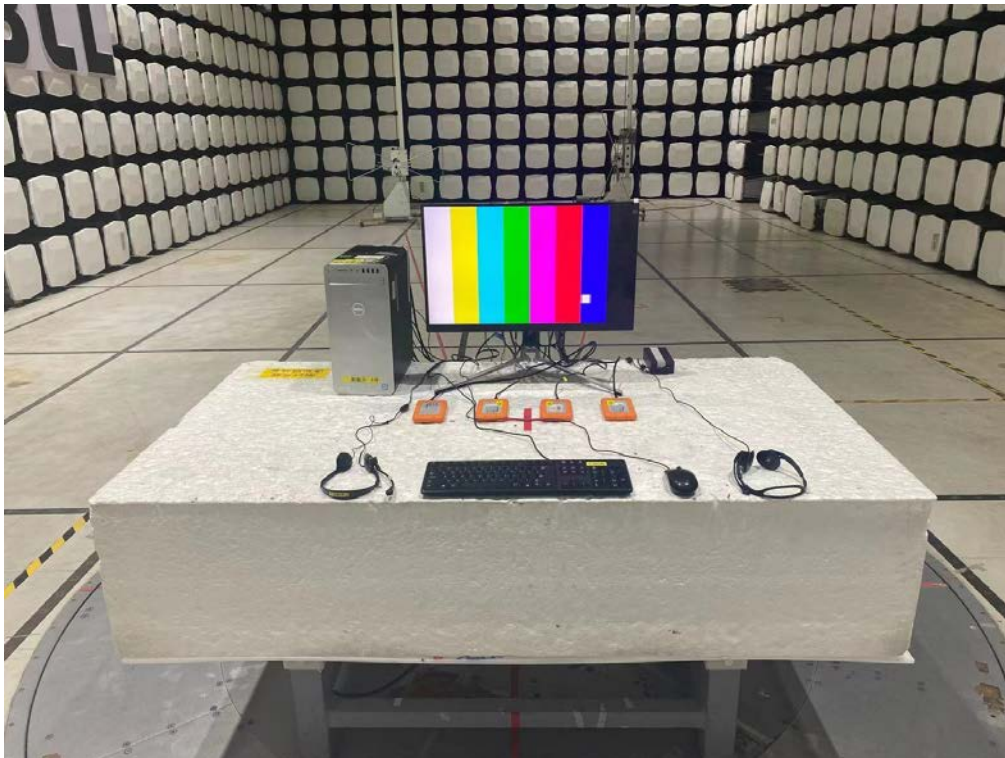



Radiated emissions above 1 GHz

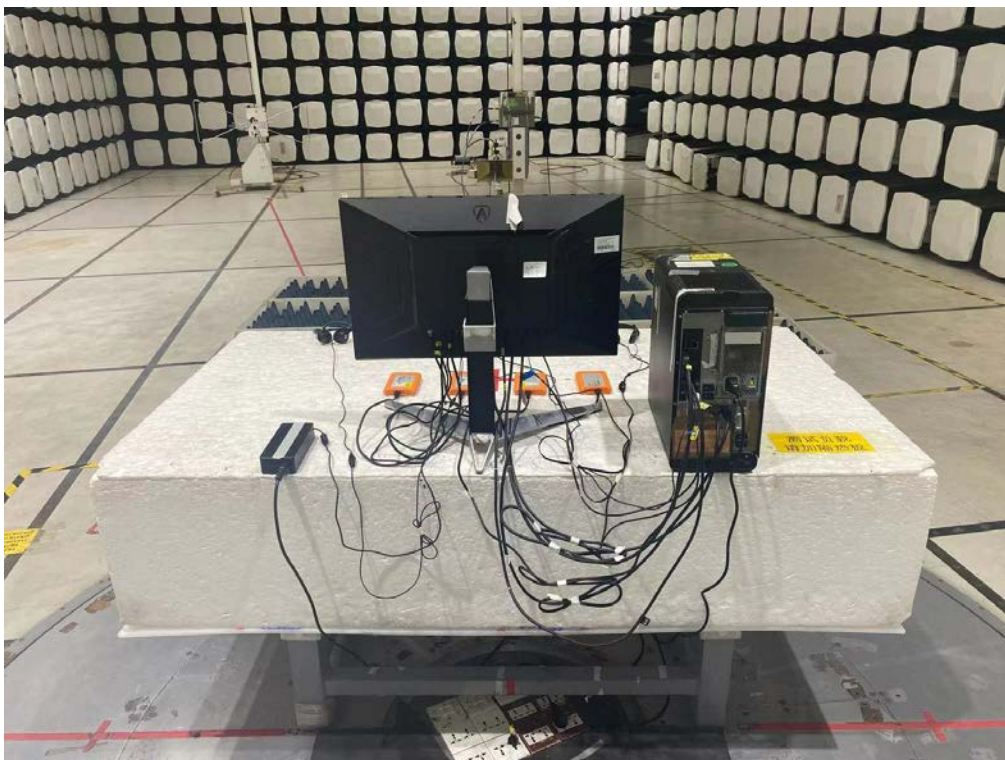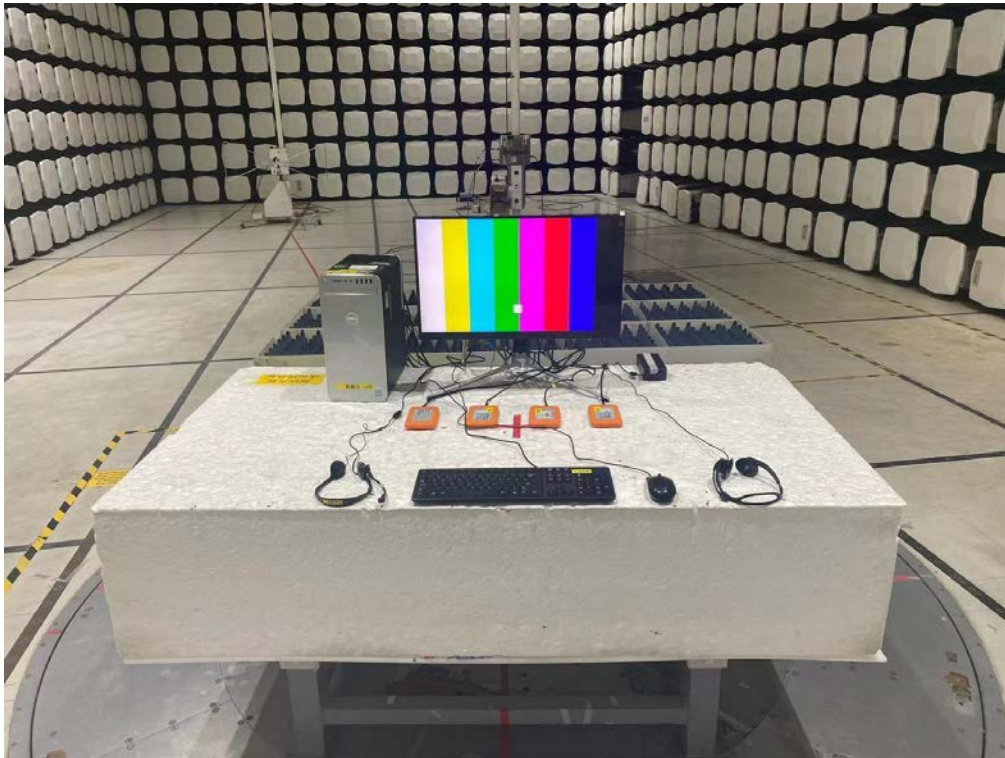

Conducted emissions AC mains power port





## Harmonic current emissions



## Voltage fluctuations (Flicker)



## Electrostatic discharge immunity



## Radiated, radio-frequency, electromagnetic field immunity – up to 1GHz



Radiated, radio-frequency, electromagnetic field immunity – above 1GHz



Electrical fast transient/burst immunity





## Surge immunity



Immunity to conducted disturbances, induced by radio-frequency fields



### Power frequency magnetic field immunity



### Voltage dips, short interruptions and voltage variations immunity



**End of Test Report**