

label 料号: label Part NO.:  
Q40G000761582A

客户 Customer	AOC
型号 Model	U28G2AE EEI LABEL
销向 Sales Area	EU

安规签核Safety parts:  
Yes  No

内销中文字体要求高度1.8mm以上  
Yes  No

针对带有UL logo的标签,其厂家须在最小包装上标示UL Recognized Component Mark  公司名称,型号及 UL file no.




条码印刷:  
barcode print:  
1. 所有条码读码等级: C级及以上, 客户有特殊要求除外;

REVISION

VERSION A  
版本变更说明:  
Version Changed Description:

备注Remark:  
  
YL.LIN  
Aug-11-20

捷联电子(福建)有限公司  
TPV Electronics (Fujian) Co., Ltd.  
地址(Add): 中国福建省福清市元洪路上邦  
Shangzheng, Yuanhong Road, Fuqing City,  
Fujian Province, China  
电话(Tel): +86-591-85285555 85285559  
传真(Fax): +86-591-85285447  
邮编(Postcode): 350301

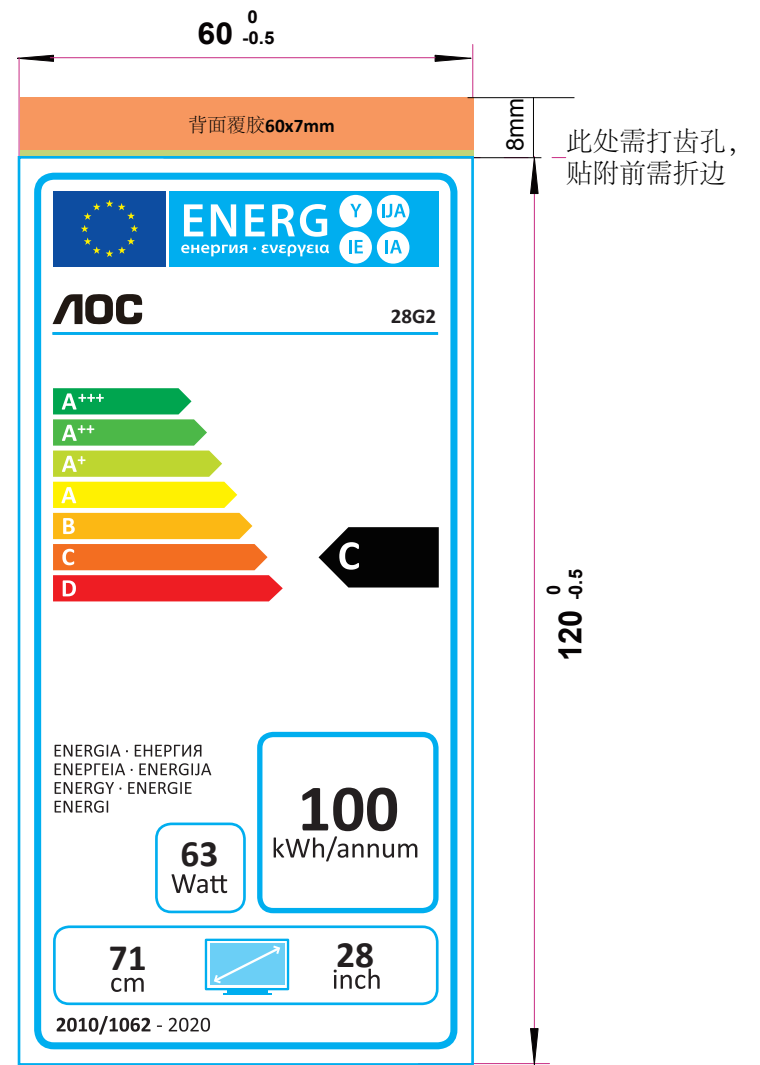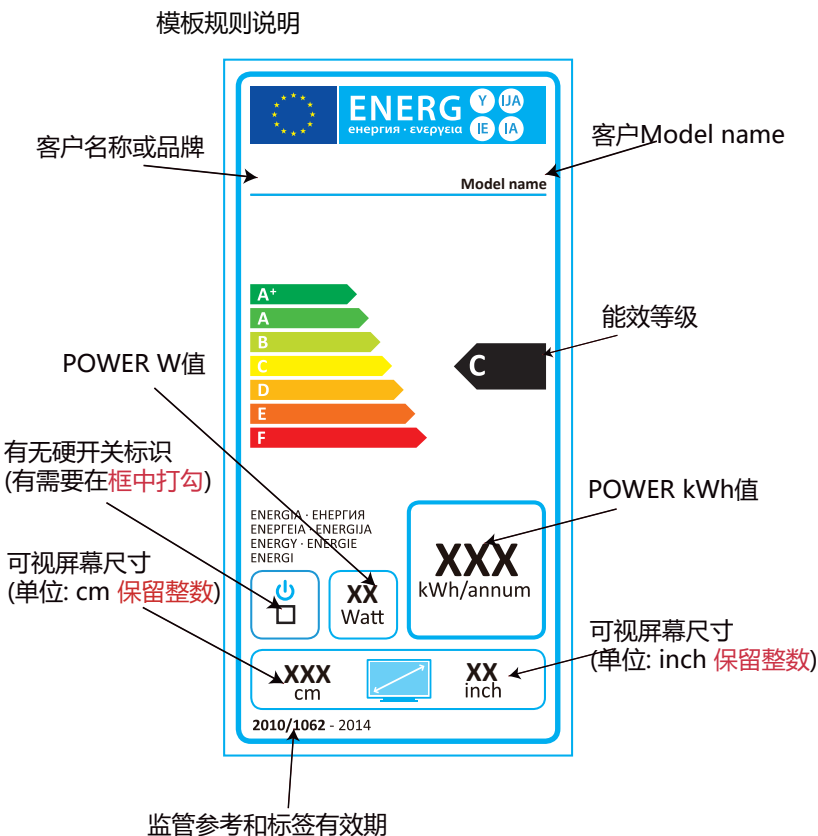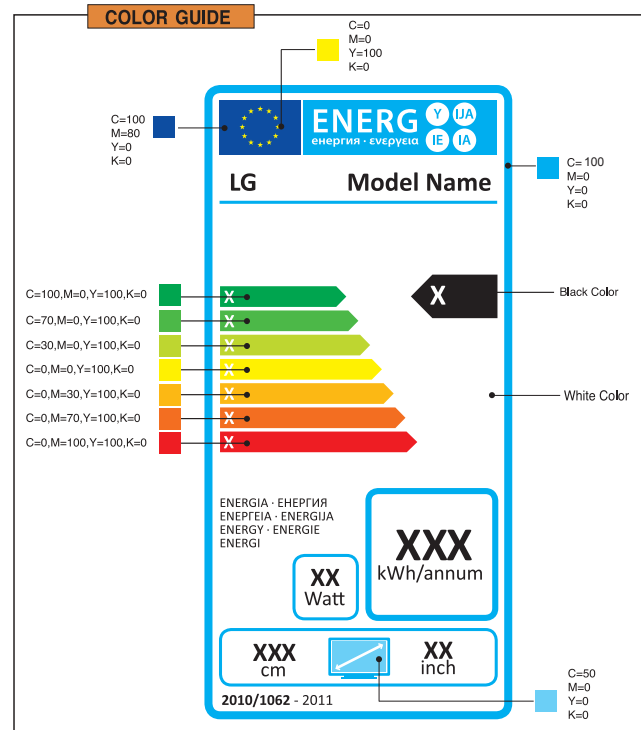

label正面

- NOTE:
- 印刷如上图  
Printing as the drawing
  - 尺寸: 具体见上图所示 (公差: +0/-0.5mm)  
Dimension: as the above drawing (Tolerance: +0/-0.5mm)
  - 材质: 50#白色PET (表面覆膜, 背面覆胶, 贴于中框咬花面上, 撕下时背胶不可残留在中框上)
  - 颜色: 如图所示  
Color: See the drawing
  - 粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。  
Stickiness strength: Cut label into 25mm width, one end paste on the plate, with 180° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
  - 正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角, 不分层, 不脱落, 不起泡等。在塑胶、纸箱上耐温范围为-20~65°C, 在65°C保持8小时后不翘角, 不分层, 不脱落, 不起泡等。  
The normal temperature test: The range of temperature on plate is -20 ~ 100 ° C. In 80 ~ 100 ° C to maintain 8 hours, the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 ° C. In 65 ° C to maintain 8 hours, the label should not be warp, delamination, frothy and so on.
  - 耐温湿度循环测试: 循环条件 (贴在塑胶咬花面 (PET) 贴在塑胶咬花面): 温度-20~65°C, 湿度30~90%, 时间96小时后不翘角不分层不脱落不起泡等。  
Temperature and humidity cycle test: Cycle conditions (stick on texture (PET), stick on texture): In temperature of -20 ~ 65 ° C and humidity of 30~90% to maintain 96 hours, the label should not be warp, delamination, frothy and so on.
  - 裁切需均匀且印刷不可有溢墨及颜色不均等不良现象  
Printing ink can not have overflow and printing color can not be uneven etc.
  - 其它测试要求详见 (FQ-背胶类产品测试检验规格)

- 根据TPV推行RoHS的有关规定, 所有的原材料及辅助材料必须符合RoHS的有关规定
- 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

- 1) According to the rule about RoHS of TPV, All raw material and assistant material should accord with the rule of RoHS
- 2) All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr (aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard about environment substance for supplier>>.