



EMC TEST REPORT

Authorized under **Declaration of Conformity**

According to

EN 55032: 2015+AC 2016 (Class B)	EN 55024 : 2010+A1:2015
EN 61000-3-2: 2014	EN 61000-4-2 : 2009
EN 61000-3-3: 2013	EN 61000-4-3 : 2006+A2-2010
CISPR 32: 2015+COR1:2016	EN 61000-4-4 : 2012
AS/NZS CISPR 32: 2015	EN 61000-4-5 : 2014+A1:2017
EN 55032: 2012+AC 2013	EN 61000-4-6 : 2014
EN 55032: 2015	EN 61000-4-8 : 2010
CISPR 32: 2015	EN 61000-4-11 : 2004+A1:2017

Applicant	: TPV Electronics (Fujian) Co., Ltd.
	Rongqiao Economic and Technological
Address	: Development Zone, Fuqing City, Fujian Province, P.R. China
Equipment	: LCD Monitor
Model No.	: **493***** (*= 0-9, A-Z, a-z, +, -, /, \ or blank)

I HEREBY CERTIFY THAT :

The sample was received on Sep. 24, 2019 and the testing was carried out on Oct. 09, 2019 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.



EMC TEST REPORT

Issued by:

Cerpass Technology (Suzhou) Corporation

No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China

Tel:86-512-6917-5888

Fax:86-512-6917-5666

The test record, data evaluation & Equipment Under Test configurations represented herein are true and accurate accounts of the measurements of the samples EMC characteristics under the conditions specified in this report.

The above equipment was tested by Cerpass Technology Corporation. for compliance with the requirements of technical standards specified above under the EMC Directive. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties

Approved by:

Miro Chueh
EMC/RF B.U. Manager

Laboratory Accreditation:

Cerpass Technology Corporation

TAF LAB Code:	1439
Cerpass Technology(SuZhou) Corporation	

CNAS LAB Code:	L5515
-----------------------	--------------



Contents

1. Summary of Test Procedure and Test Results.....	6
2. Immunity Testing Performance Criteria Definition	7
3. Test Configuration of Equipment under Test.....	8
3.1. Feature of Equipment under Test.....	8
3.2. Test Manner	9
3.3. Description of Support Unit	12
3.4. General Information of Test.....	13
3.5. Measurement Uncertainty	14
4. Test of Conducted Emission.....	16
4.1. Test Limit.....	16
4.2. Test Procedures	19
4.3. Typical Test Setup	19
4.4. Measurement Equipment.....	20
4.5. Test Result and Data.....	21
4.6. Test Photographs of Power Port	30
5. Test of Radiated Emission	32
5.1. Test Limit.....	32
5.2. Test Procedures	35
5.3. Typical Test Setup	35
5.4. Measurement Equipment.....	36
5.5. Test Result and Data (30MHz ~ 1GHz).....	37
5.6. Test Result and Data (1GHz ~ 6GHz).....	45
5.7. Test Photographs (30MHz~1GHz)	53
5.8. Test Photographs (1GHz~6GHz)	55
6. Harmonics Test.....	57
6.1. Limits of Harmonics Current Measurement	57
6.2. Measurement Equipment.....	58
6.3. Test Result and Data	59
6.4. Test Photographs	63
7. Voltage Fluctuations Test.....	64
7.1. Test Procedure	64
7.2. Measurement Equipment.....	64
7.3. Test Result and Data	65
7.4. Test Photographs	69
8. Electrostatic Discharge Immunity Test.....	70
8.1. Test Procedure	70
8.2. Test Setup for Tests Performed in Laboratory.....	71
8.3. Test Severity Levels	72
8.4. Measurement Equipment.....	72
8.5. Test Result and Data	73
8.6. Test Photographs	74
9. Radio Frequency electromagnetic field immunity test	75



9.1. Test Procedure	75
9.2. Test Severity Levels	75
9.3. TEST SETUP	76
9.4. Measurement Equipment.....	77
9.5. Test Result and Data.....	78
9.6. Test Photographs	79
10. Electrical Fast Transient/ Burst Immunity Test.....	80
10.1. Test Procedure	80
10.2. Test Severity Levels	80
10.3. TEST SETUP	81
10.4. Measurement Equipment.....	81
10.5. Test Result and Data.....	82
10.6. Test Photographs	83
11. Surge Immunity Test.....	84
11.1. Test Procedure	84
11.2. Test Severity Level	84
11.3. TEST SETUP	85
11.4. Measurement Equipment.....	85
11.5. Test Result and Data.....	86
11.6. Test Photographs	87
12. Conduction Disturbances induced by Radio-Frequency Fields	88
12.1. Test Procedure	88
12.2. Test Severity Levels	88
12.3. TEST SETUP	89
12.4. Measurement Equipment.....	90
12.5. Test Result and Data.....	91
12.6. Test Photographs	92
13. Power Frequency Magnetic Field Immunity Test.....	93
13.1. Test Setup	93
13.2. Test Severity Levels	93
13.3. Measurement Equipment.....	93
13.4. Test Result and Data.....	94
13.5. Test Photographs	95
14. Voltage Dips and Voltage Interruptions Immunity Test Setup	96
14.1. Test Conditions.....	96
14.2. TEST SETUP	96
14.3. Measurement Equipment.....	96
14.4. Test Result and Data.....	97
14.5. Test Photographs	98



History of this test report

■ ORIGINAL.

Additional attachment as following record:



1. Summary of Test Procedure and Test Results

EMISSION [EN55032: 2015+AC 2016/ EN 55032: 2012+AC 2013/ EN55032: 2015]			
Standard	Item	Result	Remarks
EN55032: 2015+AC 2016 CISPR 32: 2015+COR1: 2016 AS/NZS CISPR 32: 2015 EN 55032: 2012+AC 2013 EN 55032: 2015 CISPR 32: 2015	Conducted (Power Port)	PASS	Meet Class B Limit Minimum passing margin(QP) is -5.36 dB at 0.1500 MHz
	Conducted (Telecom port)	N/A	N/A
	Radiated	PASS	Meets Class B Limit Minimum passing margin(Peak) is -4.61dB at 31.9400 MHz
EN 61000-3-2: 2014	Harmonic current emissions	PASS	Meet the requirements
EN61000-3-3: 2013	Voltage fluctuations & flicker	PASS	Meet the requirements

IMMUNITY [EN 55024 : 2010+A1 : 2015]			
Standard	Item	Result	Remarks
EN 61000-4-2 : 2009	ESD	PASS	Meets the requirements of Performance Criterion A
EN 61000-4-3 : 2006+A2-2010	RS	PASS	Meets the requirements of Performance Criterion A
EN 61000-4-4 : 2012	EFT	PASS	Meets the requirements of Performance Criterion A
EN 61000-4-5 : 2014+A1:2017	Surge	PASS	Meets the requirements of Performance Criterion A
EN 61000-4-6 : 2014	CS	PASS	Meets the requirements of Performance Criterion A
EN 61000-4-8 : 2010	PFMF	PASS	Meets the requirements of Performance Criterion A
EN 61000-4-11 : 2004+A1:2017	Voltage dips & voltage variations	PASS	Meets the requirements of Voltage Dips: 1) >95% reduction Performance Criterion B 2) 30% reduction Performance Criterion B Voltage Interruptions: 1) >95% reduction Performance Criterion C

Note: Deviations Yes No



2. Immunity Testing Performance Criteria Definition

Criteria A:	The apparatus shell continues to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the manufacturer does not specify the minimum performance level or the permissible performance loss, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criteria B:	After test, the apparatus shell continues to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomenon below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. However, no change of operating state if stored data is allowed to persist after the test. If the manufacturer does not specify the minimum performance level or the permissible performance loss, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criteria C:	Temporary loss of function is allowed, provided the functions is self-recoverable or can be restored by the operation of controls by the user in accordance with the manufacturer instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.



3. Test Configuration of Equipment under Test

3.1. Feature of Equipment under Test

Product Name:	LCD Monitor
Model Name:	**493***** (*= 0-9, A-Z, a-z, +, -, /, \ or blank)
Housing material:	Plastic case
EUT Highest Frequency:	972.67MHz
EUT Power Rating:	Input:100-240V, 50-60Hz 3 Pin Power Port
AC Power Cord Type:	Non-shielded, 1.2m&1.5m&1.8m

Note: Please refer to user manual.

I/O PORT:

I/O PORT TYPE	Quantity
1). USB Port	4
2). HDMI Port	2
3). DP Port	2
4). Audio Port	1
5). USB C Port	1
6). Power Port	1



3.2. Test Manner

- a. During testing, the interface cables and equipment positions were varied according to Europe Standard .
- b. The personal computer driven the Windows media player to play the Colour bars with moving picture element with comply with requirement of ITU-RBT 471-1, and display under DP 1, DP 2,HDMI 1, HDMI 2, Type-C. (For EN 55032 : 2015+AC 2016, CISPR 32: 2015+COR1:2016)

The personal computer driven the Windows media player to play the Colour bars with moving picture element with comply with requirement of ITU-RBT 1729, and display under DP 1, DP 2,HDMI 1, HDMI 2, Type-C. (For EN 55032 : 2012+AC 2013, EN 55032 : 2015, CISPR 32: 2015,AS/NZS CISPR 32: 2015)

- c. The complete test system included Computer, Keyboard, Mouse, Earphone, HDD, DVD and EUT, make the EUT at the test mode.
- d. Adjust the EUT, then test.

The pre-test for CE/ RE modes

Remark: Assess high, middle and low resolution of each video port (DP 1, DP 2, HDMI 1, HDMI 2, Type-C) under 230V/ 50Hz, 110V/60Hz test voltage with ITU-RBT 1729 Colour bars and ITU-RBT 471-1 Colour bars.

Test Mode 1	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 2	Full system (Display 1 mode 1920*1080@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 3	Full system (Display 1 mode 640*480@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 4	Full system (Display 2 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 5	Full system (Display 2 mode 1920*1080@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 6	Full system (Display 2 mode 640*480@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 7	Full system (HDMI 1 mode 5120*1440@75Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 8	Full system (HDMI 1 mode 1920*1080@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 9	Full system (HDMI 1 mode 640*480@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 10	Full system (HDMI 2 mode 5120*1440@75Hz) Signal from PC for ITU-RBT 1729



	Colour bars (230V/50Hz)
Test Mode 11	Full system (HDMI 2 mode 1920*1080@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 12	Full system (HDMI 2 mode 640*480@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 13	Full system (Type-C mode 3840*1080@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 14	Full system (Type-C mode 1920*1080@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 15	Full system (Type-C mode 640*480@60Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 16	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for Type-C with R/W (230V/50Hz)
Test Mode 17	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for Type-C with Load (5V/3A) (230V/50Hz)
Test Mode 18	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for Type-C with Load (7V/3A) (230V/50Hz)
Test Mode 19	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for Type-C with Load (9V/3A) (230V/50Hz)
Test Mode 20	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for Type-C with Load (10V/3A) (230V/50Hz)
Test Mode 21	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for Type-C with Load (12V/3A) (230V/50Hz)
Test Mode 22	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for Type-C with Load (15V/3A) (230V/50Hz)
Test Mode 23	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for Type-C with Load (20V/3.25A) (230V/50Hz)
Test Mode 24	Full system (HDMI 1 mode 1080P) Signal from DVD for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 25	Full system (HDMI 2 mode 1080P) Signal from DVD for ITU-RBT 1729 Colour bars (230V/50Hz)
Test Mode 26	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)
Test Mode 27	Full system (Display 2 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)
Test Mode 28	Full system (HDMI 1 mode 5120*1440@75Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)



Test Mode 29	Full system (HDMI 2 mode 5120*1440@75Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)
Test Mode 30	Full system (Type-C mode 3840*1080@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)
Test Mode 31	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (230V/50Hz)
Test Mode 32	Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (110V/60Hz)

Remark: In the all of above test modes, 5120*1440@120Hz resolution and Display 1 port test data is the worst, so the following test modes are reported as the basis.

“Test mode 1,26,31,32” were reported as final data.

Harmonics/ Voltage Fluctuations/EMS

Test Manner

- a. During testing, the interface cables and equipment positions were varied according to Europe Standard.
- b. Running "H" pattern.
- c. During the test, connect the Computer, Keyboard, Mouse, Earphone, HDD, DVD and EUT.
- d. Make the EUT at the test mode and it is normal operation, and then test.

Test Mode 1 Full system (Display 1 mode 5120*1440@120Hz) Signal from PC

Test Mode 2 Full system (Display 2 mode 5120*1440@120Hz) Signal from PC

Test Mode 3 Full system (HDMI 1 mode 5120*1440@75Hz) Signal from PC

Test Mode 4 Full system (HDMI 2 mode 5120*1440@75Hz) Signal from PC

Test Mode 5 Full system (Type-C mode 3840*1080@120Hz) Signal from PC

“Test mode 1” was reported as final data.

The maximum operating frequency is above 108MHz, the test frequency range is from 1GHz to 6GHz.



3.3. Description of Support Unit

No.	Device	Manufacturer	Model No.	Description
1	Computer	HP	HP Compaq Elite 8200 MTPC	Non-Shielded ,1.8m(R3 3001)
2	USB Keyboard	DELL	SK-8115	T3A002
3	USB Mouse	DELL	G0K02XYK	R41108
4	Earphone	SALAR	V18	N/A
5	HDD	WD	WDBPCK5000ABK-01	N/A
6	HDD	WD	WDBPCK5000ABK-01	N/A
7	HDD	WD	WDBPCK5000ABK-01	N/A
8	DVD	Pionner	DV-600AV-S	R31271-ETC
9	Computer	Dell	XPS 8920	N/A

Use Cable

No.	Cable	Quantity	Description
A	USB Cable	1	Shielded, 1.8m
B	USB Cable	1	Shielded, 1.5m
C	USB Cable	3	Shielded, 0.6m
D	Audio out Cable	1	Non-Shielded, 1.8m
E	HDMI Cable	1	Shielded, 1.5&1.8m
F	Display Cable	1	Shielded, 1.5&1.8m
G	USB Cable	1	Shielded, 1.8m
H	Display Cable	1	Shielded, 1.5&1.8m
I	Type-C Cable	1	Shielded, 1.5m
J	HDMI Cable	1	Shielded, 1.5&1.8m



3.4. General Information of Test

<input type="checkbox"/>	Test Site	Cerpass Technology Corporation Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812 for radiated disturbance above 1GHz
	Test Site	Cerpass Technology (Suzhou) Co.,Ltd Address: No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China Tel: +86-512-6917-5888 Fax: +86-512-6917-5666
	CNAS	L5515
<input checked="" type="checkbox"/>	FCC	CN1243
	A2LA	4981.01
	IC	7290A-1, 7290A-2
	VCCI	T-11945 for Telecommunication Test C-12919 for Conducted emission test R-12670 for Radiated emission test G-10227 for radiated disturbance above 1GHz
	Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 6000MHz
	Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 10 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.



3.5. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions(LINE)	9KHz-30MHz	+/- 0.6847dB
Conducted emissions(NEUTRAL)	9KHz-30MHz	+/- 0.6763dB

Measurement	Polarity	Frequency	Uncertainty
Radiated emissions (below 1GHz)	H	30MHz ~ 200MHz	+/- 4.0702dB
		200MHz ~1000MHz	+/- 3.9158dB
	V	30MHz ~ 200MHz	+/- 4.0704dB
		200MHz ~1000MHz	+/- 3.9167dB
Radiated emissions (above 1GHz)	H	1000MHz ~18000MHz	+/- 3.8864dB
		18000MHz ~40000MHz	+/- 3.9314dB
	V	1000MHz ~18000MHz	+/- 3.8896dB
		18000MHz ~40000MHz	+/- 3.8766dB

Measurement	Uncertainty
ESD—Rise time tr	6.4%
ESD—Peak current Ip	6%
ESD—Current at 30 ns	6%
ESD—Current at 60 ns	6%
ESD- Charging voltage	1%
RS above 1GHz	±3.81dB
RS under 1GHz	±3.63dB
EFT—Rise time tr	4%
EFT—Peak current Ip	4%
EFT—Current	4%
Surge—Rise time tr	4%
Surge—Peak current Ip	4%



Surge—Current	4%
CS-CND	±0.66dB
CS-Clamp	±1.04dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 32: 2015, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement.

Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.



4. Test of Conducted Emission

4.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in European Standard EN 55032.

Table A.8 – Requirements for conducted emissions from the AC mains power ports of Class A equipment

Applicable to				
1. AC mains power ports (3.1.1)				
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class A limits dB(μV)
A8.1	0,15 – 0,5	AMN	Quasi Peak / 9 kHz	79
	0,5 – 30			73
A8.2	0,15 – 0,5	AMN	Average / 9 kHz	66
	0,5 – 30			60

NOTE Apply A8.1 and A8.2 across the entire frequency range.

Table A.9 – Requirements for conducted emissions from the AC mains power ports of Class B equipment

Applicable to				
1. AC mains power ports (3.1.1)				
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class B limits dB(μV)
A9.1	0,15 – 0,5	AMN	Quasi Peak / 9 kHz	66 – 56
	0,5 – 5			56
	5 – 30			60
A9.2	0,15 – 0,5	AMN	Average / 9 kHz	56 – 46
	0,5 – 5			46
	5 – 30			50

NOTE Apply A9.1 and A9.2 across the entire frequency range.



Table A.10 – Requirements for asymmetric mode conducted emissions from Class A equipment

Applicable to						
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class A voltage limits dB(µV)	Class A current limits dB(µA)	
A10.1	0,15 – 0,5	AAN	Quasi Peak / 9 kHz	97 – 87	n/a	
	0,5 – 30			87		
	0,15 – 0,5	AAN	Average / 9 kHz	84 – 74		
	0,5 – 30			74		
A10.2	0,15 – 0,5	CVP and current probe	Quasi Peak / 9 kHz	97 – 87	53 – 43	
	0,5 – 30			87	43	
	0,15 – 0,5	CVP and current probe	Average / 9 kHz	84 – 74	40 – 30	
	0,5 – 30			74	30	
A10.3	0,15 – 0,5	Current Probe	Quasi Peak / 9 kHz	n/a	53 – 43	
	0,5 – 30				43	
	0,15 – 0,5	Current Probe	Average / 9 kHz		40 – 30	
	0,5 – 30				30	
NOTE 1 The choice of coupling device and measurement procedure is defined in Annex C. NOTE 2 AC mains power ports shall meet the limits given in Table A.8. NOTE 3 The test shall cover the entire frequency range. NOTE 4 The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability. NOTE 5 Testing is required at only one EUT supply voltage and frequency. NOTE 6 Applicable to ports listed above and intended to connect to cables longer than 3 m.						



Table A.11 – Requirements for asymmetric mode conducted emissions from Class B equipment

Applicable to						
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class B voltage limits dB(µV)	Class B current limits dB(µA)	
A11.1	0,15 – 0,5	AAN	Quasi Peak / 9 kHz	84 – 74	n/a	
	0,5 – 30			74		
	0,15 – 0,5	AAN		74 – 64		
	0,5 – 30			64		
A11.2	0,15 – 0,5	CVP and current probe	Quasi Peak / 9 kHz	84 – 74	40 – 30	
	0,5 – 30			74	30	
	0,15 – 0,5	CVP and current probe	Average / 9 kHz	74 – 64	30 – 20	
	0,5 – 30			64	20	
A11.3	0,15 – 0,5	Current Probe	Quasi Peak / 9 kHz	n/a	40 – 30	
	0,5 – 30				30	
	0,15 – 0,5	Current Probe	Average / 9 kHz		30 – 20	
	0,5 – 30				20	

NOTE 1 The choice of coupling device and measurement procedure is defined in Annex C.

NOTE 2 Screened ports including TV broadcast receiver tuner ports are tested with a common-mode impedance of 150 Ω. This is typically accomplished with the screen terminated by 150 Ω to earth.

NOTE 3 AC mains power ports shall meet the limits given in Table A.9.

NOTE 4 The test shall cover the entire frequency range.

NOTE 5 The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability.

NOTE 6 Testing is required at only one EUT supply voltage and frequency.


NOTE 7 Applicable to ports listed above and intended to connect to cables longer than 3 m.



4.2. Test Procedures

- a. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a Artificial Mains Network (AMN).
- c. All the support units are connecting to the other AMN.
- d. The AMN provides 50 ohm coupling impedance for the measuring instrument.
- e. The CISPR states that a 50 ohm, 50 micro-Henry AMN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3. Typical Test Setup

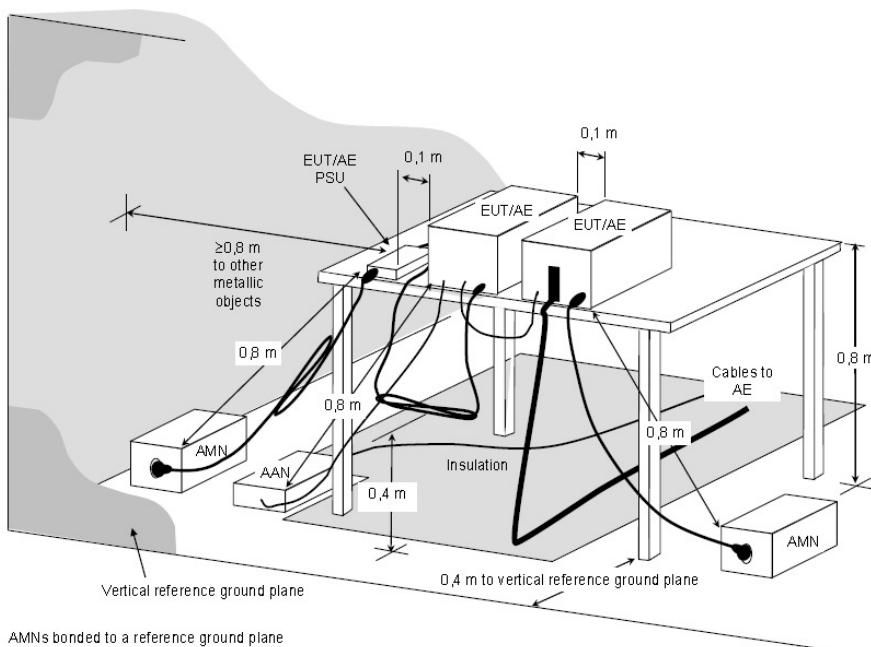

NOTE The 0,8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be ≥0,8 m.

**Figure D.2 – Example measurement arrangement for table-top EUT
(Conducted emission measurement – alternative 1)**



4.4. Measurement Equipment


Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2019.07.13	2020.07.12
AMN	R&S	ESH2-Z5	100182	2019.08.22	2020.08.21
ISN	FCC	FCC-TLISN-T2-02	20379	2019.03.11	2020.03.10
ISN	FCC	FCC-TLISN-T4-02	20380	2019.03.23	2020.03.22
ISN	SCHWARZBECK	T8 CAT6	173	2019.03.23	2020.03.22
ISN	TESEQ	ISN ST08	30175	2019.08.22	2020.08.21
ISN	TESEQ	ISN S751	31531	2019.08.22	2020.08.21
LISN	FCC	FCC-LISN-50-200-2-02	112087	2019.08.22	2020.08.21
LISN	SCHWARZBECK	NSLK 8127	8127-920	2019.08.22	2020.08.21
LISN	R&S	ENV216	100325	2019.08.22	2020.08.21
Current Probe	R&S	EZ-17	100303	2019.03.17	2020.03.16
Passive Voltage Probe	R&S	ESH2-Z3	100026	2019.03.17	2020.03.16
Pulse Limiter	R&S	ESH3-Z2	100529	2019.03.11	2020.03.10
Temperature/ Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A



4.5. Test Result and Data

4.5.1 Conducted Emission for Power Port Test Data

Test Mode :	Mode 1: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1001	Date:	2019/09/26

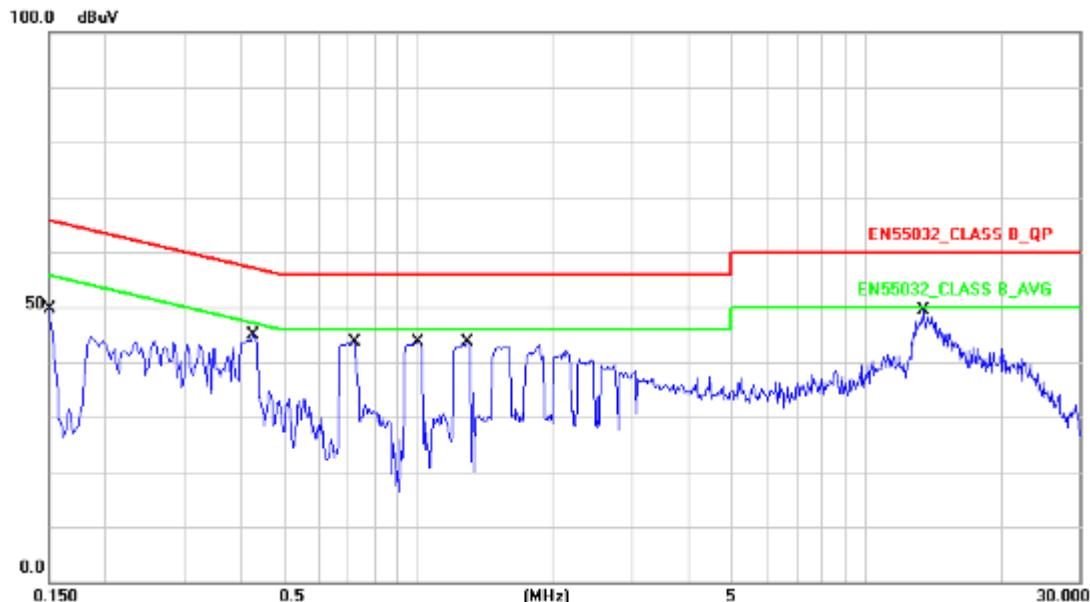


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.15	37.18	47.33	65.99	-18.66	QP
2	0.1500	10.15	26.80	36.95	55.99	-19.04	AVG
3	0.4300	10.15	32.78	42.93	57.25	-14.32	QP
4	0.4300	10.15	23.43	33.58	47.25	-13.67	AVG
5	0.7220	10.15	32.54	42.69	56.00	-13.31	QP
6	0.7220	10.15	20.29	30.44	46.00	-15.56	AVG
7	1.0060	10.17	31.84	42.01	56.00	-13.99	QP
8	1.0060	10.17	17.90	28.07	46.00	-17.93	AVG
9	1.2900	10.17	31.28	41.45	56.00	-14.55	QP
10	1.2900	10.17	15.02	25.19	46.00	-20.81	AVG
11	13.4740	10.48	29.15	39.63	60.00	-20.37	QP
12	13.4740	10.48	20.68	31.16	50.00	-18.84	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1001	Date:	2019/09/26

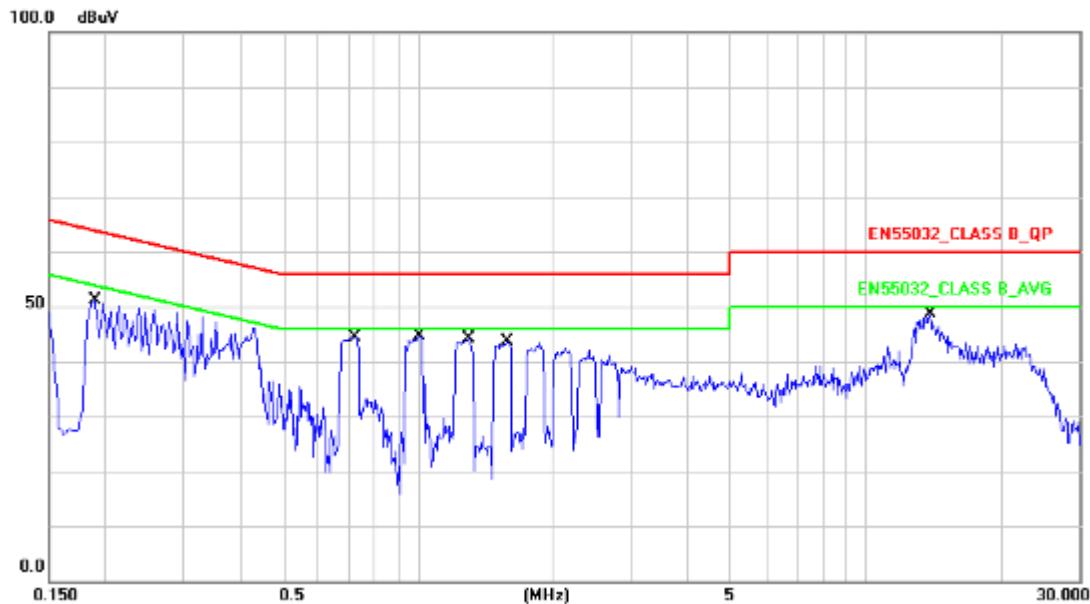


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1900	10.14	38.78	48.92	64.03	-15.11	QP
2	0.1900	10.14	22.15	32.29	54.03	-21.74	AVG
3	0.7260	10.16	33.33	43.49	56.00	-12.51	QP
4	0.7260	10.16	20.83	30.99	46.00	-15.01	AVG
5	1.0060	10.19	32.47	42.66	56.00	-13.34	QP
6	1.0060	10.19	16.90	27.09	46.00	-18.91	AVG
7	1.2980	10.19	31.96	42.15	56.00	-13.85	QP
8	1.2980	10.19	15.59	25.78	46.00	-20.22	AVG
9	1.5859	10.19	30.87	41.06	56.00	-14.94	QP
10	1.5859	10.19	13.76	23.95	46.00	-22.05	AVG
11	13.9820	10.51	28.95	39.46	60.00	-20.54	QP
12	13.9820	10.51	19.82	30.33	50.00	-19.67	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 26: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Phase :	LINE
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1001	Date:	2019/09/26

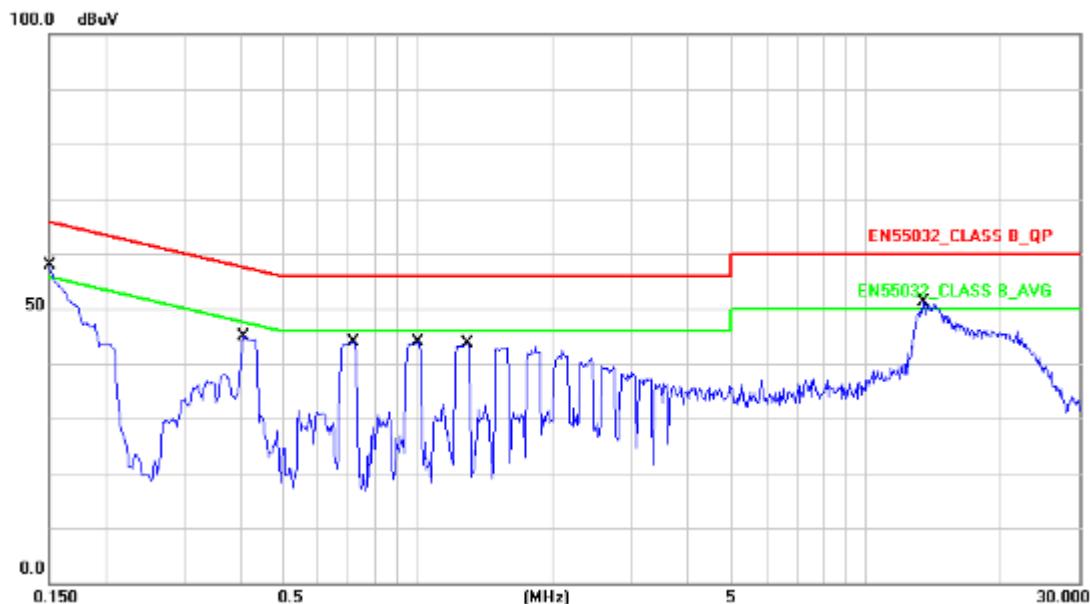


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.15	45.52	55.67	65.99	-10.32	QP
2	0.1500	10.15	34.88	45.03	55.99	-10.96	AVG
3	0.4100	10.15	32.94	43.09	57.65	-14.56	QP
4	0.4100	10.15	24.81	34.96	47.65	-12.69	AVG
5	0.7180	10.15	32.80	42.95	56.00	-13.05	QP
6	0.7180	10.15	22.33	32.48	46.00	-13.52	AVG
7	1.0020	10.17	32.26	42.43	56.00	-13.57	QP
8	1.0020	10.17	19.51	29.68	46.00	-16.32	AVG
9	1.2900	10.17	31.75	41.92	56.00	-14.08	QP
10	1.2900	10.17	16.91	27.08	46.00	-18.92	AVG
11	13.4620	10.48	35.75	46.23	60.00	-13.77	QP
12	13.4620	10.48	23.55	34.03	50.00	-15.97	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 26: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Phase :	NEUTRAL
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1001	Date:	2019/09/26

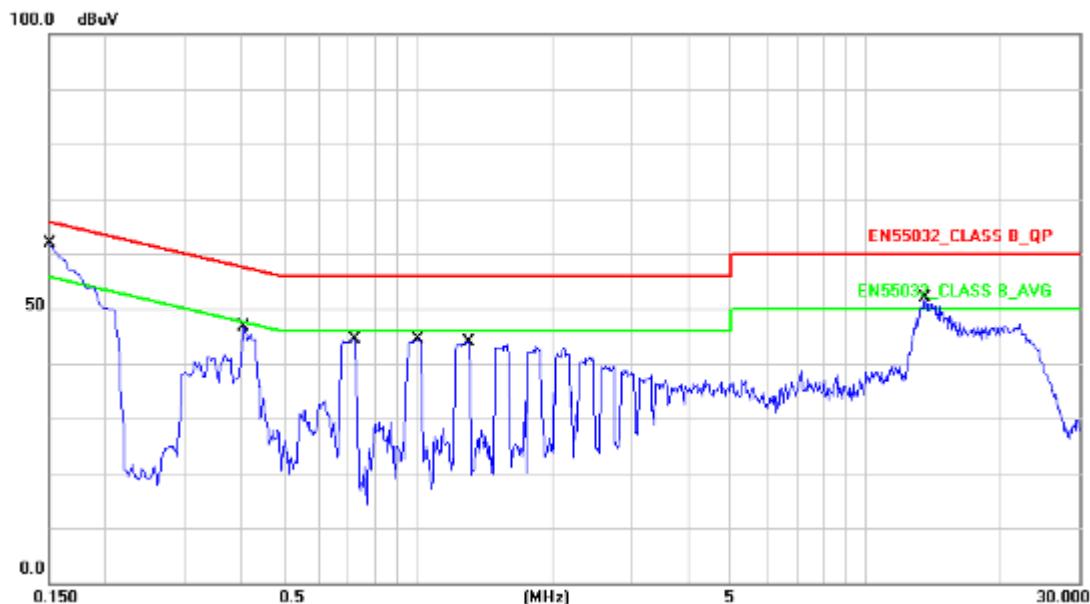


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.15	50.48	60.63	65.99	-5.36	QP
2	0.1500	10.15	37.36	47.51	55.99	-8.48	AVG
3	0.4100	10.15	33.15	43.30	57.65	-14.35	QP
4	0.4100	10.15	25.20	35.35	47.65	-12.30	AVG
5	0.7220	10.16	33.16	43.32	56.00	-12.68	QP
6	0.7220	10.16	20.77	30.93	46.00	-15.07	AVG
7	1.0020	10.19	32.65	42.84	56.00	-13.16	QP
8	1.0020	10.19	19.86	30.05	46.00	-15.95	AVG
9	1.2980	10.19	32.57	42.76	56.00	-13.24	QP
10	1.2980	10.19	18.51	28.70	46.00	-17.30	AVG
11	13.6140	10.49	34.14	44.63	60.00	-15.37	QP
12	13.6140	10.49	22.90	33.39	50.00	-16.61	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 31: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1001	Date:	2019/09/26

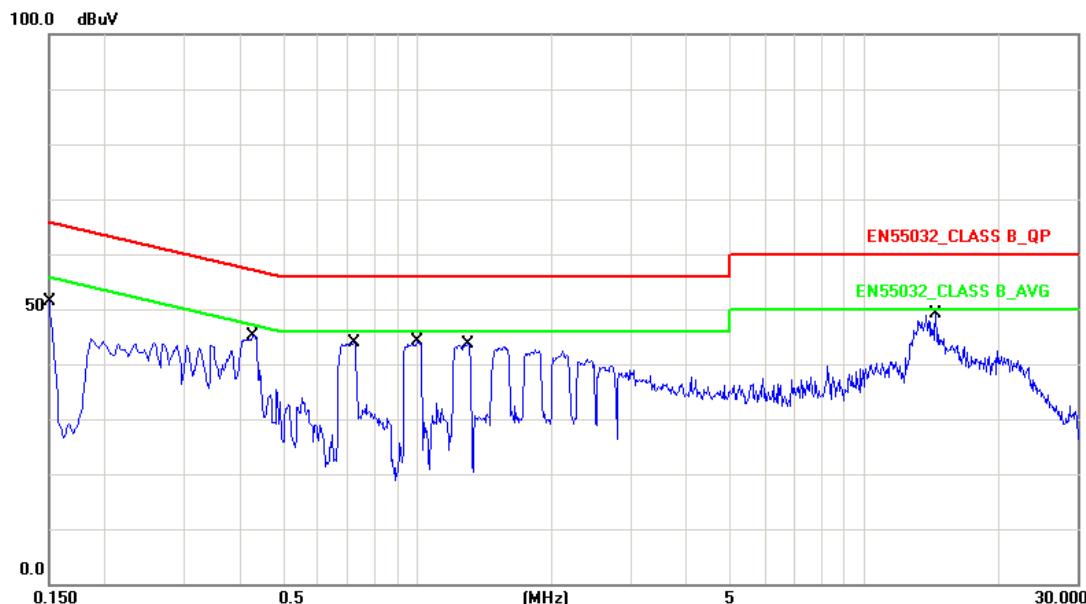


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.15	37.73	47.88	65.99	-18.11	QP
2	0.1500	10.15	27.37	37.52	55.99	-18.47	AVG
3	0.4300	10.15	33.18	43.33	57.25	-13.92	QP
4	0.4300	10.15	23.78	33.93	47.25	-13.32	AVG
5	0.7220	10.15	32.74	42.89	56.00	-13.11	QP
6	0.7220	10.15	20.64	30.79	46.00	-15.21	AVG
7	1.0020	10.17	32.03	42.20	56.00	-13.80	QP
8	1.0020	10.17	16.78	26.95	46.00	-19.05	AVG
9	1.2980	10.17	31.81	41.98	56.00	-14.02	QP
10	1.2980	10.17	18.30	28.47	46.00	-17.53	AVG
11	14.4500	10.53	27.41	37.94	60.00	-22.06	QP
12	14.4500	10.53	18.87	29.40	50.00	-20.60	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 31: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1001	Date:	2019/09/26

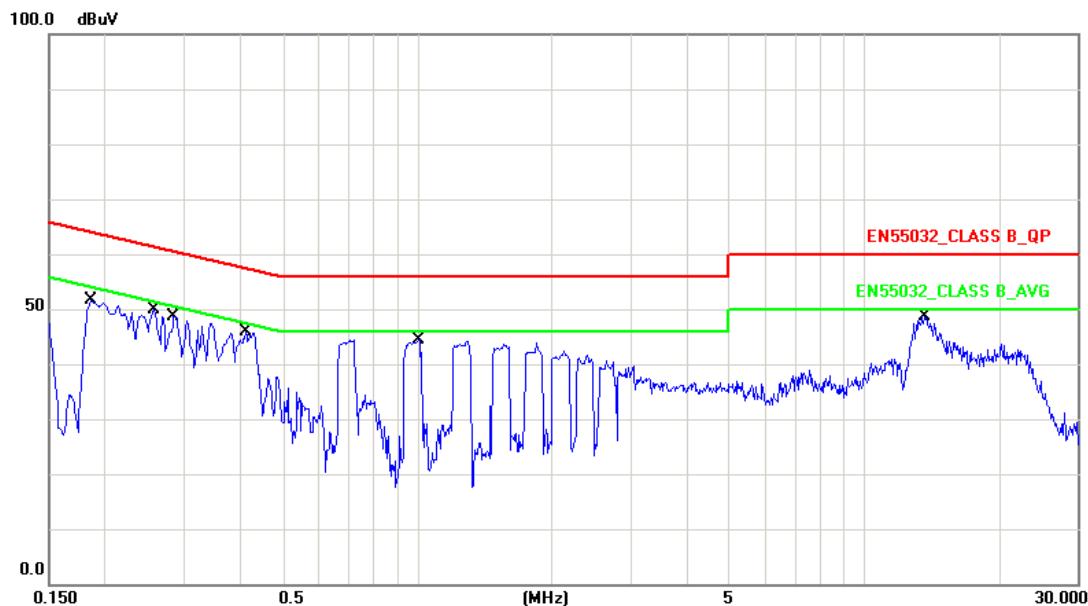


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	10.14	39.85	49.99	64.21	-14.22	QP
2	0.1860	10.14	21.95	32.09	54.21	-22.12	AVG
3	0.2580	10.14	35.58	45.72	61.49	-15.77	QP
4	0.2580	10.14	11.78	21.92	51.49	-29.57	AVG
5	0.2860	10.14	35.59	45.73	60.64	-14.91	QP
6	0.2860	10.14	12.38	22.52	50.64	-28.12	AVG
7	0.4140	10.15	32.90	43.05	57.57	-14.52	QP
8	0.4140	10.15	23.06	33.21	47.57	-14.36	AVG
9	1.0100	10.19	32.92	43.11	56.00	-12.89	QP
10	1.0100	10.19	19.29	29.48	46.00	-16.52	AVG
11	13.6660	10.49	30.76	41.25	60.00	-18.75	QP
12	13.6660	10.49	21.90	32.39	50.00	-17.61	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 32: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Phase :	LINE
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1001	Date:	2019/09/26

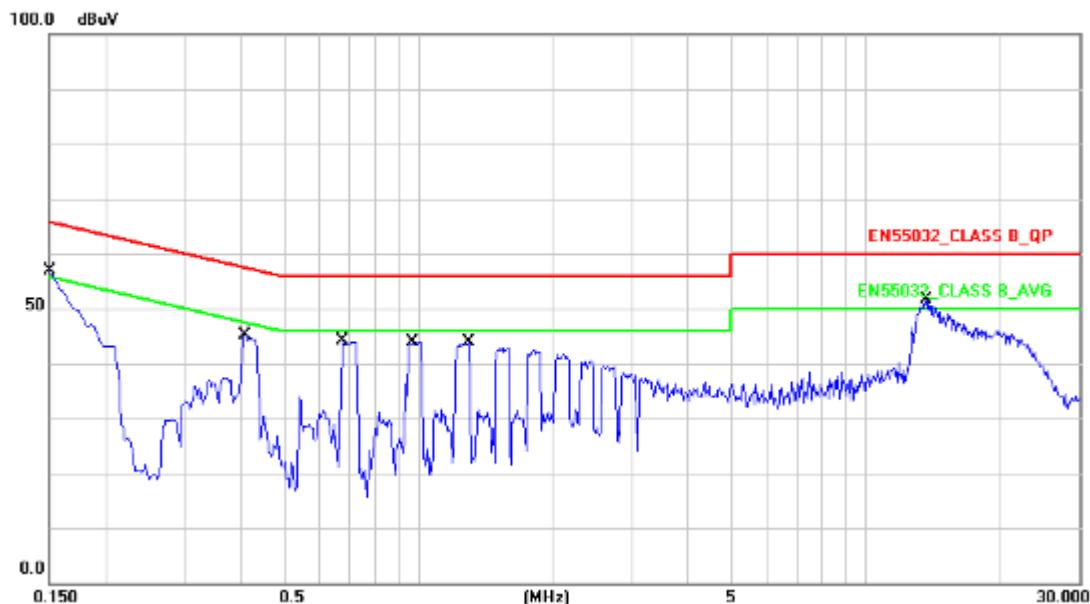


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.15	45.15	55.30	65.99	-10.69	QP
2	0.1500	10.15	34.88	45.03	55.99	-10.96	AVG
3	0.4100	10.15	33.08	43.23	57.65	-14.42	QP
4	0.4100	10.15	24.60	34.75	47.65	-12.90	AVG
5	0.6820	10.15	32.35	42.50	56.00	-13.50	QP
6	0.6820	10.15	21.15	31.30	46.00	-14.70	AVG
7	0.9740	10.17	31.93	42.10	56.00	-13.90	QP
8	0.9740	10.17	16.66	26.83	46.00	-19.17	AVG
9	1.2980	10.17	32.16	42.33	56.00	-13.67	QP
10	1.2980	10.17	18.95	29.12	46.00	-16.88	AVG
11	13.6340	10.49	34.57	45.06	60.00	-14.94	QP
12	13.6340	10.49	23.32	33.81	50.00	-16.19	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 32: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Phase :	NEUTRAL
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1001	Date:	2019/09/26

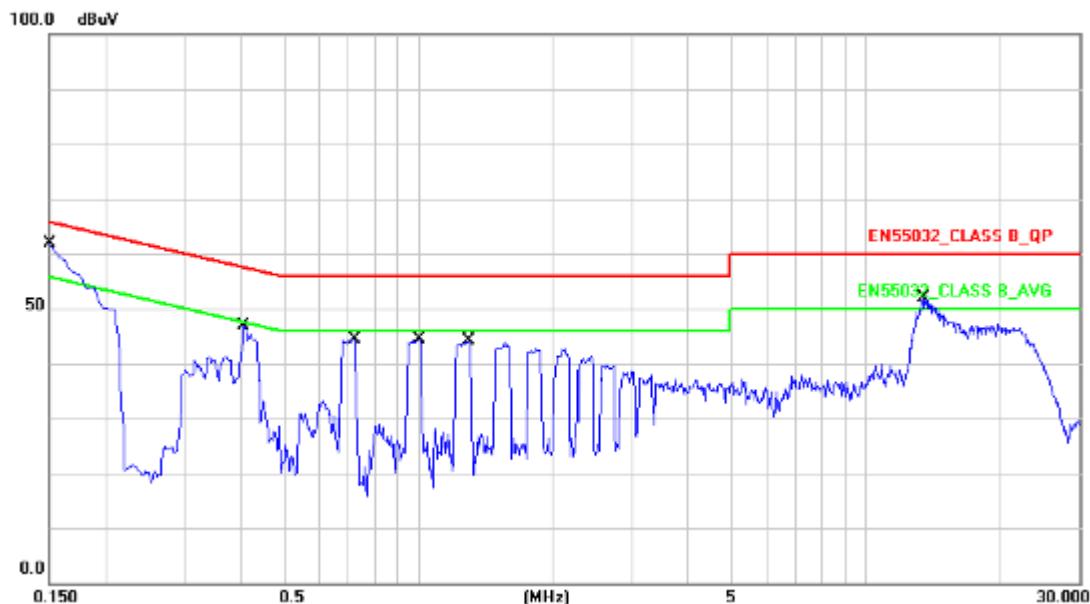

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.15	50.43	60.58	65.99	-5.41	QP
2	0.1500	10.15	37.40	47.55	55.99	-8.44	AVG
3	0.4100	10.15	33.14	43.29	57.65	-14.36	QP
4	0.4100	10.15	24.77	34.92	47.65	-12.73	AVG
5	0.7220	10.16	33.23	43.39	56.00	-12.61	QP
6	0.7220	10.16	21.32	31.48	46.00	-14.52	AVG
7	1.0060	10.19	32.79	42.98	56.00	-13.02	QP
8	1.0060	10.19	20.55	30.74	46.00	-15.26	AVG
9	1.2980	10.19	32.66	42.85	56.00	-13.15	QP
10	1.2980	10.19	19.51	29.70	46.00	-16.30	AVG
11	13.5180	10.48	37.03	47.51	60.00	-12.49	QP
12	13.5180	10.48	24.42	34.90	50.00	-15.10	AVG

Note: Measurement Level = Reading Level + Correct Factor

Vane Xia

Test engineer: _____



4.5.2 Conducted Emission for Telecommunication Port Test Data

Note: The EUT doesn't have the telecommunication port.



4.6. Test Photographs of Power Port

For ITU-RBT 1729 Colour bars

Front View



Rear View





For ITU-RBT 471-1 Colour bars

Front View



Front View





5. Test of Radiated Emission

5.1. Test Limit

The EUT shall meet the limits of below Table when measured at the measuring distance R in accordance with the methods described in European Standard EN 55032. If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the highest reading shall be recorded, with the exception of any brief isolated high reading, which shall be ignored.

Table 1 – Required highest frequency for radiated measurement

Highest internal frequency (F_x)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5 GHz
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 6 GHz

NOTE 1 For FM and TV broadcast receivers, F_x is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

NOTE 2 F_x is defined in 3.1.19.

Where the F_x is unknown, the radiated emission measurements shall be performed up to 6 GHz.

Table A.2 – Requirements for radiated emissions at frequencies up to 1 GHz for Class A equipment

Table clause	Frequency range MHz	Measurement		Class A limits dB($\mu\text{V}/\text{m}$)
		Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
A2.1	30 – 230	10	Quasi Peak / 120 kHz	40
	230 – 1 000			47
A2.2	30 – 230	3	Quasi Peak / 120 kHz	50
	230 – 1 000			57

NOTE Apply only A2.1 or A2.2 across the entire frequency range.

Table A.3 – Requirements for radiated emissions at frequencies above 1 GHz for Class A equipment

Table clause	Frequency range MHz	Measurement		Class A limits dB($\mu\text{V}/\text{m}$)
		Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)
A3.1	1 000 – 3 000	3	Average / 1 MHz	56
	3 000 – 6 000			60
A3.2	1 000 – 3 000	3	Peak / 1 MHz	76
	3 000 – 6 000			80

NOTE Apply A3.1 and A3.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

**Table A.4 – Requirements for radiated emissions at frequencies up to 1 GHz
for Class B equipment**

Table clause	Frequency range MHz	Measurement		Class B limits dB(µV/m)
		Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
A4.1	30 – 230	10	Quasi Peak / 120 kHz	30
	230 – 1 000			37
A4.2	30 – 230	3	Quasi Peak / 120 kHz	40
	230 – 1 000			47

NOTE Apply only table clause A4.1 or A4.2 across the entire frequency range.

**Table A.5 – Requirements for radiated emissions at frequencies above 1 GHz
for Class B equipment**

Table clause	Frequency range MHz	Measurement		Class B limits dB(µV/m)
		Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)
A5.1	1 000 – 3 000	3	Average/ 1 MHz	50
	3 000 – 6 000			54
A5.2	1 000 – 3 000	3	Peak/ 1 MHz	70
	3 000 – 6 000			74

NOTE Apply A5.1 and A5.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

Table A.6 – Requirements for radiated emissions from FM receivers

Table clause	Frequency range MHz	Measurement		Class B limit dB(µV/m)	
		Distance m	Detector type/ bandwidth	Fundamental	Harmonics
				OATS/SAC (see Table A.1)	OATS/SAC (see Table A.1)
A6.1	30 – 230	10	Quasi peak/ 120 kHz	50	42
	230 – 300				42
	300 – 1 000				46
A6.2	30 – 230	3	Quasi peak/ 120 kHz	60	52
	230 – 300				52
	300 – 1 000				56

NOTE 1 Apply only A.6.1 or A.6.2 across the entire frequency range.

NOTE 2 These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the local oscillator. Signals at all other frequencies shall be compliant with the limits given in Table A.4.



Table A.12 – Requirements for conducted differential voltage emissions from Class B equipment


Applicable to								
1. TV broadcast receiver tuner ports (3.1.8) with an accessible connector 2. RF modulator output ports (3.1.27) 3. FM broadcast receiver tuner ports (3.1.8) with an accessible connector								
Table clause	Frequency range MHz	Detector type/bandwidth	Class B limits dB(µV) 75 Ω			Applicability		
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics			
A12.1	30 – 950	For frequencies ≤1 GHz Quasi Peak/120 kHz	46	46	46	See NOTE 1		
	950 – 2 150		46	54	54			
A12.2	950 – 2 150	For frequencies ≥1 GHz Peak/1 MHz	46	54	54	See NOTE 2		
A12.3	30 – 300		46	54	50	See NOTE 3		
	300 – 1 000				52			
A12.4	30 – 300	For frequencies ≥1 GHz Peak/1 MHz	46	66	59	See NOTE 4		
	300 – 1 000				52			
A12.5	30 – 950	Peak/1 MHz	46	76	46	See NOTE 5		
	950 – 2 150			n/a	54			
NOTE 1 Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.								
NOTE 2 Tuner units (not the LNB) for satellite signal reception.								
NOTE 3 Frequency modulation audio receivers and PC tuner cards.								
NOTE 4 Frequency modulation car radios.								
NOTE 5 Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.								
NOTE 6 Testing is required at only one EUT supply voltage and frequency.								
NOTE 7 The term 'other' refers to all emissions other than the fundamental and the harmonics of the local oscillator.								
NOTE 8 The test shall be performed with the device operating at each reception channel.								
NOTE 9 The test shall cover the entire frequency range.								



5.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

5.3. Typical Test Setup

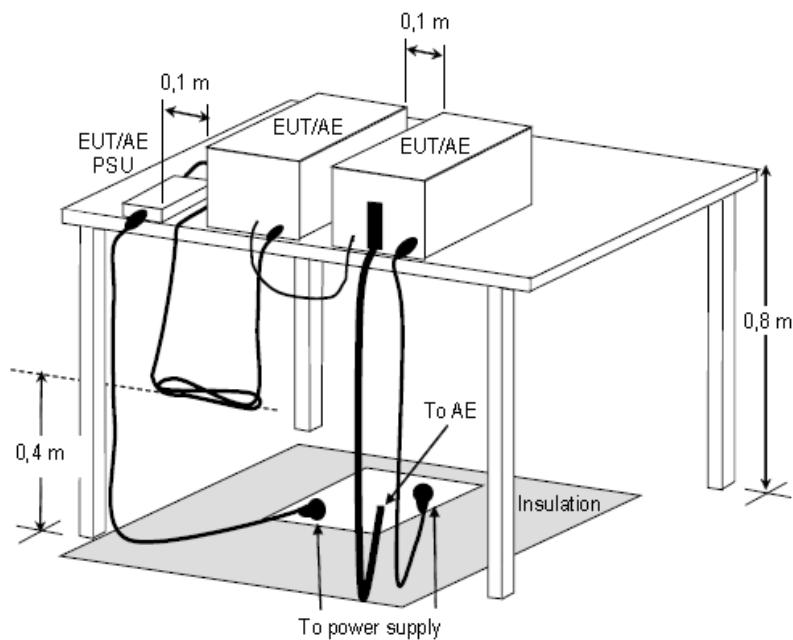

**Figure D.8 – Example measurement arrangement for table-top EUT
(Radiated emission measurement)**



5.4. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI7	100968	2019.07.28	2020.07.27
Preamplifier	EMCI	EMCI030-00-3230	SN016723	2019.03.11	2020.03.10
Preamplifier	Agilent	8449B	3008A02342	2019.03.11	2020.03.10
Bilog Antenna	Sunol Science	JB1	A072414-2	2019.07.13	2020.07.13
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-618	2019.04.16	2020.04.15
Spectrum Analyzer	R&S	FSP40	100324	2019.07.13	2020.07.12
Temperature/ Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A



5.5. Test Result and Data (30MHz ~ 1GHz)

Test Mode :	Mode 1: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	35.8200	-8.48	33.14	24.66	30.00	-5.34	peak	100	11
2	93.0497	-14.66	37.19	22.53	30.00	-7.47	peak	400	258
3	324.8798	-6.90	33.90	27.00	37.00	-10.00	peak	100	314
4	594.5398	-1.61	29.91	28.30	37.00	-8.70	peak	100	46
5	775.9298	0.98	25.77	26.75	37.00	-10.25	peak	100	230
6	903.9700	3.34	24.05	27.39	37.00	-9.61	peak	100	159

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29




No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	36.7899	-8.82	32.96	24.14	30.00	-5.86	peak	100	301
2	209.4499	-11.03	36.37	25.34	30.00	-4.66	peak	100	47
3	546.0398	-2.33	29.84	27.51	37.00	-9.49	peak	100	152
4	673.1100	-0.56	27.65	27.09	37.00	-9.91	peak	100	247
5	866.1399	2.63	27.68	30.31	37.00	-6.69	peak	100	354
6	972.8400	4.46	24.13	28.59	37.00	-8.41	peak	100	115

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 26: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

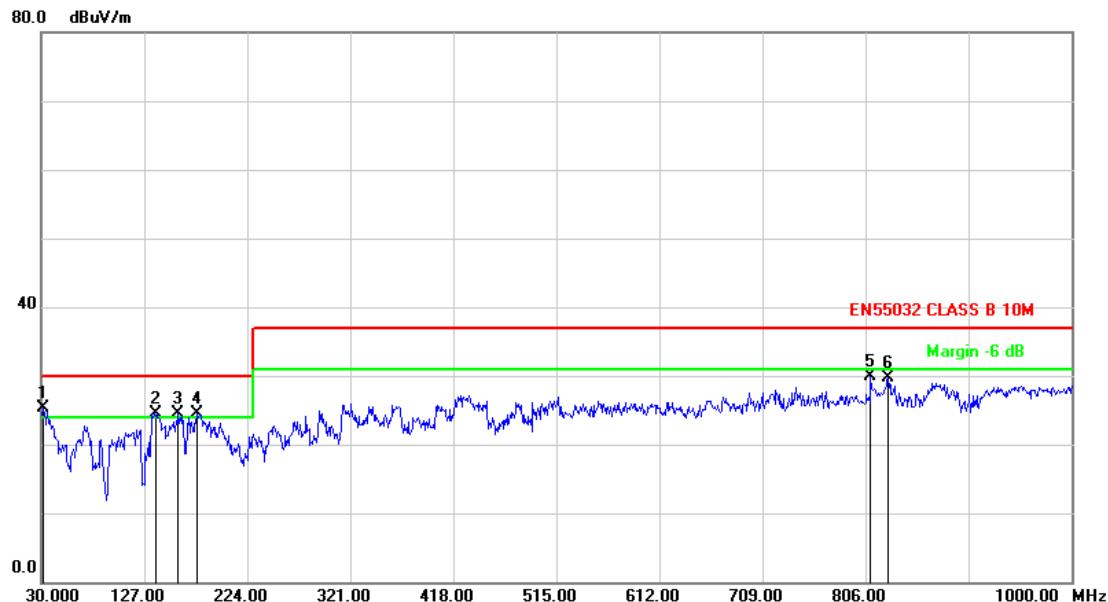


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	31.9400	-7.16	32.55	25.39	30.00	-4.61	peak	100	122
2	138.6399	-9.65	34.09	24.44	30.00	-5.56	peak	100	254
3	159.0098	-10.11	34.71	24.60	30.00	-5.40	peak	100	40
4	176.4696	-10.22	34.78	24.56	30.00	-5.44	peak	400	136
5	810.8500	1.57	28.40	29.97	37.00	-7.03	peak	100	258
6	827.3400	1.88	27.84	29.72	37.00	-7.28	peak	100	300

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 26: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

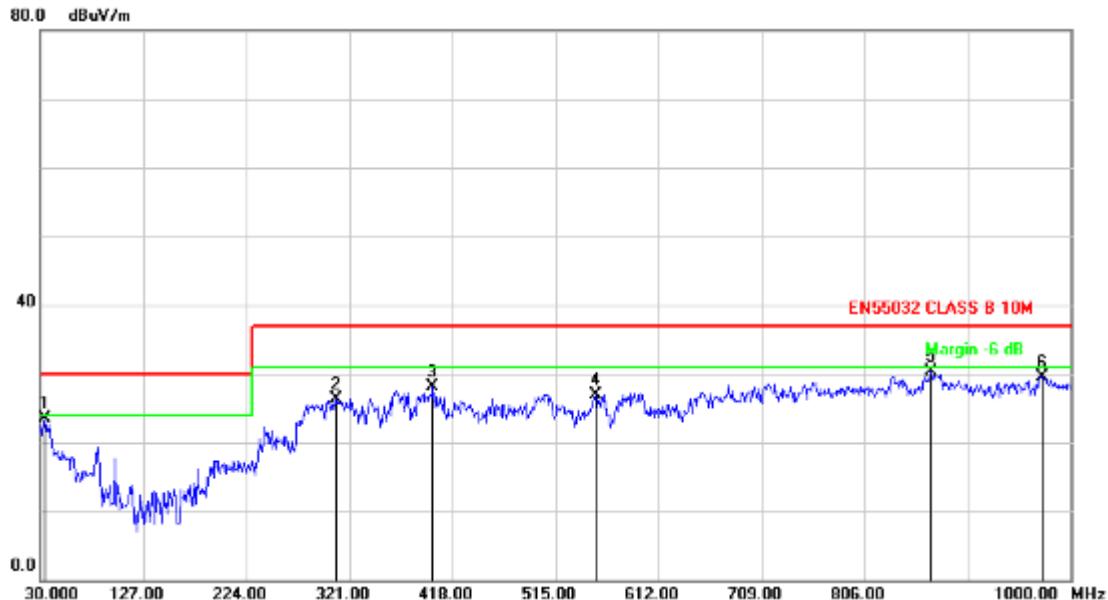

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	34.8500	-8.15	31.70	23.55	30.00	-6.45	peak	100	125
2	308.3899	-7.24	33.63	26.39	37.00	-10.61	peak	400	310
3	399.5699	-5.39	33.51	28.12	37.00	-8.88	peak	100	45
4	552.8300	-2.23	29.21	26.98	37.00	-10.02	peak	100	311
5	869.0498	2.69	27.59	30.28	37.00	-6.72	peak	100	236
6	972.8400	4.46	25.13	29.59	37.00	-7.41	peak	100	159

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 31: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	32.9099	-7.49	30.94	23.45	30.00	-6.55	peak	100	130
2	170.6500	-10.19	33.78	23.59	30.00	-6.41	peak	100	35
3	208.4798	-11.07	34.96	23.89	30.00	-6.11	peak	400	255
4	397.6299	-5.43	32.01	26.58	37.00	-10.42	peak	100	46
5	783.6900	1.11	27.57	28.68	37.00	-8.32	peak	100	102
6	891.3600	3.11	26.51	29.62	37.00	-7.38	peak	100	341

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 31: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	34.8500	-8.15	31.20	23.05	30.00	-6.95	peak	100	25
2	216.2400	-10.76	34.11	23.35	30.00	-6.65	peak	100	150
3	296.7500	-7.55	34.30	26.75	37.00	-10.25	peak	100	301
4	374.3500	-5.89	31.66	25.77	37.00	-11.23	peak	400	159
5	642.0700	-0.97	27.87	26.90	37.00	-10.10	peak	100	49
6	877.7798	2.85	25.52	28.37	37.00	-8.63	peak	400	236

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 32: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29




No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	35.8200	-8.48	32.14	23.66	30.00	-6.34	peak	100	115
2	168.7100	-10.18	34.08	23.90	30.00	-6.10	peak	100	15
3	180.3497	-10.26	34.65	24.39	30.00	-5.61	peak	400	204
4	198.7800	-11.34	34.49	23.15	30.00	-6.85	peak	400	49
5	407.3299	-5.21	32.08	26.87	37.00	-10.13	peak	100	311
6	932.1000	3.80	24.90	28.70	37.00	-8.30	peak	400	115

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 32: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

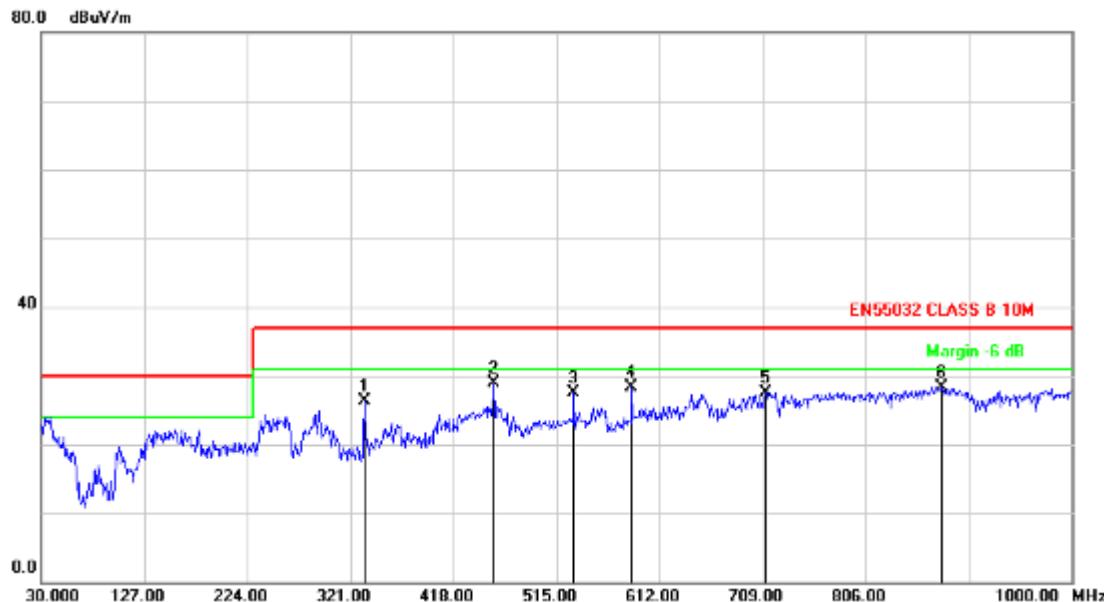


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	334.5799	-6.69	32.95	26.26	37.00	-10.74	peak	100	36
2	455.8299	-4.06	32.93	28.87	37.00	-8.13	peak	100	254
3	531.4900	-2.54	30.01	27.47	37.00	-9.53	peak	100	49
4	585.8096	-1.74	30.01	28.27	37.00	-8.73	peak	100	157
5	711.9098	-0.01	27.60	27.59	37.00	-9.41	peak	100	342
6	877.7798	2.85	25.52	28.37	37.00	-8.63	peak	400	211

Note: Measurement Level = Reading Level + Correct Factor



5.6. Test Result and Data (1GHz ~ 6GHz)

Test Mode :	Mode 1: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

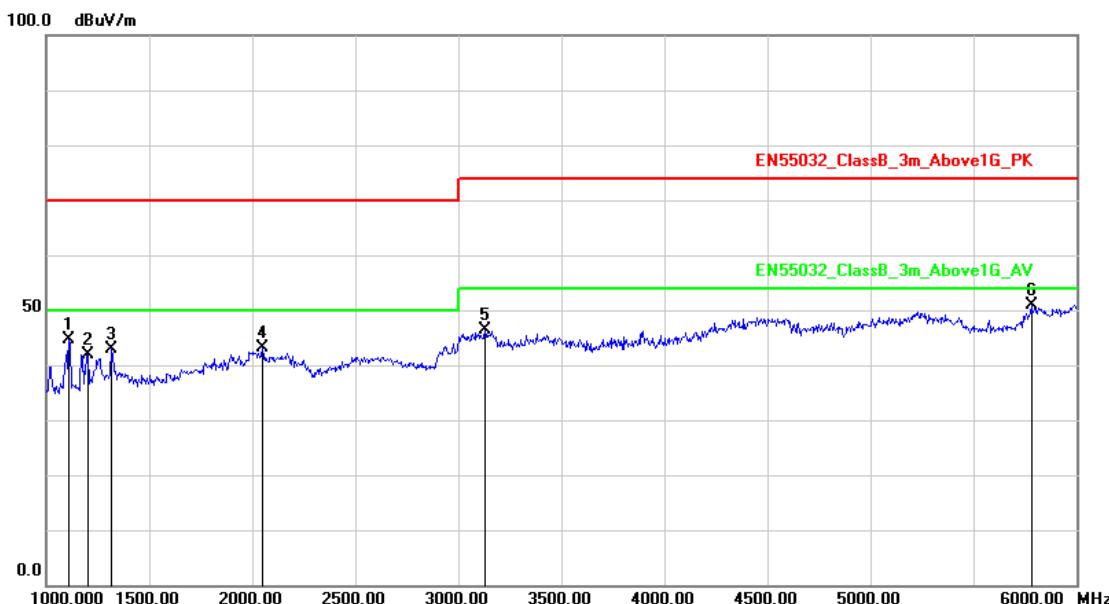


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1110.000	-5.24	49.85	44.61	70.00	-25.39	peak	100	35
2	1205.000	-4.61	46.59	41.98	70.00	-28.02	peak	100	155
3	1315.000	-3.88	46.88	43.00	70.00	-27.00	peak	200	41
4	2050.000	-0.94	44.14	43.20	70.00	-26.80	peak	100	106
5	3130.000	4.52	41.96	46.48	74.00	-27.52	peak	100	311
6	5780.000	13.32	37.51	50.83	74.00	-23.17	peak	200	265

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

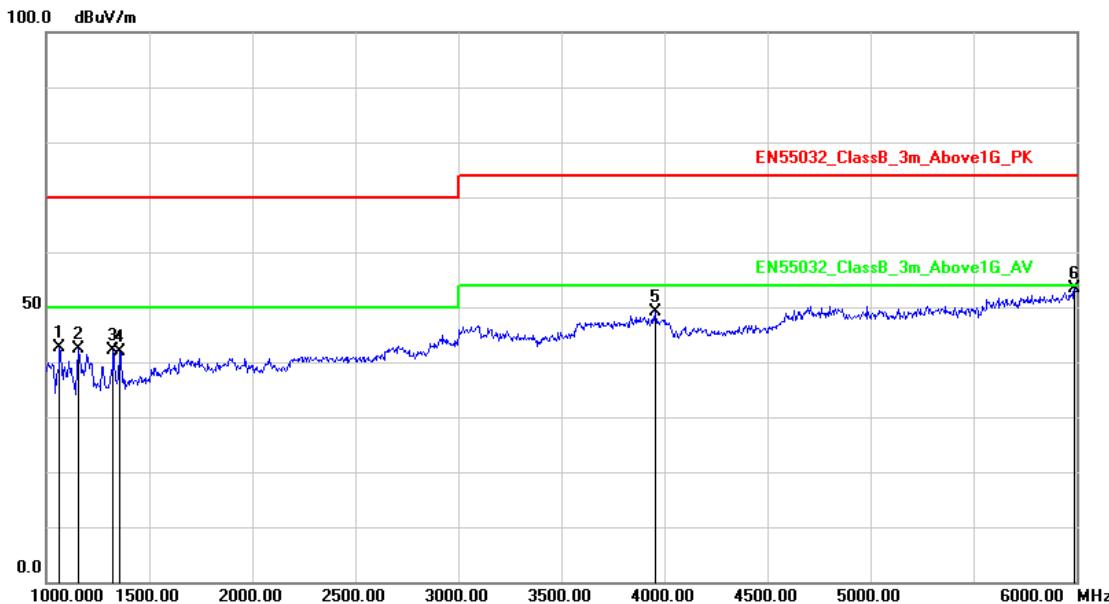


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1065.000	-5.54	48.27	42.73	70.00	-27.27	peak	100	115
2	1155.000	-4.94	47.33	42.39	70.00	-27.61	peak	200	241
3	1325.000	-3.81	46.02	42.21	70.00	-27.79	peak	100	150
4	1355.000	-3.61	45.39	41.78	70.00	-28.22	peak	200	304
5	3955.000	7.22	41.84	49.06	74.00	-24.94	peak	100	49
6	5990.000	14.19	39.22	53.41	74.00	-20.59	peak	100	116

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 26: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

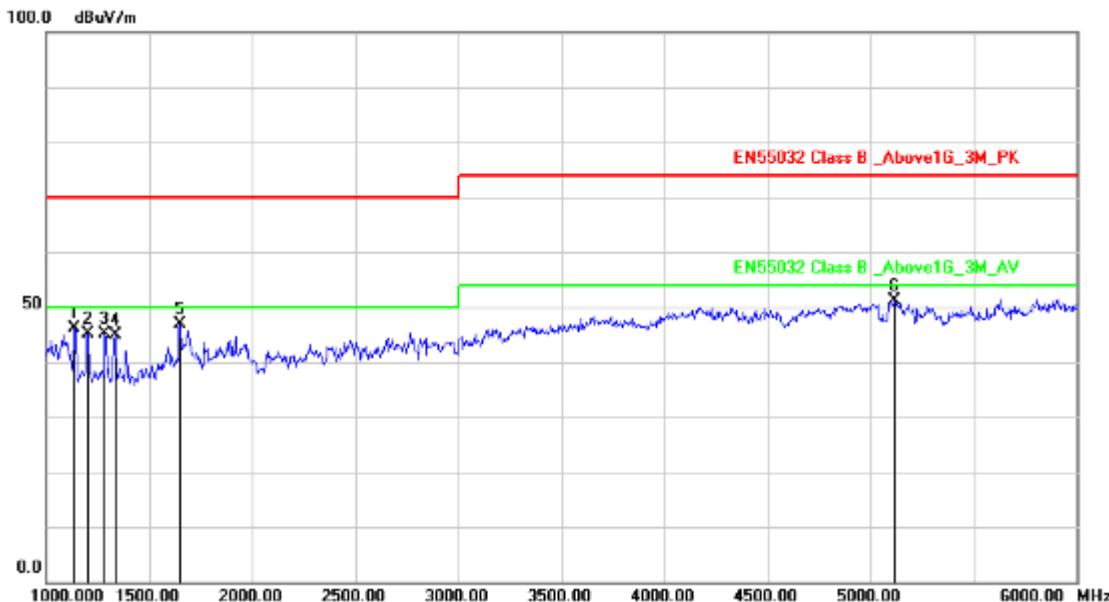


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1135.000	-7.31	53.37	46.06	70.00	-23.94	peak	100	123
2	1200.000	-6.97	52.09	45.12	70.00	-24.88	peak	200	301
3	1285.000	-6.53	51.66	45.13	70.00	-24.87	peak	100	25
4	1335.000	-6.27	51.13	44.86	70.00	-25.14	peak	200	104
5	1650.000	-4.54	51.31	46.77	70.00	-23.23	peak	100	258
6	5115.000	6.43	44.58	51.01	74.00	-22.99	peak	100	311

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 26: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 1729 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

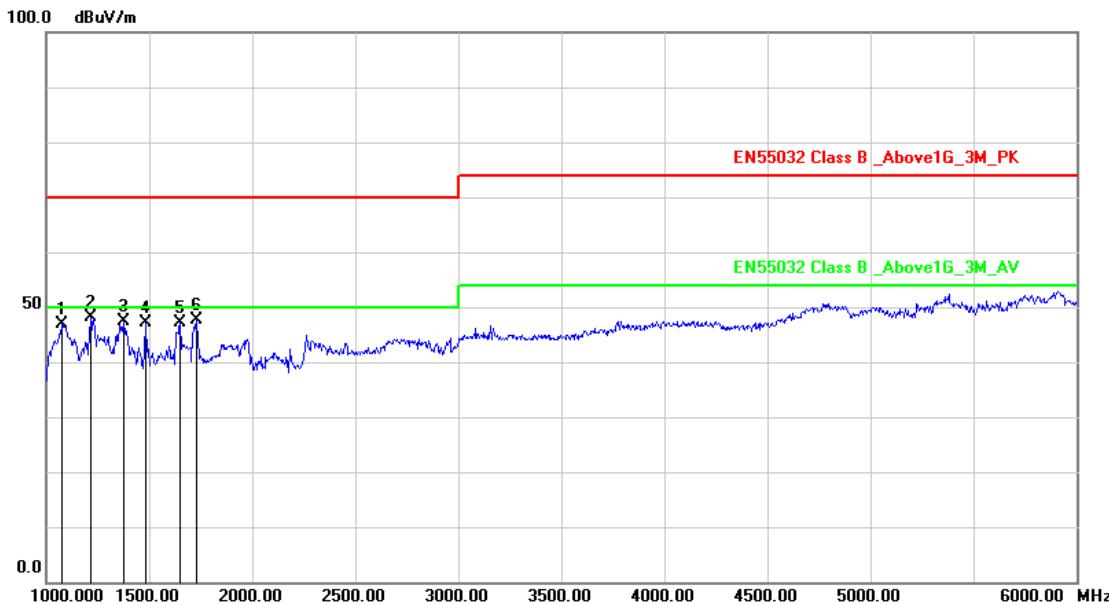


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1075.000	-7.62	54.44	46.82	70.00	-23.18	peak	100	115
2	1215.000	-6.89	55.08	48.19	70.00	-21.81	peak	100	25
3	1375.000	-6.06	53.45	47.39	70.00	-22.61	peak	200	302
4	1480.000	-5.51	52.55	47.04	70.00	-22.96	peak	100	254
5	1650.000	-4.54	51.73	47.19	70.00	-22.81	peak	200	213
6	1730.000	-4.07	51.81	47.74	70.00	-22.26	peak	100	144

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 31: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

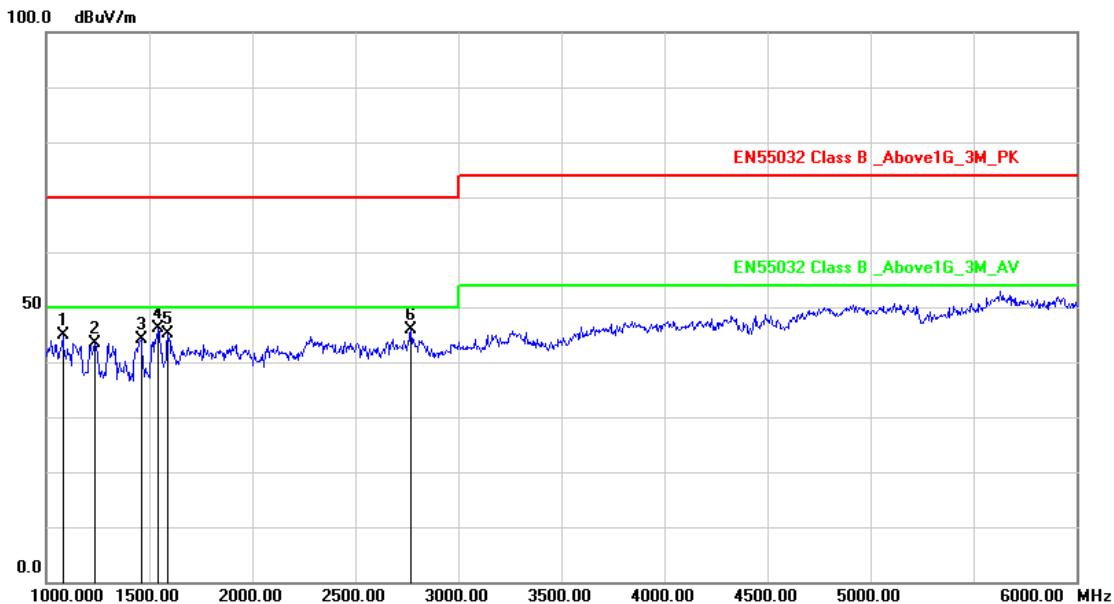


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1080.000	-7.59	52.48	44.89	70.00	-25.11	peak	100	44
2	1235.000	-6.79	50.16	43.37	70.00	-26.63	peak	100	106
3	1460.000	-5.62	49.79	44.17	70.00	-25.83	peak	200	69
4	1545.000	-5.15	51.26	46.11	70.00	-23.89	peak	100	287
5	1590.000	-4.89	49.97	45.08	70.00	-24.92	peak	100	306
6	2770.000	1.59	44.17	45.76	70.00	-24.24	peak	100	211

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 31: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (230V/50Hz)		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

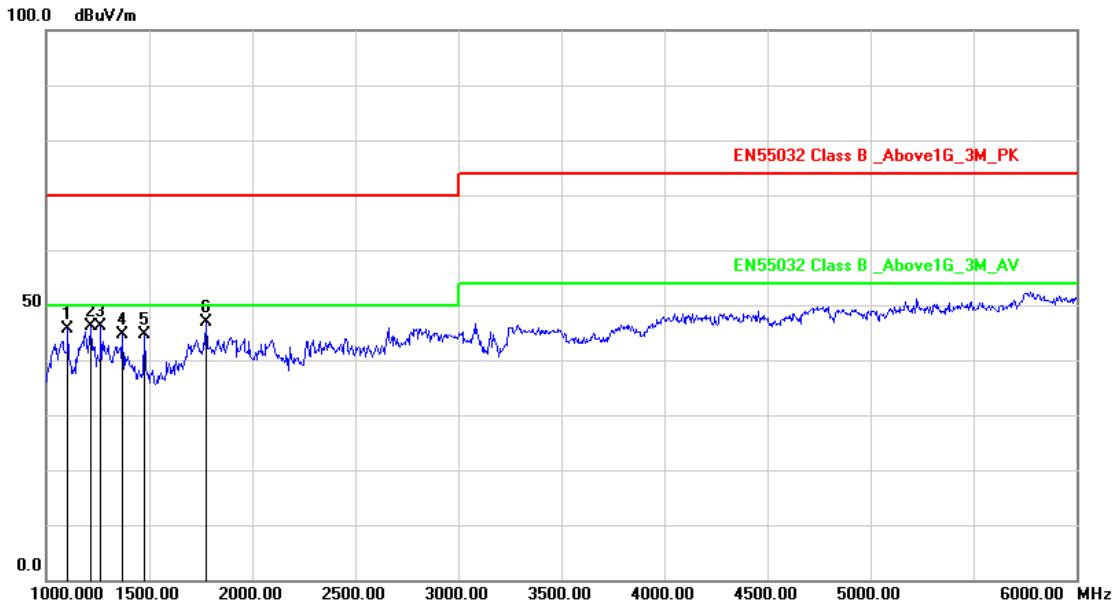


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1105.000	-7.46	53.13	45.67	70.00	-24.33	peak	100	102
2	1215.000	-6.89	53.08	46.19	70.00	-23.81	peak	100	211
3	1265.000	-6.63	52.68	46.05	70.00	-23.95	peak	200	231
4	1370.000	-6.09	50.84	44.75	70.00	-25.25	peak	100	306
5	1475.000	-5.54	50.06	44.52	70.00	-25.48	peak	200	247
6	1775.000	-3.81	50.81	47.00	70.00	-23.00	peak	100	162

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 32: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

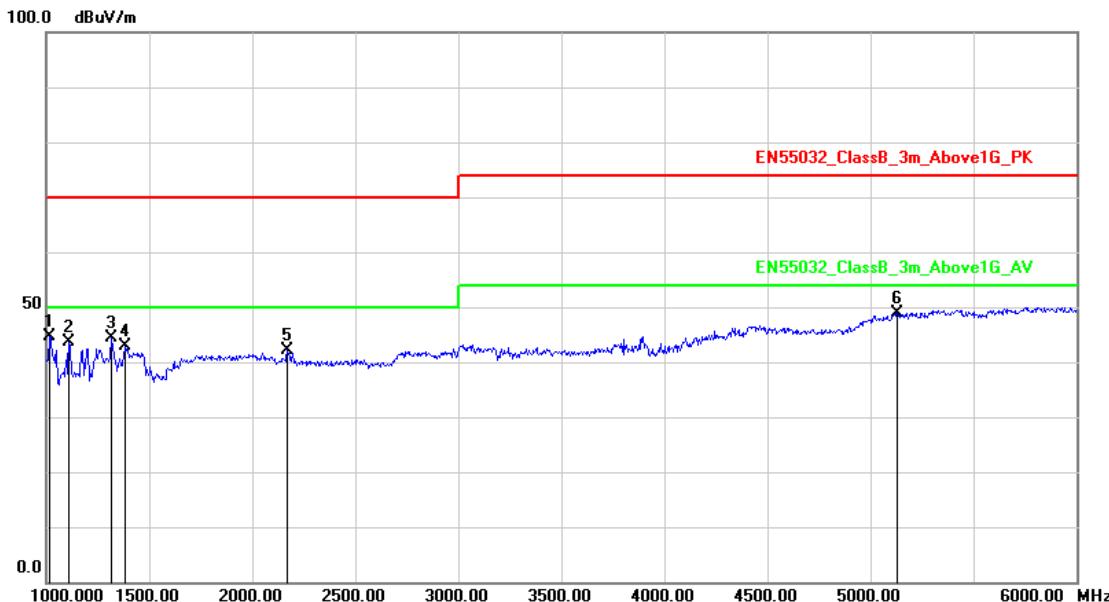


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1015.000	-5.88	50.58	44.70	70.00	-25.30	peak	100	115
2	1110.000	-5.24	48.85	43.61	70.00	-26.39	peak	200	26
3	1315.000	-3.88	48.38	44.50	70.00	-25.50	peak	100	311
4	1385.000	-3.41	46.28	42.87	70.00	-27.13	peak	100	43
5	2170.000	-0.33	42.38	42.05	70.00	-27.95	peak	200	257
6	5130.000	11.39	37.55	48.94	74.00	-25.06	peak	100	69

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 32: Full system (Display 1 mode 5120*1440@120Hz) Signal from PC for ITU-RBT 471-1 Colour bars (110V/60Hz)		
AC Power :	AC 110V/60Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	**493*****
Temperature :	25°C	Humidity :	52%
Pressure(mbar) :	1001	Date:	2019/09/29

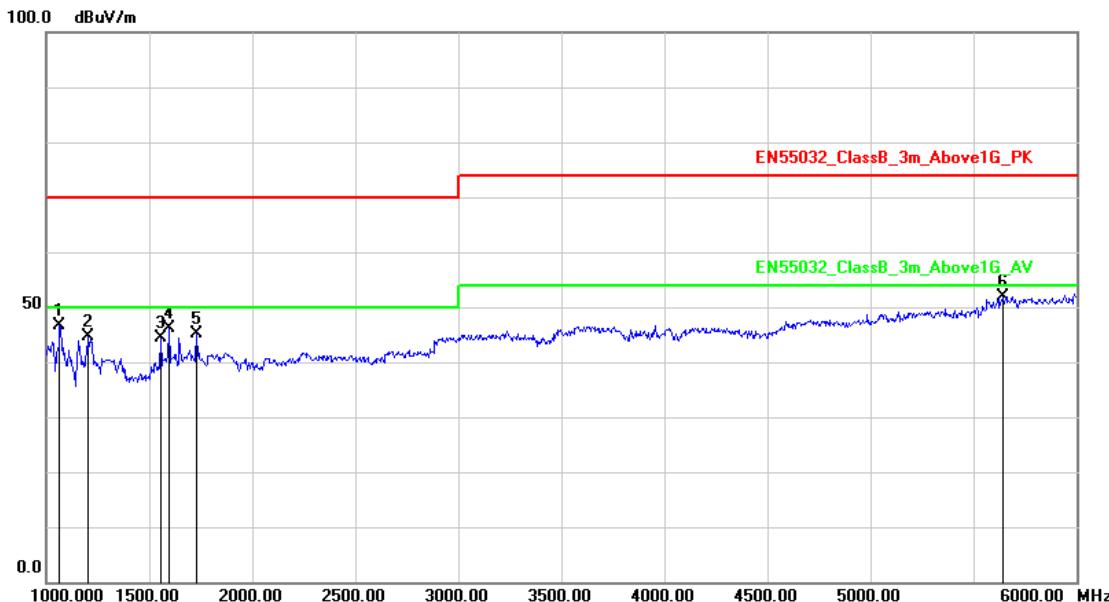

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1065.000	-5.54	52.27	46.73	70.00	-23.27	peak	100	25
2	1205.000	-4.61	49.24	44.63	70.00	-25.37	peak	200	261
3	1555.000	-2.57	47.03	44.46	70.00	-25.54	peak	100	130
4	1595.000	-2.37	48.41	46.04	70.00	-23.96	peak	200	115
5	1730.000	-1.98	47.08	45.10	70.00	-24.90	peak	100	342
6	5645.000	12.76	39.18	51.94	74.00	-22.06	peak	100	20

Note: Measurement Level = Reading Level + Correct Factor

Vane Xia

Test engineer: _____




5.7. Test Photographs (30MHz~1GHz)

For ITU-RBT 1729 Colour bars

Front View




Rear View

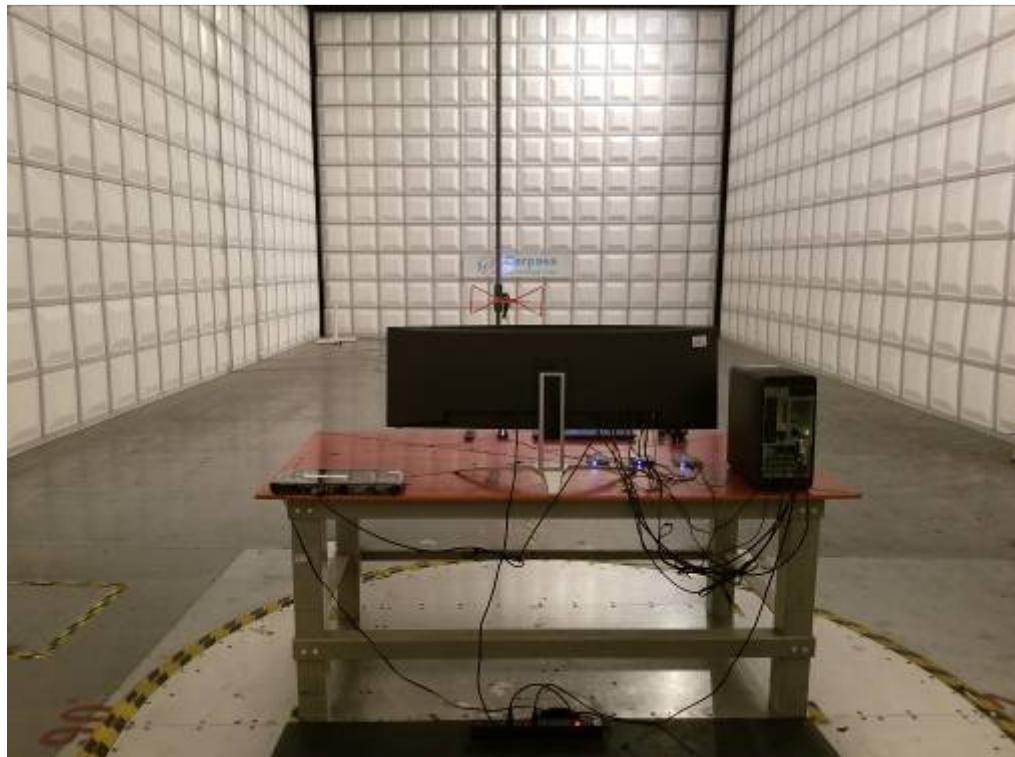




For ITU-RBT 471-1 Colour bars

Front View

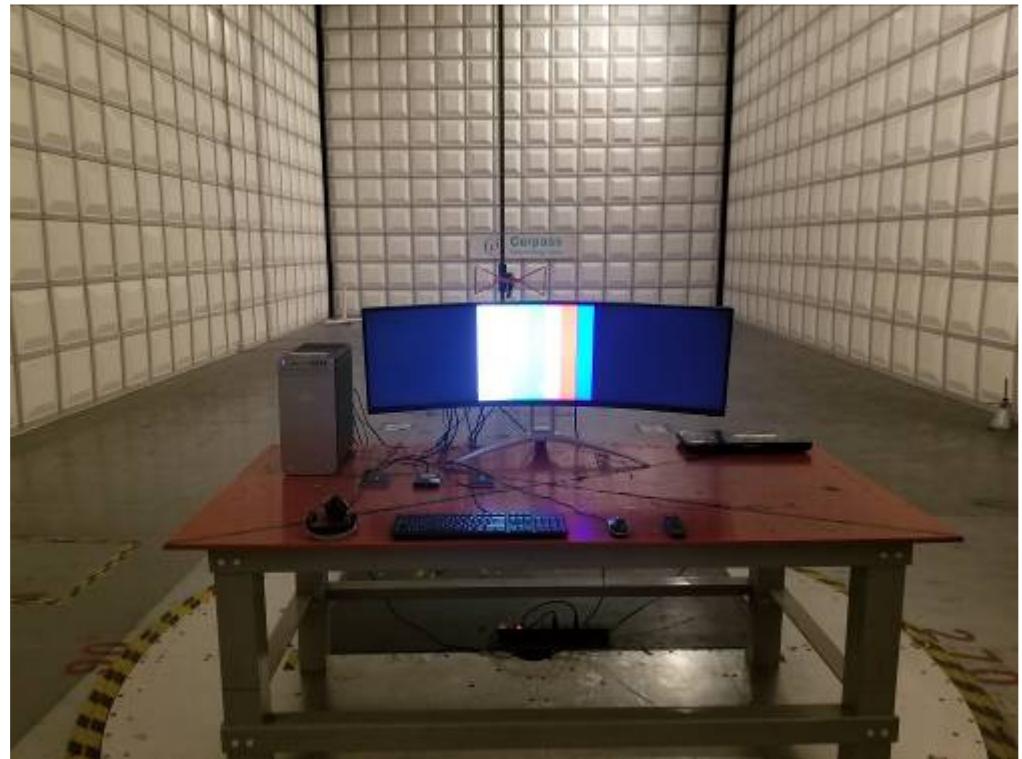

Rear View

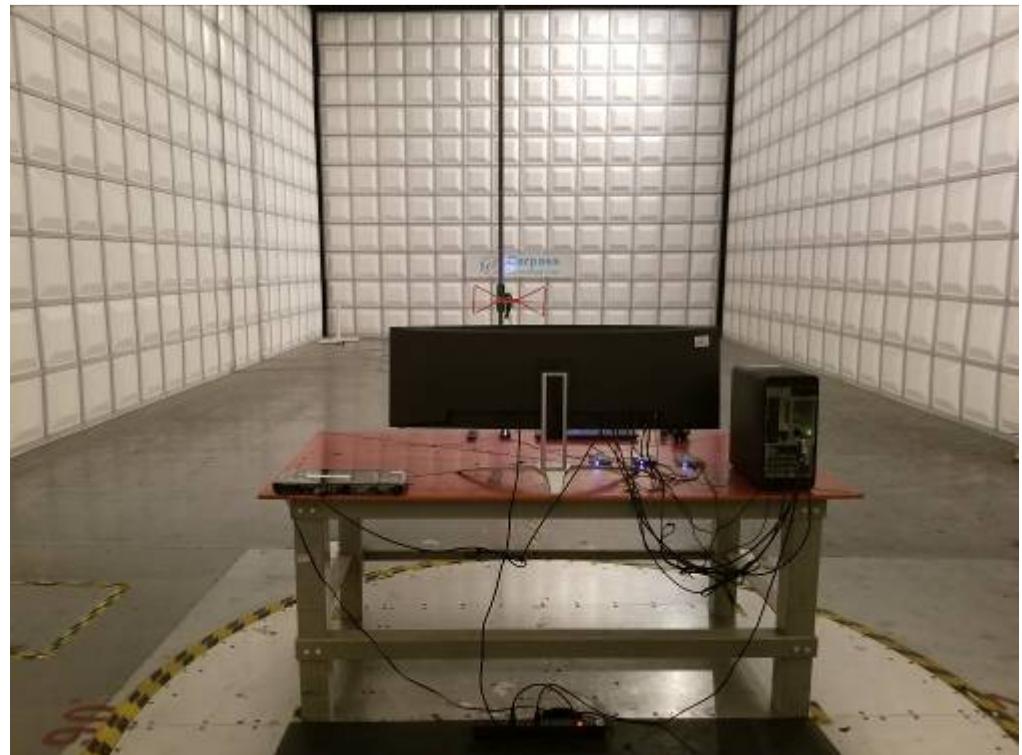




5.8. Test Photographs (1GHz~6GHz)

For ITU-RBT 1729 Colour bars

Front View



Rear View

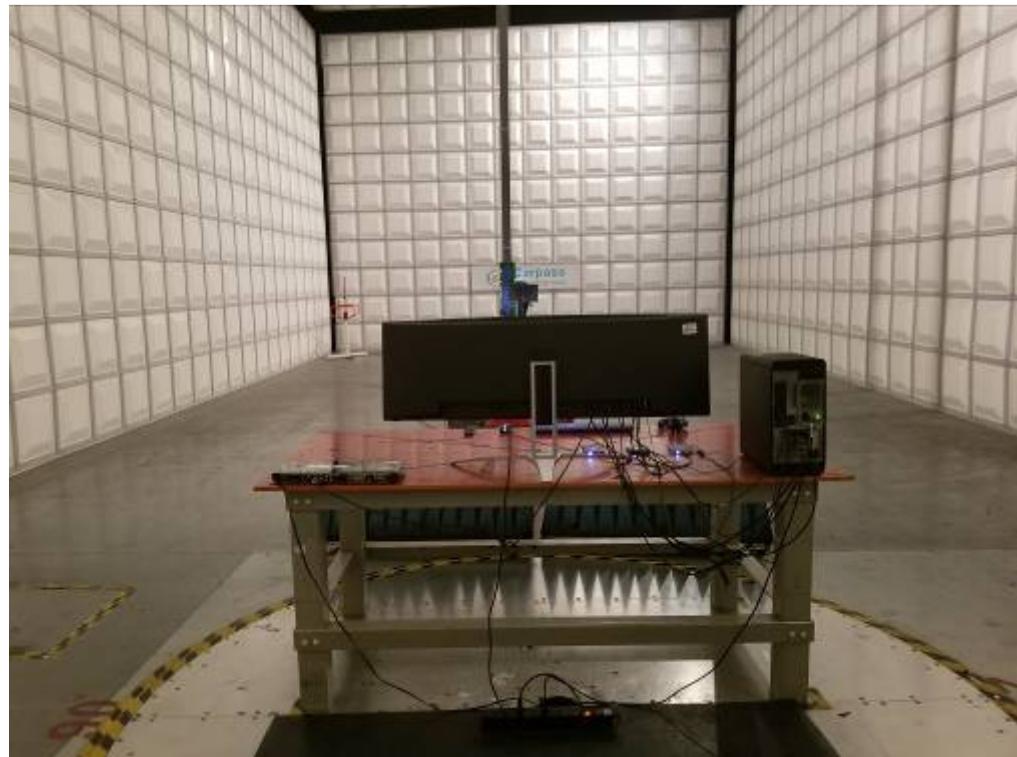




For ITU-RBT 471-1 Colour bars

Front View



Rear View

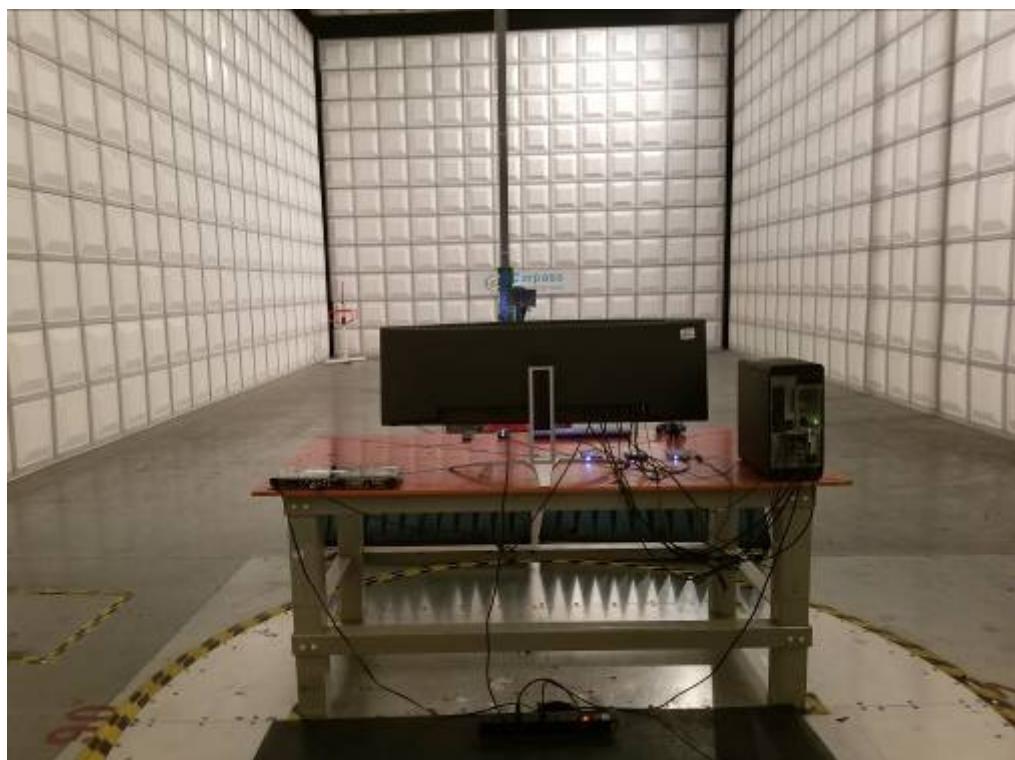



6. Harmonics Test

6.1. Limits of Harmonics Current Measurement

Limits for Class A equipment

Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	8≤n≤40	0.23x8/n
11	0.33		
13	0.21		
15≤n≤39	0.15x15/n		

(b) Limits for Class B equipment

For Class B equipment, the harmonics of the input current shall not exceed the values given in Table that is the limit of Class A multiplied by a factor of 1,5.

(c) Limits for Class C equipment

Harmonics Order n	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency %
2	2
3	30 · λ*
5	10
7	7
9	5
11< n < 39 (odd harmonics only)	3

* λ is the circuit power factor

(d) Limits for Class D equipment

Harmonics Order n	Maximum permissible harmonic current per watt mA/W	Maximum permissible harmonic current A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
11 < n < 39 (odd harmonics only)	3.85/n	See limit of Class A

NOTE: According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.




6.2. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2019.03.23	2020.03.22
Temperature/ Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14
HARCS	EMC Partner AG	Ver 4.18	N/A	N/A	N/A
Harmonics&Flicker Power Line Test	PAC	ECTS2-140M	55054	2019.03.11	2020.03.10



6.3. Test Result and Data

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 1
Model No.	:	**493*****
Temperature	:	23°C
Humidity	:	51%
Atmospheric Pressure	:	100 kPa
Test Date	:	Sep. 29, 2019

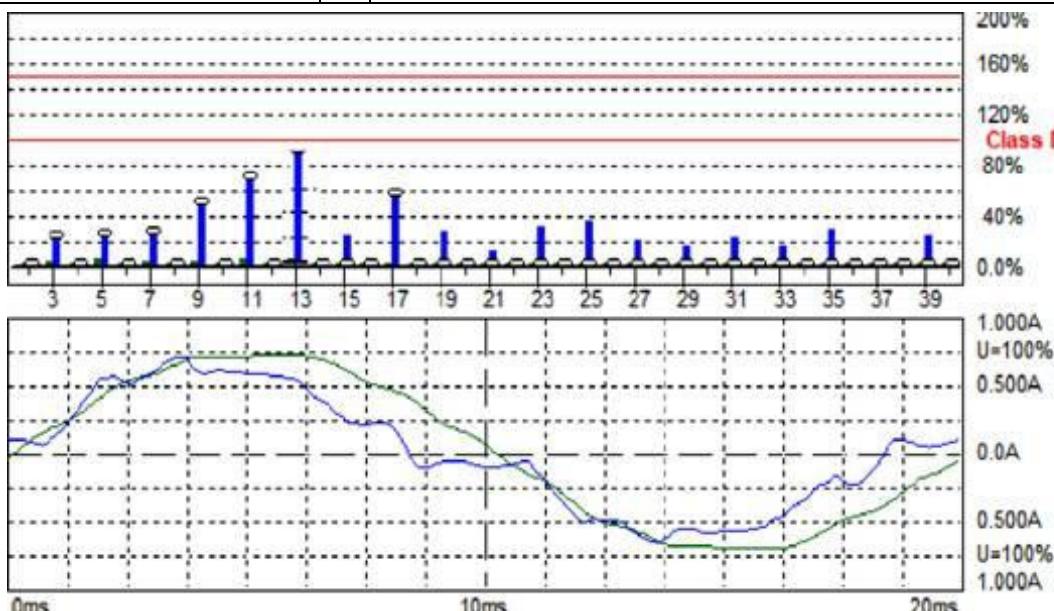

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2) 2019/9/29 9:42:02 harmonic.hsu
Urms = 225.2 V P = 86.78 W THC = 0.090 A Range: 1 A
Irms = 0.413 A pf = 0.933 Pmax = 87.61 W V-nom: 230 V
1909108 TestTime 15 min (100%)

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 225.2V Freq = 49.987 Range: 1 A

Irms = 0.413A Ipk = 0.714A cf = 1.729

P = 86.78W S = 93.03VA pf = 0.933

THDi = 22.6 % THDu = 3.40 % Class D

Test - Time : 15min (100 %)

Limit Reference: Pmax = 87.612W

Test completed, Result: PASSED



Order	Freq. [Hz]	Irms [A]	Irms%L [%]	Imax [A]	Imax%L [%]	Limit [A]
1	50	0.4019		0.4016		
2	100	0.0063		0.0063		
3	150	0.0639	21.453	0.0638	21.432	0.2979
4	200	0.0042		0.0042		
5	250	0.0397	23.833	0.0397	23.833	0.1665
6	300	0.0016		0.0016		
7	350	0.0222	25.358	0.0222	25.358	0.0876
8	400	0.0021		0.0021		
9	450	0.0211	48.069	0.0210	47.930	0.0438
10	500	0.0018		0.0018		
11	550	0.0210	68.471	0.0209	68.272	0.0307
12	600	0.0012		0.0012		
13	650	0.0289	111.27	0.0287	110.80	0.0259
14	700	0.0008		0.0008		
15	750	0.0050	22.257	0.0049	21.985	0.0225
16	800	0.0029		0.0029		
17	850	0.0107	54.140	0.0108	54.448	0.0198
18	900	0.0009		0.0009		
19	950	0.0045	25.098	0.0044	24.754	0.0178
20	1000	0.0020		0.0020		
21	1050	0.0017	10.640	0.0017	10.640	0.0161
22	1100	0.0021		0.0021		
23	1150	0.0043	29.133	0.0043	29.133	0.0147
24	1200	0.0008		0.0008		
25	1250	0.0046	33.928	0.0046	33.928	0.0135
26	1300	0.0022		0.0022		
27	1350	0.0024	19.054	0.0024	19.054	0.0125
28	1400	0.0021		0.0021		
29	1450	0.0015	12.594	0.0015	12.594	0.0116
30	1500	0.0015		0.0015		
31	1550	0.0021	19.633	0.0021	19.633	0.0109
32	1600	0.0020		0.0020		
33	1650	0.0013	12.540	0.0013	12.540	0.0102
34	1700	0.0010		0.0010		
35	1750	0.0026	26.600	0.0026	26.600	0.0096
36	1800	0.0010		0.0010		
37	1850	0.0003	3.3476	0.0004	4.0171	0.0091
38	1900	0.0018		0.0018		
39	1950	0.0019	21.877	0.0019	21.877	0.0086
40	2000	0.0024		0.0024		


EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (Iavg)
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (Imax)
are below 150% of the Individual Limits.



Default mode:

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 1
Model No.	:	**493*****
Temperature	:	23°C
Humidity	:	51%
Atmospheric Pressure	:	100 kPa
Test Date	:	Sep. 29, 2019

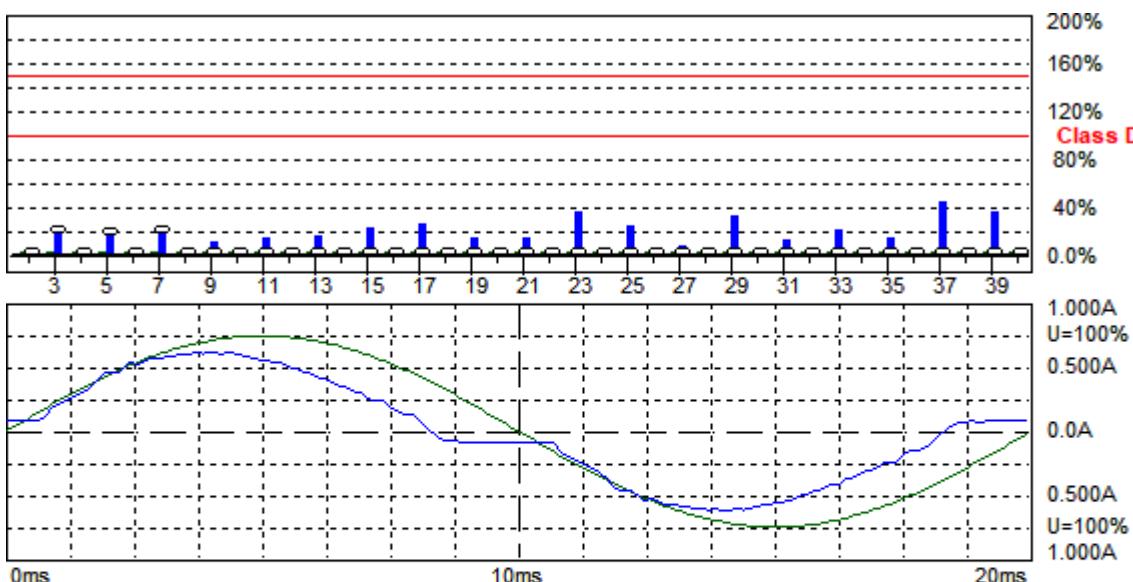

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)

2019/9/29 8:56:01 harmonic.hsu

Urms = 230.5 V P = 84.47 W THC = 0.071 A Range: 1 A
 Irms = 0.393 A pf = 0.932 Pmax = 84.30 W V-nom: 230 V
 1909108 Test completed, Result: PASSED TestTime: 15 min (100%)

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 230.5V Freq = 50.013 Range: 1 A

Irms = 0.393A Ipk = 0.623A cf = 1.585

P = 84.47W S = 90.60VA pf = 0.932

THDi = 19.6 % THDu = 0.20 % Class D

Test - Time : 15min (100 %)

Limit Reference: Pmax = 84.297W

Test completed, Result: PASSED



Order	Freq. [Hz]	Irms [A]	Irms%L [%]	Imax [A]	Imax%L [%]	Limit [A]
1	50	0.3657		0.3602		
2	100	0.0005		0.0020		
3	150	0.0609	21.232	0.0600	20.934	0.2866
4	200	0.0002		0.0002		
5	250	0.0313	19.511	0.0308	19.206	0.1602
6	300	0.0002		0.0003		
7	350	0.0170	20.129	0.0167	19.839	0.0843
8	400	0.0001		0.0002		
9	450	0.0036	8.5438	0.0035	8.3990	0.0421
10	500	0.0002		0.0002		
11	550	0.0033	11.171	0.0032	10.964	0.0295
12	600	0.0001		0.0002		
13	650	0.0033	13.202	0.0033	13.202	0.0250
14	700	0.0001		0.0002		
15	750	0.0043	19.747	0.0042	19.465	0.0216
16	800	0.0001		0.0002		
17	850	0.0046	23.978	0.0045	23.339	0.0191
18	900	0.0001		0.0001		
19	950	0.0020	11.792	0.0020	11.434	0.0171
20	1000	0.0001		0.0002		
21	1050	0.0019	12.243	0.0019	12.243	0.0155
22	1100	0.0002		0.0002		
23	1150	0.0048	33.739	0.0047	33.306	0.0141
24	1200	0.0002		0.0002		
25	1250	0.0030	23.038	0.0029	22.568	0.0130
26	1300	0.0002		0.0002		
27	1350	0.0005	4.5700	0.0005	4.5700	0.0120
28	1400	0.0002		0.0002		
29	1450	0.0035	31.087	0.0034	30.542	0.0112
30	1500	0.0002		0.0002		
31	1550	0.0010	9.9110	0.0010	9.9110	0.0105
32	1600	0.0002		0.0002		
33	1650	0.0018	18.618	0.0018	17.998	0.0098
34	1700	0.0002		0.0002		
35	1750	0.0010	11.190	0.0010	11.190	0.0093
36	1800	0.0002		0.0002		
37	1850	0.0037	41.750	0.0037	41.750	0.0088
38	1900	0.0002		0.0002		
39	1950	0.0028	33.739	0.0027	33.005	0.0083
40	2000	0.0002		0.0003		


EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (Iavg)
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (Imax)
are below 150% of the Individual Limits.
are below 150% of the Individual Limits.

Test engineer: _____



6.4. Test Photographs

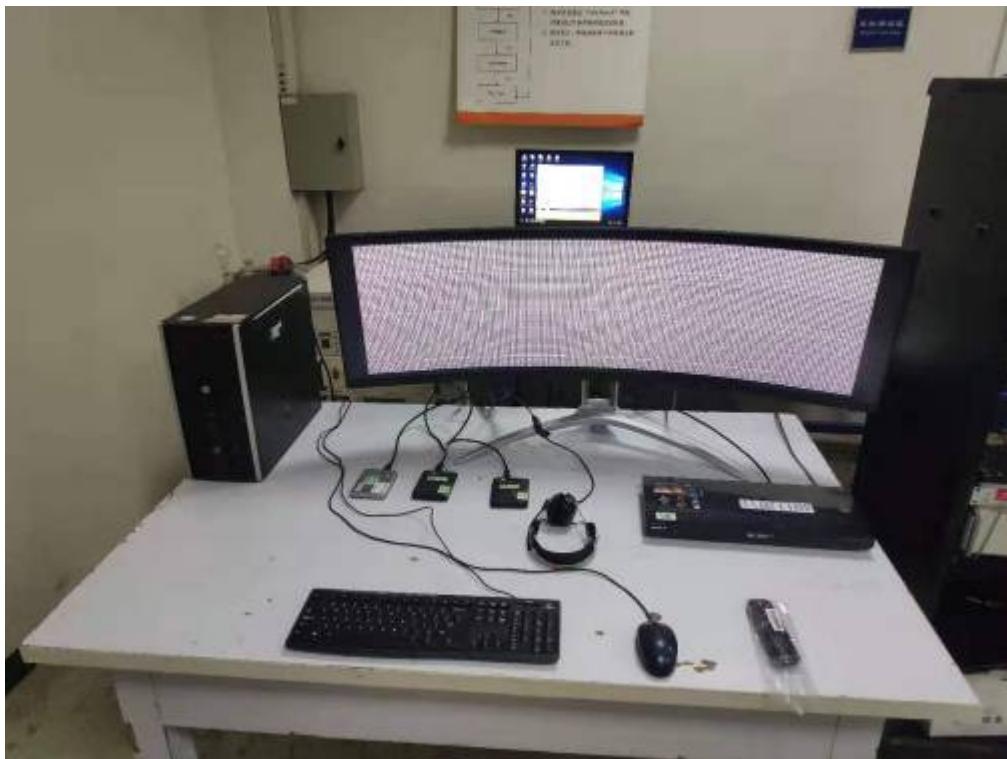

Default mode





7. Voltage Fluctuations Test

7.1. Test Procedure

The equipment shall be tested under the conditions of **Clause 5**.

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance.

The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure.

7.2. Measurement Equipment


Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2019.03.23	2020.03.22
Temperature/Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14
HARCS	EMC Partner AG	Ver 4.18	N/A	N/A	N/A
Harmonics&Flicker Power Line Test	PAC	ECTS2-140M	55054	2019.03.11	2020.03.10



7.3. Test Result and Data

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 1
Model No.	:	**493*****
Temperature	:	23°C
Humidity	:	51%
Atmospheric Pressure	:	100 kPa
Test Date	:	Sep. 29, 2019

Flicker Emission IEC 61000-4-15 for 230V/50Hz

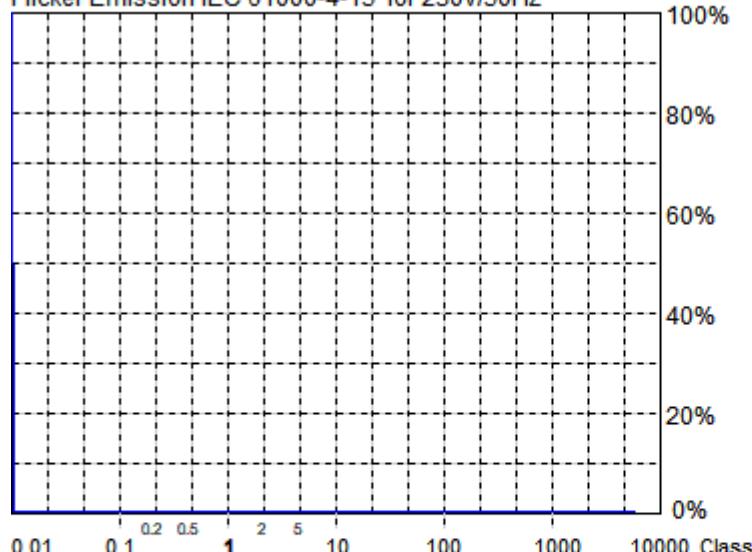

Actual Flicker (Fli): 0.00

Short-term Flicker (Pst): 0.07

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.07

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.00%

Limit (dc): 3.30%

Tmax 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3

2019/9/29 10:00:23 harmonic.hsu

Urms = 225.0 V P = 86.46 W
 Irms = 0.413 A pf = 0.931

Range: 1 A
 V-nom: 230 V
 TestTime: 10 min (100%)

1909108

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 225.0V Freq = 49.974 Range: 1 A

Irms = 0.413A Ipk = 0.719A cf = 1.743

P = 86.46W S = 92.84VA pf = 0.931

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : L: 0.24ohm +j0.15ohm N: 0.16ohm +j0.10ohm

Limits : Plt : 0.65 Pst : 1.00

dmax : 4.00 % dc : 3.30 %

dtLim: 3.30 % dt>Lim: 500ms


Test completed, Result: PASSED



Default mode:

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 1
Model No.	:	**493*****
Temperature	:	23°C
Humidity	:	51%
Atmospheric Pressure	:	100 kPa
Test Date	:	Sep. 29, 2019

Flicker Emission IEC 61000-4-15 for 230V/50Hz

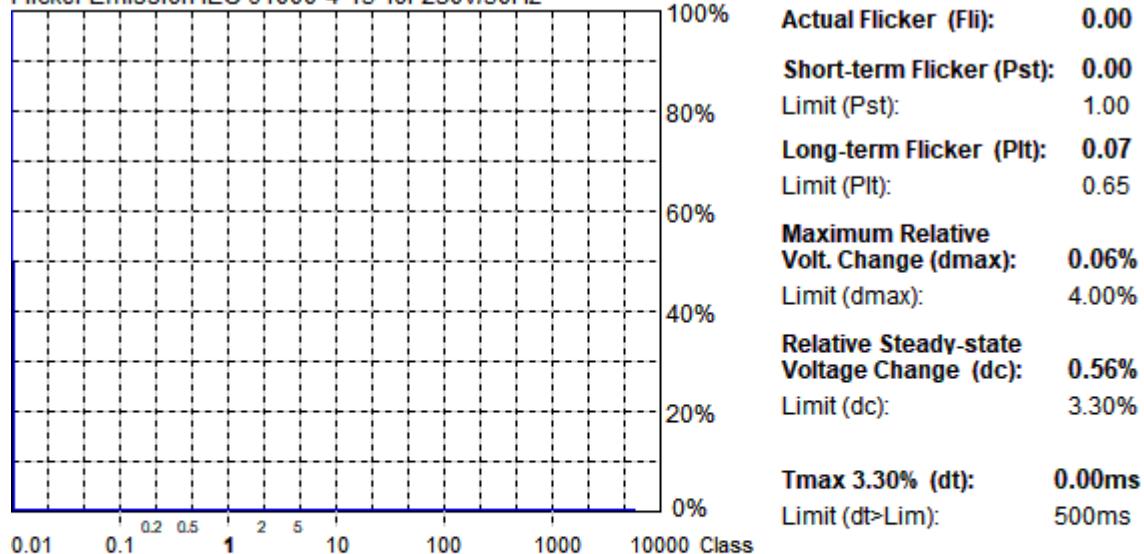

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3

2019/9/29 9:16:41 harmonic.hsu

Urms = 226.2 V P = 3.657 W
 Irms = 0.084 A pf = 0.193

Range: 1 A
 V-nom: 230 V
 TestTime: 10 min (100%)

1909108

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 226.2V Freq = 50.013 Range: 1 A

Irms = 0.084A Ipk = 0.382A cf = 4.552

P = 3.657W S = 19.00VA pf = 0.193

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : L: 0.24ohm +j0.15ohm N: 0.16ohm +j0.10ohm

Limits : Plt : 0.65 Pst : 1.00

dmax : 4.00 % dc : 3.30 %

dtLim: 3.30 % dt>Lim: 500ms


Test completed, Result: PASSED

Vane Xia

Test engineer: _____



7.4. Test Photographs

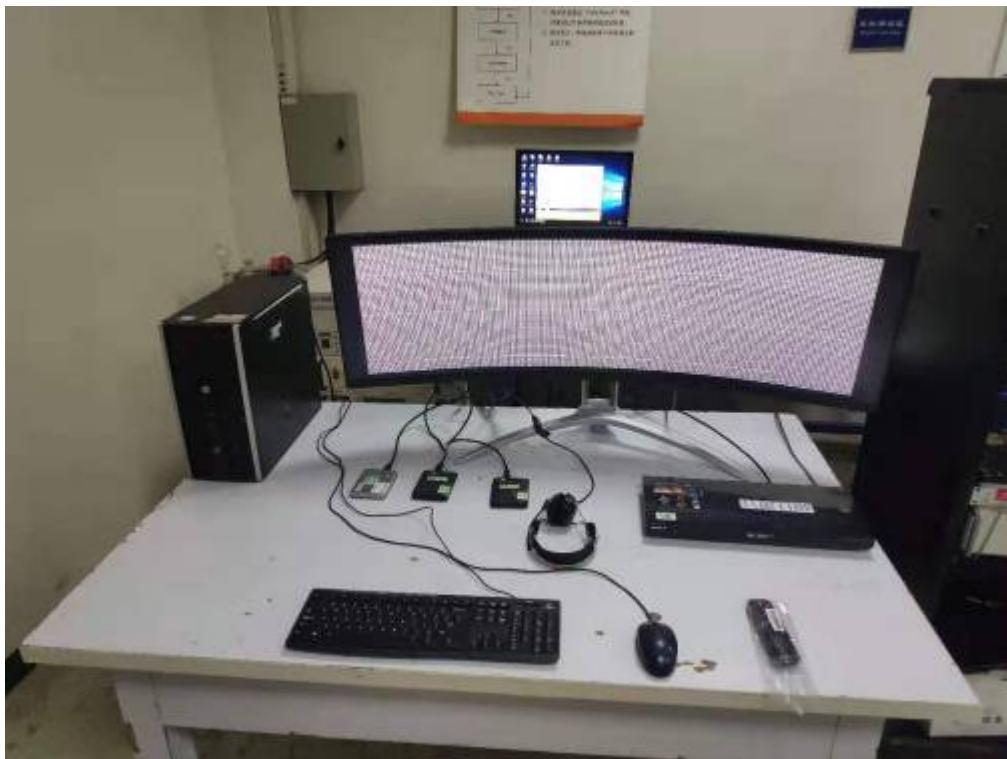

Default mode






8. Electrostatic Discharge Immunity Test

8.1. Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 KPa (860 mbar) to 106 KPa (1060 mbar).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with both air discharge and contact discharge. On reselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On reselected points at least 25 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
 - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.



8.2. Test Setup for Tests Performed in Laboratory

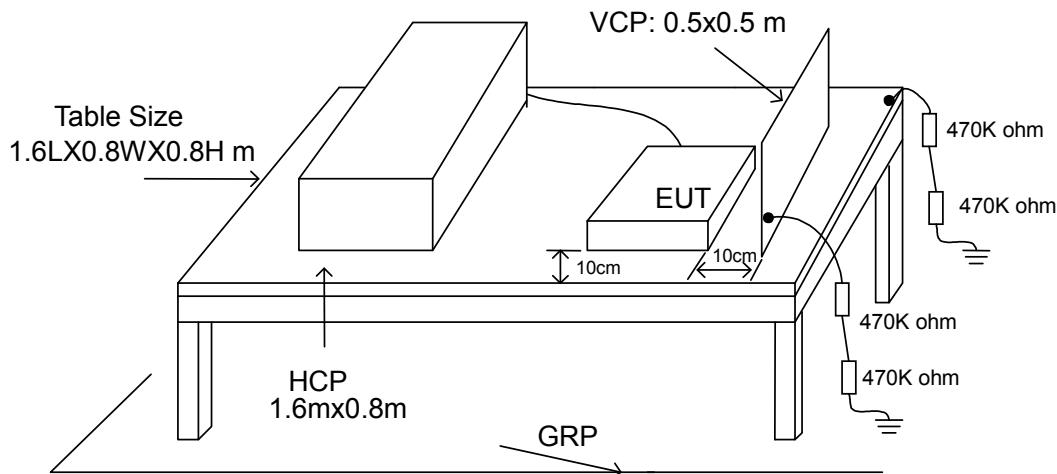

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner :

- Contact Discharge to the conductive surfaces and to coupling plane;
- Air Discharge at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the Cerpass Technology Corporation., we provided 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 2.5 m x 2.5 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resister located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.



8.3. Test Severity Levels

Contact Discharge		Air Discharge	
Level	Test Voltage (KV) of Contact discharge	Level	Test Voltage (KV) of Air Discharge
1	±2	1	±2
2	±4	2	±4
3	±6	3	±8
4	±8	4	±15
X	Specified	X	Specified

Remark: "X" is an open level.

8.4. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
ESD Simulator	EM Test	Dito	P1645186902	2019.08.26	2020.08.25
Tonometer	shanghaifengyun	DYM3	3251	2018.12.07	2019.12.06
Dehumidifier	ZEDO	ZD-220LB	CEP-TH-01	N/A	N/A
Humidifier	YADU	YZ-DS251C	CEP-TH-02	N/A	N/A
Temperature/Humidity Meter	feiyan	N/A	102	2019.08.26	2020.08.25
ESD Simulator	NoiseKen	ESS-B3011A	AEC00315-00 C-0A	2018.12.07	2019.12.06



8.5. Test Result and Data

Basic Standard : EN 61000-4-2
 Final Test Result : PASS
 Model No. : **493*****
 Pass performance criteria : B
 Test Voltage : $\pm 2 / \pm 4 / \pm 8$ kV for air discharge,
 : $\pm 2 / \pm 4$ kV for contact discharge
 Temperature : 20 °C
 Relative Humidity : 49 %
 Atmospheric Pressure : 100 kPa
 Test Date : Oct. 09, 2019


Mode 1

	Contact Discharge								Air Discharge							
	<u>25</u> times / each								<u>10</u> times / each							
Voltage	2 Kv		4 Kv		6 Kv		8 Kv		2 Kv		4 Kv		8 Kv		10 Kv	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
Screw	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
Case	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
Panel	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
HDMI Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
USB Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
DP Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
TYPE-C Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
Audio Port	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test engineer: Vane Xia



8.6. Test Photographs

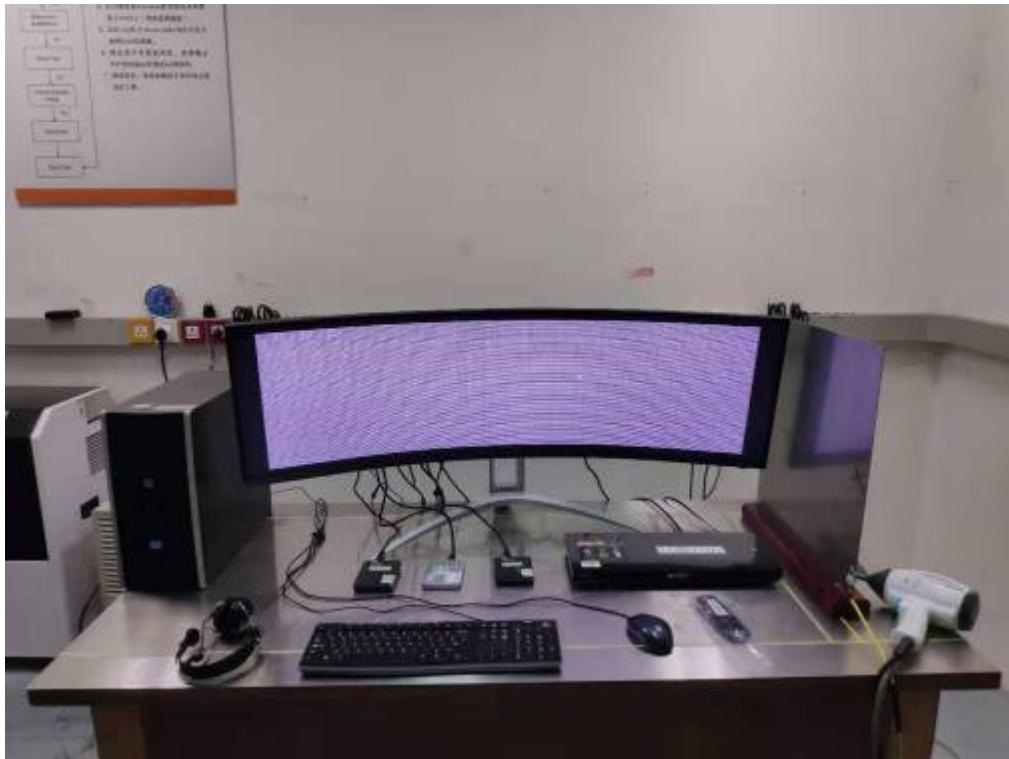



9. Radio Frequency electromagnetic field immunity test

9.1. Test Procedure

- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The antenna which is enabling the complete frequency range of 80-1000 MHz is placed 3m away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- c. The test is normally performed with the antenna facing the most sensitive side of the EUT. The polarization of the field generated by the bucolical antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
- d. At each of the above conditions, the frequency range is swept 80-1000 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of 1.5×10^{-3} decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.


9.2. Test Severity Levels

Frequency Band : 80-1000 MHz	
Level	Test field strength (V/m)
1	1
2	3
3	10
X	Specified

Remark: "X" is an open class.



9.3. TEST SETUP

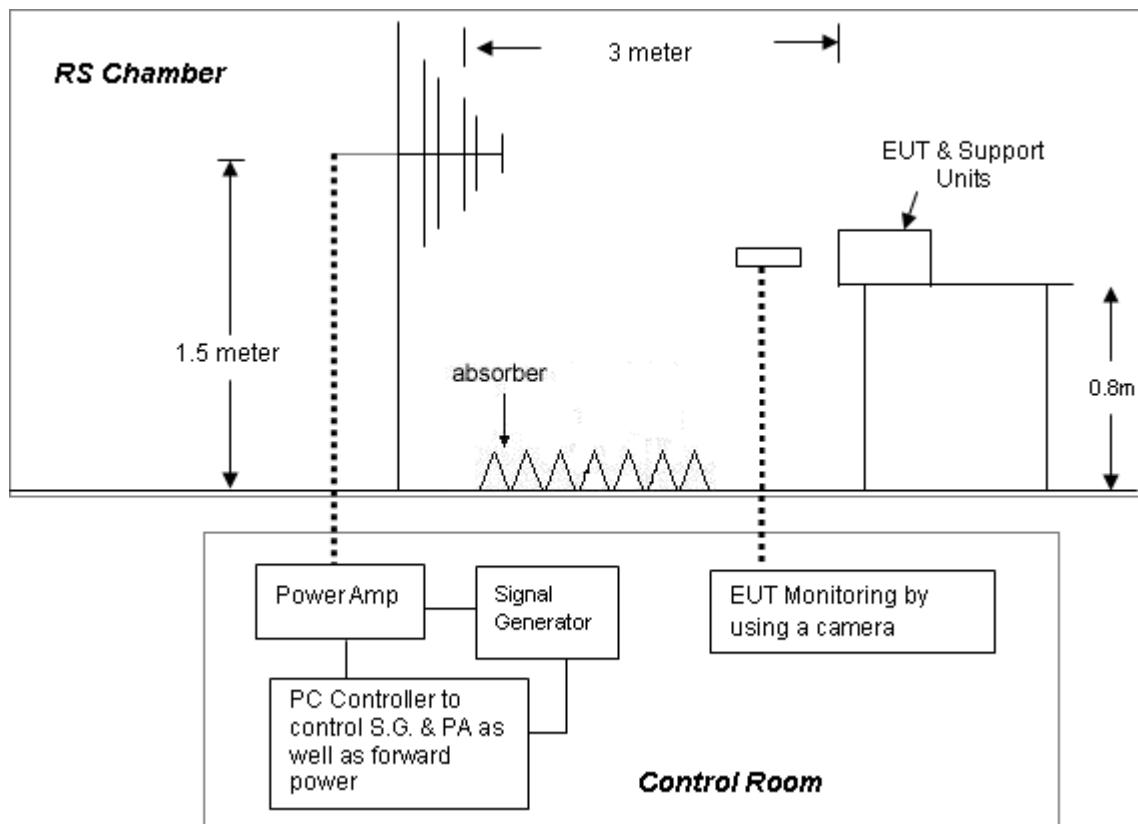

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:**TABLETOP EQUIPMENT**

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.



9.4. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Signal Generator	R&S	SML03	103287	2019.03.11	2020.03.10
Signal Generator	R&S	SMR30	100049	2019.03.11	2020.03.10
Power Sensor	R&S	NR P-Z91	100383	2019.03.11	2020.03.10
Power Meter	R&S	NRP	101206	2019.03.11	2020.03.10
Power Amplifier	BONN	BLWA0830-16 0/100/40D	076659	2019.03.11	2020.03.10
Power Amplifier	MILMEGA	AS1860-30	10040456	2019.03.11	2020.03.10
Istropic Electric Field Probe	EST.LINDGRE N	HI-6105	137445	2018.12.07	2019.12.06
EMS Antenna	R&S	HL046E	100028	N/A	N/A
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120 E	475	2019.08.26	2020.08.25
Laser Data Interface	ETS.LINDGRE N	HI-6113	130208	2019.08.26	2020.08.25
AUDIO ANALYZER	R&S	UPV	103339	2018.12.04	2019.12.03
Low Noise Microphone	Brueel&Kj	4955	3094785	2019.08.26	2020.08.25
Microphone Conditioning Amplifier	Brueel&Kj	2690-0F2	3008833	2019.08.26	2020.08.25
Sound Calibrator	Brueel&Kj	4231	3020682	2018.12.07	2019.12.06
Mouth Simulator	Brueel&Kj	4227	3131288	2019.08.26	2020.08.25
Temperature/Humidity Meter	feiyan	N/A	101	2019.08.26	2020.08.25
EMC-32	Rohde&Schwarz	Ver 6.10.0	N/A	N/A	N/A



9.5. Test Result and Data

Basic Standard : EN 61000-4-3
Final Test Result : PASS
Model No. : **493*****
Pass performance criteria : A
Frequency Range : 80~1000 MHz
Temperature : 19°C
Relative Humidity : 50%
Atmospheric Pressure : 100 kPa
Test Date : Oct. 09,2019

Mode 1

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Vertical	Front	3 V/m	A
80~1000	Vertical	Rear	3 V/m	A
80~1000	Vertical	Left	3 V/m	A
80~1000	Vertical	Right	3 V/m	A
80~1000	Horizontal	Front	3 V/m	A
80~1000	Horizontal	Rear	3 V/m	A
80~1000	Horizontal	Left	3 V/m	A
80~1000	Horizontal	Right	3 V/m	A

Test engineer: _____



9.6. Test Photographs





10. Electrical Fast Transient/ Burst Immunity Test

10.1. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 45% to 75%;
 - Atmospheric pressure: 86 Kpa (860 mbar) to 106 Kpa (1060 mbar).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. Test on Power Line:
 - The EFT/B-generator was located on the GRP.
For floor standing equipment 1,0 m
For table top equipment 0,5 m
 - The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.
- e. Test on Communication Lines
 - The coupling clamp is composed of a clamp unit for housing the cable (length more than 3 m), and was placed on the GRP.
 - The coupling clamp provides the ability of coupling the fast transient/bursts to the cable under test.
- f. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
 - Normal performance within the specification limits.
 - Temporary degradation or loss of function or performance which is self-recoverable.
 - Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - Degradation or loss of function which is not recoverable due to damage of equipment (components).

10.2. Test Severity Levels


The following test severity levels are recommended for the fast transient/burst test :

Open circuit output test voltage $\pm 10\%$		
Level	On Power Supply	On I/O signal, data and control line
1	0.5 KV	0.25 KV
2	1.0 KV	0.50 KV
3	2.0 KV	1.00 KV
4	4.0 KV	2.00 KV
X	Specified	Specified

Remark : " X " is an open level. The level is subject to negotiation between the user and manufacturer or is specified by the manufacturer.



10.3. TEST SETUP

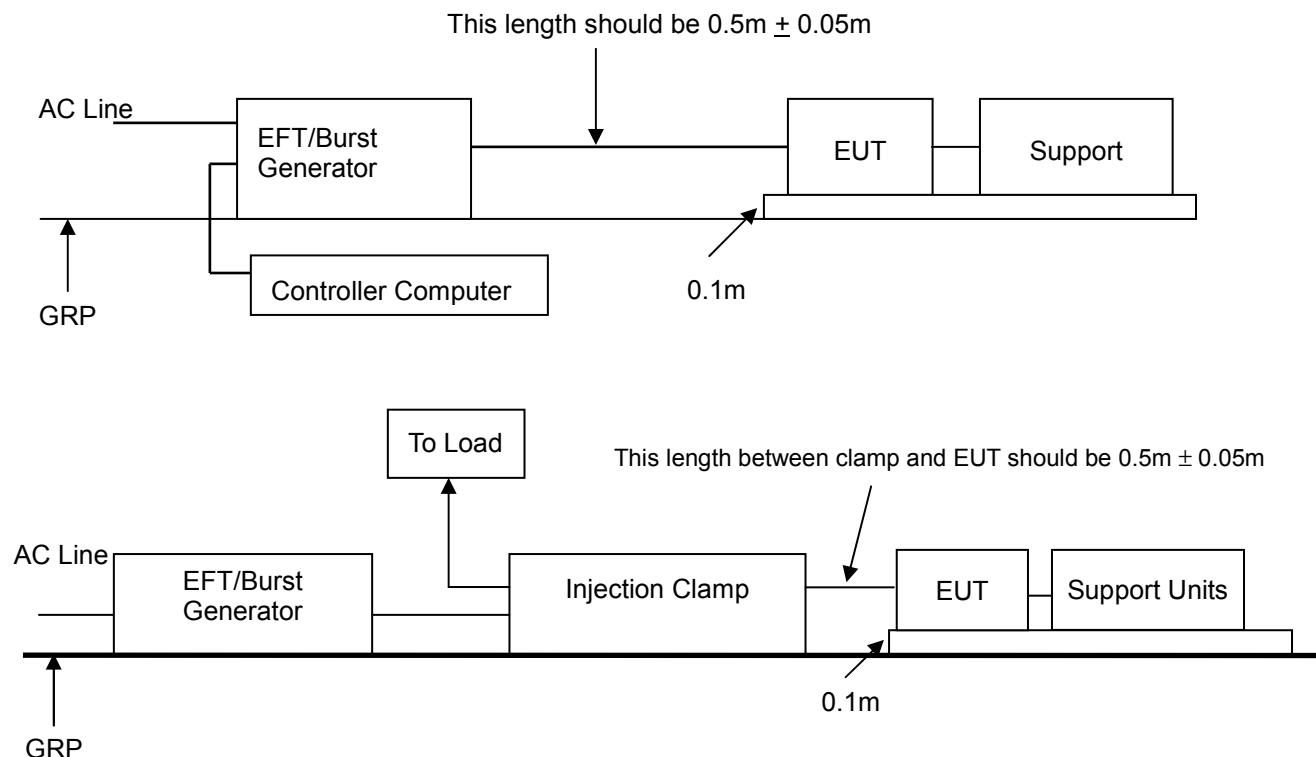

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The configuration consisted of a wooden table (0.1m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

10.4. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2019.08.22	2020.08.21
CDN	EMCPARTNER	CDN2000-06-32	121	2019.03.11	2020.03.10
Coupling clamp	EMCPARTNER	CN-EFT1000	547	2019.03.11	2020.03.10
Temperature/ Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14



10.5. Test Result and Data

Basic Standard : EN 61000-4-4
 Final Test Result : PASS
 Model No. : **493*****
 Pass performance criteria : B
 Test Voltage : On Power Supply -- ±1.0 kV
 : On I/O signal, data and control line -- ±0.5 kV
 Temperature : 18°C
 Relative Humidity : 47 %
 Atmospheric Pressure : 100 kPa
 Test Date : Oct. 09,2019

Mode 1

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
Power Line	+	-	+	-	
	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
	PE	---	---	A	A
	L-PE	---	---	A	A
	N-PE	---	---	A	A
L-N-PE		---	---	A	A

Test engineer: _____



10.6. Test Photographs





11. Surge Immunity Test

11.1. Test Procedure

a. Climatic conditions

The climatic conditions shall comply with the following requirements :

- ambient temperature : 15 °C to 35 °C
- relative humidity : 10 % to 75 %
- atmospheric pressure : 86 kPa to 106 kPa (860 mbar to 1060 mbar)

b. Electromagnetic conditions

the electromagnetic environment of the laboratory shall not influence the test results.

c. The test shall be performed according the test plan that shall specify the test set-up with

- generator and other equipment utilized;
- test level (voltage/current);
- generator source impedance;
- internal or external generator trigger;
- number of tests : at least five positive and five negative at the selected points;
- repetition rate : maximum 1/min.
- inputs and outputs to be tested;
- representative operating conditions of the EUT;
- sequence of application of the surge to the circuit;
- phase angle in the case of AC. Power supply;
- actual installation conditions, for example :

AC : neutral earthed,

DC : (+) or (-) earthed to simulated the actual earthing conditions.

d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the AC. Voltage wave (positive and negative).

e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.

f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.

g. All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage breakdown level (let-through level) of the primary protection.

h. If the actual operating signal sources are not available, that may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to a test plan.

i. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test previously unstressed equipment shall be used to the protection devices shall be replaced.


11.2. Test Severity Level

Level	Open-circuit test voltage, $\pm 10\%$, KV
1	0.5
2	1.0
3	2.0
4	4.0
X	Specified

NOTE: "X" is an open class. This level can be specified in the product specification.



11.3. TEST SETUP

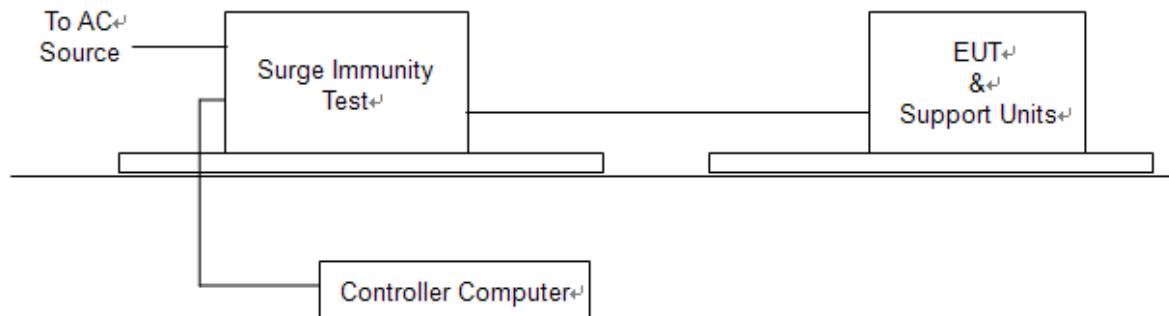

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

11.4. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2019.08.22	2020.08.21
CDN	EMCPARTNER	CDN-UTP8	021	2019.03.11	2020.03.10
CDN	EMCPARTNER	CDN2000-06-32	121	2019.03.11	2020.03.10
TRANSIENT	TESEQ	NSG 3060	1830	2018.12.04	2019.12.03
CDN	TESEQ	CDN 3061	1575	2018.12.04	2019.12.03
CDN	TESEQ	CNV508T5	P 1546167499	2018.12.04	2019.12.03
CDN	TESEQ	CDN HSS-2	41020	2018.12.04	2019.12.03
Temperature/ Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14



11.5. Test Result and Data

Basic Standard : EN 61000-4-5
Final Test Result : PASS
Model No. : **493*****
Pass performance criteria : B
Test Voltage : Input AC Power Port -- ±0.5/1.0 kV for Line to Line
Relative Humidity : ±0.5/1.0/2.0 kV for Line to Ground
Temperature : 18°C
Atmospheric Pressure : 100 kPa
Test Date : Oct.09,2019

Mode 1


Power Port

Waveform : 1.2/50μs(8/20μs)			Repetition rate : 60 sec		Time : 20 time/each condition	
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		-	A	A	A	A
0.5/1.0/2.0kV	L-PE	+	A	A	A	A
		-	A	A	A	A
	N-PE	+	A	A	A	A
		-	A	A	A	A

Test engineer: Vane Xia



11.6. Test Photographs

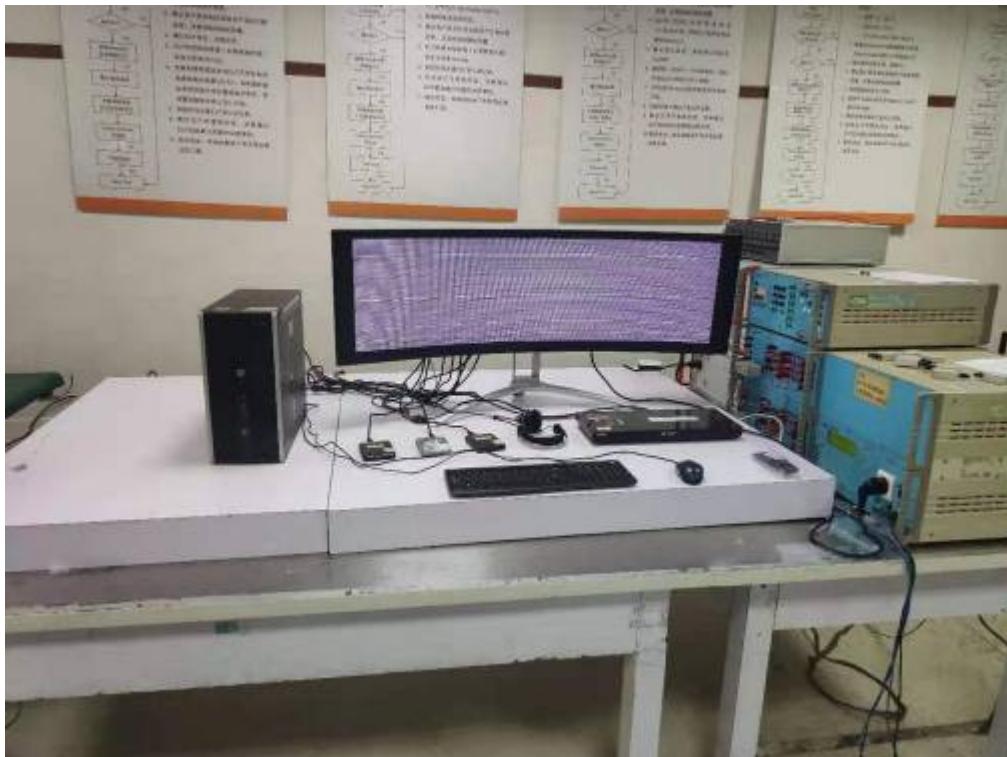



12. Conduction Disturbances induced by Radio-Frequency Fields

12.1. Test Procedure

- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a sell shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 KHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1KHz sign wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency (ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. An alternative test procedure may be adopted, wherein the frequency range is swept incrementally, with a step size not exceeding 4% of the start ad thereafter 4% of the preceding frequency value. The test level should be at least twice the value of the specified test level.
- g. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- h. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- i. The use of special exercising programs is recommended.
- j. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- k. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.


12.2. Test Severity Levels

Level	Voltage Level (e.m.f.)
1	1 V
2	3 V
3	10 V
x	Specified

NOTE – x is an open class. This level can be specified in the product specification.



12.3. TEST SETUP

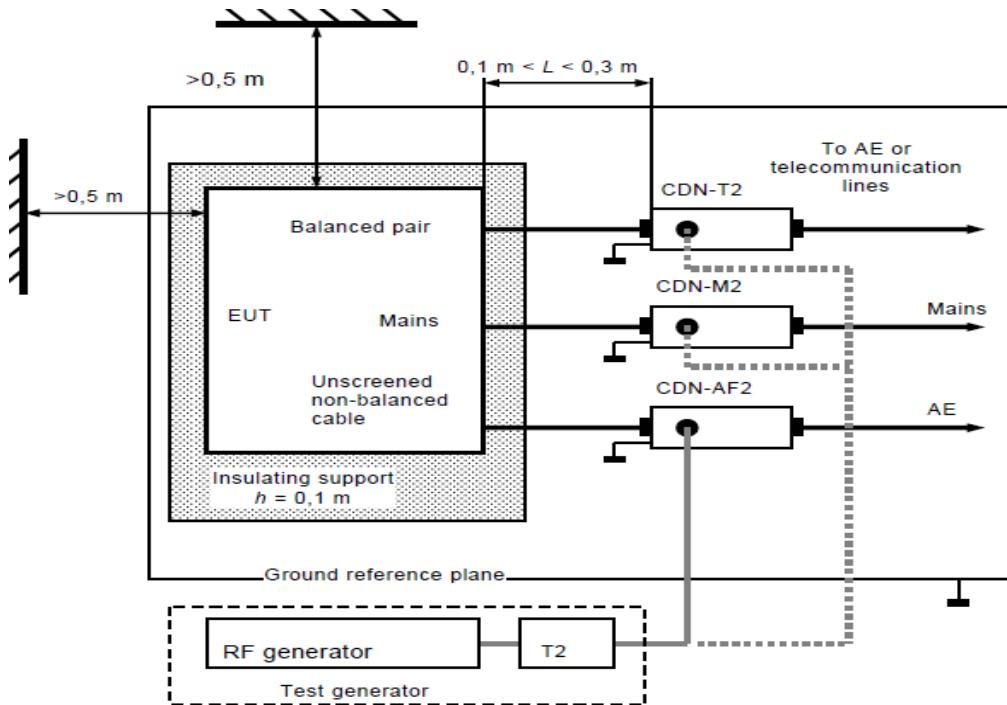

- Note:**
1. The EUT is setup 0.1m above Ground Reference Plane
 2. The CDNs and / or EM clamp used for real test depends on ports and cables configuration of EUT.
 3. For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



12.4. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Conducted immunity test system	FRANKONIA	CIT-10/75	102D1294	2019.03.23	2020.03.22
EM Injection clamp	FCC	F-203I-23MM	536	2019.03.11	2020.03.10
CDN	FCC	CDN-M5/32	A3013024	2019.03.11	2020.03.10
CDN	TESEQ	CDN T8-10	43767	2019.08.22	2020.08.21
CDN	TESEQ	CDN T2-10	43762	2019.08.22	2020.08.21
CDN	TESEQ	CDN T4-10	43754	2019.08.22	2020.08.21
CDN	TESEQ	CDN M016	44025	2019.08.22	2020.08.21
6 dB Attenuator	FRANKONIA	N/A	N/A	2019.03.11	2020.03.10
RF POWER METER	FRANKONIA	PMS-1084	132A1099	2019.08.22	2020.08.21
Dual Directional Coupler	FRANKONIA	C5091-12	108207	2019.08.22	2020.08.21
AUDIO ANALYZER	R&S	UPV	103339	2018.12.04	2019.12.03
Low Noise Microphone	Brue&Kj	4955	3094785	2019.08.26	2020.08.25
Microphone Conditioning Amplifier	Brue&Kj	2690-0F2	3008833	2019.08.26	2020.08.25
Sound Calibrator	Brue&Kj	4231	3020682	2018.12.07	2019.12.06
Mouth Simulator	Brue&Kj	4227	3131288	2019.08.26	2020.08.25
Temperature/Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14
EN61000-4-6	Hubert GmbH	Ver 2.21	N/A	N/A	N/A



12.5. Test Result and Data

Basic Standard : EN 61000-4-6
Final Test Result : PASS
Model No. : **493*****
Pass performance criteria : A
 CDN-(M2+M3) for AC power ports
Coupling mode : CDN-T4 for signal ports
 EM-Clamp for signal ports
Temperature : 18°C
Relative Humidity : 47 %
Atmospheric Pressure : 100 kPa
Test Date : Oct. 09,2019

Mode 1

Frequency : 0.15~80MHz, Modulation : AM 80%, 1KHz sine wave, Dwell time:3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M3)	3	A

Test engineer: _____

Vane Xia




12.6. Test Photographs





13. Power Frequency Magnetic Field Immunity Test

13.1. Test Setup

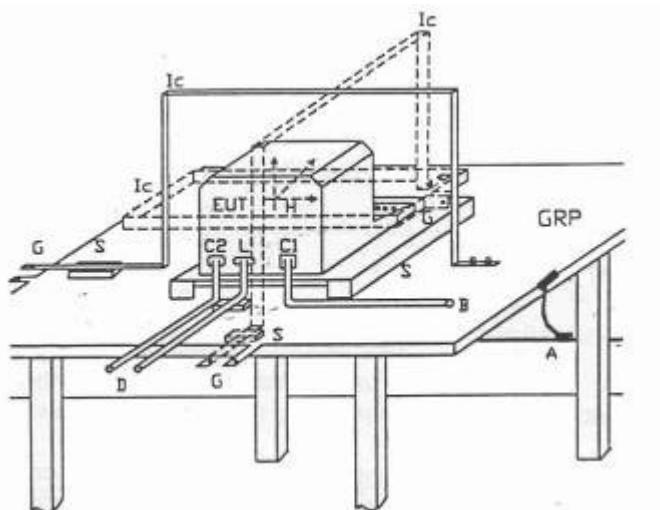

GPR	: Ground plane	C1	: Power supply circuit
A	: Safety earth	C2	: Signal circuit
S	: Insulating support	L	: Communication line
EUT	: Equipment under test	B	: To power supply source
Lc	: Induction coil	D	: To signal source, simulator
E	: Earth terminal	G	: To the test generator

13.2. Test Severity Levels

Level	Magnetic field strength (A/m)
1	1
2	3
3	10
4	30
5	100
X ¹⁾	special

NOTE 1 "X" is an open level. This level can be given in the product specification.

13.3. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2019.08.22	2020.08.21
H-Filed-Loop	EMCPARTNER	MF1000-1	144	2019.03.23	2020.03.22
Temperature/ Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14



13.4. Test Result and Data

Basic Standard : EN 61000-4-8
Final Test Result : PASS
Model No. : **493*****
Pass performance criteria : A
Temperature : 18°C
Relative Humidity : 47 %
Atmospheric Pressure : 100 kPa
Test Date : Oct. 09,2019

Mode 1

Power Frequency Magnetic Field : <u>50/60 Hz</u> , <u>1 A/m</u>		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Power Frequency Magnetic Field : <u>60 Hz</u> , <u>1 A/m</u>		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test engineer: _____



13.5. Test Photographs






14. Voltage Dips and Voltage Interruptions Immunity Test Setup

14.1. Test Conditions

1. Source voltage and frequency : AC 100/230/240V / 50Hz, Single phase.
2. Test of interval : 10 sec.
3. Level and duration : Sequence of 3 dips/interrupts.
4. Voltage rise (and fall) time : 1 ~ 5 μ s.
5. Test severity :

Voltage dips and Interrupt reduction (%)	Test Duration (period)
>95%	250
30%	25
>95%	0.5

14.2. TEST SETUP

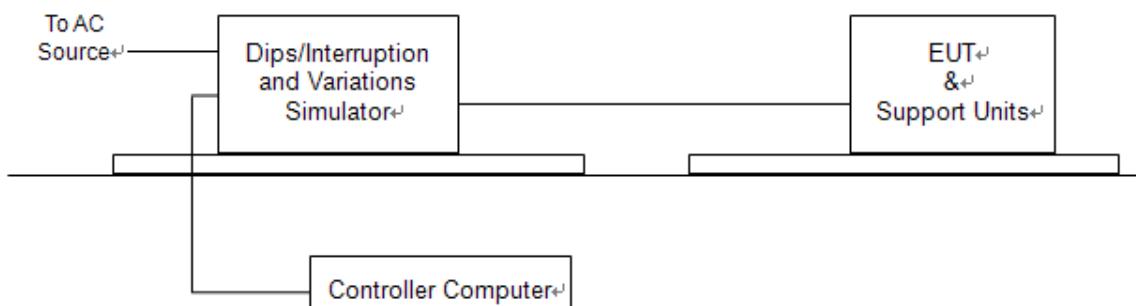

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

14.3. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2019.08.22	2020.08.21
Temperature/ Humidity Meter	GEMIlead	STH200A	N/A	2019.04.15	2020.04.14



14.4. Test Result and Data

Basic Standard : EN 61000-4-11
 Final Test Result : PASS
 Model No. : **493*****
 Pass performance Criteria : C for voltage interruption, B for voltage dips
 Temperature : 18°C
 Relative Humidity : 47 %
 Atmospheric Pressure : 100 kPa
 Test Date : Oct.09,2019

Mode 1

Test Mode :								
Voltage(UT): AC 230 V/240V 50 Hz Interval(s) : 10s Times : 3								
Test mod	Test level UT %	Durations (period / ms)	Phase / Result					
			0	45	90	135	180	225
Voltage interruptions	>95%	250	C	C	C	C	C	C
Voltage dips	30%	25	B	B	B	B	B	B
	>95%	0.5	B	B	B	B	B	B

Test Mode :								
Voltage(UT): AC 100 V 50 Hz Interval(s) : 10s Times : 3								
Test mod	Test level UT %	Durations (period / ms)	Phase / Result					
			0	45	90	135	180	225
Voltage interruptions	>95%	250	C	C	C	C	C	C
Voltage dips	30%	25	B	B	B	B	B	B
	>95%	0.5	B	B	B	B	B	B

Test engineer: _____



14.5. Test Photographs

