


Find your product and get support

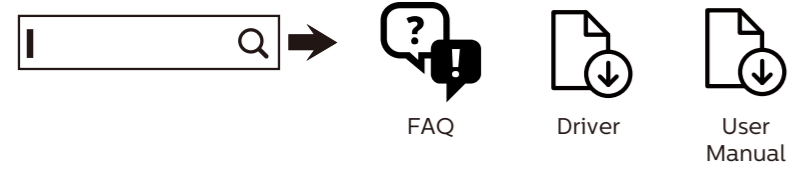

**Europe**  
<https://eu.aoc.com/en/support>

**Россия**  
<https://eu.aoc.com/ru/support>

**Australia**  
[https://au.aoc.com/user\\_manual](https://au.aoc.com/user_manual)

**Hong Kong S.A.R.**  
[https://hk.aoc.com/user\\_manual](https://hk.aoc.com/user_manual)

**中國台灣**  
[https://tw.aoc.com/user\\_manual](https://tw.aoc.com/user_manual)

**Indonesia**  
[https://id.aoc.com/user\\_manual](https://id.aoc.com/user_manual)

**日本**  
[https://jp.aoc.com/user\\_manual](https://jp.aoc.com/user_manual)

**한국**  
[https://kr.aoc.com/user\\_manual](https://kr.aoc.com/user_manual)

**Malaysia**  
[https://my.aoc.com/user\\_manual](https://my.aoc.com/user_manual)

**Myanmar**  
[https://mm.aoc.com/user\\_manual](https://mm.aoc.com/user_manual)

**New Zealand**  
[https://nz.aoc.com/user\\_manual](https://nz.aoc.com/user_manual)

**Philippines**  
[https://ph.aoc.com/user\\_manual](https://ph.aoc.com/user_manual)

**Singapore**  
[https://sg.aoc.com/user\\_manual](https://sg.aoc.com/user_manual)

**ประเทศไทย**  
[https://th.aoc.com/user\\_manual](https://th.aoc.com/user_manual)

**Việt Nam**  
[https://vn.aoc.com/user\\_manual](https://vn.aoc.com/user_manual)

**Middle East**  
[https://me.aoc.com/user\\_manual](https://me.aoc.com/user_manual)

**South Africa**  
[https://za.aoc.com/user\\_manual](https://za.aoc.com/user_manual)

**Brasil**  
<https://aoc.portaltpv.com.br/>

**India**  
[https://www.aocindia.com/download\\_manuals.php](https://www.aocindia.com/download_manuals.php)

**US/Canada**  
<https://us.aoc.com/en-US/downloads>




**AOC**  
GAMING





Quick Start  
24G2ZE

www.aoc.com  
©2023 AOC.All Rights Reserved


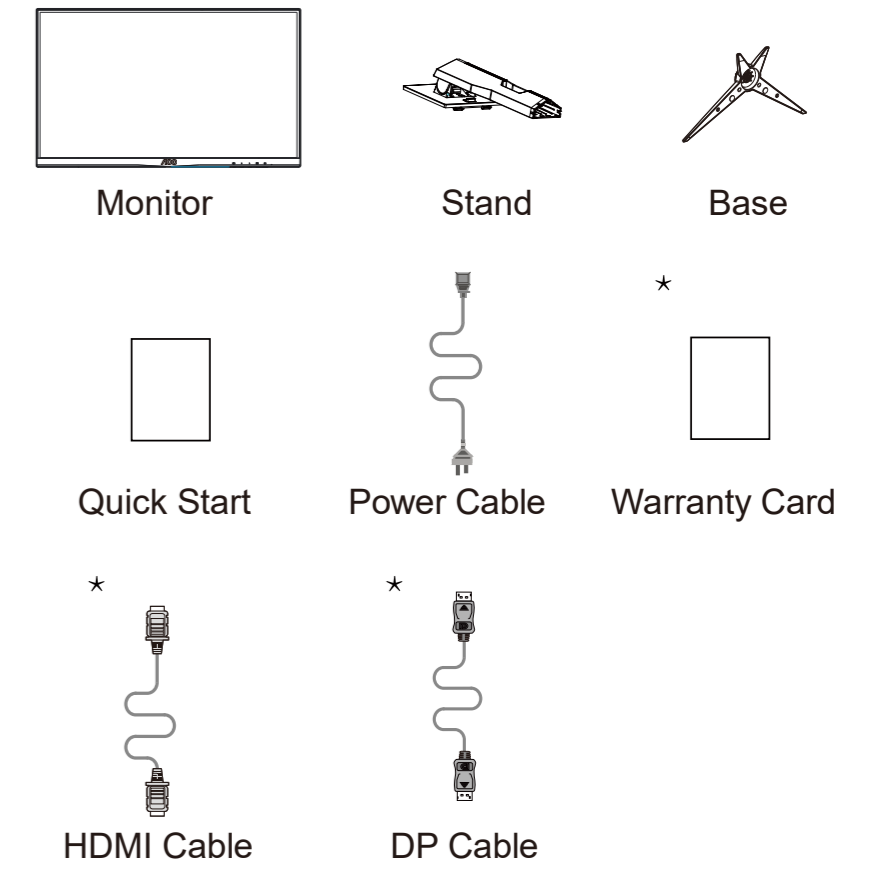


\*Different according to countries/regions  
Display design may differ from that illustrated


1

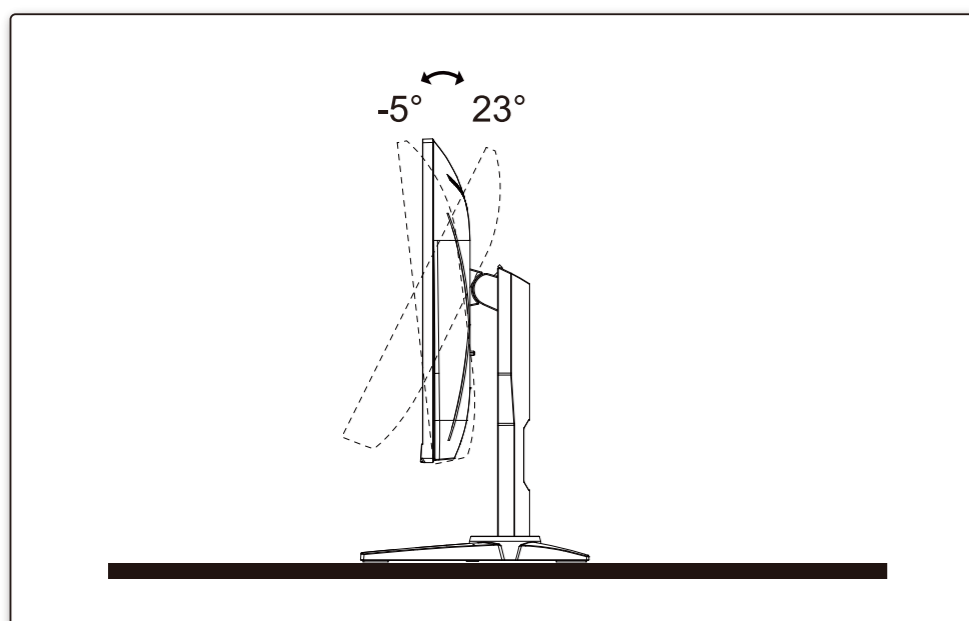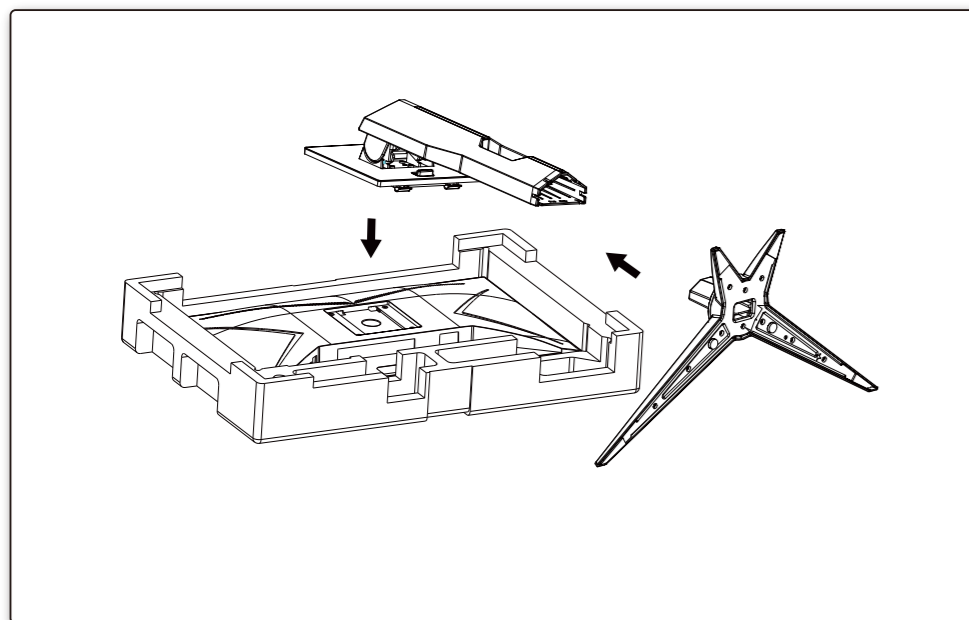

2

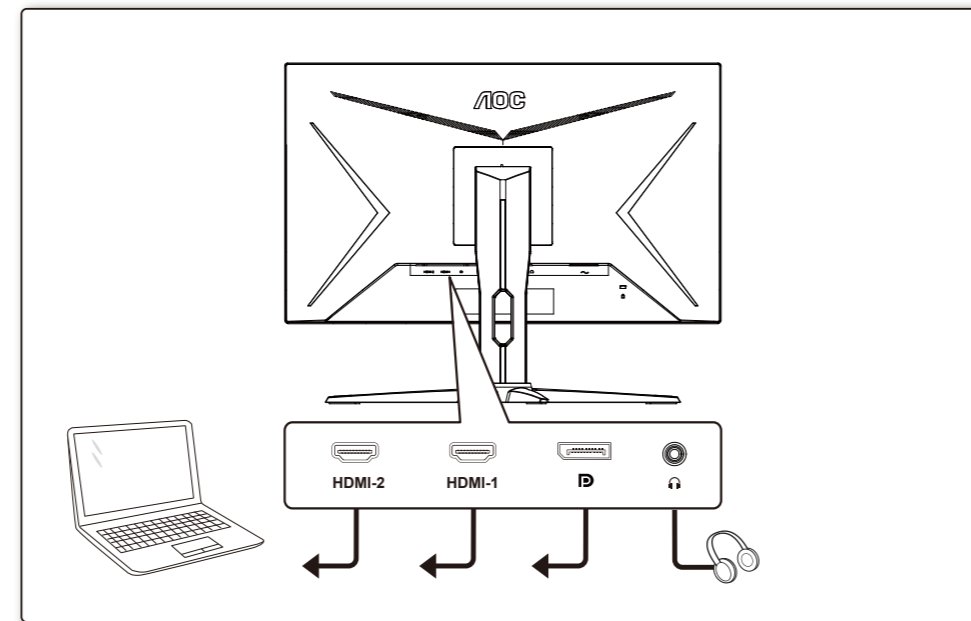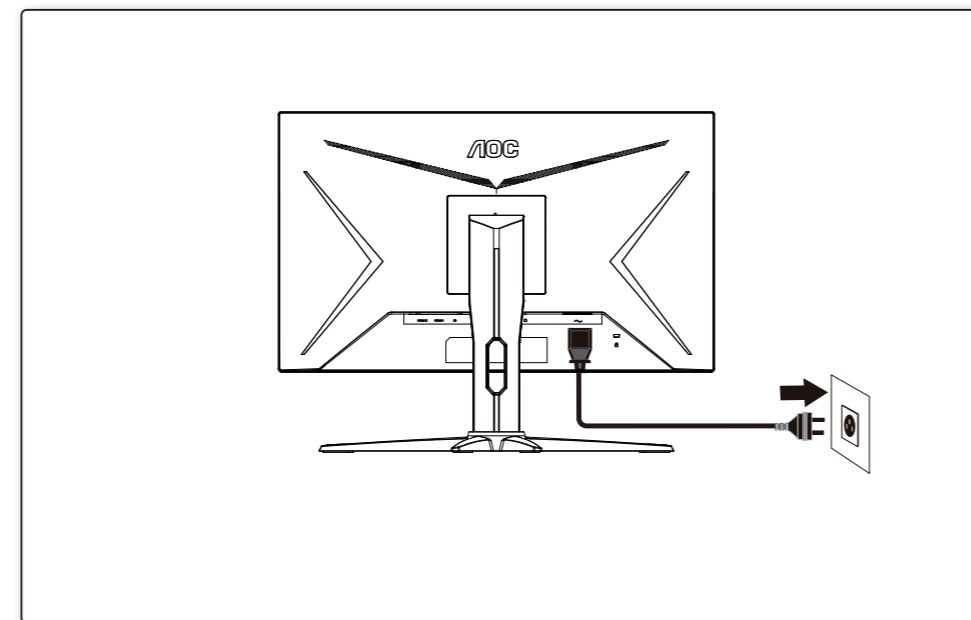

3

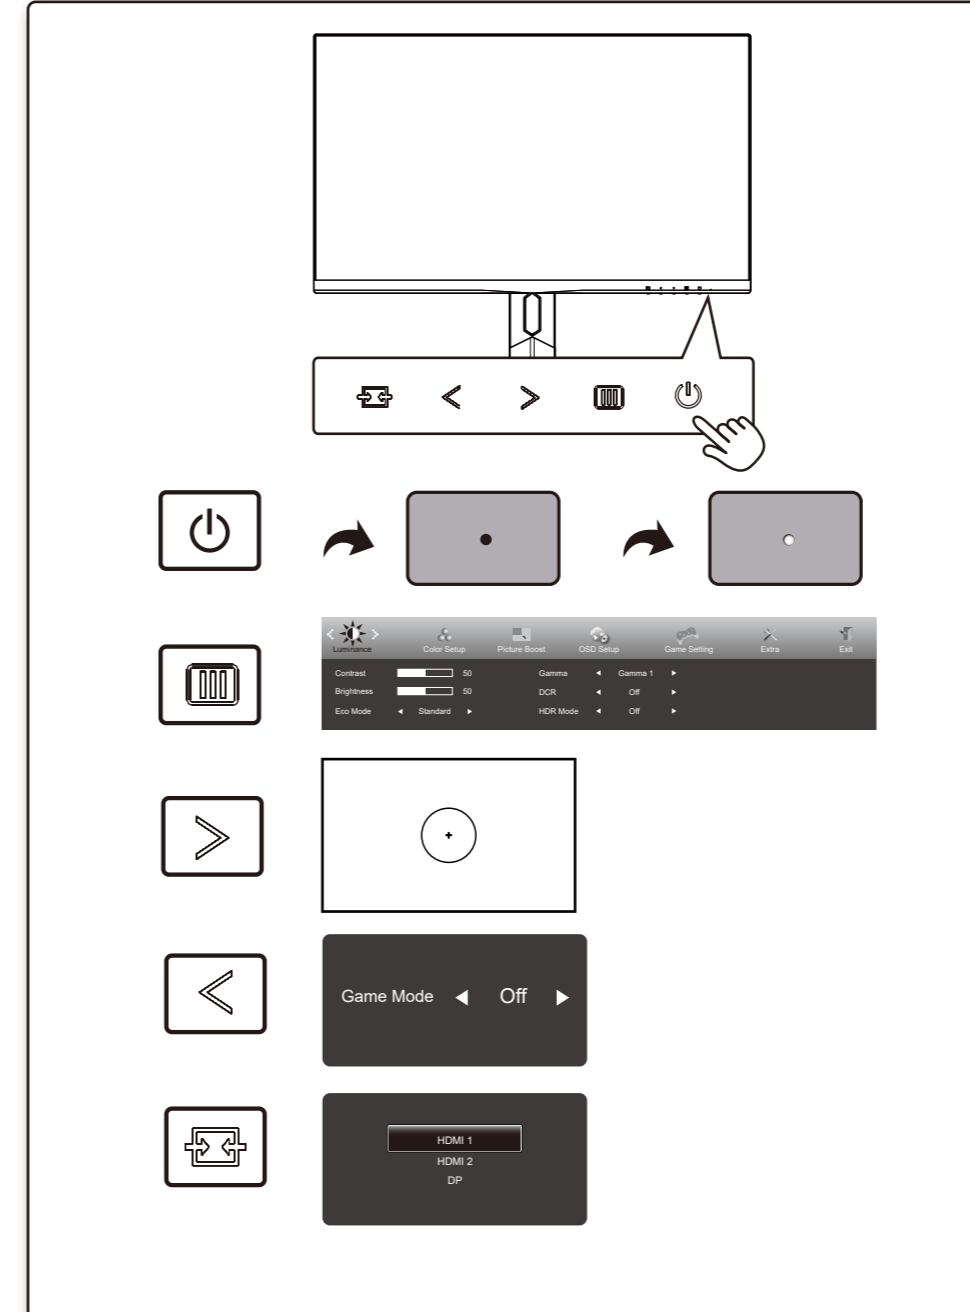

4

General Specification

Panel	Model name	24G2ZE		
	Driving system	TFT Color LCD		
	Viewable Image Size	60.5cm diagonal(23.8" Wide Screen)		
	Pixel pitch	0.2745mm(H) x 0.2745mm(V)		
Others	Horizontal scan range	30k-280kHz		
	Horizontal scan Size(Maximum)	527.04mm		
	Vertical scan range	48-240Hz		
	Vertical Scan Size(Maximum)	296.46mm		
	Max resolution	1920x1080@240Hz		
	Plug & Play	VESA DDC2B/CI		
	Power Source	100-240V~, 50/60Hz, 1.5A		
	Power Consumption	Typical(default brightness and contrast)	25W	
		Max. (brightness = 100, contrast = 100)	≤ 46W	
		Standby mode	≤ 0.3W	
Dimensions(with stand)	539.2x439.8x227.4mm(WxHxD)			
Net Weight	4.5kg			
Physical Characteristics	Connector Type	HDMIx2/DP/Earphone		
	Signal Cable Type	Detachable		
Environmental	Temperature	Operating	0°C ~ 40°C	
		Non-Operating	-25°C ~ 55°C	
	Humidity	Operating	10% ~ 85% (non-condensing)	
		Non-Operating	5% ~ 93% (non-condensing)	
	Altitude	Operating	0 ~ 5000 m (0 ~ 16404ft )	
		Non-Operating	0 ~ 12192m (0 ~ 40000ft )	