



EMC TEST REPORT

Authorized under Declaration of Conformity

According to

EN 55022 : 2010 (Class B)	EN 55024 : 2010
EN61000-3-2:2006+A1:2009+A2:2009	IEC 61000-4-2 : 2008
EN 61000-3-3 : 2008	IEC 61000-4-3 : 2006+A1:2007+A2:2010
CISPR 22 : 2008	IEC 61000-4-4 : 2012
AS/NZS CISPR 22 : 2009	IEC 61000-4-5 : 2005
	IEC 61000-4-6 : 2008
	IEC 61000-4-8 : 2009
	IEC 61000-4-11 : 2004

Applicant	: TPV Electronics (Fujian) Co., Ltd.
Address	: Shangzheng, Yuanhong Road, Fuqing City, Fujian Province, P.R.China
Equipment	: LCD Monitor
Model No.	: 238LM00001;I2470***

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **CerpPASS Technology(Suzhou) Corp.** the test report shall not be reproduced except in full.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



Contents

CERTIFICATE OF COMPLIANCE	5
1. Summary of Test Procedure and Test Results	6
2. Immunity Testing Performance Criteria Definition	7
3. Test Configuration of Equipment under Test	8
3.1. Feature of Equipment under Test.....	8
3.2. Test Mode and Test Manner.....	8
3.3. Description of Support Unit	9
3.4. General Information of Test.....	10
3.5. Measurement Uncertainty	10
4. Test of Conducted Emission.....	11
4.1. Test Limit	11
4.2. Test Procedures	12
4.3. Typical Test Setup	12
4.4. Measurement equipment	13
4.5. Test Data and Result.....	14
4.6. Test Photographs	22
5. Test of Radiated Emission	24
5.1. Test Limit	24
5.2. Test Procedures	25
5.3. Typical test Setup.....	26
5.4. Measurement equipment	27
5.5. Test Result and Data (30MHz ~ 1000MHz)	28
5.6. Test Result and Data (1000MHz ~ 6000MHz)	36
5.7. Test Photographs (30MHz ~ 1000MHz).....	44
5.8. Test Photographs (1000MHz ~ 6000MHz).....	46
6. Harmonics Test	48
6.1. Limits Of Harmonics Current Measurement.....	48
6.2. Measurement equipment	48
6.3. Test Result and Data.....	49
6.4. Test Photographs	57
7. Voltage Fluctuations Test	58
7.1. Test Procedure	58
7.2. Measurement equipment	58
7.3. Test Result and Data.....	59
7.4. Test Photographs	67
8. Electrostatic Discharge Immunity Test	68
8.1. Test Procedure	68
8.2. Test Setup for Tests Performed in Laboratory.....	69
8.3. Test Severity Levels	70
8.4. Measurement equipment	70
8.5. Test Result and Data.....	71



- 8.6. Test Photographs 72
- 9. Radio Frequency electromagnetic field immunity test..... 73
 - 9.1. Test Procedure 73
 - 9.2. Test Severity Levels 74
 - 9.3. Measurement equipment 74
 - 9.4. Test Result and Data 75
 - 9.5. Test Photographs 76
- 10. Electrical Fast Transient/ Burst Immunity Test 77
 - 10.1. Test Procedure 77
 - 10.2. Test Severity Levels 78
 - 10.3. Measurement equipment 78
 - 10.4. Test Result and Data 79
 - 10.5. Test Photographs 80
- 11. Surge Immunity Test 81
 - 11.1. Test Procedure 81
 - 11.2. Test Severity Level 82
 - 11.3. Measurement equipment 82
 - 11.4. Test Result and Data 83
 - 11.5. Test Photographs 84
- 12. Conduction Disturbances induced by Radio-Frequency Fields..... 85
 - 12.1. Test Procedure 85
 - 12.2. Test Severity Levels 86
 - 12.3. Measurement equipment 86
 - 12.4. Test Result and Data 87
 - 12.5. Test Photographs 88
- 13. Power Frequency Magnetic Field Immunity Tests 89
 - 13.1. Test Setup 89
 - 13.2. Test Severity Levels 89
 - 13.3. Measurement equipment 89
 - 13.4. Test Result and Data 90
 - 13.5. Test Photographs 91
- 14. Voltage Dips and Voltage Interruptions Immunity Test Setup 92
 - 14.1. Test Conditions 92
 - 14.2. Measurement equipment 92
 - 14.3. Test Result and Data 93
 - 14.4. Test Photographs 94
- 15. Photographs of EUT 95



CERTIFICATE OF COMPLIANCE

According to

EN 55022 : 2010 (Class B)	EN 55024 : 2010
EN61000-3-2:2006+A1:2009+A2:2009	IEC 61000-4-2 : 2008
EN 61000-3-3 : 2008	IEC 61000-4-3 : 2006+A1:2007+A2:2010
CISPR 22 : 2008	IEC 61000-4-4 : 2012
AS/NZS CISPR 22 : 2009	IEC 61000-4-5 : 2005
	IEC 61000-4-6 : 2008
	IEC 61000-4-8 : 2009
	IEC 61000-4-11 : 2004

Applicant : TPV Electronics (Fujian) Co., Ltd.
Address : Shangzheng, Yuanhong Road, Fuqing City, Fujian
Province, P.R.China
Equipment : LCD Monitor
Model No. : 238LM00001;I2470***

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **EUROPEAN COUNCIL DIRECTIVE 2004/108/EC.**

The test was carried out on Jun 24, 2013 at **CerpPASS Technology(Suzhou) Corp.**

Signature

Miro Chueh/ Technical director



1. Summary of Test Procedure and Test Results

Test Item	Normative References	Test Result	Remarks
Conducted Emission	EN 55022:2010	PASS	Meets Class B Limit Minimum passing margin(AV) is -12.12 dB at 3.1540 MHz
Radiated Emission	EN 55022:2010	PASS	Meets Class B Limit Minimum passing margin(QP) is -4.76 dB at 960.3200 MHz
Harmonics	EN61000-3-2:2006+A1:2009 +A2:2009	PASS	Meets the requirements.
Voltage Fluctuations	EN 61000-3-3: 2008	PASS	Meets the requirements.
Electrostatic Discharge Immunity Test (ESD)	IEC 61000-4-2 :2008	PASS	Meets the requirements of performance criterion B
Radio Frequency electromagnetic field immunity test (RS)	IEC 61000-4-3 : 2006+A1:2007+A2:2010	PASS	Meets the requirements of performance criterion A
Electrical Fast Transient/ Burst Immunity Test (EFT)	IEC 61000-4-4 : 2012	PASS	Meets the requirements of performance criterion B
Surge Immunity Test	IEC 61000-4-5 : 2005	PASS	Meets the requirements of performance criterion B
Conduction Disturbances induced by Radio-Frequency Fields	IEC 61000-4-6 : 2008	PASS	Meets the requirements of performance criterion A
Power Frequency Magnetic Field Immunity Test	IEC 61000-4-8 : 2009	PASS	Meets the requirements of performance criterion A
Voltage Dips and Voltage Interruptions Immunity Test	IEC 61000-4-11 : 2004	PASS	Meets the requirements: Voltage Dips: 1) >95% reduction – Performance Criterion B 2) 30% reduction – Performance Criterion C Voltage Interruptions: 1) >95% reduction – Performance Criterion C



2. Immunity Testing Performance Criteria Definition

- A. Normal performance within limits specified by the manufacture, requestor or purchaser;
- B. Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention;
- C. Temporary loss of function or degradation of performance, the correction of which requires operation intervention;
- D. Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.



3. Test Configuration of Equipment under Test

3.1. Feature of Equipment under Test

LCD Monitor	Model No:	238LM00001;I2470*** (The "*" could be any alphanumeric character including blank for marketing differentiation.)
Power Cable	Non-shielding, 1.2m&1.5m&1.8m	

3.2. Test Mode and Test Manner

Test Manner

- During testing, the interface cables and equipment positions were varied according to Europe Standard.
- Running "H" pattern.
- During the test, connect the PC, USB Keyboard, USB Mouse, 3.0HDD, Earphone, IPOD and EUT, make the EUT at the test mode.
- Adjust the EUT, then test.

The pre-test modes

Test Mode 1: Full system (VGA mode 1920*1080@60Hz) for horizontal
 Test Mode 2: Full system (VGA mode 1280*1024@75Hz) for horizontal
 Test Mode 3: Full system (VGA mode 640*480@60Hz) for horizontal
 Test Mode 4: Full system (VGA mode 1920*1080@60Hz) for vertical
 Test Mode 5: Full system (DISPLAY mode 1920*1080@60Hz) for horizontal
 Test Mode 6: Full system (DISPLAY mode 1280*1024@75Hz) for horizontal
 Test Mode 7: Full system (DISPLAY mode 640*480@60Hz) for horizontal
 Test Mode 8: Full system (DISPLAY mode 1920*1080@60Hz) for vertical
 Test Mode 9: Full system (DVI mode 1920*1080@60Hz) for horizontal
 Test Mode 10: Full system (DVI mode 1280*1024@75Hz) for horizontal
 Test Mode 11: Full system (DVI mode 640*480@60Hz) for horizontal
 Test Mode 12: Full system (DVI mode 1920*1080@60Hz) for vertical
 Test Mode 13: Full system (HDMI mode 1920*1080@60Hz) for horizontal
 Test Mode 14: Full system (HDMI mode 1280*1024@75Hz) for horizontal
 Test Mode 15: Full system (HDMI mode 640*480@60Hz) for horizontal
 Test Mode 16: Full system (HDMI mode 1920*1080@60Hz) for vertical
 Test Mode 17: DVD 1080P Mode

The worse case was selected as the final test mode and record in the report

Test Mode 1: Full system (VGA mode 1920*1080@60Hz) for horizontal
 Test Mode 5: Full system (DISPLAY mode 1920*1080@60Hz) for horizontal
 Test Mode 9: Full system (DVI mode 1920*1080@60Hz) for horizontal
 Test Mode 13: Full system (HDMI mode 1920*1080@60Hz) for horizontal



3.3. Description of Support Unit

No.	Device	Manufacturer	Model No.	Description
1	PC	DELL	DCMF	N/A
2	USB Keyboard	DELL	SK-8115	N/A
3	USB Mouse	DELL	G0K02XYK	N/A
4	3.0HDD	WD	WDBPCK5000ABK-PESN	N/A
5	3.0HDD	WD	WDBPCK5000ABK-PESN	N/A
6	Earphone	SALAR	V18	N/A
7	IPOD	APPLE	MA477TA/A	N/A
8	IPOD	APPLE	MA477TA/A	N/A

No.	Cable	Quantity	Description
A	VGA Cable	1	Shielded, 1.2m&1.5m&1.8m, with two ferrites core bonded
B	DVI Cable	1	Shielded, 1.2m&1.5m&1.8m
C	Display Cable	1	Shielded, 1.2m&1.5m&1.8m
D	HDMI Cable	1	Shielded, 1.2m&1.5m&1.8m
E	USB Cable	1	Shielded, 1.8m
F	Audio Cable	1	Shielded, 1.2m&1.5m&1.8m
G	Audio Cable	1	Non-Shielded, 1.8m
H	USB Cable	1	Shielded, 1.8m, with one ferrite core bonded
I	USB Cable	1	Shielded, 1.2m
J	USB Cable	1	Shielded, 0.6m
K	USB Cable	1	Shielded, 0.6m
L	USB Cable	1	Shielded, 1.0m
M	USB Cable	1	Shielded, 1.0m



3.4. General Information of Test

Test Site:	Cerpass Technology (Suzhou) Co.,Ltd
Test Site Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-1945 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz
Frequency Range Investigated :	Conducted Emission Test: from 150kHz to 30 MHz Radiated Emission Test: from 30 MHz to 1,000 MHz Radiated Emission Test: from 1GHz to 6GHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 10 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

LABORATORY ACCREDITATION



3.5. Measurement Uncertainty

Conducted Emission		
The measurement uncertainty is evaluated as ± 2.71 dB.		
Radiated Emission		
(30MHz -1000MHz)	Horizontal	The measurement uncertainty is evaluated as ± 3.59 dB.
	Vertical	The measurement uncertainty is evaluated as ± 3.89 dB
(1GHz-6GHz)	Horizontal	The measurement uncertainty is evaluated as ± 2.31 dB.
	Vertical	The measurement uncertainty is evaluated as ± 2.15 dB.



4. Test of Conducted Emission

4.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in European Standard EN 55022. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in standard. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.

Table 1 Class B Line Conducted Emission Limits:

Frequency range (MHz)	Limits (dB μ V)	
	Quasi Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5. to 30.	60	50

Note 1: The lower limits shall apply at the transition frequencies.
 Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to .50MHz.

Table 2 - Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment.

Frequency range (MHz)	Voltage limits dB(μ V)		Current limits dB(μ A)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.5	84 to 74	74 to 64	40 to 30	30 to 20
0.5 to 30	74	64	30	20

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 to 0.5 MHz.
 Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication under test (conversion factor is $20 \log_{10} 150/1 = 44$ dB).




4.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2012.11.05	2013.11.04
AMN	R&S	ESH2-Z5	100182	2012.11.05	2013.11.04
Two-Line V-Network	R&S	ENV216	100325	2013.03.10	2014.03.09
ISN	FCC	FCC-TLISN-T2-02	20379	2012.12.08	2013.12.07
ISN	FCC	FCC-TLISN-T4-02	20380	2012.12.08	2013.12.07
ISN	FCC	FCC-TLISN-T8-02	20381	2012.12.08	2013.12.07
ISN	TESEQ	ISN ST08	30175	2012.09.13	2013.09.12
Current Probe	R&S	EZ-17	100303	2013.03.10	2014.03.09
Passive Voltage Probe	R&S	ESH2-Z3	100026	2013.03.10	2014.03.09
Attenuator	R&S	ESH3-Z2	100529	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2013.03.10	2014.03.09



4.5. Test Data and Result

Test Mode :	Mode 1: Full system (VGA mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	LCD Monitor	Model No :	238LM00001
Temperature :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/20

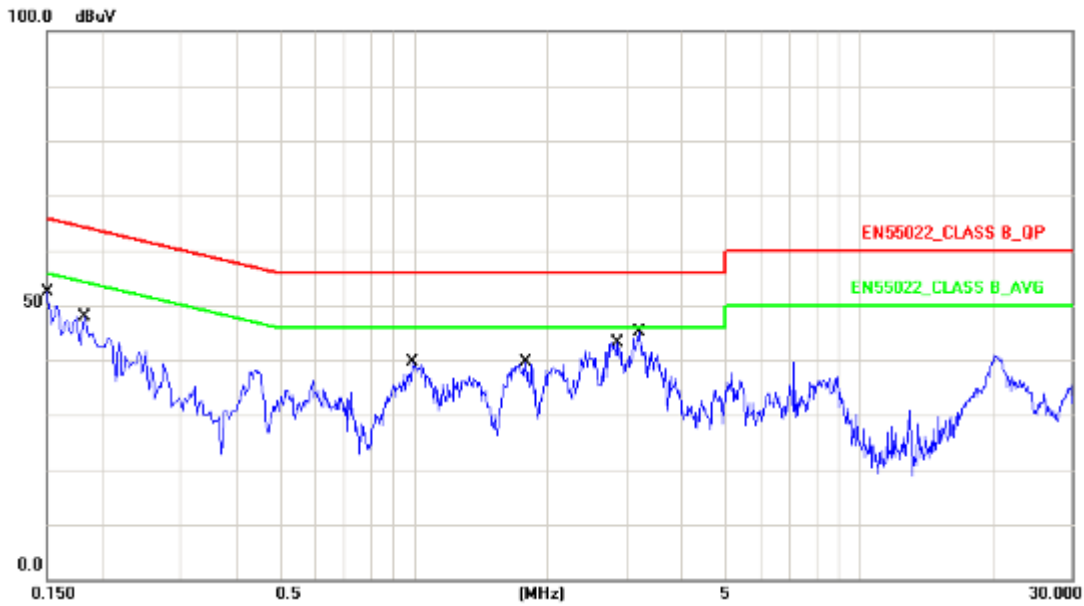


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	9.87	35.46	45.33	66.00	-20.67	QP
2	0.1500	9.87	22.25	32.12	56.00	-23.88	AVG
3	0.1820	9.87	31.14	41.01	64.39	-23.38	QP
4	0.1820	9.87	20.13	30.00	54.39	-24.39	AVG
5	0.9980	9.75	25.45	35.20	56.00	-20.80	QP
6	0.9980	9.75	20.33	30.08	46.00	-15.92	AVG
7	1.7860	9.72	24.19	33.91	56.00	-22.09	QP
8	1.7860	9.72	18.82	28.54	46.00	-17.46	AVG
9	2.8620	9.71	28.24	37.95	56.00	-18.05	QP
10	2.8620	9.71	20.83	30.54	46.00	-15.46	AVG
11	3.2220	9.71	29.13	38.84	56.00	-17.16	QP
12	3.2220	9.71	20.60	30.31	46.00	-15.69	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system (VGA mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	LCD Monitor	Model No :	238LM00001
Temperature :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/20

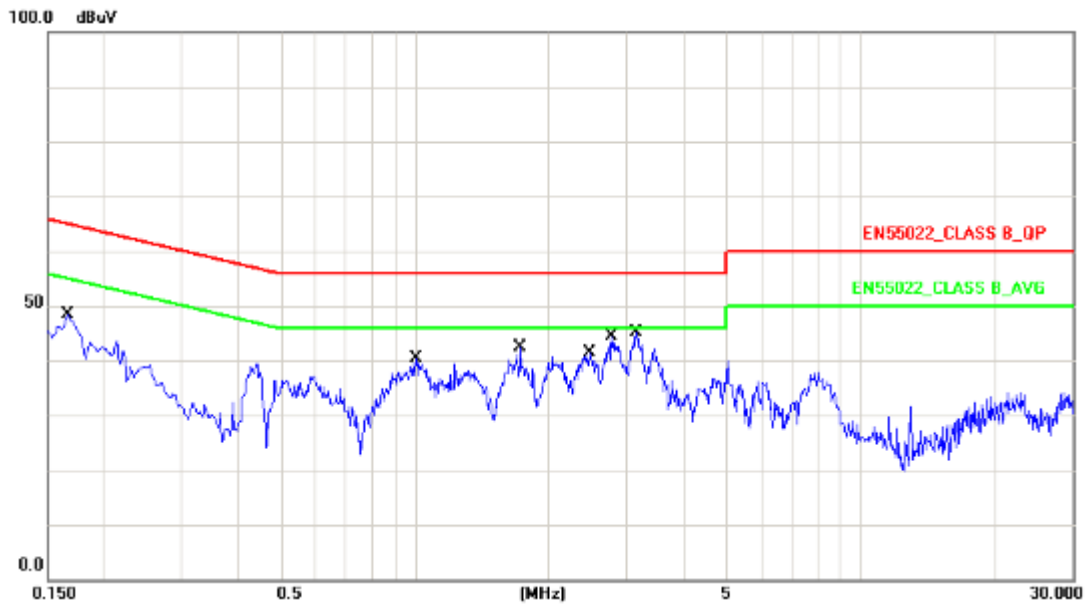


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	9.50	30.91	40.41	65.16	-24.75	QP
2	0.1660	9.50	23.48	32.98	55.16	-22.18	AVG
3	1.0060	9.44	26.04	35.48	56.00	-20.52	QP
4	1.0060	9.44	20.60	30.04	46.00	-15.96	AVG
5	1.7340	9.49	26.31	35.80	56.00	-20.20	QP
6	1.7340	9.49	21.16	30.65	46.00	-15.35	AVG
7	2.4660	9.53	28.92	38.45	56.00	-17.55	QP
8	2.4660	9.53	23.56	33.09	46.00	-12.91	AVG
9	2.7740	9.54	28.70	38.24	56.00	-17.76	QP
10	2.7740	9.54	21.54	31.08	46.00	-14.92	AVG
11	3.1540	9.56	30.73	40.29	56.00	-15.71	QP
12	3.1540	9.56	24.32	33.88	46.00	-12.12	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Full system (DISPLAY mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	LCD Monitor	Model No :	238LM00001
Temperature :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/20

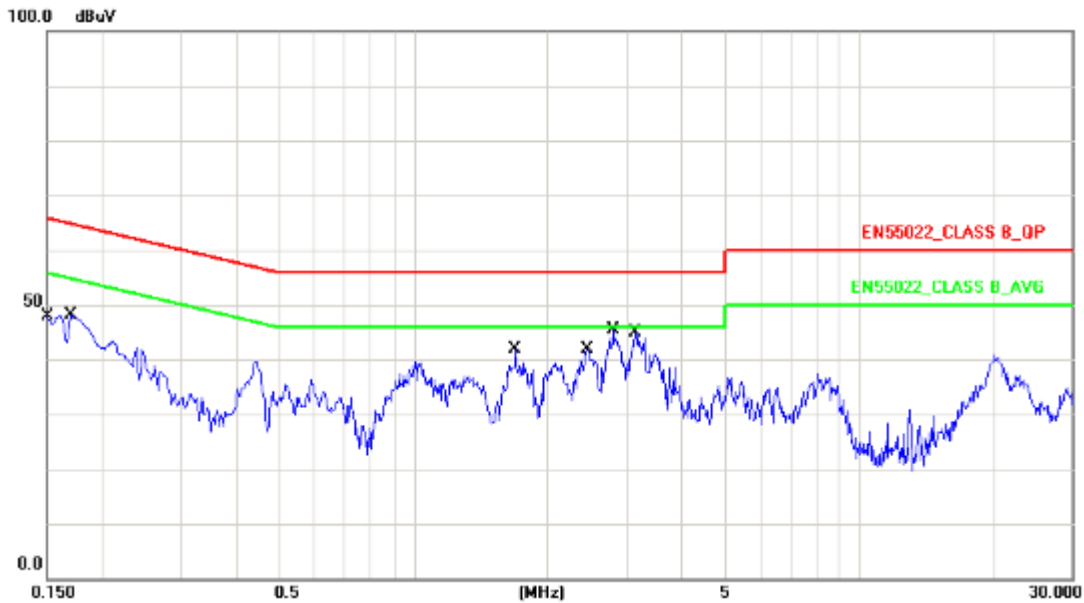


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	9.87	35.73	45.60	66.00	-20.40	QP
2	0.1500	9.87	22.10	31.97	56.00	-24.03	AVG
3	0.1700	9.87	33.59	43.46	64.96	-21.50	QP
4	0.1700	9.87	24.43	34.30	54.96	-20.66	AVG
5	1.6940	9.72	25.52	35.24	56.00	-20.76	QP
6	1.6940	9.72	20.11	29.83	46.00	-16.17	AVG
7	2.4580	9.71	26.72	36.43	56.00	-19.57	QP
8	2.4580	9.71	21.09	30.80	46.00	-15.20	AVG
9	2.8180	9.71	28.80	38.51	56.00	-17.49	QP
10	2.8180	9.71	21.24	30.95	46.00	-15.05	AVG
11	3.1540	9.71	29.29	39.00	56.00	-17.00	QP
12	3.1540	9.71	21.25	30.96	46.00	-15.04	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Full system (DISPLAY mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	LCD Monitor	Model No :	238LM00001
Temperature :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/20

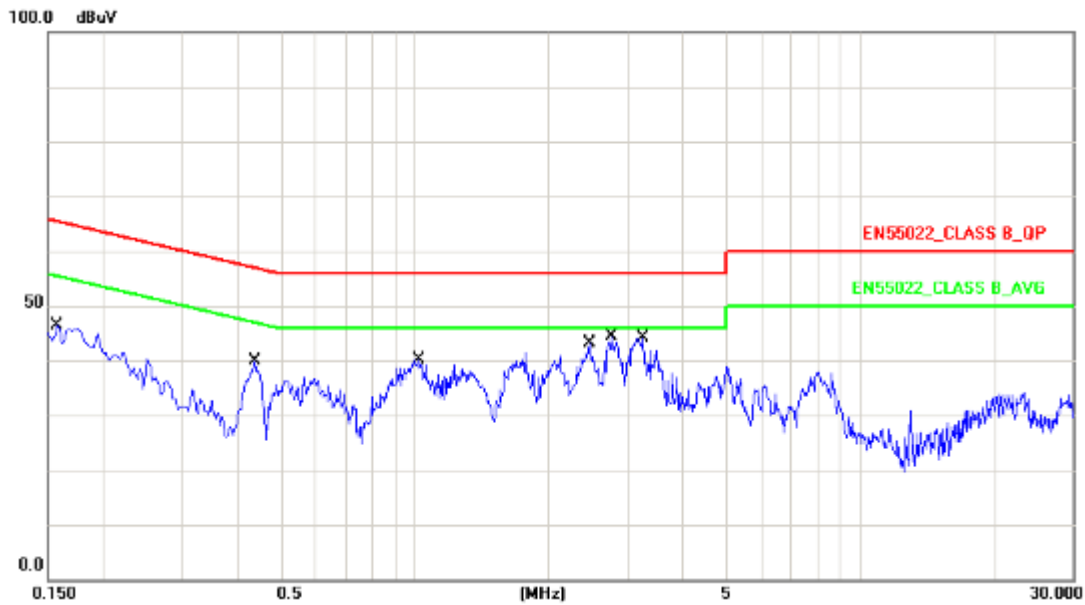


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	9.50	33.62	43.12	65.57	-22.45	QP
2	0.1580	9.50	23.40	32.90	55.57	-22.67	AVG
3	0.4380	9.50	27.22	36.72	57.10	-20.38	QP
4	0.4380	9.50	22.69	32.19	47.10	-14.91	AVG
5	1.0260	9.44	26.56	36.00	56.00	-20.00	QP
6	1.0260	9.44	21.27	30.71	46.00	-15.29	AVG
7	2.4620	9.53	28.80	38.33	56.00	-17.67	QP
8	2.4620	9.53	23.56	33.09	46.00	-12.91	AVG
9	2.7700	9.54	28.77	38.31	56.00	-17.69	QP
10	2.7700	9.54	21.56	31.10	46.00	-14.90	AVG
11	3.2620	9.56	26.99	36.55	56.00	-19.45	QP
12	3.2620	9.56	17.97	27.53	46.00	-18.47	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 9: Full system (DVI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	LCD Monitor	Model No :	238LM00001
Temperature :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/20

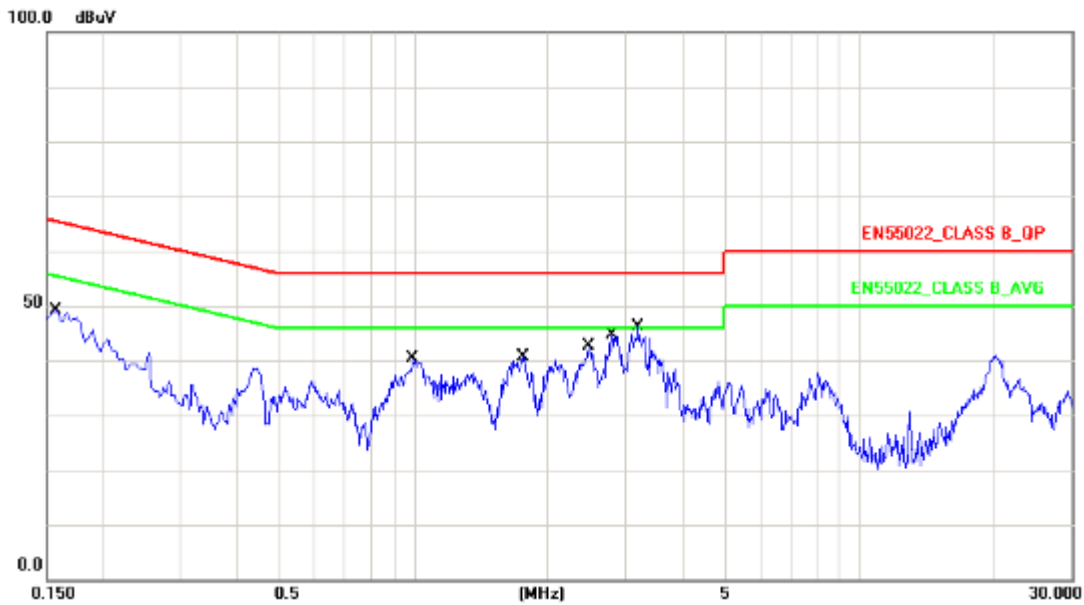


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	9.87	35.86	45.73	65.57	-19.84	QP
2	0.1580	9.87	24.33	34.20	55.57	-21.37	AVG
3	0.9980	9.75	25.63	35.38	56.00	-20.62	QP
4	0.9980	9.75	20.37	30.12	46.00	-15.88	AVG
5	1.7620	9.72	25.09	34.81	56.00	-21.19	QP
6	1.7620	9.72	19.81	29.53	46.00	-16.47	AVG
7	2.4620	9.71	28.25	37.96	56.00	-18.04	QP
8	2.4620	9.71	23.05	32.76	46.00	-13.24	AVG
9	2.7860	9.71	28.43	38.14	56.00	-17.86	QP
10	2.7860	9.71	20.80	30.51	46.00	-15.49	AVG
11	3.2020	9.71	29.52	39.23	56.00	-16.77	QP
12	3.2020	9.71	21.29	31.00	46.00	-15.00	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 9: Full system (DVI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	LCD Monitor	Model No :	238LM00001
Temperature :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/20

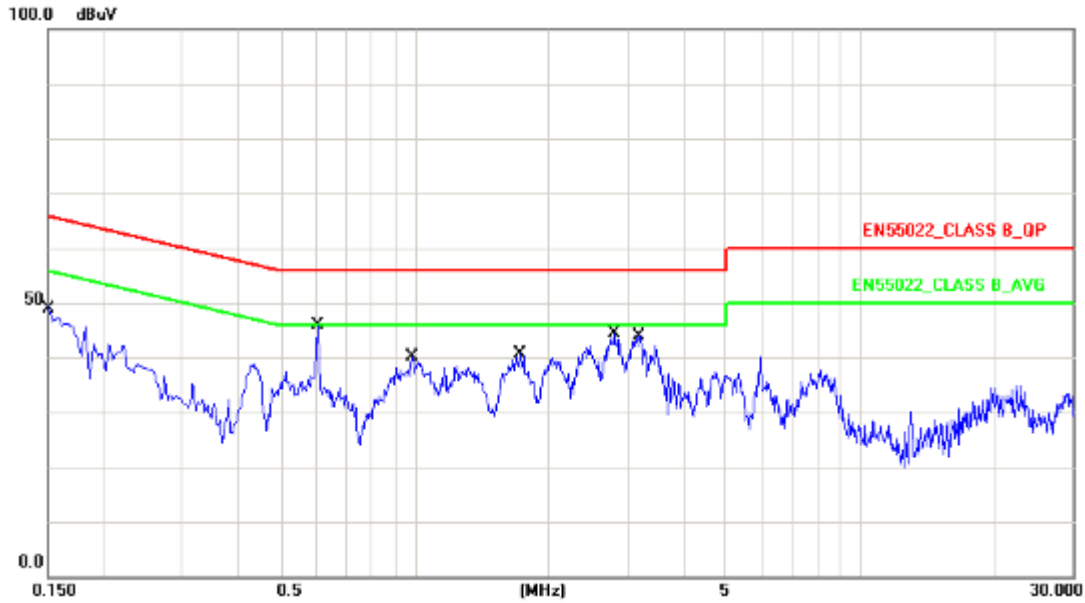


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1516	9.50	31.37	40.87	65.91	-25.04	QP
2	0.1516	9.50	20.46	29.96	55.91	-25.95	AVG
3	0.6060	9.50	23.18	32.68	56.00	-23.32	QP
4	0.6060	9.50	18.87	28.37	46.00	-17.63	AVG
5	0.9860	9.44	25.88	35.32	56.00	-20.68	QP
6	0.9860	9.44	20.83	30.27	46.00	-15.73	AVG
7	1.7260	9.49	26.32	35.81	56.00	-20.19	QP
8	1.7260	9.49	21.10	30.59	46.00	-15.41	AVG
9	2.8220	9.54	28.98	38.52	56.00	-17.48	QP
10	2.8220	9.54	21.66	31.20	46.00	-14.80	AVG
11	3.1900	9.56	29.60	39.16	56.00	-16.84	QP
12	3.1900	9.56	21.43	30.99	46.00	-15.01	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 13: Full system (HDMI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	LCD Monitor	Model No :	238LM00001
Temperature :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/20

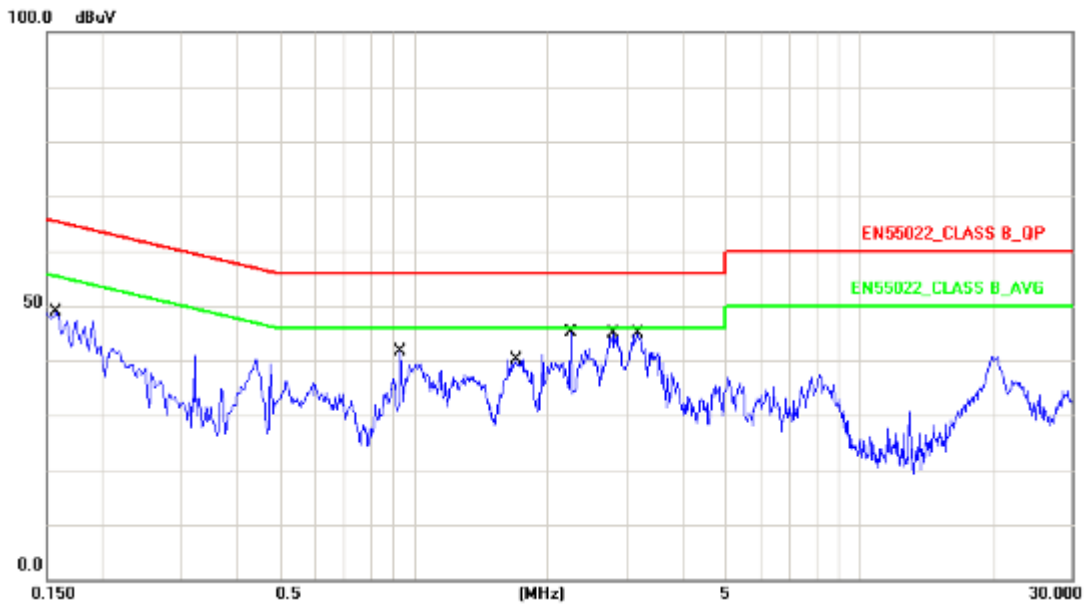


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	9.87	35.55	45.42	65.56	-20.14	QP
2	0.1580	9.87	24.32	34.19	55.56	-21.37	AVG
3	0.9380	9.77	23.07	32.84	56.00	-23.16	QP
4	0.9380	9.77	18.27	28.04	46.00	-17.96	AVG
5	1.7020	9.72	25.83	35.55	56.00	-20.45	QP
6	1.7020	9.72	20.39	30.11	46.00	-15.89	AVG
7	2.2500	9.71	20.98	30.69	56.00	-25.31	QP
8	2.2500	9.71	13.76	23.47	46.00	-22.53	AVG
9	2.8100	9.71	28.81	38.52	56.00	-17.48	QP
10	2.8100	9.71	21.37	31.08	46.00	-14.92	AVG
11	3.1860	9.71	29.78	39.49	56.00	-16.51	QP
12	3.1860	9.71	23.13	32.84	46.00	-13.16	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 13: Full system (HDMI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	LCD Monitor	Model No :	238LM00001
Temperature :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/20

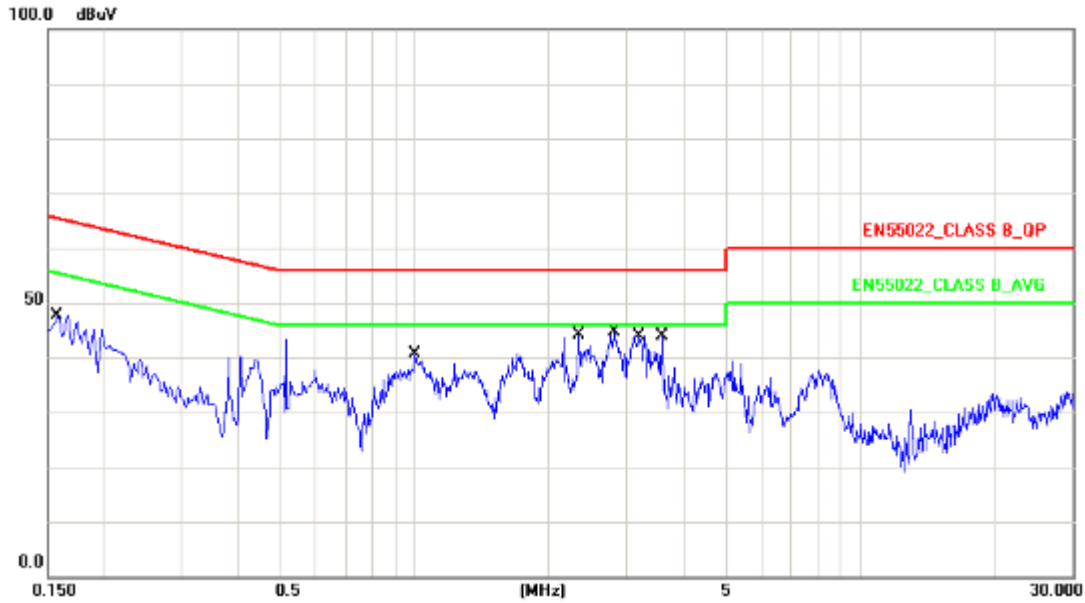

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1582	9.50	34.32	43.82	65.56	-21.74	QP
2	0.1582	9.50	23.53	33.03	55.56	-22.53	AVG
3	1.0020	9.44	26.32	35.76	56.00	-20.24	QP
4	1.0020	9.44	20.95	30.39	46.00	-15.61	AVG
5	2.3380	9.52	24.37	33.89	56.00	-22.11	QP
6	2.3380	9.52	18.63	28.15	46.00	-17.85	AVG
7	2.8020	9.54	29.09	38.63	56.00	-17.37	QP
8	2.8020	9.54	21.74	31.28	46.00	-14.72	AVG
9	3.2060	9.56	28.93	38.49	56.00	-17.51	QP
10	3.2060	9.56	20.42	29.98	46.00	-16.02	AVG
11	3.5940	9.57	21.11	30.68	56.00	-25.32	QP
12	3.5940	9.57	14.61	24.18	46.00	-21.82	AVG

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Seben



4.6. Test Photographs

lifting rotation base

Front View



Rear View





common base

Front View



Rear View





5. Test of Radiated Emission

5.1. Test Limit

The EUT shall meet the limits of below Table when measured at the measuring distance R in accordance with the methods described in European Standard EN 55022. If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the highest reading shall be recorded, with the exception of any brief isolated high reading, which shall be ignored.

Table – Limits for radiated disturbance of class B ITE at a measuring distance of 10 m

Frequency range MHz	Quasi-peak limits dB(μ V/m)
30 to 230	30
230 to 1000	37
NOTE 1 The lower limit shall apply at the transition frequency. NOTE 2 Additional provisions may be required for cases where interference occurs.	

The EUT shall meet the limits of below Table when measured in accordance with the method described in European Standard EN 55022 and the conditional testing procedure described below.

Table – Limits for radiated disturbance of class B ITE at a measuring distance of 3 m

Frequency range GHz	Average limit dB(μ V/m)	Peak limits dB(μ V/m)
1 to 3	50	70
3 to 6	54	74
NOTE The lower limit applies at the transition frequency.		

• Conditional testing procedure:

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.




5.2. Test Procedures

- a. The EUT was placed on a relatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.




5.3. Typical test Setup

Below 1GHz Test Setup

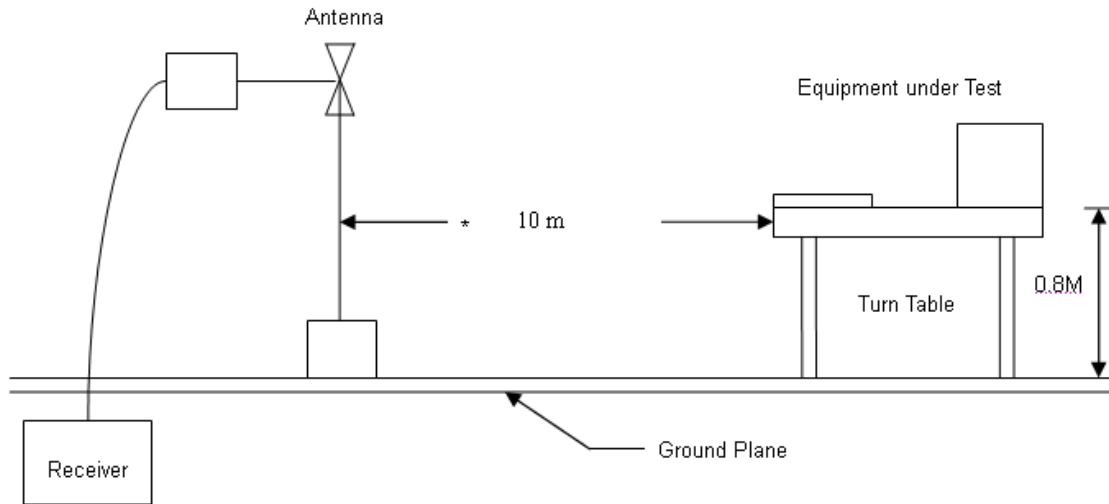

Above 1GHz Test Setup

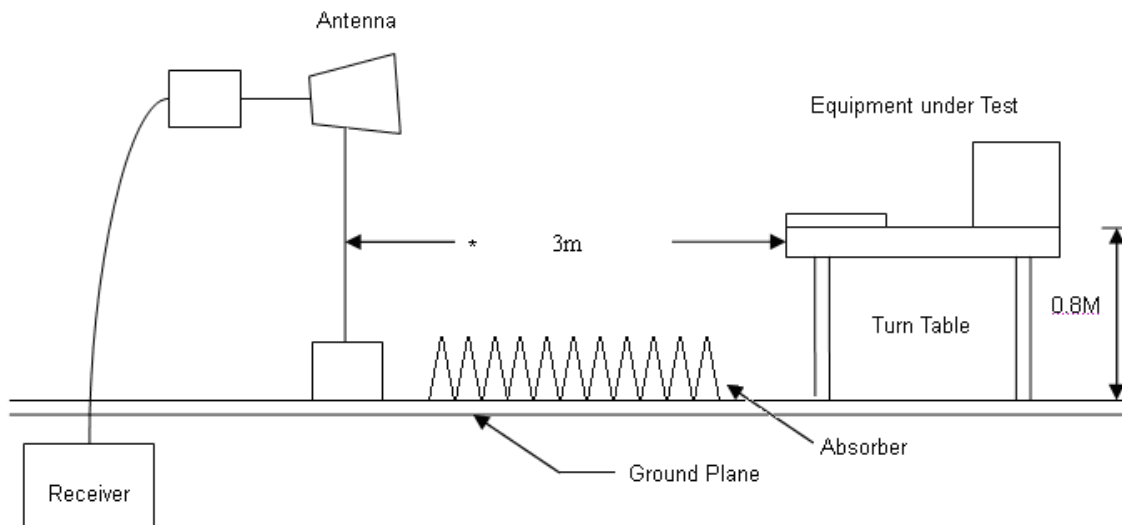




5.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	101183	2013.03.10	2014.03.09
Preamplifier	Agilent	87405B	My39500554	2013.03.10	2014.03.09
Preamplifier	Agilent	8449B	3008A02342	2013.03.10	2014.03.09
Ultra Broadband Antenna	R&S	HL562	100363	2013.05.02	2014.05.01
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-618	2013.05.02	2014.05.01
Spectrum Analyzer	R&S	FSP40	100324	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-001	2013.03.10	2014.03.09



5.5. Test Result and Data (30MHz ~ 1000MHz)

Test Mode :	Mode 1: Full system (VGA mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

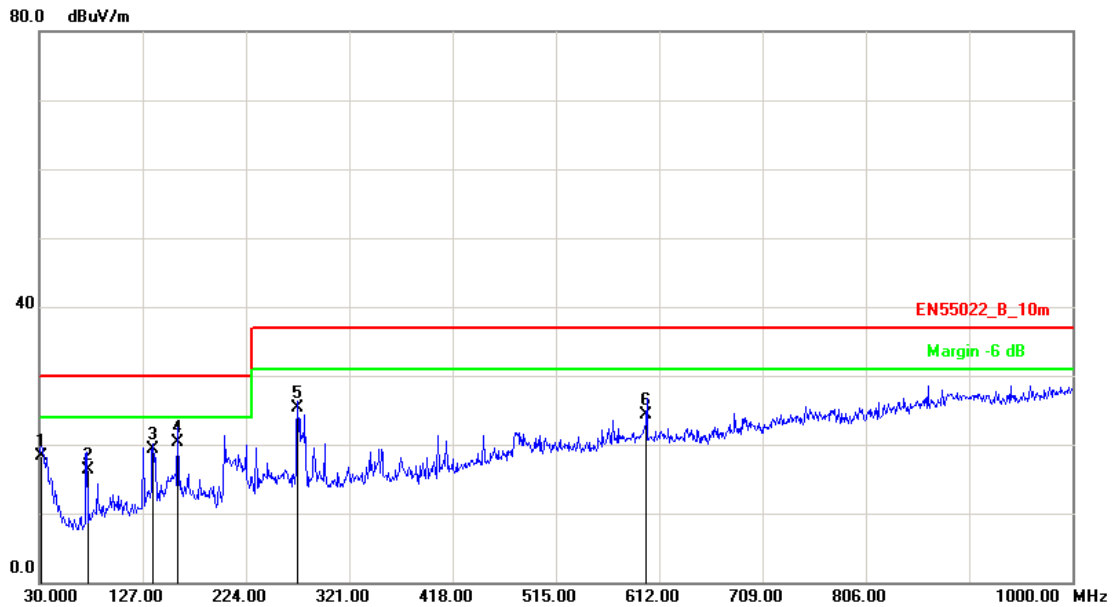


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	32.1200	-6.57	24.89	18.32	30.00	-11.68	QP	300	357
2	75.3300	-16.63	32.88	16.25	30.00	-13.75	QP	400	290
3	136.8200	-15.08	34.41	19.33	30.00	-10.67	QP	347	0
4	160.3200	-15.30	35.54	20.24	30.00	-9.76	QP	400	176
5	272.6200	-12.07	37.39	25.32	37.00	-11.68	QP	200	333
6	600.1500	-3.66	27.99	24.33	37.00	-12.67	QP	100	140

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system (VGA mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

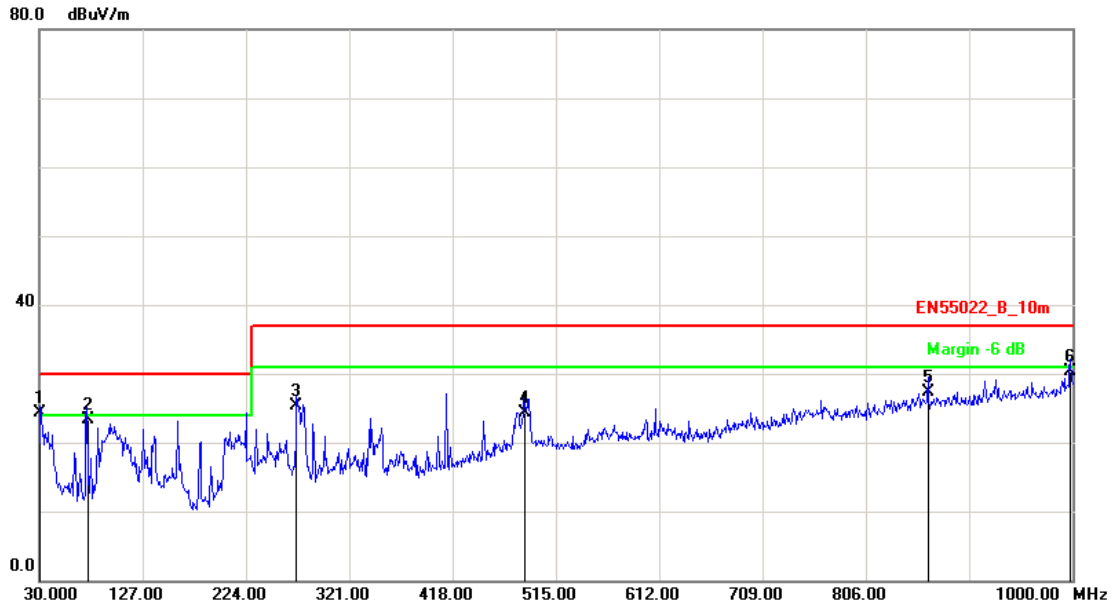


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	31.2400	-6.15	30.38	24.23	30.00	-5.77	QP	100	142
2	75.3200	-16.63	39.87	23.24	30.00	-6.76	QP	300	180
3	271.6200	-12.10	37.43	25.33	37.00	-11.67	QP	100	0
4	485.3300	-5.35	29.59	24.24	37.00	-12.76	QP	300	186
5	864.6200	0.93	26.32	27.25	37.00	-9.75	QP	300	177
6	998.2400	2.75	27.49	30.24	37.00	-6.76	QP	200	119

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Full system (DISPLAY mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

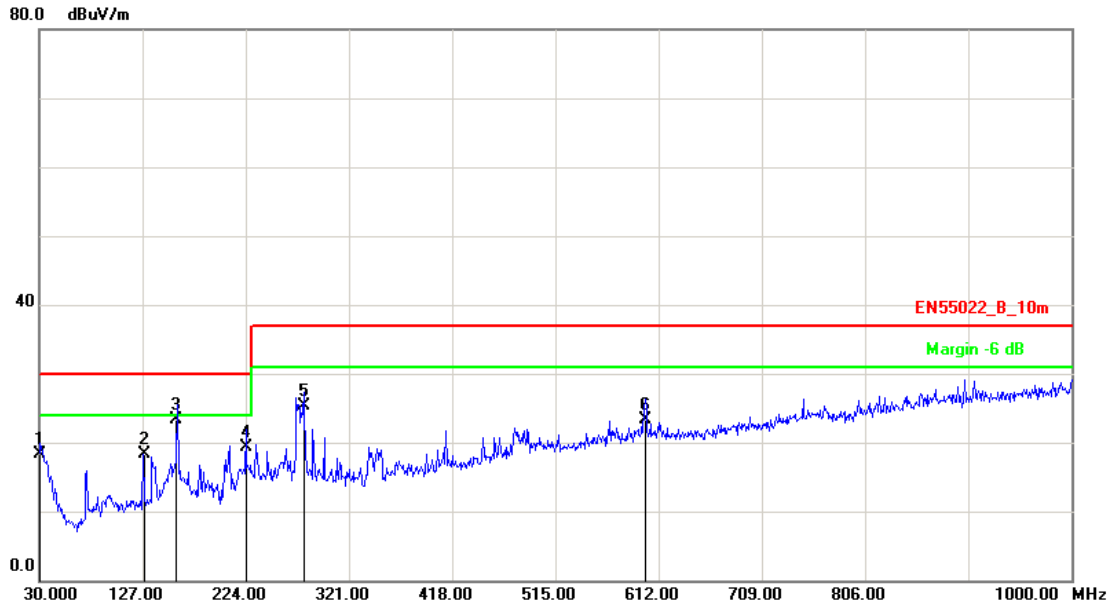


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	31.2200	-6.14	24.38	18.24	30.00	-11.76	QP	100	33
2	128.3200	-14.98	33.30	18.32	30.00	-11.68	QP	100	14
3	159.2800	-15.29	38.54	23.25	30.00	-6.75	QP	400	142
4	224.3600	-14.24	33.49	19.25	30.00	-10.75	QP	250	215
5	278.6400	-11.86	37.19	25.33	37.00	-11.67	QP	400	256
6	600.2400	-3.66	26.90	23.24	37.00	-13.76	QP	400	302

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Full system (DISPLAY mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

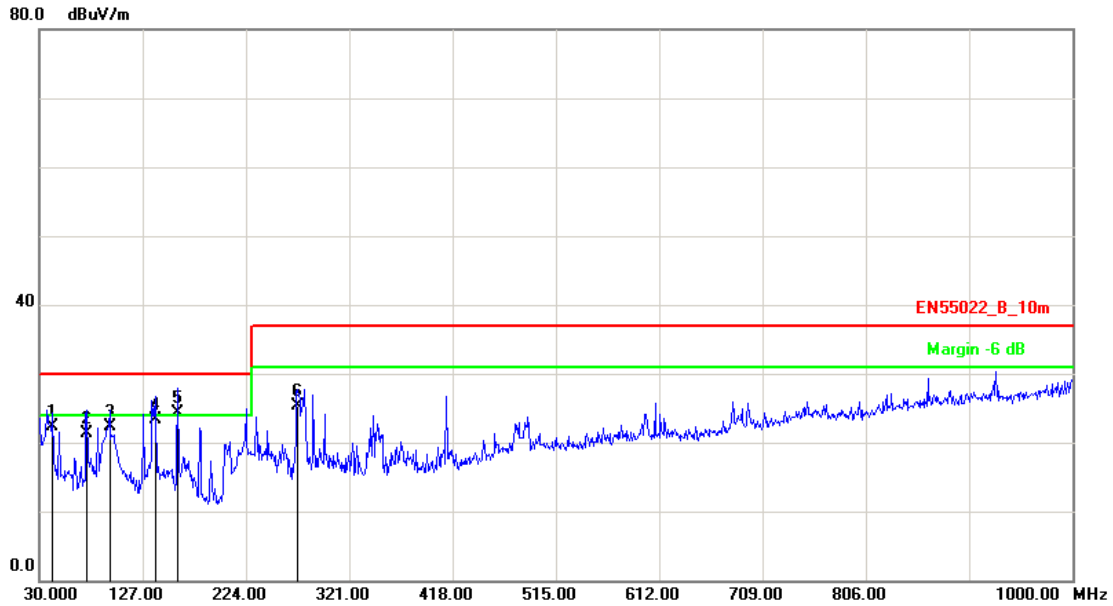


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	42.6100	-11.79	34.11	22.32	30.00	-7.68	QP	100	286
2	74.6200	-16.80	38.04	21.24	30.00	-8.76	QP	300	228
3	95.9600	-14.79	37.11	22.32	30.00	-7.68	QP	100	0
4	138.6400	-15.10	38.35	23.25	30.00	-6.75	QP	100	82
5	160.3200	-15.30	39.55	24.25	30.00	-5.75	QP	100	43
6	272.6200	-12.07	37.39	25.32	37.00	-11.68	QP	400	19

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 9: Full system (DVI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

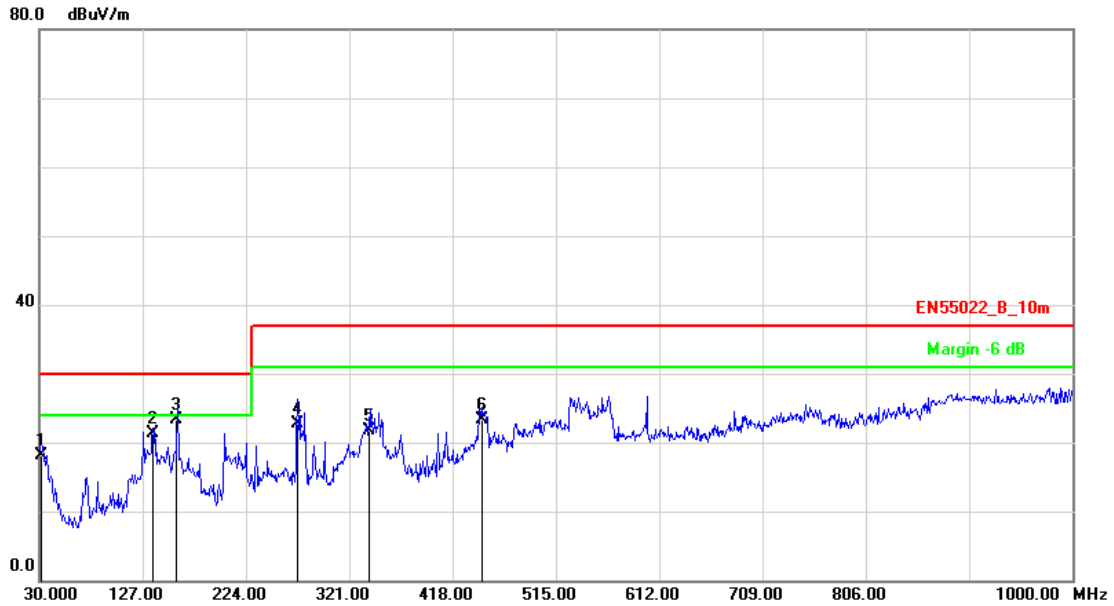


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	32.1500	-6.59	24.70	18.11	30.00	-11.89	QP	400	225
2	136.8200	-15.08	36.33	21.25	30.00	-8.75	QP	400	166
3	159.2400	-15.29	38.54	23.25	30.00	-6.75	QP	400	360
4	272.6800	-12.06	34.68	22.62	37.00	-14.38	QP	100	12
5	340.1100	-9.99	31.61	21.62	37.00	-15.38	QP	100	35
6	445.2500	-6.66	29.90	23.24	37.00	-13.76	QP	400	142

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 9: Full system (DVI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

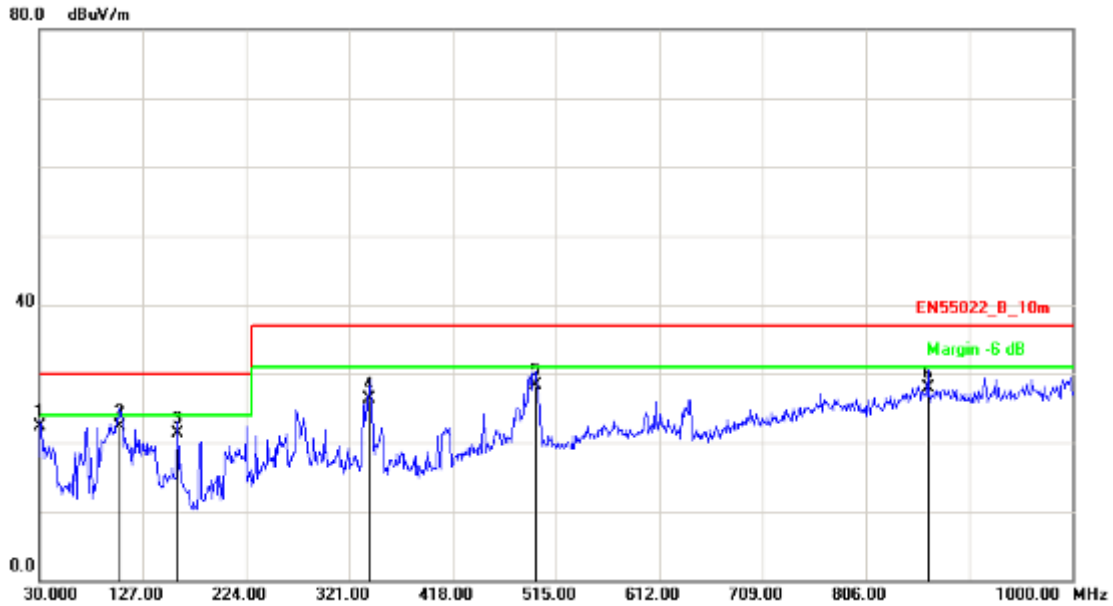


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	31.2500	-6.16	28.48	22.32	30.00	-7.68	QP	100	25
2	105.6200	-14.72	37.04	22.32	30.00	-7.68	QP	100	156
3	160.3300	-15.30	36.54	21.24	30.00	-8.76	QP	400	6
4	340.2500	-9.99	36.32	26.33	37.00	-10.67	QP	100	332
5	495.6200	-5.03	33.30	28.27	37.00	-8.73	QP	100	189
6	864.8200	0.94	26.98	27.92	37.00	-9.08	QP	200	222

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 13: Full system (HDMI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

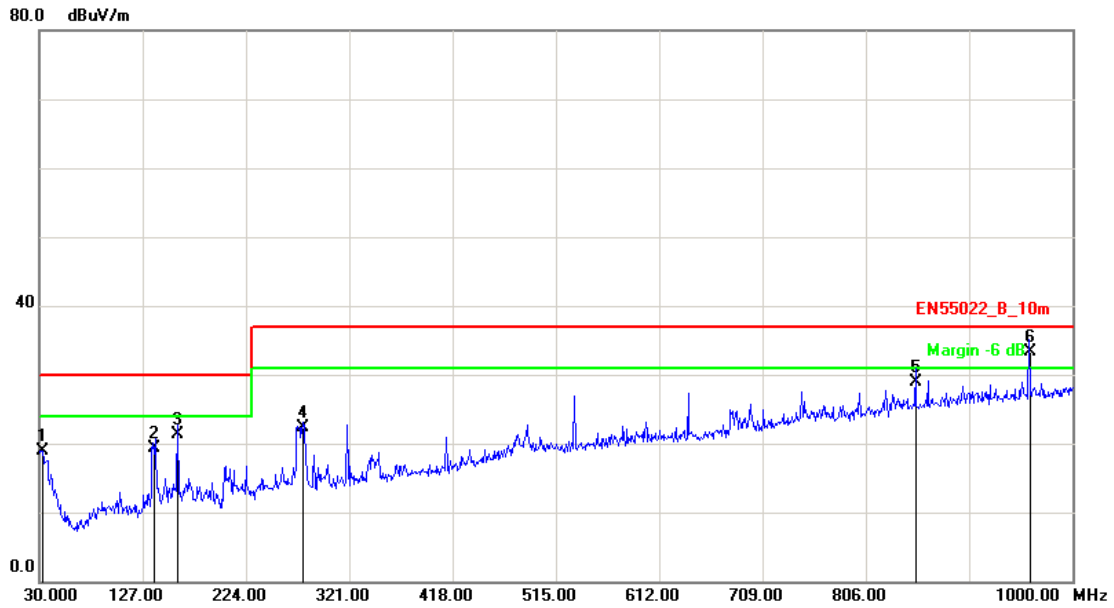


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	32.9099	-6.95	25.86	18.91	30.00	-11.09	QP	400	28
2	138.2400	-15.10	34.40	19.30	30.00	-10.70	QP	400	311
3	160.3300	-15.30	36.55	21.25	30.00	-8.75	QP	400	172
4	277.2500	-11.91	34.24	22.33	37.00	-14.67	QP	200	0
5	853.2400	0.75	28.17	28.92	37.00	-8.08	QP	300	215
6	960.3200	2.00	30.24	32.24	37.00	-4.76	QP	100	213

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 13: Full system (HDMI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

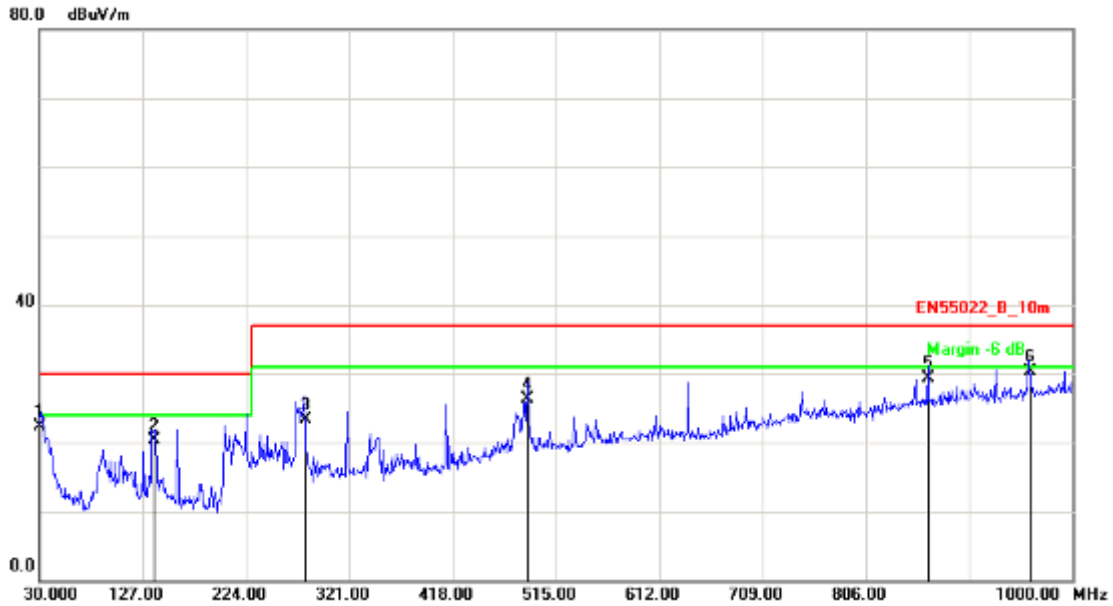


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	31.2500	-6.16	28.48	22.32	30.00	-7.68	QP	124	0
2	138.2400	-15.10	35.34	20.24	30.00	-9.76	QP	101	0
3	280.3300	-11.80	35.05	23.25	37.00	-13.75	QP	100	2
4	488.3200	-5.25	31.58	26.33	37.00	-10.67	QP	300	202
5	864.6200	0.93	28.39	29.32	37.00	-7.68	QP	200	165
6	960.2100	1.99	28.22	30.21	37.00	-6.79	QP	167	0

Note: Measurement Level = Reading Level + Correct Factor



5.6. Test Result and Data (1000MHz ~ 6000MHz)

Test Mode :	Mode 1: Full system (VGA mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

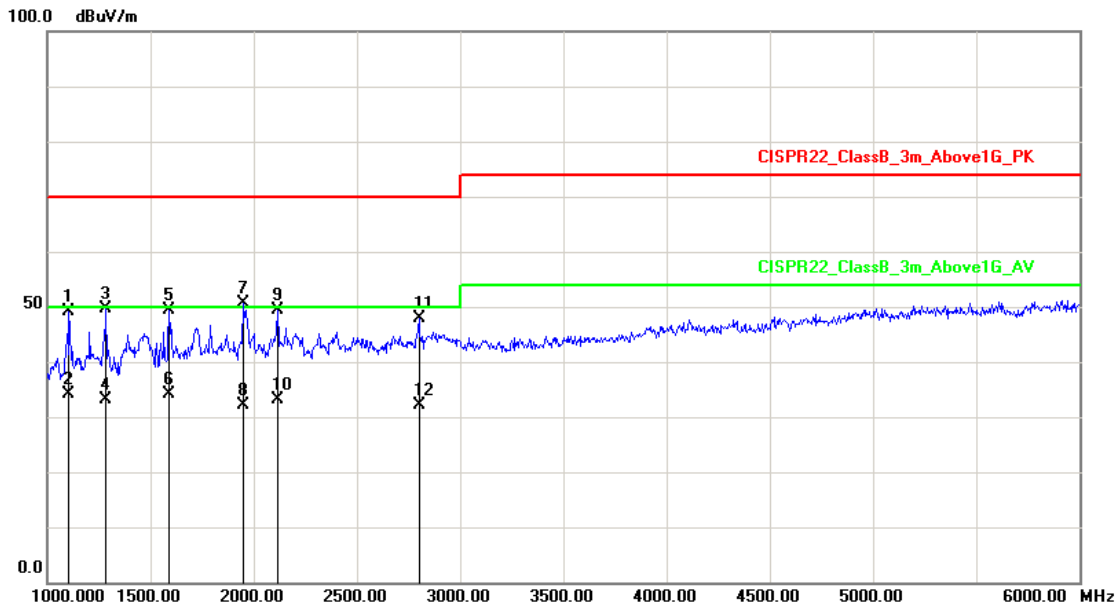


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1105.000	-13.63	62.64	49.01	70.00	-20.99	peak	100	142
2	1105.000	-13.63	47.88	34.25	50.00	-15.75	AVG	100	142
3	1285.000	-12.34	61.97	49.63	70.00	-20.37	peak	100	33
4	1285.000	-12.34	45.59	33.25	50.00	-16.75	AVG	100	33
5	1590.000	-10.11	59.60	49.49	70.00	-20.51	peak	100	215
6	1590.000	-10.11	44.36	34.25	50.00	-15.75	AVG	100	215
7	1950.000	-7.35	57.97	50.62	70.00	-19.38	peak	100	256
8	1950.000	-7.35	39.60	32.25	50.00	-17.75	AVG	100	256
9	2115.000	-5.57	54.90	49.33	70.00	-20.67	peak	100	322
10	2115.000	-5.57	38.81	33.24	50.00	-16.76	AVG	100	322
11	2800.000	-3.30	51.08	47.78	70.00	-22.22	peak	100	99
12	2800.000	-3.30	35.52	32.22	50.00	-17.78	AVG	100	99

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system (VGA mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

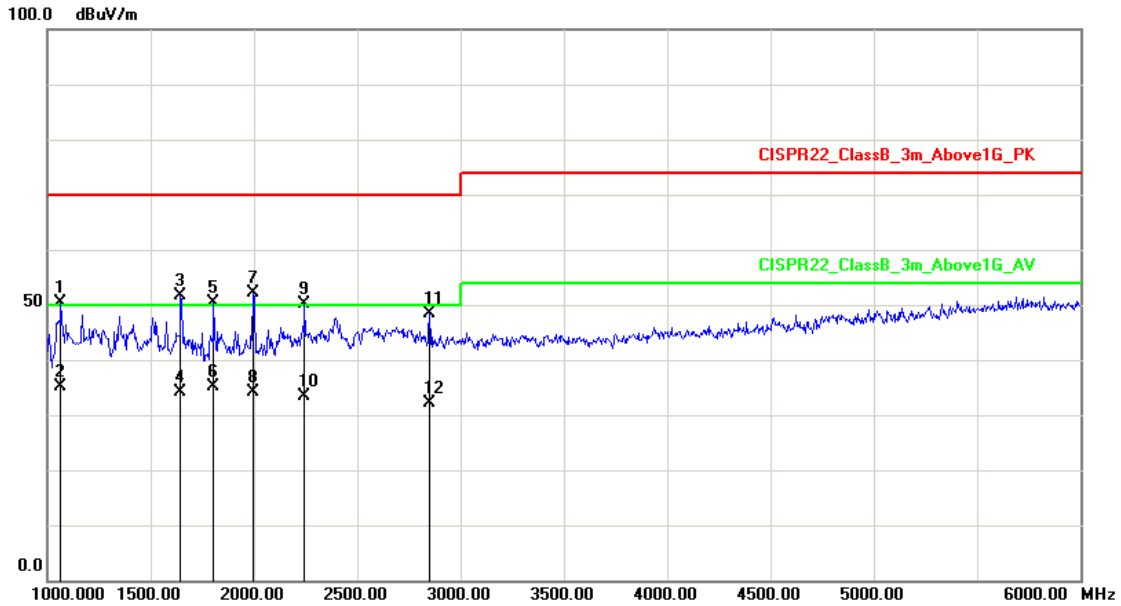


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1065.000	-13.86	64.31	50.45	70.00	-19.55	peak	100	144
2	1065.000	-13.86	49.10	35.24	50.00	-14.76	AVG	100	144
3	1645.000	-10.26	61.91	51.65	70.00	-18.35	peak	100	256
4	1645.000	-10.26	44.48	34.22	50.00	-15.78	AVG	100	256
5	1805.000	-10.91	61.27	50.36	70.00	-19.64	peak	100	33
6	1805.000	-10.91	46.16	35.25	50.00	-14.75	AVG	100	33
7	1995.000	-6.25	58.34	52.09	70.00	-17.91	peak	100	258
8	1995.000	-6.25	40.50	34.25	50.00	-15.75	AVG	100	258
9	2245.000	-4.94	55.18	50.24	70.00	-19.76	peak	100	37
10	2245.000	-4.94	38.26	33.32	50.00	-16.68	AVG	100	37
11	2850.000	-3.23	51.71	48.48	70.00	-21.52	peak	100	5
12	2850.000	-3.23	35.47	32.24	50.00	-17.76	AVG	100	5

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Full system (DISPLAY mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

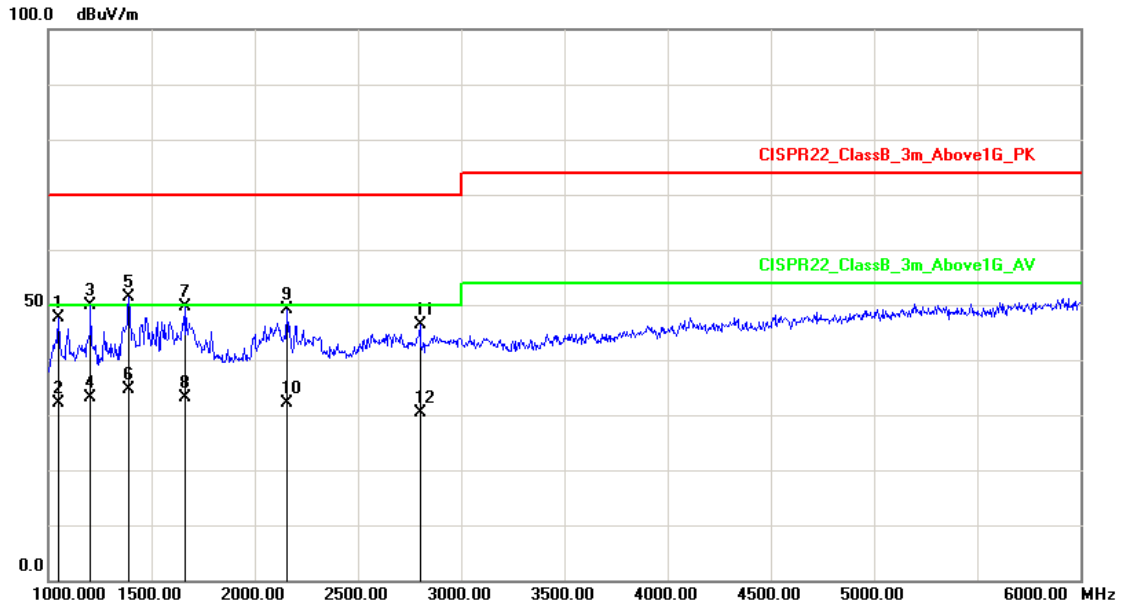


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1050.000	-13.95	61.58	47.63	70.00	-22.37	peak	100	172
2	1050.000	-13.95	46.19	32.24	50.00	-17.76	AVG	100	172
3	1205.000	-13.03	62.81	49.78	70.00	-20.22	peak	100	118
4	1205.000	-13.03	46.28	33.25	50.00	-16.75	AVG	100	118
5	1390.000	-11.44	62.75	51.31	70.00	-18.69	peak	100	35
6	1390.000	-11.44	45.96	34.52	50.00	-15.48	AVG	100	35
7	1665.000	-10.36	59.94	49.58	70.00	-20.42	peak	100	156
8	1665.000	-10.36	43.61	33.25	50.00	-16.75	AVG	100	156
9	2155.000	-5.38	54.50	49.12	70.00	-20.88	peak	100	221
10	2155.000	-5.38	37.53	32.15	50.00	-17.85	AVG	100	221
11	2800.000	-3.30	49.58	46.28	70.00	-23.72	peak	100	68
12	2800.000	-3.30	33.62	30.32	50.00	-19.68	AVG	100	68

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Full system (DISPLAY mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

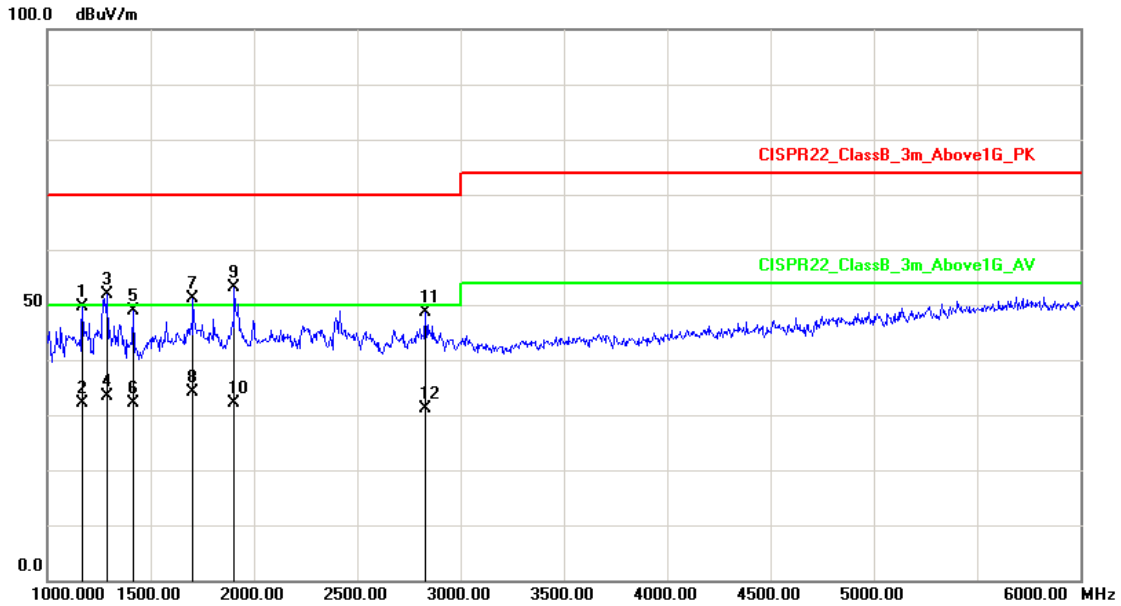


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1170.000	-13.25	62.94	49.69	70.00	-20.31	peak	100	174
2	1170.000	-13.25	45.50	32.25	50.00	-17.75	AVG	100	174
3	1290.000	-12.30	64.23	51.93	70.00	-18.07	peak	100	66
4	1290.000	-12.30	45.65	33.35	50.00	-16.65	AVG	100	66
5	1415.000	-11.25	60.17	48.92	70.00	-21.08	peak	100	262
6	1415.000	-11.25	43.50	32.25	50.00	-17.75	AVG	100	262
7	1705.000	-10.56	61.80	51.24	70.00	-18.76	peak	100	119
8	1705.000	-10.56	44.81	34.25	50.00	-15.75	AVG	100	119
9	1905.000	-8.46	61.64	53.18	70.00	-16.82	peak	100	219
10	1905.000	-8.46	40.71	32.25	50.00	-17.75	AVG	100	219
11	2830.000	-3.25	51.94	48.69	70.00	-21.31	peak	100	50
12	2830.000	-3.25	34.47	31.22	50.00	-18.78	AVG	100	50

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 9: Full system (DVI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

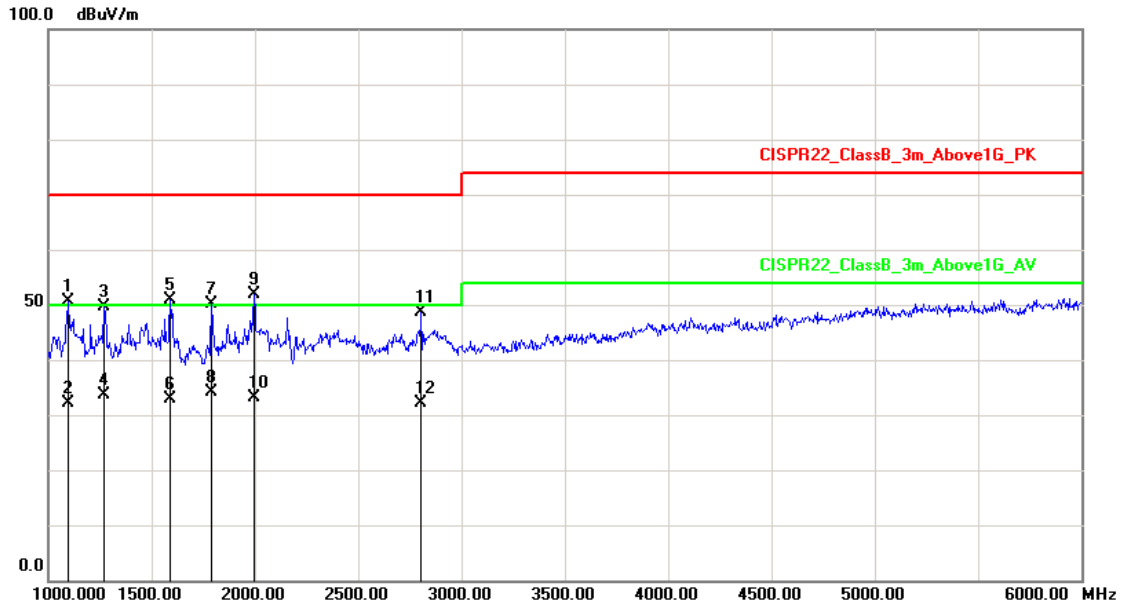


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1095.000	-13.68	64.33	50.65	70.00	-19.35	peak	100	118
2	1095.000	-13.68	45.93	32.25	50.00	-17.75	AVG	100	118
3	1270.000	-12.47	62.00	49.53	70.00	-20.47	peak	100	162
4	1270.000	-12.47	45.99	33.52	50.00	-16.48	AVG	100	162
5	1590.000	-10.11	61.10	50.99	70.00	-19.01	peak	100	19
6	1590.000	-10.11	43.03	32.92	50.00	-17.08	AVG	100	19
7	1790.000	-10.98	61.14	50.16	70.00	-19.84	peak	100	215
8	1790.000	-10.98	45.22	34.24	50.00	-15.76	AVG	100	215
9	1995.000	-6.25	58.15	51.90	70.00	-18.10	peak	100	119
10	1995.000	-6.25	39.50	33.25	50.00	-16.75	AVG	100	119
11	2805.000	-3.29	51.90	48.61	70.00	-21.39	peak	100	360
12	2805.000	-3.29	35.54	32.25	50.00	-17.75	AVG	100	360

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 9: Full system (DVI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

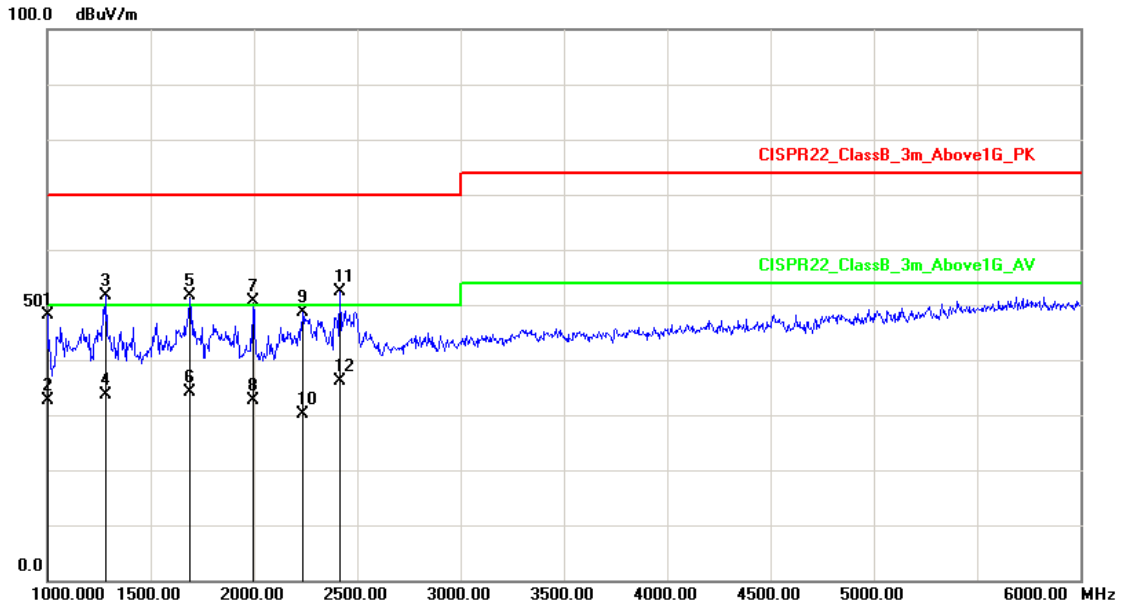


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1000.0000	-14.24	62.46	48.22	70.00	-21.78	peak	100	178
2	1000.0000	-14.24	46.76	32.52	50.00	-17.48	AVG	100	178
3	1285.0000	-12.34	64.07	51.73	70.00	-18.27	peak	100	66
4	1285.0000	-12.34	45.96	33.62	50.00	-16.38	AVG	100	66
5	1690.0000	-10.49	62.09	51.60	70.00	-18.40	peak	100	152
6	1690.0000	-10.49	44.74	34.25	50.00	-15.75	AVG	100	152
7	1995.0000	-6.25	56.84	50.59	70.00	-19.41	peak	100	330
8	1995.0000	-6.25	38.87	32.62	50.00	-17.38	AVG	100	330
9	2235.0000	-4.99	53.56	48.57	70.00	-21.43	peak	100	357
10	2235.0000	-4.99	35.24	30.25	50.00	-19.75	AVG	100	357
11	2415.0000	-4.12	56.55	52.43	70.00	-17.57	peak	100	28
12	2415.0000	-4.12	40.36	36.24	50.00	-13.76	AVG	100	28

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 13: Full system (HDMI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

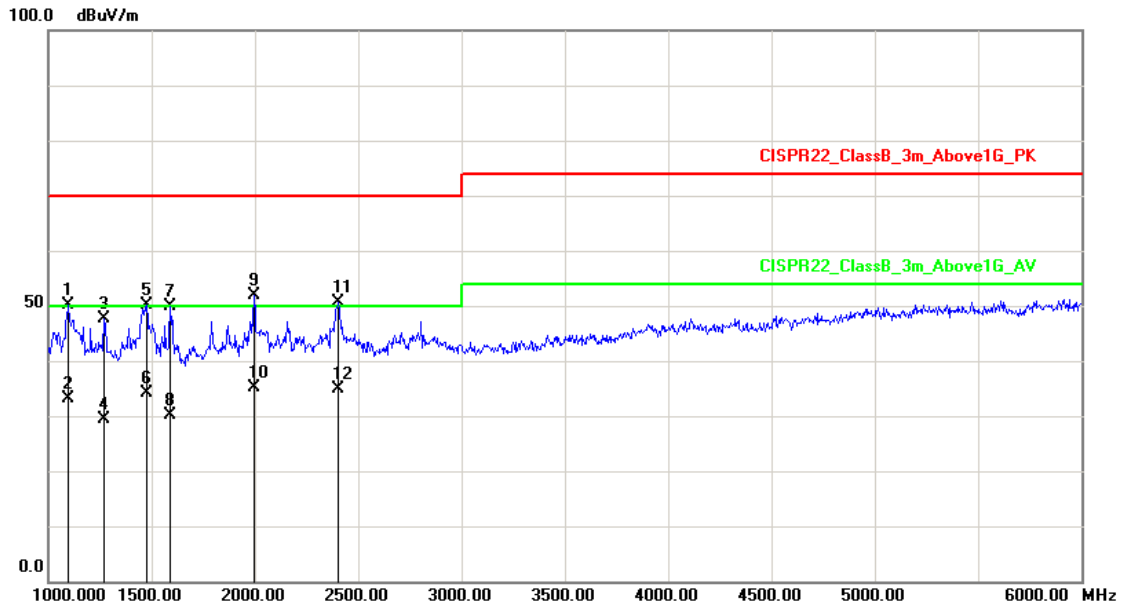


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1095.000	-13.68	63.83	50.15	70.00	-19.85	peak	100	142
2	1095.000	-13.68	46.92	33.24	50.00	-16.76	AVG	100	142
3	1270.000	-12.47	60.00	47.53	70.00	-22.47	peak	100	26
4	1270.000	-12.47	41.80	29.33	50.00	-20.67	AVG	100	26
5	1475.000	-10.86	60.89	50.03	70.00	-19.97	peak	100	156
6	1475.000	-10.86	45.11	34.25	50.00	-15.75	AVG	100	156
7	1590.000	-10.11	60.10	49.99	70.00	-20.01	peak	100	33
8	1590.000	-10.11	40.36	30.25	50.00	-19.75	AVG	100	33
9	1995.000	-6.25	58.15	51.90	70.00	-18.10	peak	100	258
10	1995.000	-6.25	41.50	35.25	50.00	-14.75	AVG	100	258
11	2405.000	-4.17	54.71	50.54	70.00	-19.46	peak	100	157
12	2405.000	-4.17	38.99	34.82	50.00	-15.18	AVG	100	157

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 13: Full system (HDMI mode 1920*1080@60Hz) for horizontal		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	LCD Monitor	Model No :	238LM00001
Temp :	23	Humidity :	50%
Pressure(mbar) :	1002	Date :	2013/06/22

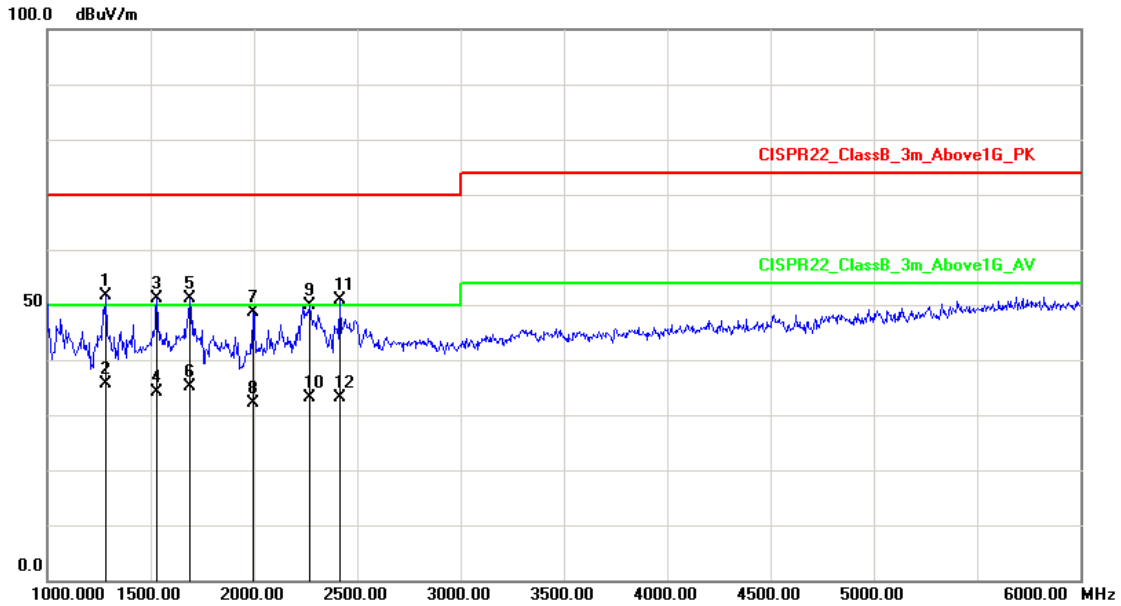

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1285.000	-12.34	64.07	51.73	70.00	-18.27	peak	100	142
2	1285.000	-12.34	47.96	35.62	50.00	-14.38	AVG	100	142
3	1530.000	-10.50	61.74	51.24	70.00	-18.76	peak	100	33
4	1530.000	-10.50	44.75	34.25	50.00	-15.75	AVG	100	33
5	1690.000	-10.49	61.59	51.10	70.00	-18.90	peak	100	256
6	1690.000	-10.49	45.71	35.22	50.00	-14.78	AVG	100	256
7	1995.000	-6.25	54.84	48.59	70.00	-21.41	peak	100	158
8	1995.000	-6.25	38.49	32.24	50.00	-17.76	AVG	100	158
9	2270.000	-4.82	54.65	49.83	70.00	-20.17	peak	100	88
10	2270.000	-4.82	38.02	33.20	50.00	-16.80	AVG	100	88
11	2415.000	-4.12	55.05	50.93	70.00	-19.07	peak	100	24
12	2415.000	-4.12	37.36	33.24	50.00	-16.76	AVG	100	24

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Seben




5.7. Test Photographs (30MHz ~ 1000MHz)

lifting rotation base

Front View



Rear View

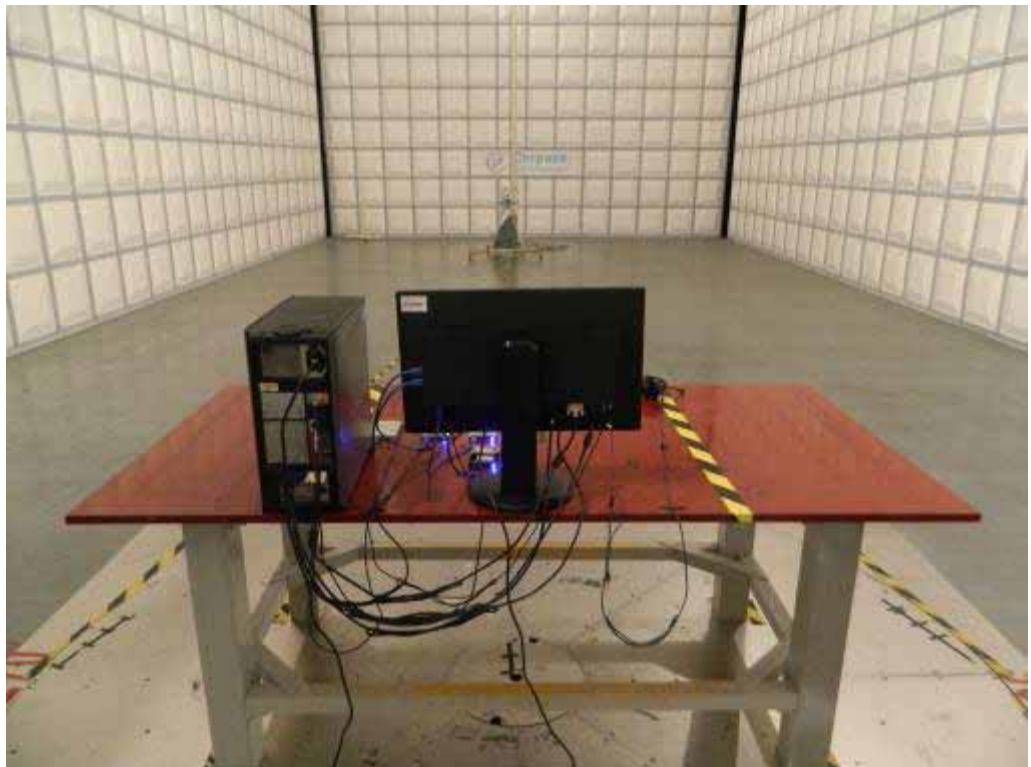




common base

Front View



Rear View

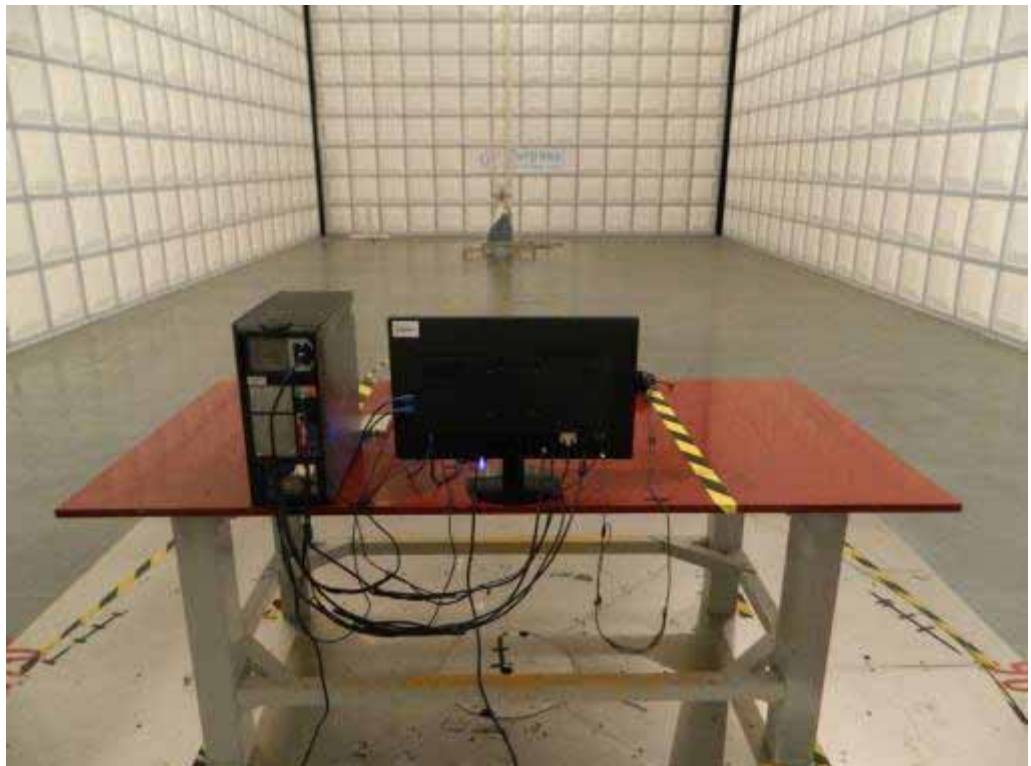




5.8. Test Photographs (1000MHz ~ 6000MHz)

lifting rotation base

Front View



Rear View

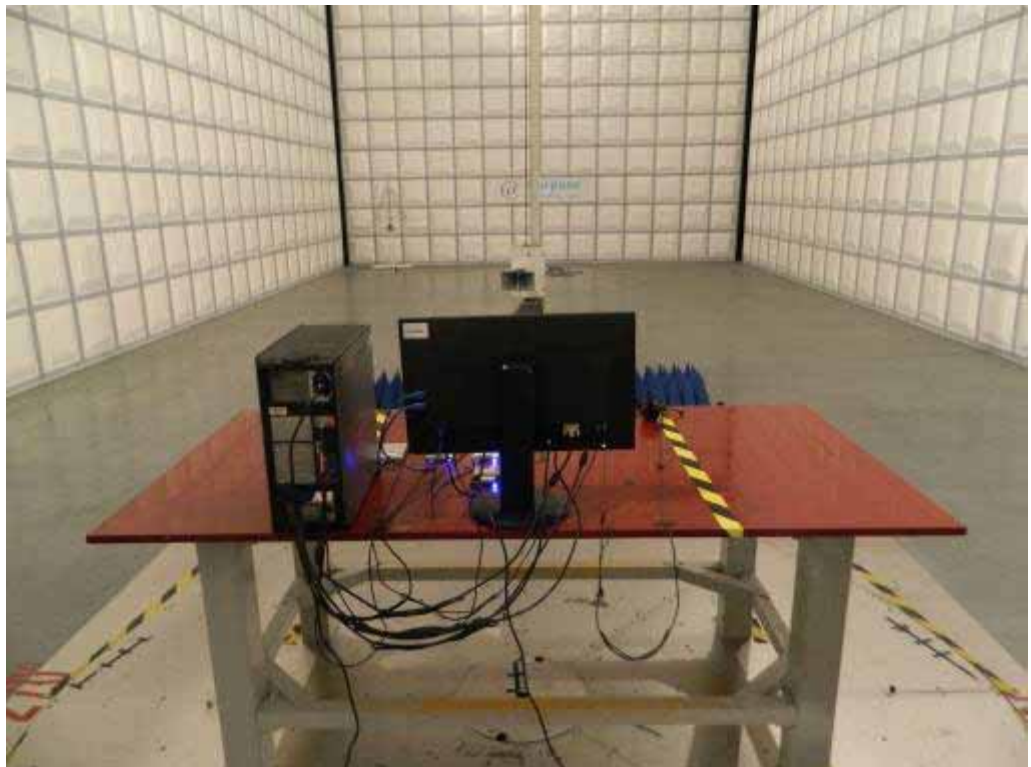



common base

Front View



Rear View





6. Harmonics Test

6.1. Limits Of Harmonics Current Measurement

Limits for Class A equipment		Limits for Class D equipment		
Harmonics Order n	Max. Permissible harmonics current A	Harmonics Order n	Max. Permissible harmonics current per watt mA/W	Max. Permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
15<=n<=39	0.15 × 15/n	15<=n<=39	3.85/n	0.15 x15/n
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
8<=n<=40	0.23 × 8/n			


6.2. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2013.03.10	2014.03.09



6.3. Test Result and Data

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 1
Model No.	:	238LM00001
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 21, 2013

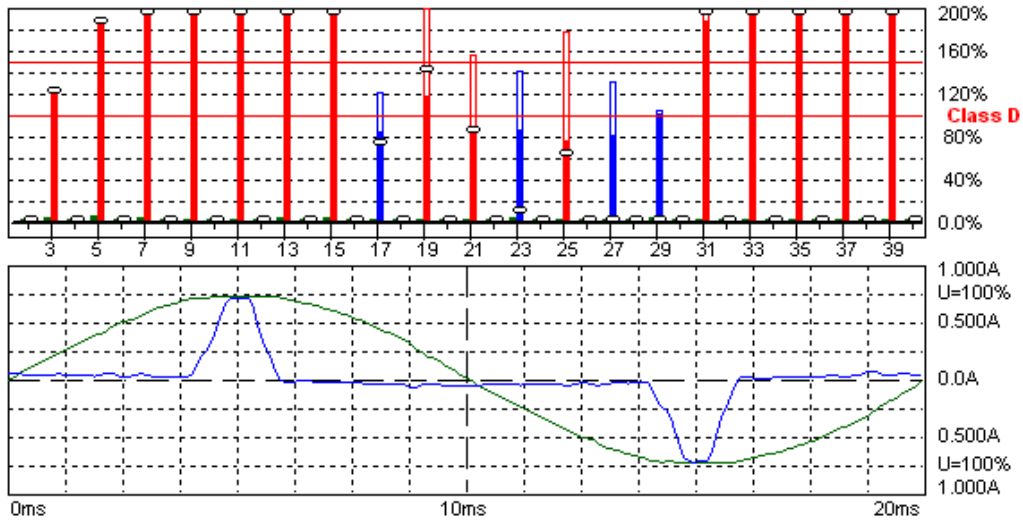

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)

2013-6-21 15:25:02 harmonic.hsu

Urms = 227.8 V P = 26.58 W THC = 0.184 A Range: 1 A
 Irms = 0.217 A pf = 0.537 Pmax = 26.60 W V-nom: 230 V
 TestTime: 15 min (100%)

HAR-1000 EMC-Partner

Full Bar : Actual Values
 Empty Bar : Maximum Values
 Blue : Current , Green : Voltage , Red : Failed

Urms = 227.8V Freq = 49.987 Range: 1 A
 Irms = 0.217A Ipk = 0.726A cf = 3.339
 P = 26.58W S = 49.49VA pf = 0.537
 THDi = 83.1 % THDu = 1.80 % Class D
 Test - Time : 15min (100 %)
 Limit Reference: Pmax = 26.605W
 Test completed




Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]	Status
1	50	0.1229		0.1233			
2	100	0.0006		0.0014			
3	150	0.1090	120.51	0.1096	121.18	0.00	N/L
4	200	0.0008		0.0014			
5	250	0.0941	186.07	0.0958	189.45	0.00	N/L
6	300	0.0010		0.0015			
7	350	0.0801	300.99	0.0833	312.92	0.00	N/L
8	400	0.0009		0.0016			
9	450	0.0604	453.78	0.0645	484.98	0.00	N/L
10	500	0.0009		0.0016			
11	550	0.0414	445.06	0.0460	493.57	0.00	N/L
12	600	0.0007		0.0015			
13	650	0.0266	336.97	0.0314	398.94	0.00	N/L
14	700	0.0005		0.0013			
15	750	0.0132	193.07	0.0164	239.54	0.00	N/L
16	800	0.0005		0.0012			
17	850	0.0050	83.066	0.0071	118.52	0.00	N/L
18	900	0.0005		0.0012			
19	950	0.0062	115.48	0.0118	218.51	0.00	N/L
20	1000	0.0006		0.0011			
21	1050	0.0042	86.343	0.0075	153.92	0.00	N/L
22	1100	0.0006		0.0011			
23	1150	0.0037	83.602	0.0062	139.79	0.00	N/L
24	1200	0.0005		0.0011			
25	1250	0.0030	72.995	0.0072	175.78	0.00	N/L
26	1300	0.0005		0.0010			
27	1350	0.0030	78.835	0.0049	128.71	0.00	N/L
28	1400	0.0005		0.0010			
29	1450	0.0035	98.499	0.0036	101.96	0.00	N/L
30	1500	0.0005		0.0009			
31	1550	0.0061	184.72	0.0100	302.95	0.00	N/L
32	1600	0.0005		0.0009			
33	1650	0.0059	190.74	0.0088	283.16	0.00	N/L
34	1700	0.0004		0.0008			
35	1750	0.0060	206.47	0.0092	314.92	0.00	N/L
36	1800	0.0004		0.0007			
37	1850	0.0068	246.93	0.0076	273.39	0.00	N/L
38	1900	0.0005		0.0007			
39	1950	0.0073	276.55	0.0075	285.84	0.00	N/L
40	2000	0.0005		0.0008			

The power of EUT is less than 75W after the testing. According the standard, the equipment with a rated power of 75W or less, other than lighting equipment, limits are not specified in this standard. So the test data needn't list.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 5
Model No.	:	238LM00001
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 21, 2013

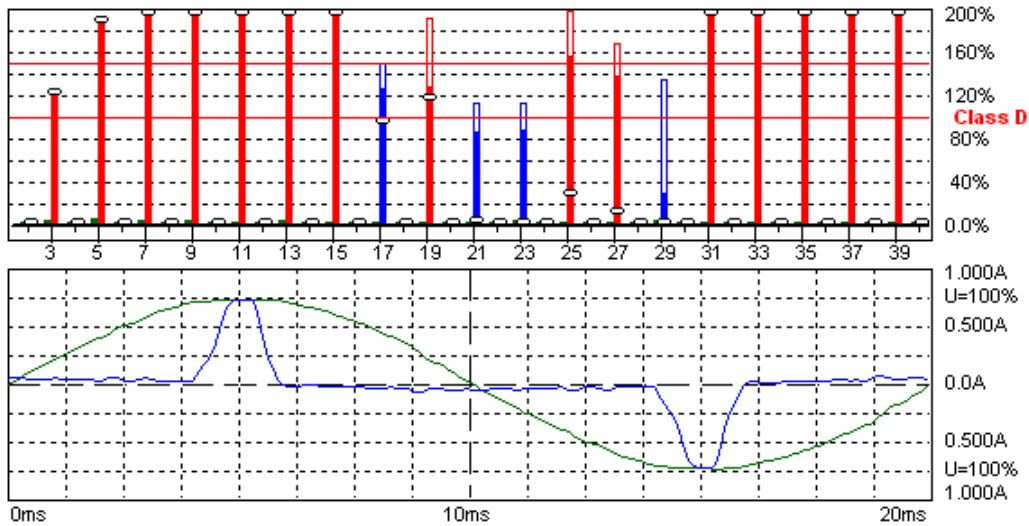

Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)

2013-6-21 15:42:54 harmonic.hsu

Urms = 228.1 V	P = 26.51 W	THC = 0.190 A	Range: 1 A
Irms = 0.222 A	pf = 0.524	Pmax = 26.57 W	V-nom: 230 V
			TestTime: 15 min (100%)

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 228.1V Freq = 50.013 Range: 1 A
Irms = 0.222A Ipk = 0.755A cf = 3.405
P = 26.51W S = 50.58VA pf = 0.524
THDi = 84.0 % THDu = 1.90 % Class D
Test - Time : 15min (100 %)
Limit Reference: Pmax = 26.568W
Test completed




Order	Freq. [Hz]	I _{rms} [A]	I _{rms} %L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]	Status
1	50	0.1226		0.1232			
2	100	0.0007		0.0009			
3	150	0.1093	121.01	0.1096	121.28	0.00	N/L
4	200	0.0007		0.0011			
5	250	0.0953	188.86	0.0959	189.95	0.00	N/L
6	300	0.0009		0.0013			
7	350	0.0828	311.51	0.0840	316.34	0.00	N/L
8	400	0.0009		0.0014			
9	450	0.0646	486.11	0.0660	496.68	0.00	N/L
10	500	0.0008		0.0013			
11	550	0.0463	497.53	0.0478	513.94	0.00	N/L
12	600	0.0007		0.0011			
13	650	0.0315	400.27	0.0333	423.54	0.00	N/L
14	700	0.0006		0.0009			
15	750	0.0170	248.82	0.0187	273.89	0.00	N/L
16	800	0.0005		0.0009			
17	850	0.0074	123.76	0.0089	147.09	0.00	N/L
18	900	0.0005		0.0009			
19	950	0.0068	125.84	0.0101	188.20	0.00	N/L
20	1000	0.0005		0.0009			
21	1050	0.0041	83.956	0.0054	111.52	0.00	N/L
22	1100	0.0005		0.0009			
23	1150	0.0038	85.090	0.0049	111.17	0.00	N/L
24	1200	0.0006		0.0008			
25	1250	0.0063	153.65	0.0080	195.42	0.00	N/L
26	1300	0.0006		0.0007			
27	1350	0.0051	135.33	0.0063	165.94	0.00	N/L
28	1400	0.0006		0.0007			
29	1450	0.0010	27.687	0.0047	133.24	0.00	N/L
30	1500	0.0005		0.0007			
31	1550	0.0073	220.12	0.0103	310.76	0.00	N/L
32	1600	0.0005		0.0007			
33	1650	0.0068	218.57	0.0095	305.21	0.00	N/L
34	1700	0.0004		0.0007			
35	1750	0.0070	238.08	0.0091	311.18	0.00	N/L
36	1800	0.0004		0.0006			
37	1850	0.0060	216.36	0.0082	295.84	0.00	N/L
38	1900	0.0005		0.0007			
39	1950	0.0058	221.08	0.0080	304.85	0.00	N/L
40	2000	0.0005		0.0007			

The power of EUT is less than 75W after the testing. According the standard, the equipment with a rated power of 75W or less, other than lighting equipment, limits are not specified in this standard. So the test data needn't list.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 9
Model No.	:	238LM00001
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 21, 2013

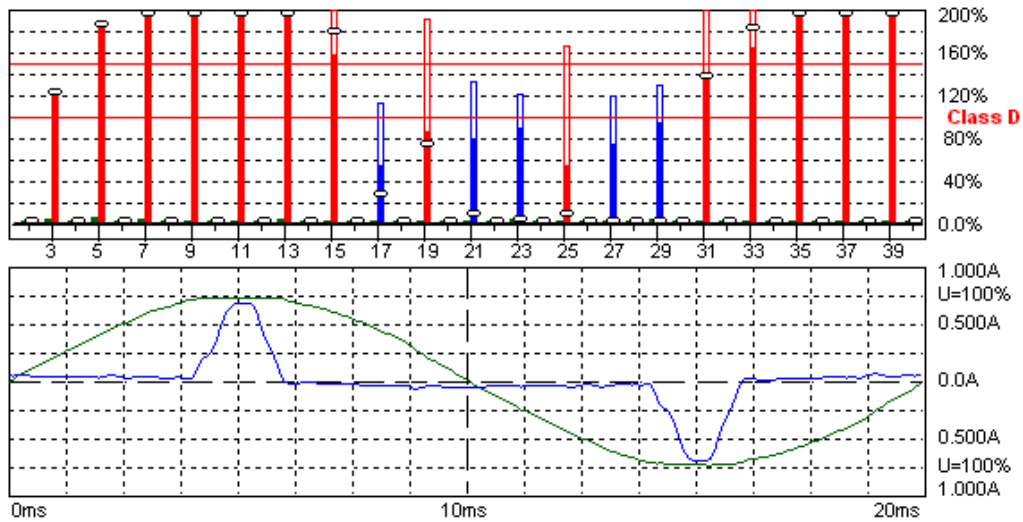

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)

2013-6-21 16:25:29 harmonic.hsu

Urms = 228.9 V P = 26.48 W THC = 0.179 A Range: 1 A
 Irms = 0.214 A pf = 0.541 Pmax = 26.52 W V-nom: 230 V
 TestTime: 15 min (100%)

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 228.9V Freq = 49.987 Range: 1 A
 Irms = 0.214A Ipk = 0.712A cf = 3.331
 P = 26.48W S = 48.96VA pf = 0.541
 THDi = 82.5 % THDu = 1.80 % Class D
 Test - Time : 15min (100 %)
 Limit Reference: Pmax = 26.520W
 Test completed




Order	Freq. [Hz]	I _{rms} [A]	I _{rms} %L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]	Status
1	50	0.1224		0.1232			
2	100	0.0007		0.0013			
3	150	0.1079	119.68	0.1088	120.62	0.00	N/L
4	200	0.0009		0.0013			
5	250	0.0923	183.15	0.0942	187.02	0.00	N/L
6	300	0.0010		0.0015			
7	350	0.0778	293.21	0.0808	304.71	0.00	N/L
8	400	0.0011		0.0016			
9	450	0.0576	434.52	0.0620	467.66	0.00	N/L
10	500	0.0010		0.0014			
11	550	0.0385	414.92	0.0436	470.16	0.00	N/L
12	600	0.0009		0.0012			
13	650	0.0237	301.52	0.0285	362.91	0.00	N/L
14	700	0.0008		0.0010			
15	750	0.0106	156.02	0.0144	211.62	0.00	N/L
16	800	0.0007		0.0010			
17	850	0.0031	51.828	0.0067	110.77	0.00	N/L
18	900	0.0007		0.0010			
19	950	0.0045	84.048	0.0102	189.68	0.00	N/L
20	1000	0.0007		0.0010			
21	1050	0.0037	76.576	0.0063	130.56	0.00	N/L
22	1100	0.0006		0.0010			
23	1150	0.0038	86.619	0.0053	119.62	0.00	N/L
24	1200	0.0005		0.0009			
25	1250	0.0021	52.306	0.0067	164.39	0.00	N/L
26	1300	0.0005		0.0009			
27	1350	0.0027	72.631	0.0045	117.82	0.00	N/L
28	1400	0.0005		0.0009			
29	1450	0.0032	91.879	0.0045	128.28	0.00	N/L
30	1500	0.0005		0.0009			
31	1550	0.0045	135.28	0.0097	294.65	0.00	N/L
32	1600	0.0006		0.0009			
33	1650	0.0051	163.73	0.0096	311.68	0.00	N/L
34	1700	0.0004		0.0008			
35	1750	0.0061	209.22	0.0109	374.51	0.00	N/L
36	1800	0.0004		0.0007			
37	1850	0.0065	236.66	0.0086	311.86	0.00	N/L
38	1900	0.0004		0.0008			
39	1950	0.0070	268.11	0.0079	303.08	0.00	N/L
40	2000	0.0005		0.0008			

The power of EUT is less than 75W after the testing. According the standard, the equipment with a rated power of 75W or less, other than lighting equipment, limits are not specified in this standard. So the test data needn't list.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 13
Model No.	:	238LM00001
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 21, 2013

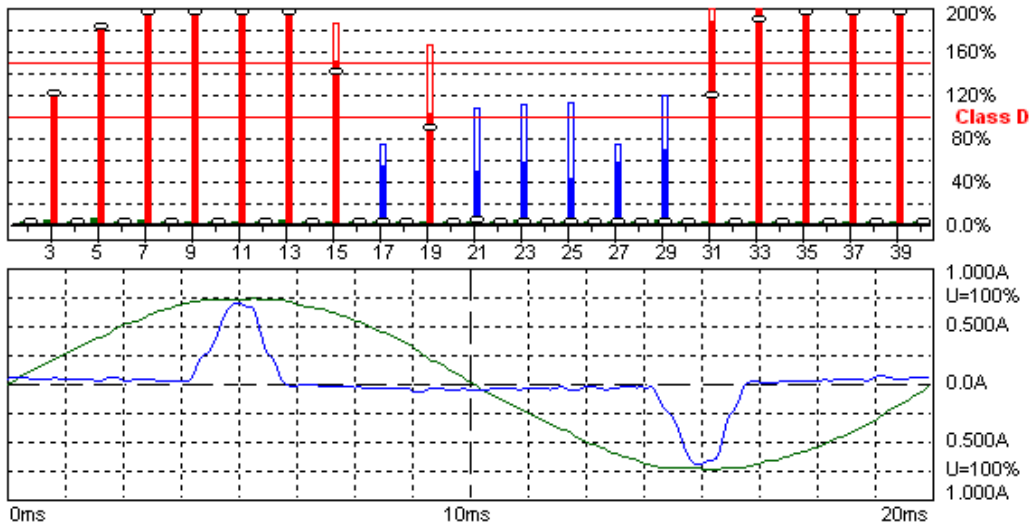

Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)

2013-6-21 16:41:31 harmonic.hsu

Urms = 229.3 V P = 26.48 W THC = 0.177 A Range: 1 A
 Irms = 0.212 A pf = 0.544 Pmax = 26.62 W V-nom: 230 V
 TestTime: 15 min (100%)

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.3V Freq = 49.974 Range: 1 A
 Irms = 0.212A Ipk = 0.719A cf = 3.386
 P = 26.48W S = 48.71VA pf = 0.544
 THDi = 82.3 % THDu = 1.80 % Class D
 Test - Time : 15min (100 %)
 Limit Reference: Pmax = 26.615W
 Test completed



6.4. Test Photographs

lifting rotation base



common base





7. Voltage Fluctuations Test

7.1. Test Procedure

The equipment shall be tested under the conditions of **Clause 5**.

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure.


7.2. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2013.03.10	2014.03.09



7.3. Test Result and Data

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 1
Model No.	:	238LM00001
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 21, 2013

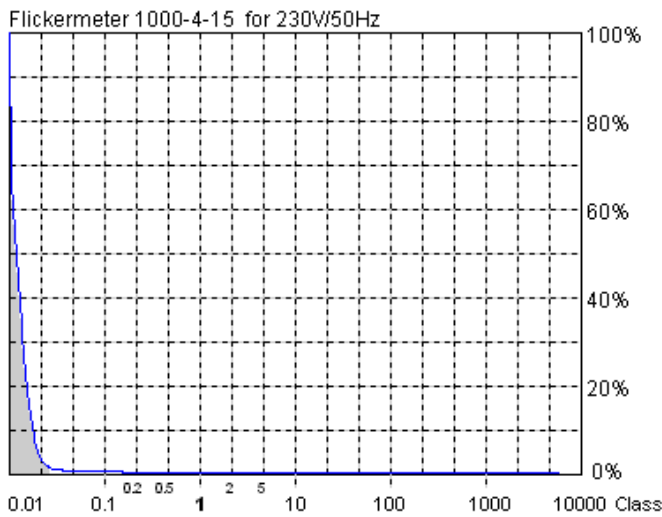

Actual Flicker (Fli): 0.01
Short-term Flicker (Pst): 0.14
 Limit (Pst): 1.00
Long-term Flicker (Plt): 0.14
 Limit (Plt): 0.65
Maximum Relative Volt. Change (dmax): 0.01%
 Limit (dmax): 4.00%
Relative Steady-state Voltage Change (dc): 0.50%
 Limit (dc): 3.30%
Maximum Interval exceeding 3.30% (dt): 0.00ms
 Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

Urms = 228.3 V P = 26.60 W
 Irms = 0.218 A pf = 0.534

2013-6-21 15:08:53 harmonic.hsu

Range: 1 A
 V-nom: 230 V
 TestTime: 10 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Parber

- Full Bar : Actual Values
- Empty Bar : Maximum Values
- Circles : Average Values
- Blue : Current , Green : Voltage , Red : Failed



Urms = 228.3V Freq = 50.013 Range: 1 A
Irms = 0.218A Ipk = 0.732A cf = 3.356
P = 26.60W S = 49.84VA pf = 0.534

Test - Time : 1 x 10min = 10min (100 %)


LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 5
Model No.	:	238LM00001
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 21, 2013

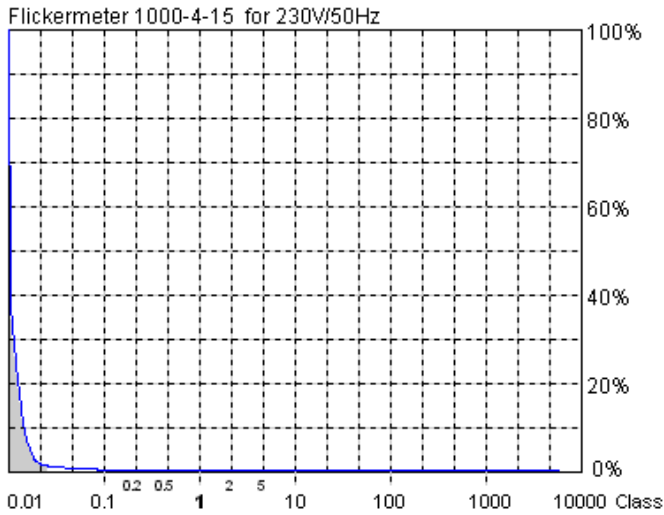

Actual Flicker (Fli): 0.01
Short-term Flicker (Pst): 0.11
 Limit (Pst): 1.00
Long-term Flicker (Plt): 0.11
 Limit (Plt): 0.65
Maximum Relative Volt. Change (dmax): 0.01%
 Limit (dmax): 4.00%
Relative Steady-state Voltage Change (dc): 0.59%
 Limit (dc): 3.30%
Maximum Interval exceeding 3.30% (dt): 0.00ms
 Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

Urms = 228.3 V P = 28.22 W
 Irms = 0.244 A pf = 0.506

2013-6-21 15:57:47 harmonic.hsu

Range: 50 A
 V-nom: 230 V
 TestTime: 10 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Parter

- Full Bar : Actual Values
- Empty Bar : Maximum Values
- Circles : Average Values
- Blue : Current , Green : Voltage , Red : Failed



Urms = 228.3V Freq = 49.974 Range: 50 A
Irms = 0.244A Ipk = 0.903A cf = 3.700
P = 28.22W S = 55.75VA pf = 0.506

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN


Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 9
Model No.	:	238LM00001
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 21, 2013

Flickermeter 1000-4-15 for 230V/50Hz

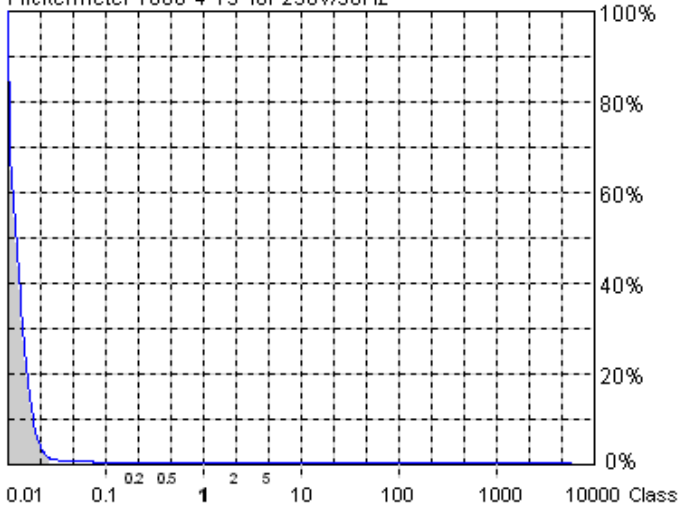

Actual Flicker (Fli): 0.01
Short-term Flicker (Pst): 0.12
 Limit (Pst): 1.00
Long-term Flicker (Plt): 0.12
 Limit (Plt): 0.65
Maximum Relative Volt. Change (dmax): 0.01%
 Limit (dmax): 4.00%
Relative Steady-state Voltage Change (dc): 0.54%
 Limit (dc): 3.30%
Maximum Interval exceeding 3.30% (dt): 0.00ms
 Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

Urms = 228.5 V P = 26.48 W
 Irms = 0.218 A pf = 0.532

2013-6-21 16:08:59 harmonic.hsu

Range: 1 A
 V-nom: 230 V
 TestTime: 10 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Parter

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 228.5V Freq = 50.000 Range: 1 A
Irms = 0.218A Ipk = 0.737A cf = 3.386
P = 26.48W S = 49.77VA pf = 0.532

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN


Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 13
Model No.	:	238LM00001
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 21, 2013

Flickermeter 1000-4-15 for 230V/50Hz

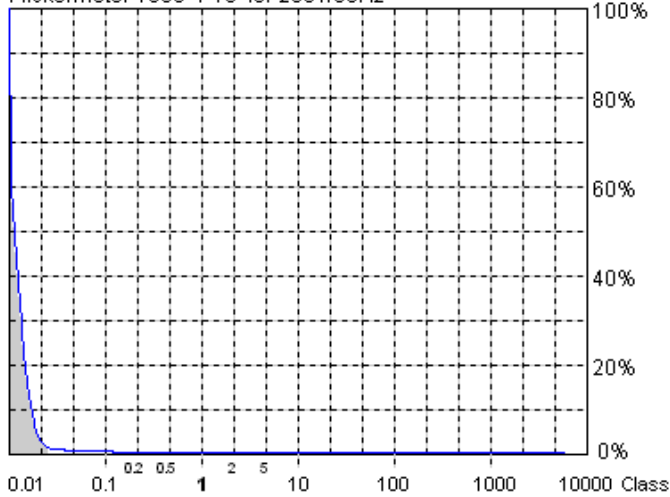

Actual Flicker (Fli): 0.03
Short-term Flicker (Pst): 0.13
 Limit (Pst): 1.00
Long-term Flicker (Plt): 0.13
 Limit (Plt): 0.65
Maximum Relative Volt. Change (dmax): 0.01%
 Limit (dmax): 4.00%
Relative Steady-state Voltage Change (dc): 0.63%
 Limit (dc): 3.30%
Maximum Interval exceeding 3.30% (dt): 0.00ms
 Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

Urms = 230.5 V P = 26.48 W
 Irms = 0.213 A pf = 0.540

2013-6-21 16:52:13 harmonic.hsu

Range: 1 A
 V-nom: 230 V
 TestTime: 10 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 230.5V Freq = 49.974 Range: 1 A
Irms = 0.213A Ipk = 0.711A cf = 3.342
P = 26.48W S = 49.07VA pf = 0.540

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED

Test engineer: _____



7.4. Test Photographs

lifting rotation base



common base






8. Electrostatic Discharge Immunity Test

8.1. Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15 to 35 ;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 KPa (860 hPa) to 106 KPa (1060 hPa).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with both air discharge and contact discharge. On reselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On reselected points at least 25 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
 - ✧ If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - ✧ Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - ✧ The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.



8.2. Test Setup for Tests Performed in Laboratory

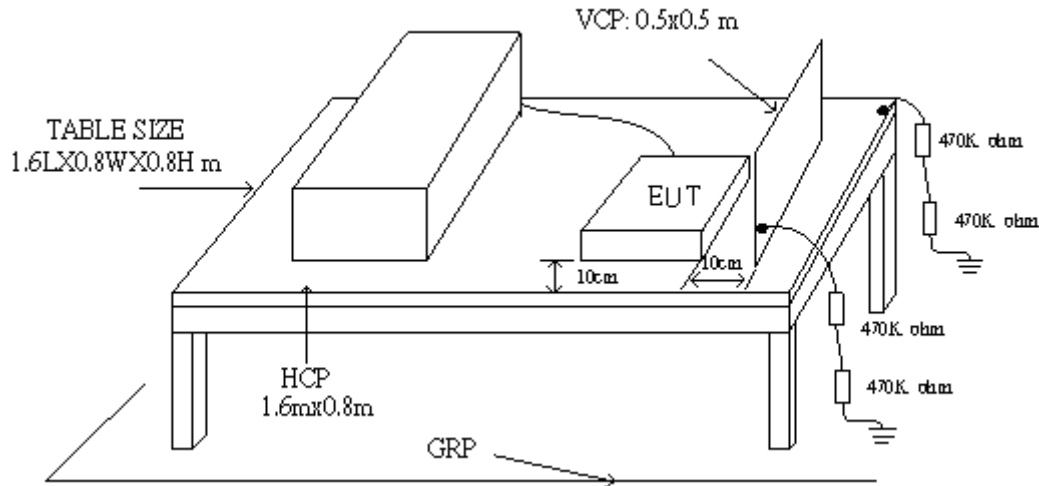

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner :

- a. Contact Discharge to the conductive surfaces and to coupling plane;
- b. Air Discharge at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the Exclusive Certification Corp., we provided 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 2.5 m x 2.5 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resistor located at each end, to prevent a build-up of charge. The test setup



was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.

8.3. Test Severity Levels

Contact Discharge		Air Discharge	
Level	Test Voltage (kV) of Contact discharge	Level	Test Voltage (kV) of Air Discharge
1	±2	1	±2
2	±4	2	±4
3	±6	3	±8
4	±8	4	±15
X	Specified	X	Specified

Remark: "X" is an open level.

8.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
ESD Simulator	EM Test	ditto	V0714102399	2013.03.26	2014.03.25
ESD Simulator	EMC PARTNER	ESD3000	292	2013.02.01	2014.01.31
Tonometer	shanghaifengyun	DYM3	3251	2013.03.22	2014.03.21
Dehumidifier	ZEDO	ZD-220LB	CEP-TH-01	N/A	N/A
Humidifier	YADU	YZ-DS251C	CEP-TH-02	N/A	N/A
Temperature/ Humidity Meter	feiyun	N/A	102	2013.03.10	2014.03.09



8.5. Test Result and Data

Basic Standard : IEC 61000-4-2
 Final Test Result : PASS
 Model No. : 238LM00001
 Pass performance criteria : B
 Test Voltage : ±2 / ±4 / ±8 kV for air discharge,
 : ±2 / ±4 kV for contact discharge
 Temperature : 20°C
 Relative Humidity : 50 %
 Atmospheric Pressure : 100 kPa
 Test Date : Jun 24, 2013

Test Mode 1& Mode 5& Mode 9&Mode 13

	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
Screw	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
Case	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
Panel	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
VGA Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
Display Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
HDMI Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
DVI Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
USB Port	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
Button	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
LED Light	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
Audio Port	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
Power Port	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test engineer:




8.6. Test Photographs

lifting rotation base



common base

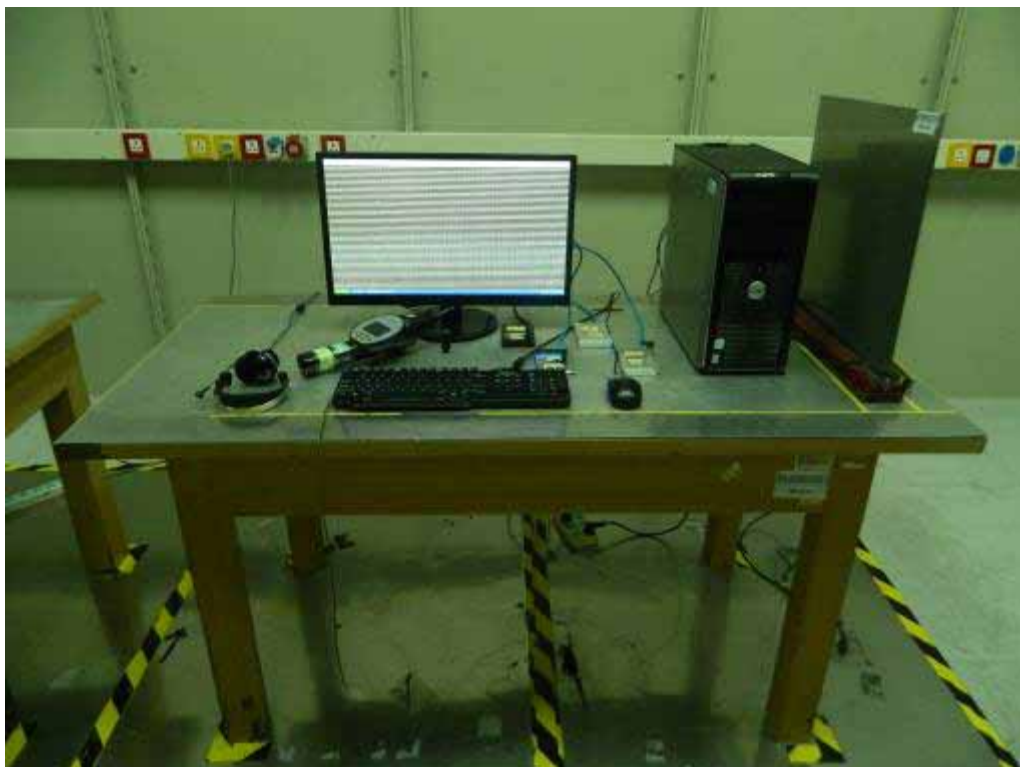



9. Radio Frequency electromagnetic field immunity test

9.1. Test Procedure

- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The antenna which is enabling the complete frequency range of 80-1000 MHz is placed 3m away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- c. The test is normally performed with the antenna facing the most sensitive side of the EUT. The polarization of the field generated by the bucolical antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
- d. At each of the above conditions, the frequency range is swept 80-1000 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of 1.5×10^{-3} decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.



9.2. Test Severity Levels

Frequency Band	
Level	Test field strength (V/m)
1	1
2	3
3	10
X	Specified
Remark: "X" is an open class.	

9.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Signal Generator	R&S	SML03	103287	2013.03.10	2014.03.09
Power Sensor	R&S	NR P-Z91	100383	2013.03.10	2014.03.09
Power Sensor	R&S	NRP-Z91	100384	2013.03.10	2014.03.09
Power Meter	R&S	NRP	101206	2013.03.10	2014.03.09
Power Amplifier	BONN	BLWA0830-16 0/100/40D	076659	2013.03.10	2014.03.09
Istropic Electric Field Probe	EST.LINDGRE N	HI-6105	137445	2012.09.26	2013.09.25
EMS Antenna	R&S	HL046E	100028	N/A	N/A
Temperature/ Humidity Meter	feiyang	N/A	101	2013.03.10	2014.03.09



9.4. Test Result and Data

Basic Standard : IEC 61000-4-3
 Final Test Result : PASS
 Model No. : 238LM00001
 Pass performance criteria : A
 Frequency Range : 80~1000 MHz
 Temperature : 22°C
 Relative Humidity : 50 %
 Atmospheric Pressure : 100 kPa
 Test Date : Jun 24, 2013

Test Mode 1& Mode 5& Mode 9&Mode 13

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Vertical	Front	3 V/m	A
80~1000	Vertical	Rear	3 V/m	A
80~1000	Vertical	Left	3 V/m	A
80~1000	Vertical	Right	3 V/m	A
80~1000	Horizontal	Front	3 V/m	A
80~1000	Horizontal	Rear	3 V/m	A
80~1000	Horizontal	Left	3 V/m	A
80~1000	Horizontal	Right	3 V/m	A

Test engineer: Seben




9.5. Test Photographs

lifting rotation base



common base

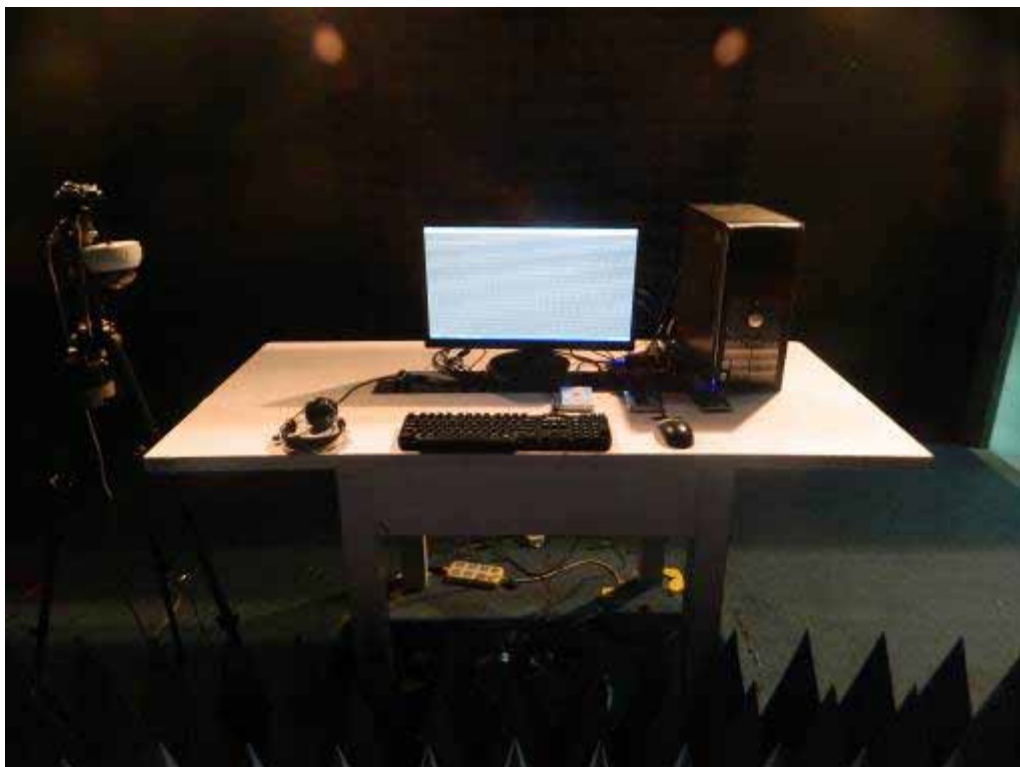



10. Electrical Fast Transient/ Burst Immunity Test

10.1. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
 - ✧ ambient temperature: 15 to 35 ;
 - ✧ relative humidity : 45% to 75%;
 - ✧ Atmospheric pressure: 86 Kpa (860 hPa) to 106 Kpa (1060 hPa).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. Test on Power Line:
 - ✧ The EFT/B-generator was located on the GRP.. The length from the EFT/B-generator to the EUT is not exceeding 1 m.
 - ✧ The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.
- e. Test on Communication Lines
 - ✧ The coupling clamp is composed of a clamp unit for housing the cable (length more than 3 m), and was placed on the GRP.
 - ✧ The coupling clamp provides the ability of coupling the fast transient/bursts to the cable under test.
- f. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
 - ✧ Normal performance within the specification limits.
 - ✧ Temporary degradation or loss of function or performance which is self-recoverable.
 - ✧ Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - ✧ Degradation or loss of function which is not recoverable due to damage of equipment (components).



10.2. Test Severity Levels

The following test severity levels are recommended for the fast transient/burst test :

Open circuit output test voltage $\pm 10\%$		
Level	On Power Supply	On I/O signal, data and control line
1	0.5 kV	0.25 kV
2	1.0 kV	0.50 kV
3	2.0 kV	1.00 kV
4	4.0 kV	2.00 kV
X	Specified	Specified

Remark : “ X ” is an open level. The level is subject to negotiation between the user and the manufacturer or is specified by the manufacturer.

10.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2013.03.10	2014.03.09
CDN	EMCPARTNER	CDN200-06-32	121	2013.03.10	2014.03.09
Coupling clamp	EMCPARTNER	CN-EFT1000	547	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



10.4. Test Result and Data

Basic Standard : IEC 61000-4-4
 Final Test Result : PASS
 Model No. : 238LM00001
 Pass performance criteria : B
 Test Voltage : On Power Supply -- ± 1.0 kV
 : On I/O signal, data and control line -- ± 0.5 kV
 Temperature : 21°C
 Relative Humidity : 51 %
 Atmospheric Pressure : 100 kPa
 Test Date : Jun 24, 2013

Test Mode 1 & Mode 5 & Mode 9 & Mode 13

Pulse : 5/50 ns		Repetition Rate: <u>5 kHz</u> above 2.0 kV			
Burst : 15m/300ms		5 <u>kHz</u> below and equal 2.0 kV			
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	-	+	-
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
	PE	---	---	A	A
	L-PE	---	---	A	A
	N-PE	---	---	A	A
	L-N-PE	---	---	A	A

Test engineer: Seben



10.5. Test Photographs

lifting rotation base



common base





11. Surge Immunity Test

11.1. Test Procedure

a. Climatic conditions

The climatic conditions shall comply with the following requirements :

- ✧ ambient temperature : 15 to 35
- ✧ relative humidity : 10 % to 75 %
- ✧ atmospheric pressure : 86 kPa to 106 kPa (860 hPa to 1060 hPa)

b. Electromagnetic conditions

the electromagnetic environment of the laboratory shall not influence the test results.

c. The test shall be performed according the test plan that shall specify the test set-up with

- ✧ generator and other equipment utilized;
- ✧ test level (voltage/current);
- ✧ generator source impedance;
- ✧ internal or external generator trigger;
- ✧ number of tests : at least five positive and five negative at the selected points;
- ✧ repetition rate : maximum 1/min.
- ✧ inputs and outputs to be tested;
- ✧ representative operating conditions of the EUT;
- ✧ sequence of application of the surge to the circuit;
- ✧ phase angle in the case of AC. power supply;
- ✧ actual installation conditions, for example :

AC : neutral earthed,

DC : (+) or (-) earthed to simulated the actual earthing conditions.

- d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the AC. voltage wave (positive and negative).
- e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.
- g. All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage breakdown level (let-through level) of the primary protection.
- h. If the actual operating signal sources are not available, that may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to a test plan.
- i. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test previously unstressed equipment shall be used to the protection devices shall be replaced.



11.2. Test Severity Level

Level	Open-circuit test voltage, $\pm 10\%$, kV
1	0.5
2	1.0
3	2.0
4	4.0
X	Specified

NOTE: "X" is an open class. This level can be specified in the product specification.

11.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2013.03.10	2014.03.09
CDN	EMCPARTNER	CDN-UTP8	021	2013.03.10	2014.03.09
CDN	EMCPARTNER	CDN200-06-32	121	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



11.5. Test Photographs

lifting rotation base



common base





12. Conduction Disturbances induced by Radio-Frequency Fields

12.1. Test Procedure

- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a sell shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 KHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1KHz sign wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency (ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. An alternative test procedure may be adopted, wherein the frequency range is swept incrementally, with a step size not exceeding 4% of the start ad thereafter 4% of the preceding frequency value. The test level should be at least twice the value of the specified test level.
- g. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- h. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- i. The use of special exercising programs is recommended.
- j. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- k. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.



12.2. Test Severity Levels

Level	Voltage Level (EMF),
1	1 V
2	3 V
3	10 V
x	Specified
NOTE - x is an open class. This level can be specified in the product specification.	

12.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Conducted immunity test system	FRANKONIA	CIT-10/75	102D1294	2013.03.10	2014.03.09
EM Injection clamp	FCC	F-203I-23MM	536	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-T2	A3010029	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-T4	A3015017	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-T8	A3022010	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-M2	A3002037	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-M2+M3	A3011102	2013.03.10	2014.03.09
CDN	FCC	CDN-M5/32	A3013024	2013.03.10	2014.03.09
6 dB Attenuator	FRANKONIA	N/A	N/A	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



12.5. Test Photographs

lifting rotation base




common base





13. Power Frequency Magnetic Field Immunity Tests

13.1. Test Setup

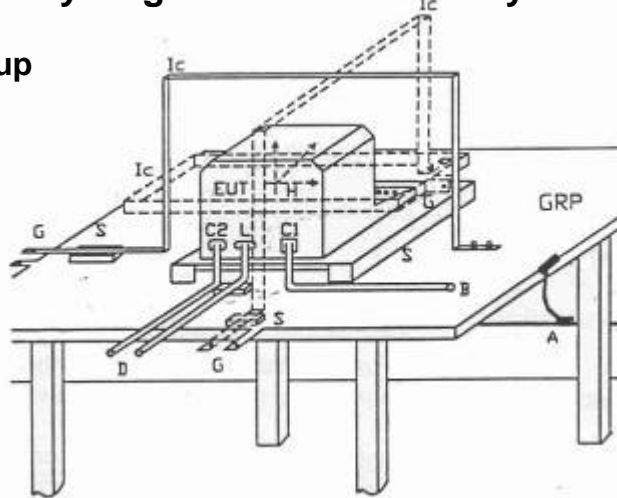

GPR	: Ground plane	C1	: Power supply circuit
A	: Safety earth	C2	: Signal circuit
S	: Insulating support	L	: Communication line
EUT	: Equipment under test	B	: To power supply source
Lc	: Induction coil	D	: To signal source, simulator
E	: Earth terminal	G	: To the test generator

13.2. Test Severity Levels

Level	Magnetic field strength A/m
1	1
2	3
3	10
4	30
5	100
X ¹⁾	special

NOTE 1 "X" is an open level. This level can be given in the product specification.

13.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2013.03.10	2014.03.09
H-Filed-Loop	EMCPARTNER	MF1000-1	144	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



13.4. Test Result and Data

Basic Standard : IEC 61000-4-8
Final Test Result : PASS
Model No. : 238LM00001
Pass performance criteria : A
Temperature : 21°C
Relative Humidity : 51 %
Atmospheric Pressure : 100 kPa
Test Date : Jun 24, 2013
Test Mode 1& Mode 5& Mode 9&Mode 13

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test engineer: Seben



13.5. Test Photographs

lifting rotation base



common base





14. Voltage Dips and Voltage Interruptions Immunity Test Setup

14.1. Test Conditions

1. Source voltage and frequency : 230V / 50Hz, Single phase.
2. Test of interval : 10 sec.
3. Level and duration : Sequence of 3 dips/interrupts.
4. Voltage rise (and fall) time : 1 ~ 5 μ s.
5. Test severity :

Voltage dips and Interrupt reduction (%)	Test Duration (period)
>95%	250
30%	25
>95%	0.5

14.2. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



14.4. Test Photographs

lifting rotation base




common base






15. Photographs of EUT

1) EUT Photo(lifting rotation base)

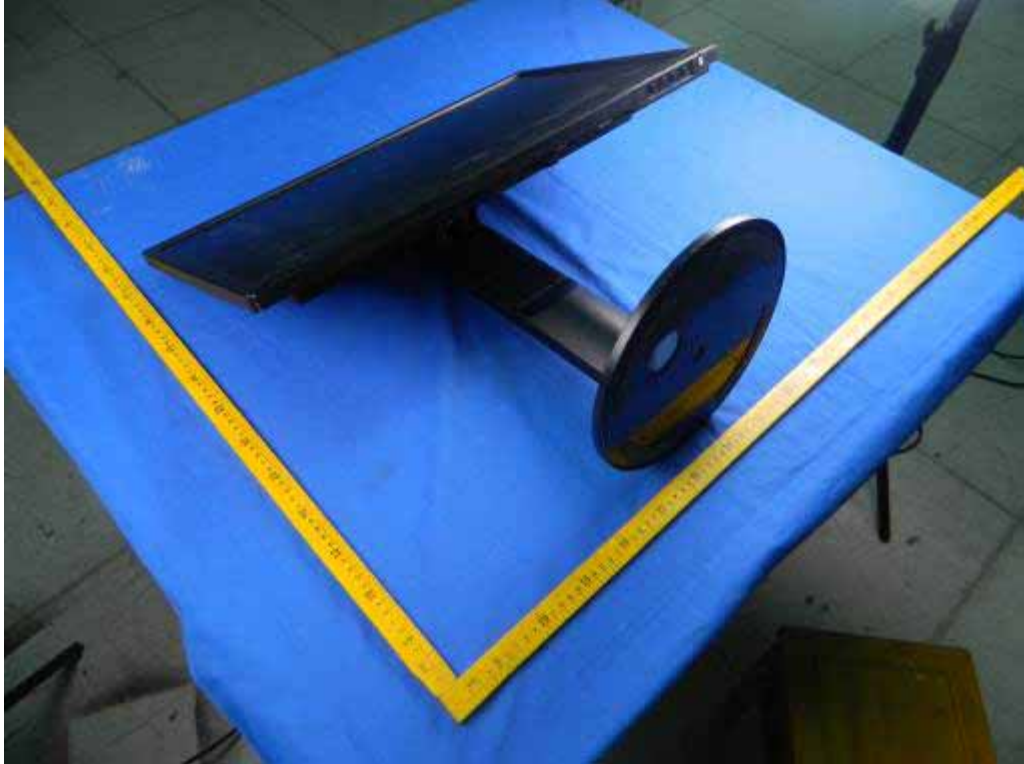

2) EUT Photo(lifting rotation base)

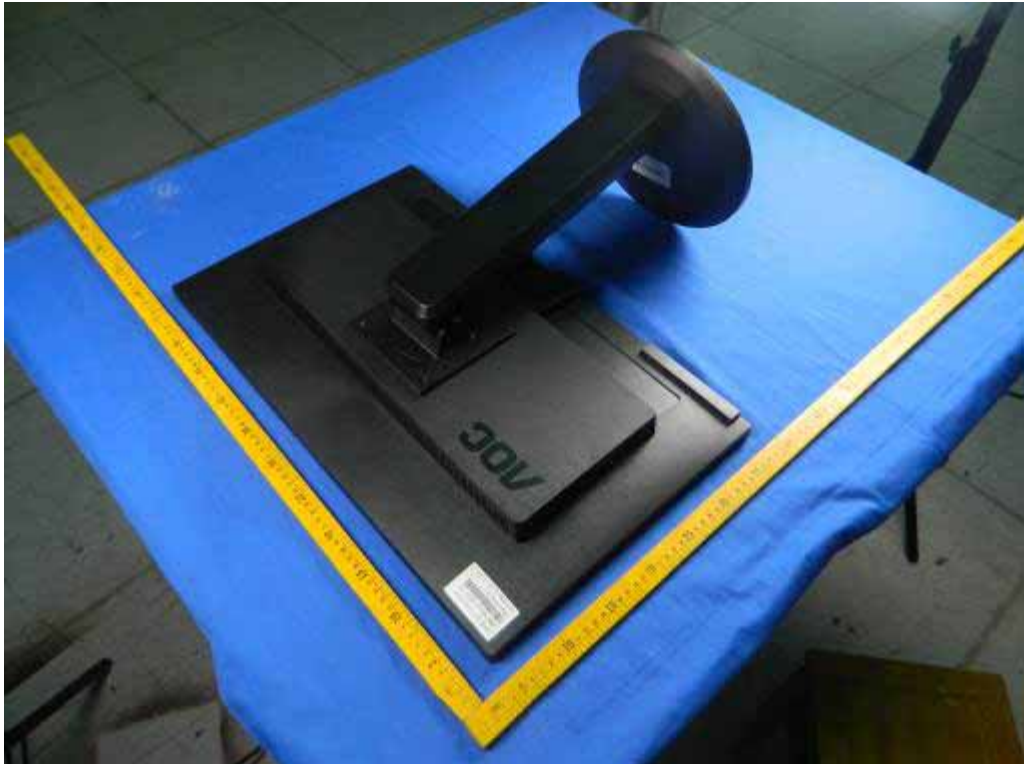




3) EUT Photo(common base)



4) EUT Photo(common base)

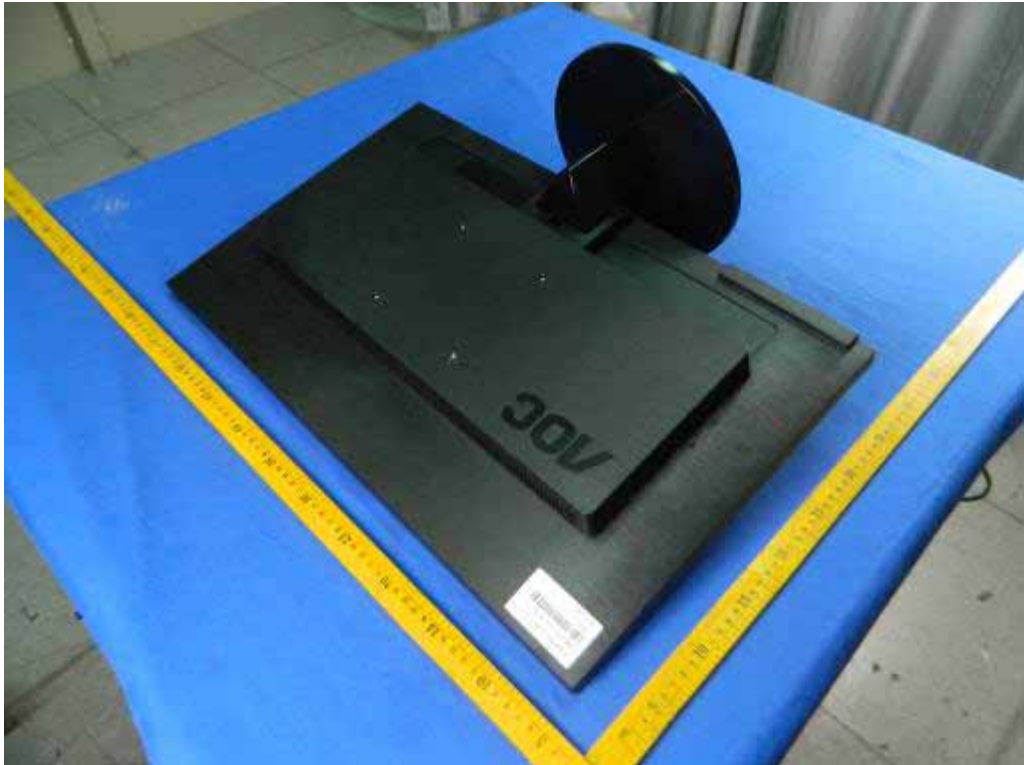



5) EUT Photo



6) EUT Photo





7) EUT Photo

