


Find your product and get support

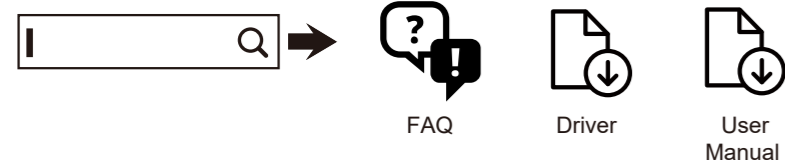

Europe
<https://eu.aoc.com/en/support>

Россия
<https://eu.aoc.com/ru/support>

Australia
https://au.aoc.com/user_manual

Hong Kong S.A.R.
https://hk.aoc.com/user_manual

中國台灣
https://tw.aoc.com/user_manual

Indonesia
https://id.aoc.com/user_manual

日本
https://jp.aoc.com/user_manual

한국
https://kr.aoc.com/user_manual

Malaysia
https://my.aoc.com/user_manual

Myanmar
https://mm.aoc.com/user_manual

New Zealand
https://nz.aoc.com/user_manual

Philippines
https://ph.aoc.com/user_manual

Singapore
https://sg.aoc.com/user_manual

ประเทศไทย
https://th.aoc.com/user_manual

Việt Nam
https://vn.aoc.com/user_manual

Middle East
https://me.aoc.com/user_manual

South Africa
https://za.aoc.com/user_manual

Brasil
<https://aoc.portaltv.com.br/>

India
https://www.aocindia.com/download_manuals.php

US/Canada
<https://us.aoc.com/en-US/downloads>




AOC



Quick Start



24P3CW

www.aoc.com
 ©2022 AOC. All Rights Reserved


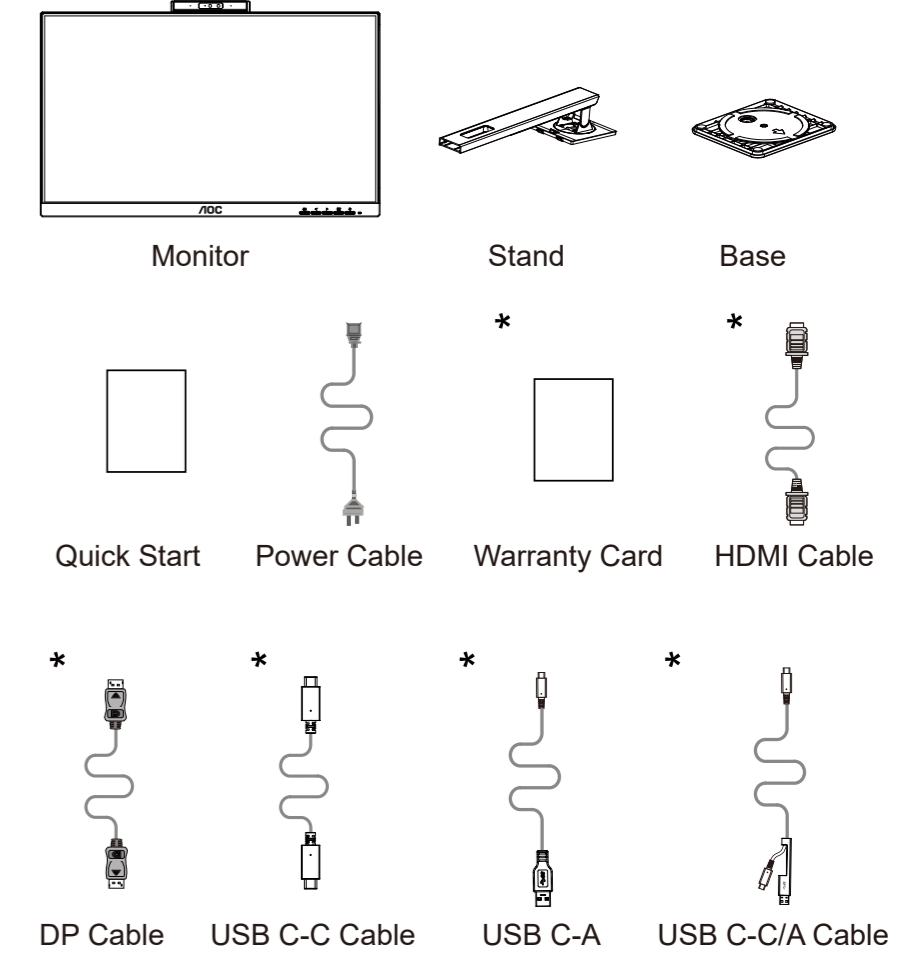


*Different according to countries/regions
 Display design may differ from that illustrated


1

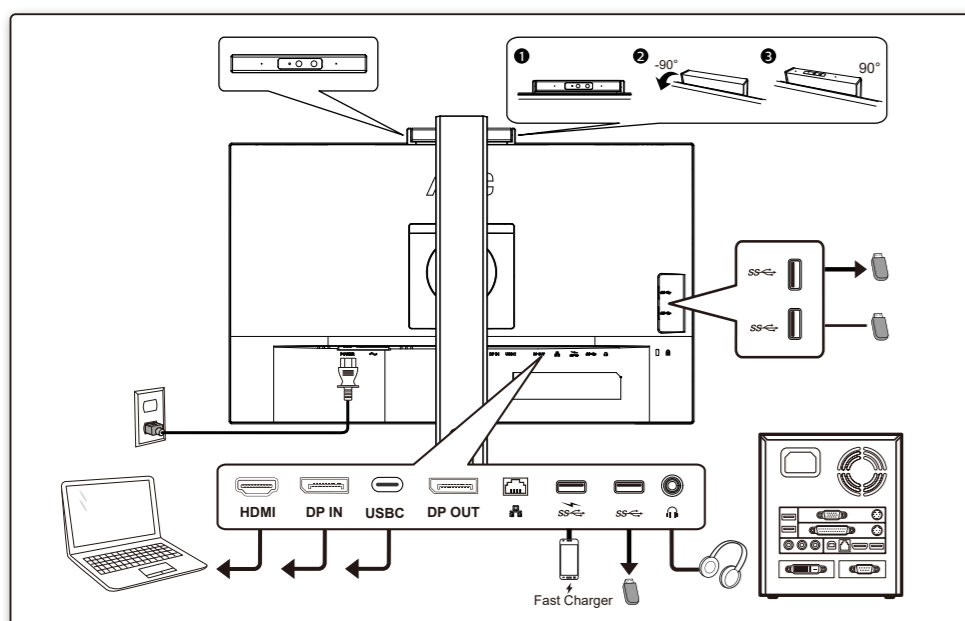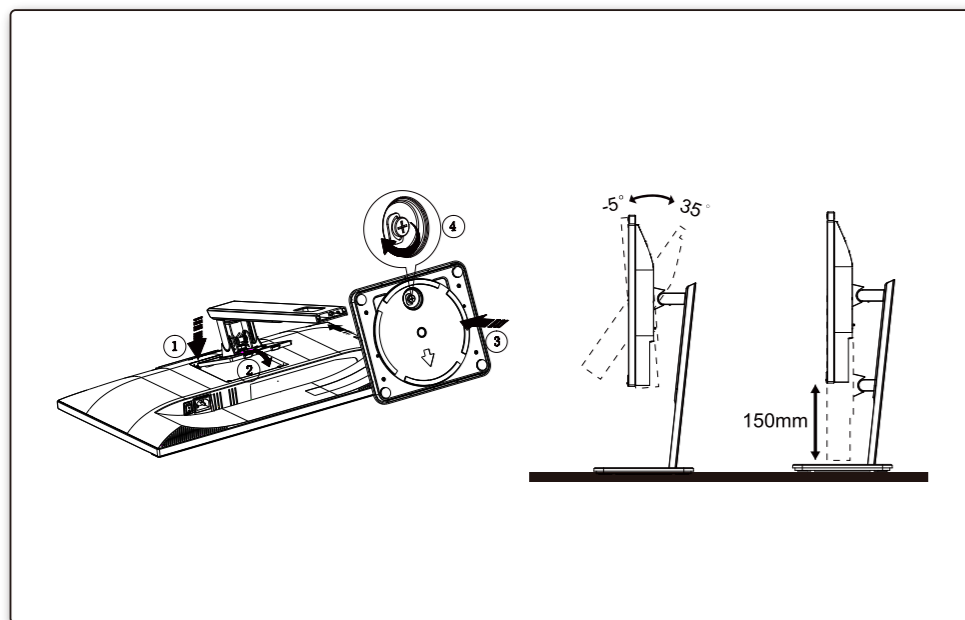

2

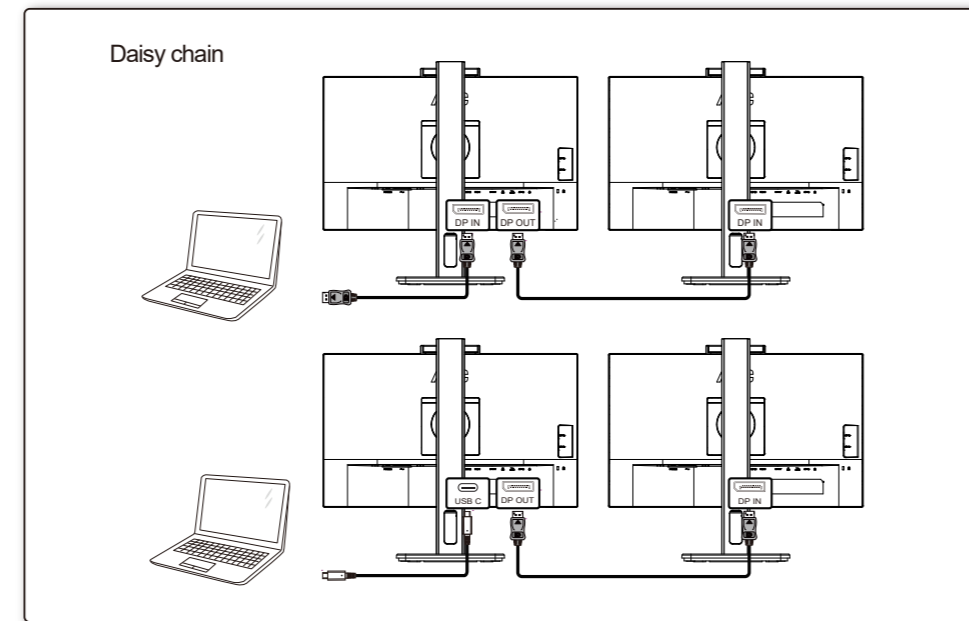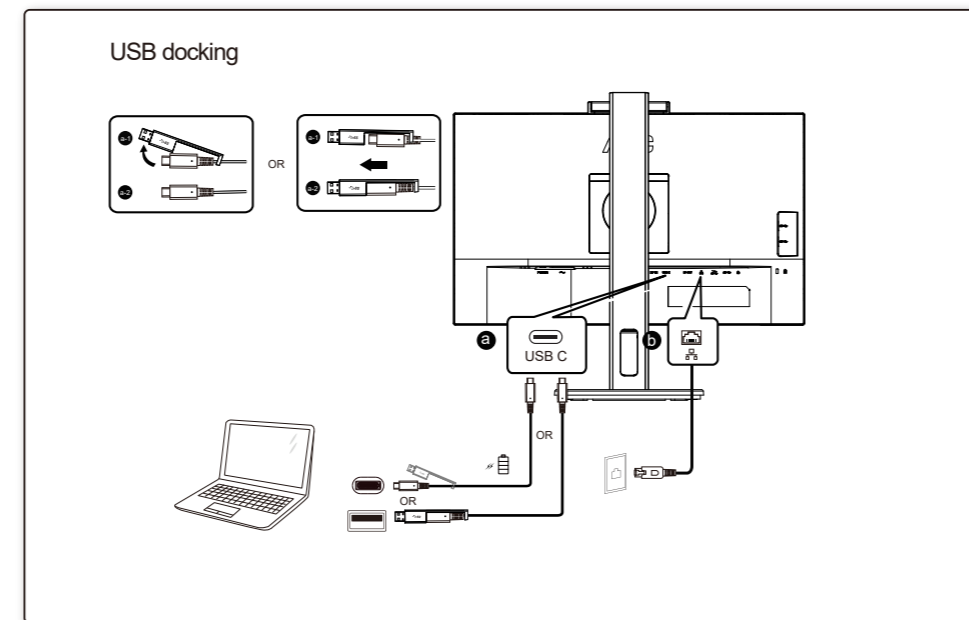

3

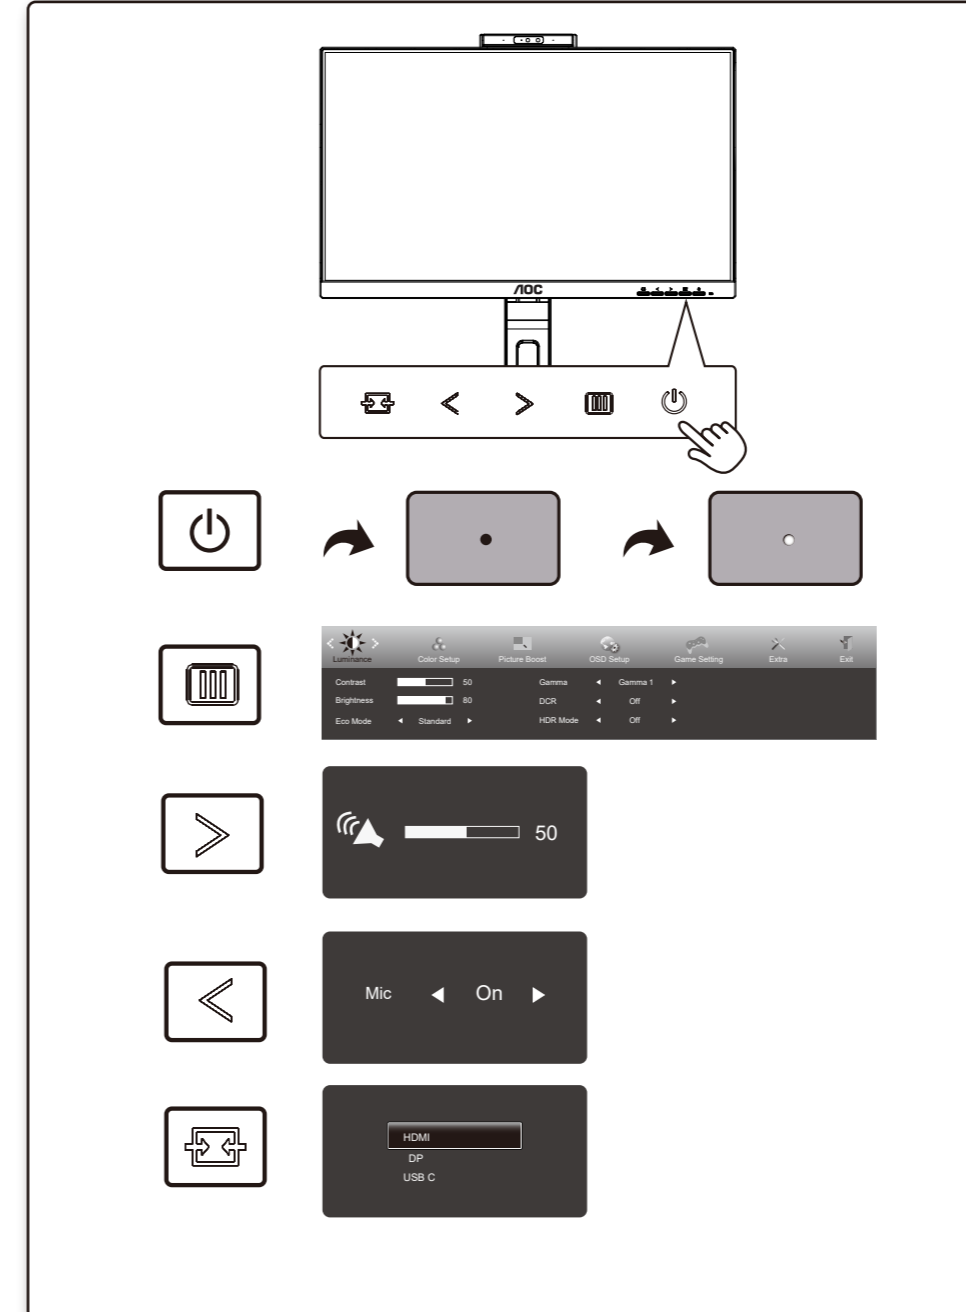

4

General Specification

Panel	Model Name	24P3CW		
	Driving System	TFT Color LCD		
	Viewable Image Size	60.47cm diagonal(23.8" Wide Screen)		
	Pixel Pitch	0.2745mm(H) x 0.2745mm(V)		
Others	Horizontal Scan Range	30k-85kHz		
	Horizontal Scan Size(Maximum)	527.04mm		
	Vertical Scan Range	48-75Hz		
	Vertical Scan Size(Maximum)	296.46mm		
	Max Resolution	1920x1080@75Hz		
	Plug & Play	VESA DDC2B/CI		
	Power Source	100-240V~, 50/60Hz, 1.5A		
	Power Consumption	Typical (default brightness and contrast)	24W	
		Max. (brightness =100, contrast =100)	≤ 139W	
	USB C	Standby Mode	≤ 0.5W	
Dimensions(with stand)		540x(384.4-520.2)x200.1mm(WxHxD)		
Net Weight		5.41kg		
Physical Characteristics	USB-C	Double-sided Connectable Plug		
	Ultra-highSpeed	Data And Video Transmission		
	DP	Built-in DP Alt Mode		
	Power Supply	USB PD Version 3.0		
Environmental	Maximum Power Supply	Up to 65W (5V/3A, 7V/3A, 9V/3A, 10V/3A, 12V/3A, 15V/3A, 20V/3.25A)		
	Connector Type	HDMI/DP IN/USBC/DP OUT/RJ45 -input/ USB3.2 Gen1x4(includes 1 fast charger)/Earphone		
	RJ45	Ethernet LAN (10M/100M/1000M)		
	Signal Cable Type	Detachable		
Environmental	Temperature	Operating	0°C~ 40°C	
		Non-Operating	-25°C~55°C	
	Humidity	Operating	10%~85% (non-condensing)	
		Non-Operating	5%~93% (non-condensing)	
Altitude	Operating	0~5000m (0~16404ft)		
	Non-Operating	0~12192m (0~40000ft)		