


Find your product and get support



Product information for EU/UK Energy




QUICK START GUIDE

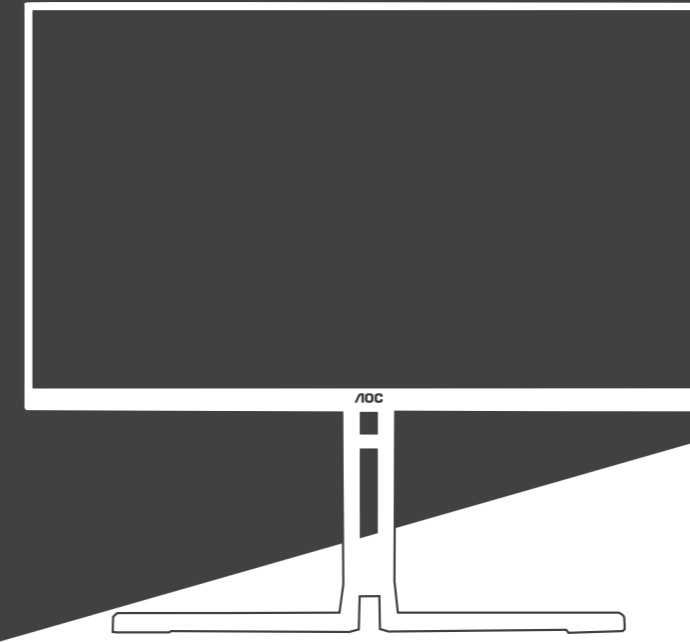



U32U3CV
MONITOR

AOC.COM
©2024 AOC. All rights reserved.


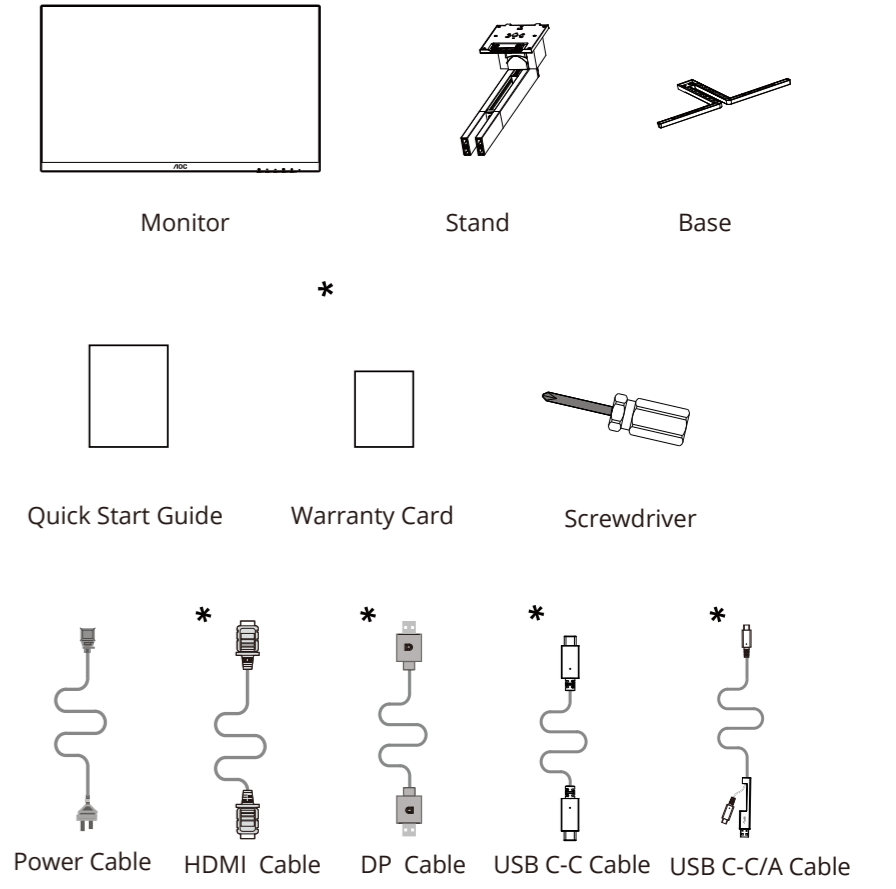


*Different according to countries/regions
Display design may differ from that illustrated


1

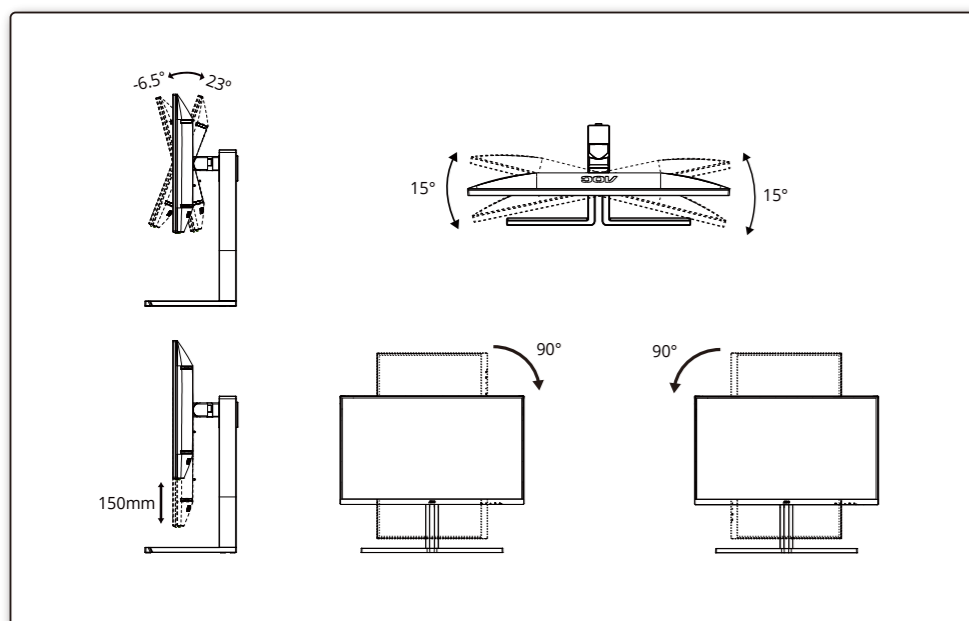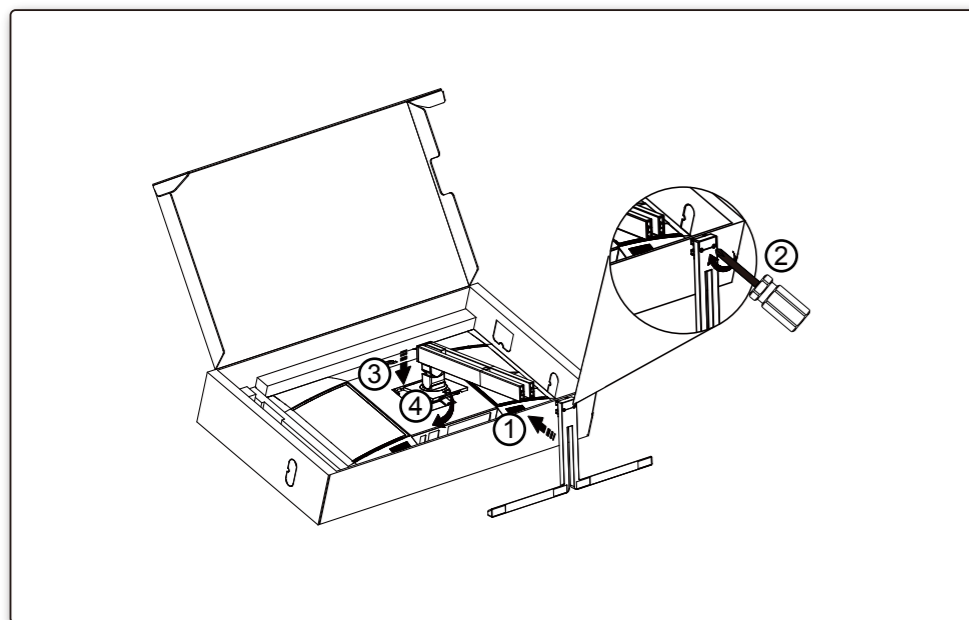

2

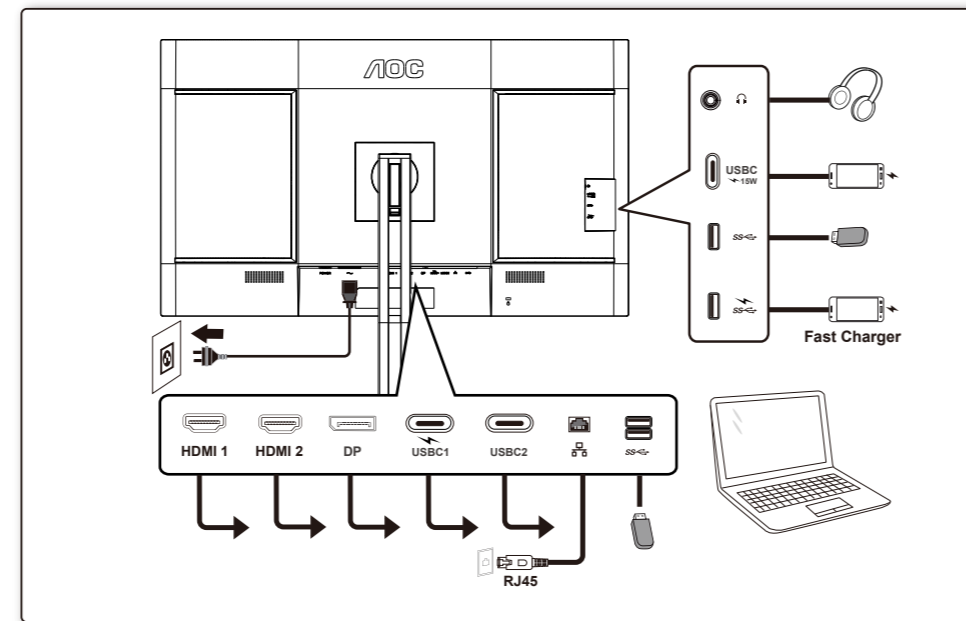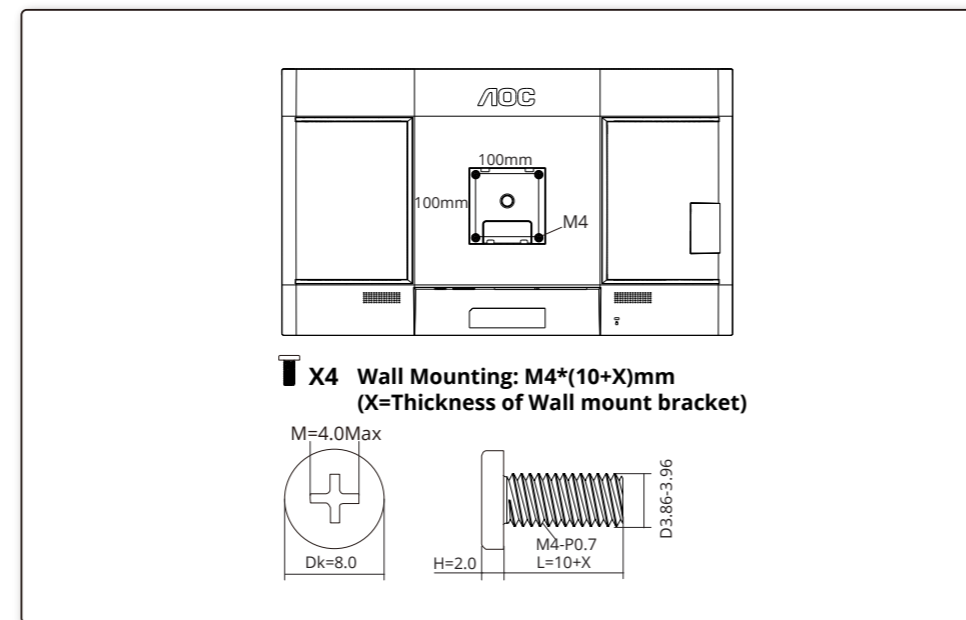

3

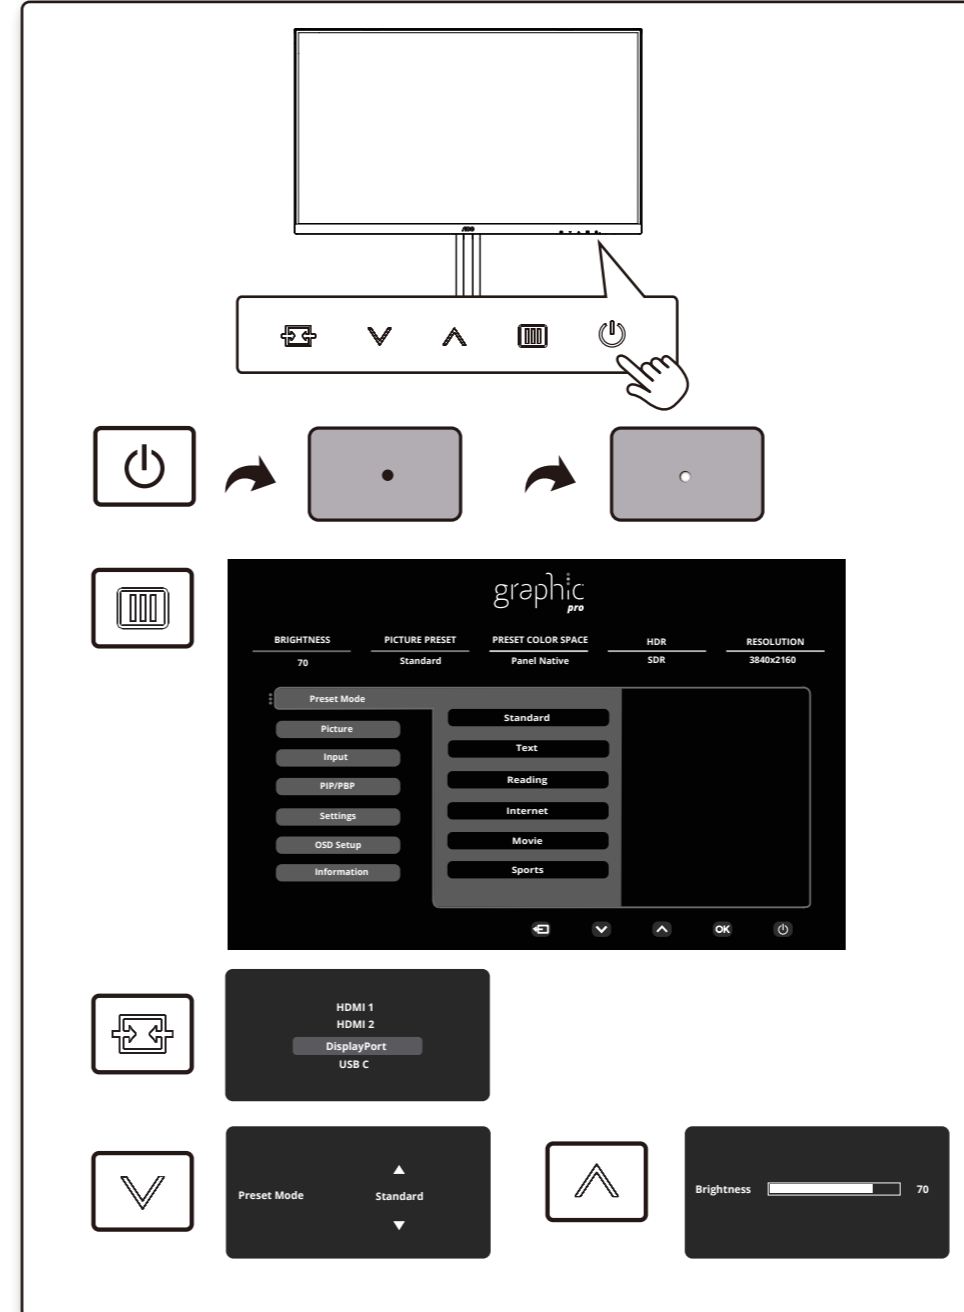

4

General Specification

Panel	Model Name	U32U3CV	
	Driving System	TFT Color LCD	
	Viewable Image Size	80.0cm diagonal (31.5" Wide Screen)	
	Pixel Pitch	0.18159mm(H) x 0.18159mm(V)	
Others	Horizontal Scan Range	30k-140kHz	
	Horizontal Scan Size(Maximum)	697.3mm	
	Vertical Scan Range	23-75Hz	
	Vertical Scan Size(Maximum)	392.2mm	
	Max Resolution	3840x2160@60Hz	
	Plug & Play	VESA DDC2B/CI	
	Power Source	100-240V~ 50/60Hz 3.0A	
Power Consumption	Typical (default brightness and contrast)	46W	
	Max. (brightness =100, contrast =100)	≤ 215W	
	Standby mode	≤ 0.3W	
Dimensions(with stand)	714.4x(459.3-609.3)x258.6mm (WxHxD)		
Net Weight	8.46kg		
Physical Characteristics	Connector Type	HDMIx2, DisplayPort, RJ-45, Earphone, USB C1: Video,PD 96W USB C2: Upstream USB C (Side): Power supply up to 15W USB-Ax4 (include 1 fast charge)	
	Signal Cable Type	Detachable	
	Built-In Speaker	3Wx2	
Environmental	Temperature	Operating	0°C-40°C
		Non-Operating	-25°C-55°C
	Humidity	Operating	10%-85% (Non-Condensing)
		Non-Operating	5%-93% (Non-Condensing)
Altitude	Operating	0m-5000m (0ft-16404ft)	
	Non-Operating	0m-12192m (0ft-40000ft)	