

Find your product and get support




AOC



Quick Start Guide



24B3HA2

www.aoc.com
©2023 AOC. All Rights Reserved


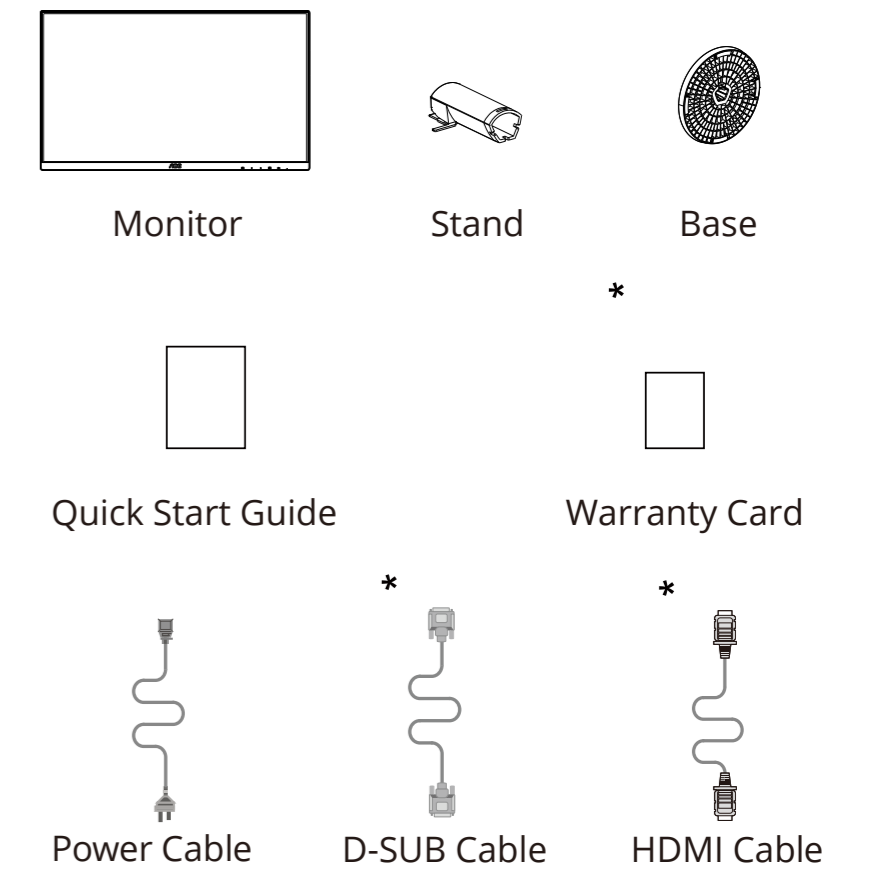


*Different according to countries/regions
Display design may differ from that illustrated


1

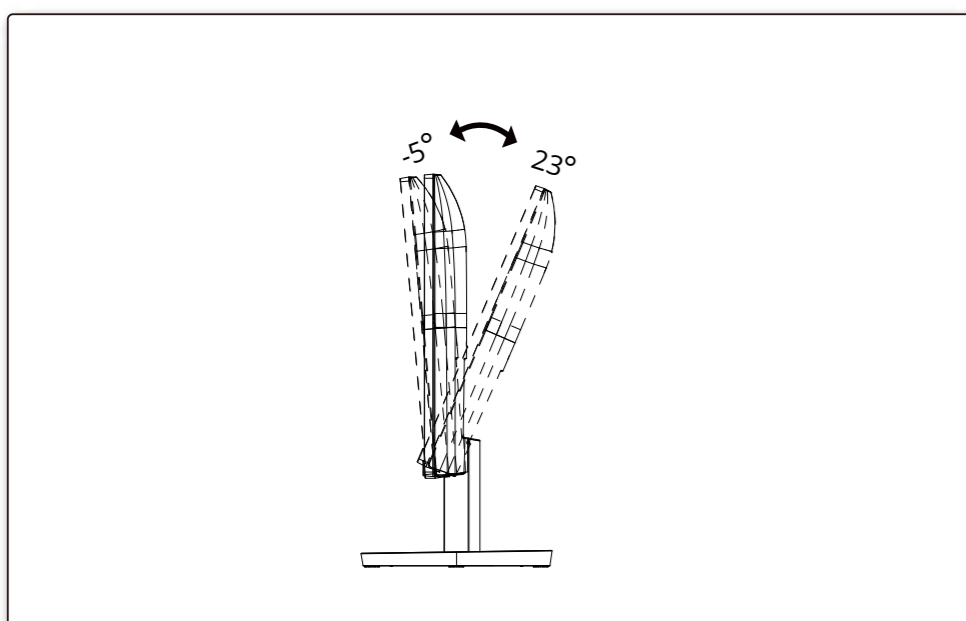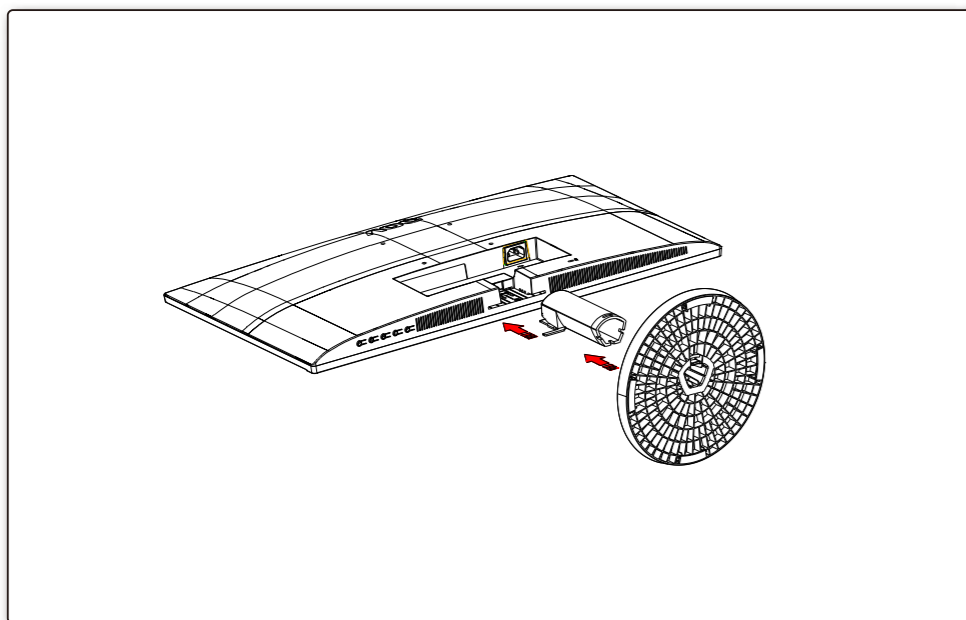

2

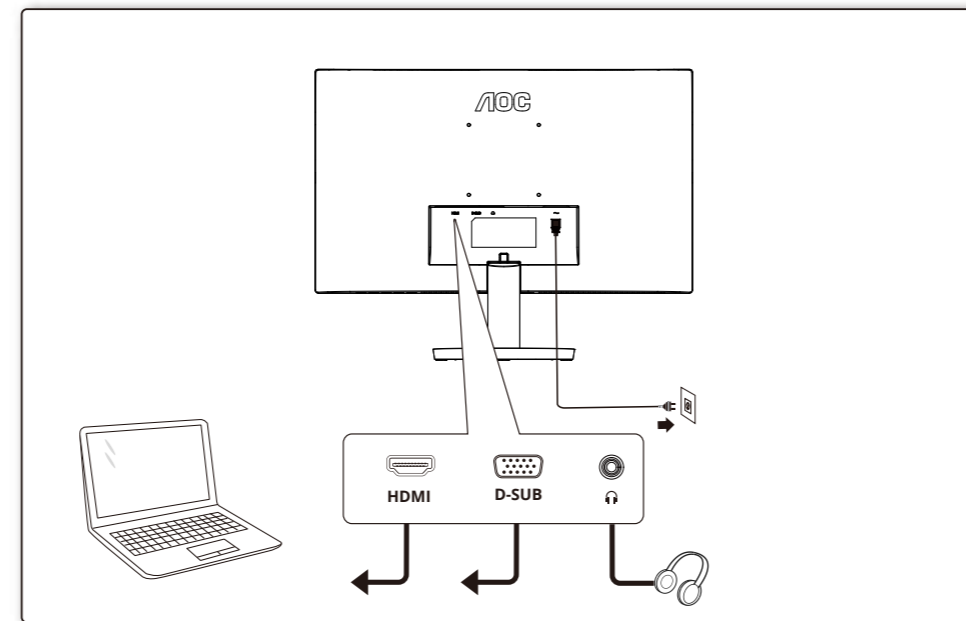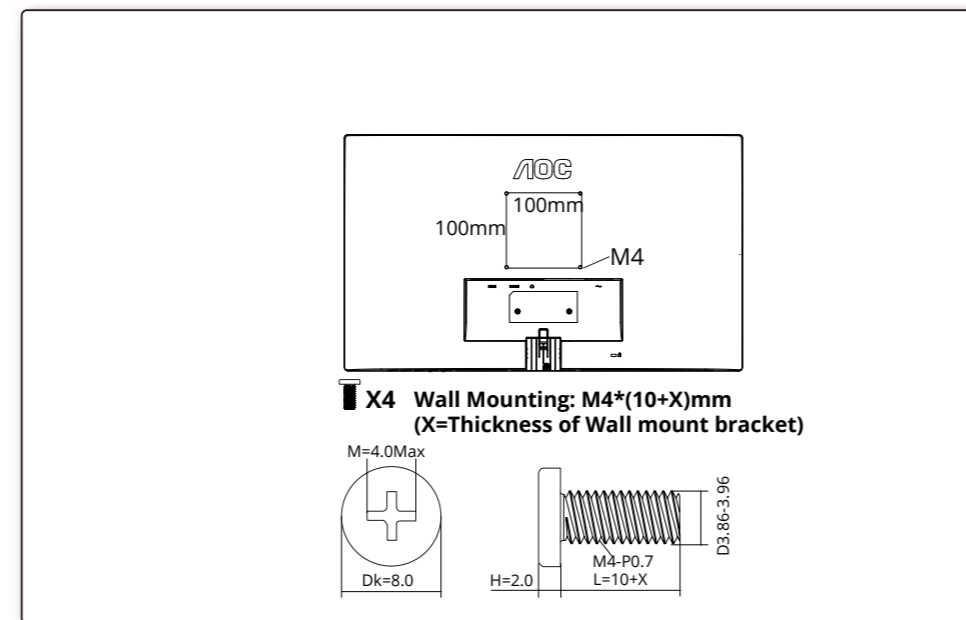

3

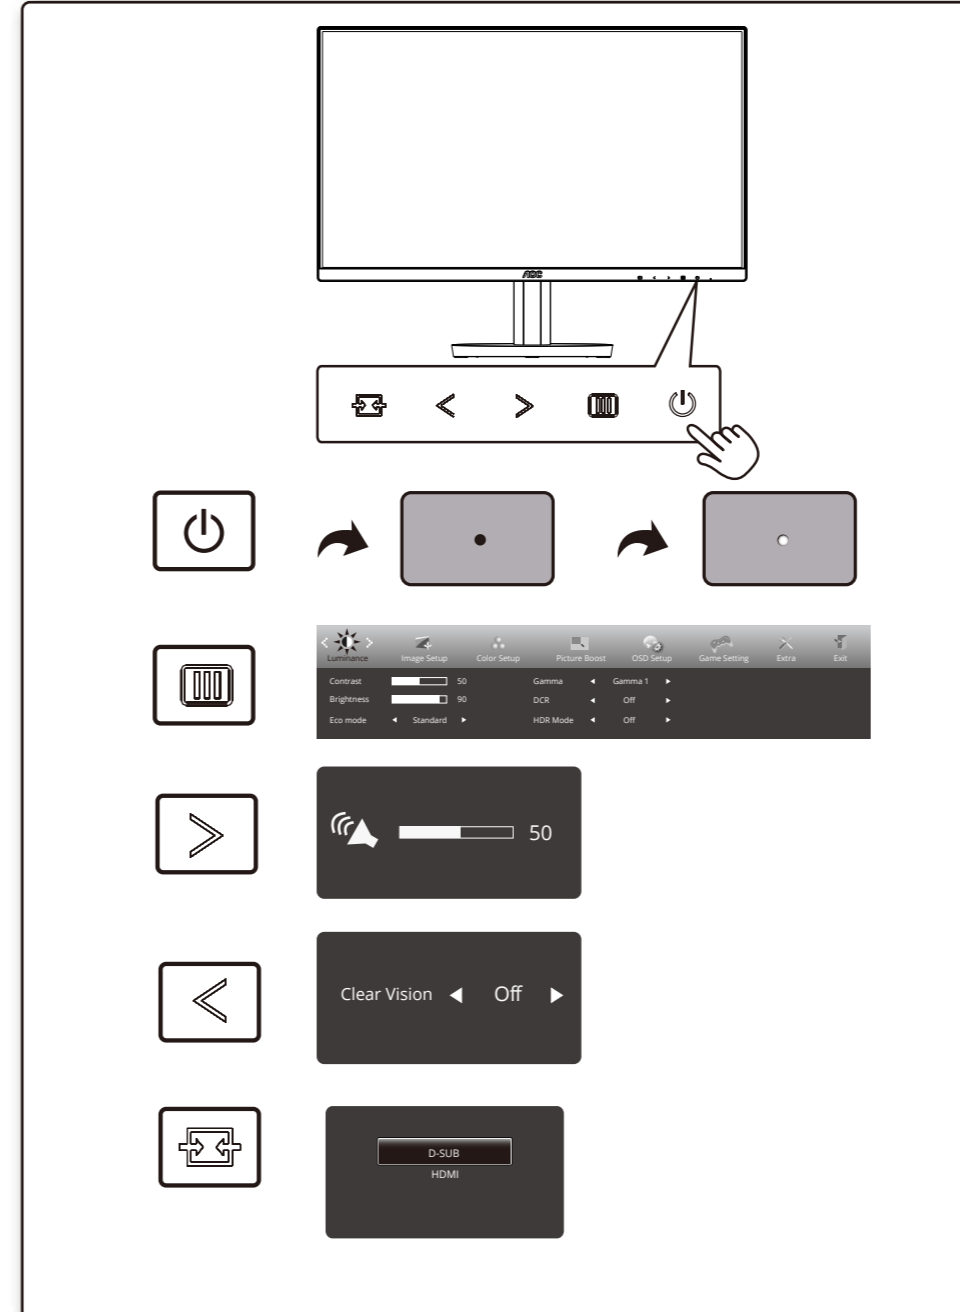

4

General Specification

Panel	Model Name	24B3HA2		
	Driving System	TFT Color LCD		
	Viewable Image Size	60.5cm Diagonal(23.8" Wide Screen)		
	Pixel Pitch	0.2745(H)mm x 0.2745(V)mm		
Others	Horizontal Scan Range	30k-115kHz		
	Horizontal Scan Size(Maximum)	527.04mm		
	Vertical Scan Range	48-100Hz		
	Vertical Scan Size(Maximum)	296.46mm		
	Max Resolution	1920x1080@60Hz(D-SUB) 1920x1080@100Hz(HDMI)		
	Plug & Play	VESA DDC2B/CI		
	Power Source	100-240V~, 50/60Hz, 1.5A		
	Power Consumption	Typical (Default Brightness And Contrast)	20W	
		Max. (Brightness =100, Contrast =100)	≤ 32W	
		Standby Mode	≤ 0.5W	
	Dimensions(with stand)	542.4x412.1x202.3mm(WxHxD)		
	Net Weight	2.97kg		
Physical Characteristics	Connector Type	D-Sub/ HDMI/ Earphone Out		
	Signal Cable Type	Detachable		
	Built-In Speaker	2Wx2		
Environmental	Temperature	Operating	0°C~ 40° C	
		Non-Operating	-25°C~ 55°C	
	Humidity	Operating	10% ~ 85% (non-condensing)	
		Non-Operating	5% ~ 93% (non-condensing)	
	Altitude	Operating	0m~ 5000m (0~ 16404ft)	
		Non-Operating	0m~ 12192m (0~ 40000ft)	