



Find your product and get support




AOC

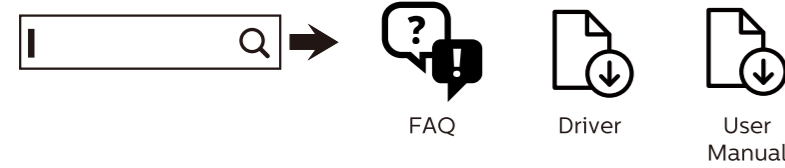

Quick Start
CU34P3CV



www.aoc.com
©2022 AOC.All Rights Reserved

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE


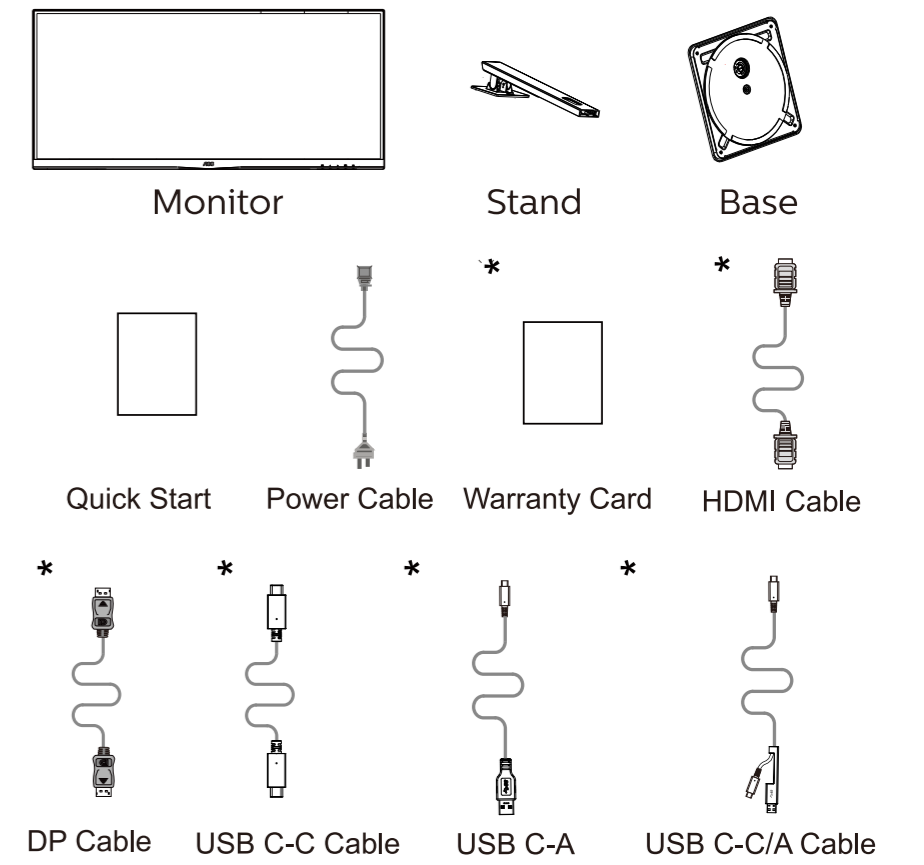


*Different according to countries/regions
Display design may differ from that illustrated


1

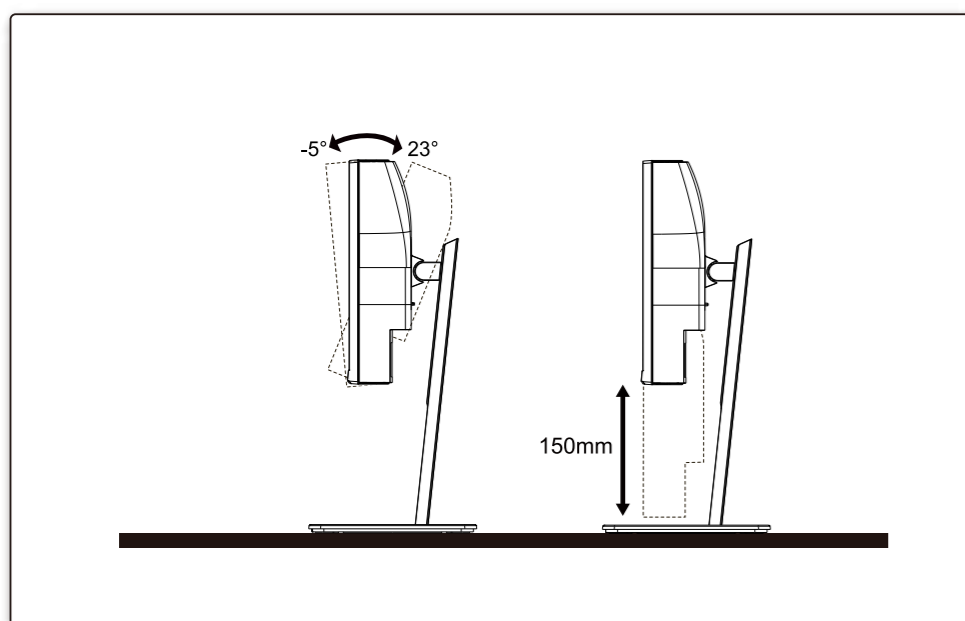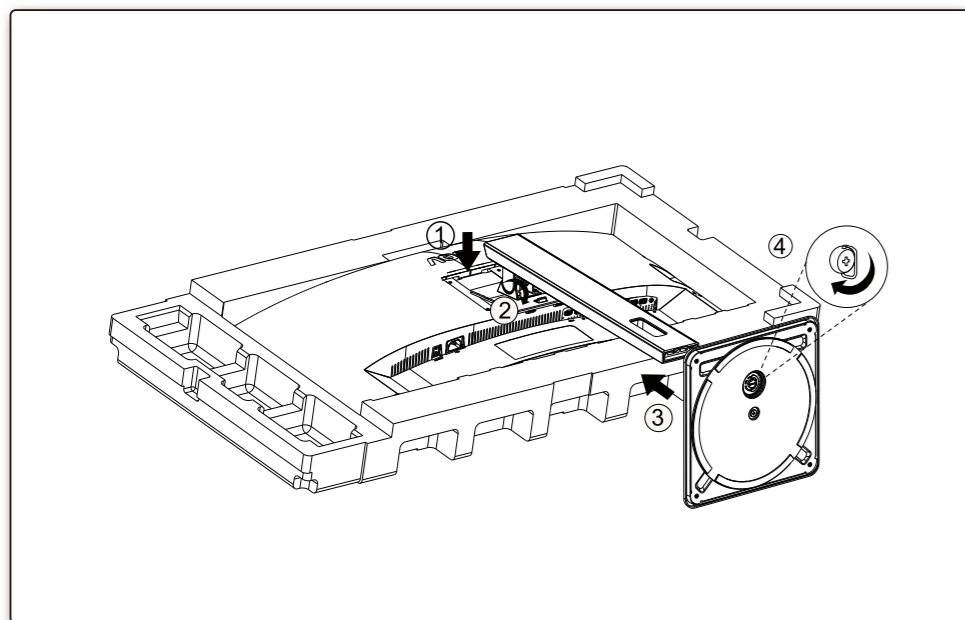

2

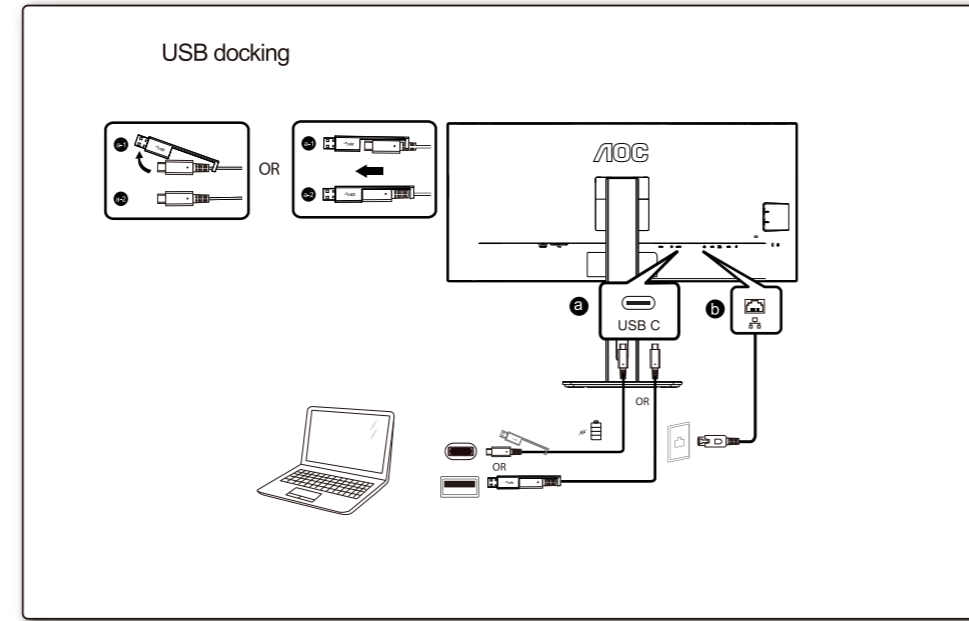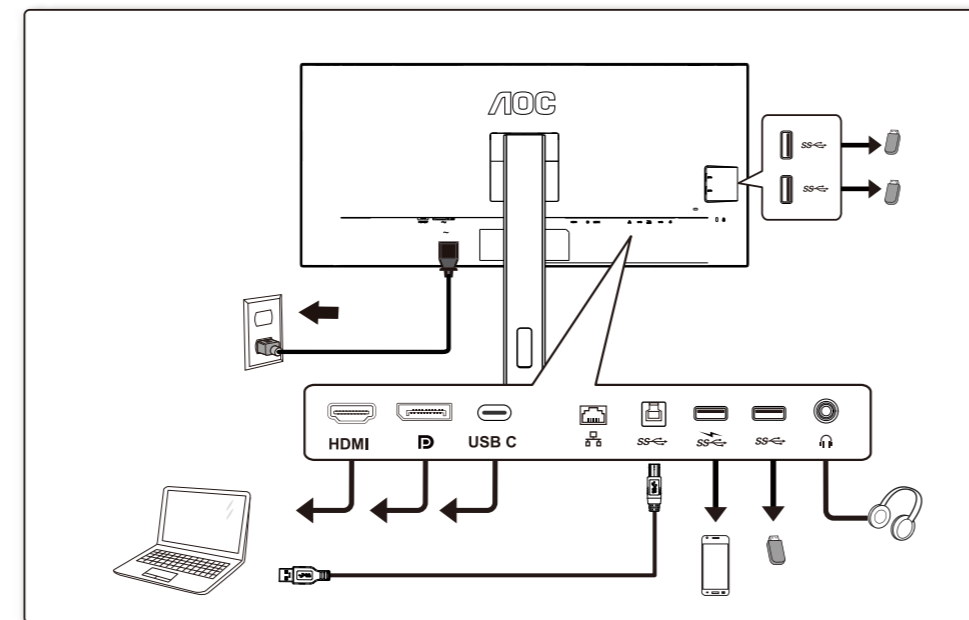

3

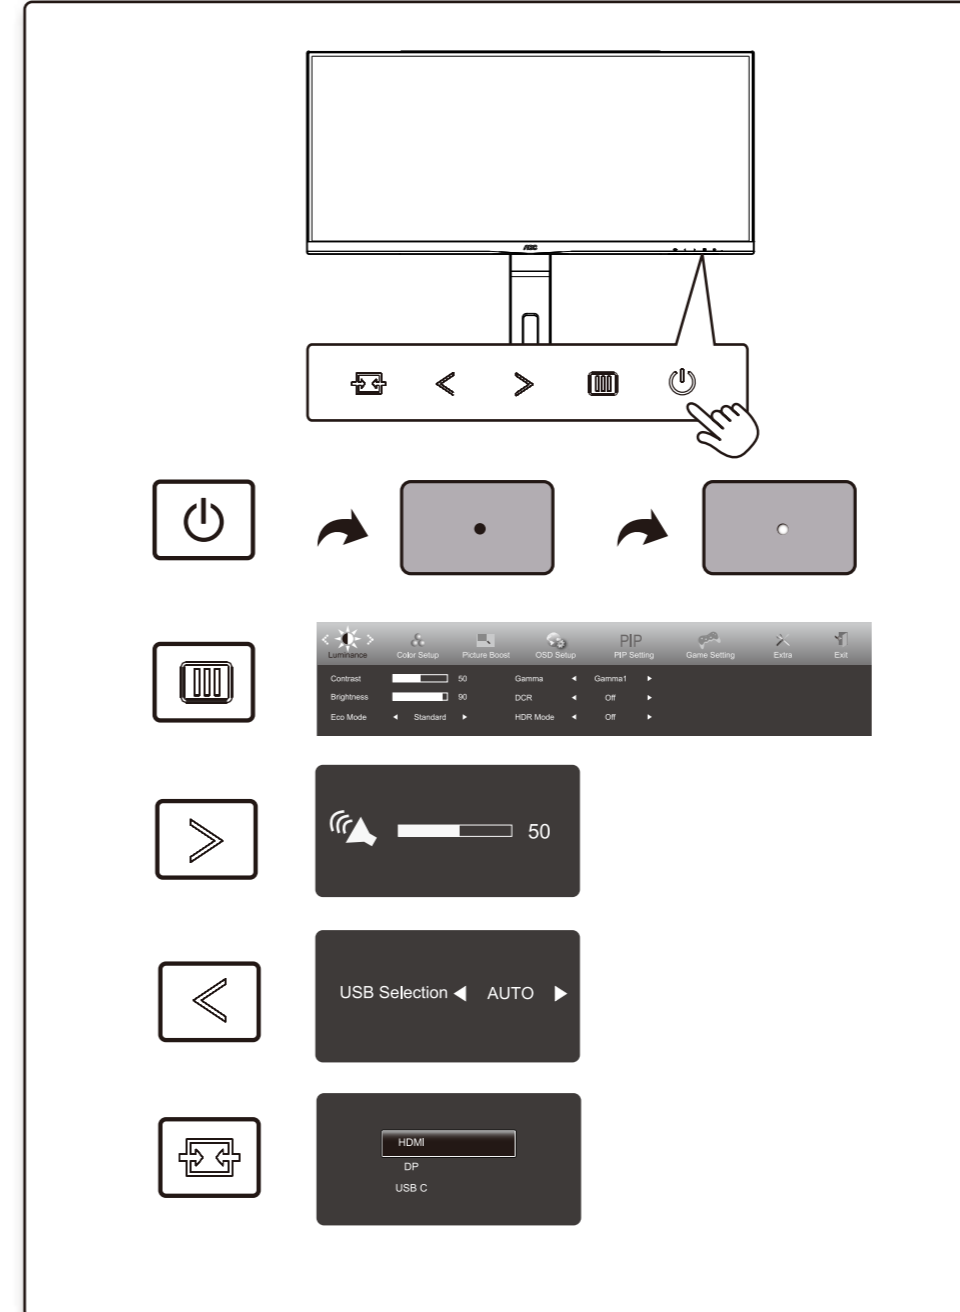

4

General Specification

Panel	Model Name	CU34P3CV		
	Driving System	TFT Color LCD		
	Viewable Image Size	86.4cm diagonal(34" Wide Screen)		
	Pixel Pitch	0.23175mm(H) x 0.23175mm(V)		
Others	Horizontal Scan Range	30k-160kHz		
	Horizontal Scan Size(Maximum)	797.22mm		
	Vertical Scan Range	48-100Hz		
	Vertical Scan Size(Maximum)	333.72mm		
	Max Resolution	3440x1440@100Hz(HDMI/DP/USB C)		
	Plug & Play	VESA DDC2B/CI		
	Power Source	100-240V~, 50/60Hz, 2A		
	Power Consumption	Typical (Default Brightness And Contrast)	35W	
		Max. (Brightness =100, Contrast =100)	≤ 180W	
		Standby Mode	≤ 0.5W	
Dimensions(With Stand)	808.3x(482.4-611.0)x275.1mm(WxHxD)			
Net Weight	10.0 kg			
USB C	USB-C	Double-sided Connectable Plug		
	Ultra-HighSpeed	Data And Video Transmission		
	DP	Built-in DP Alt Mode		
	Power Supply	USB PD Version 3.0		
Maximum Power Supply	Up to 65W (5V/3A, 7V/3A, 9V/3A, 10V/3A, 12V/3A, 15V/3A, 20V/3.25A)			
Physical Characteristics	Connector Type	HDMI/DP/USB C/Earphone/RJ45 input/USB Upstream		
	RJ45	Ethernet LAN (10M/100M/1000M)		
	Signal Cable Type	Detachable		
Environmental	Temperature	Operating	0°C~ 40°C	
		Non-Operating	-25°C~55°C	
	Humidity	Operating	10%~85% (Non-Condensing)	
		Non-Operating	5%~93% (Non-Condensing)	
	Altitude	Operating	0~5000m (0~16404ft)	
		Non-Operating	0~12192m (0~40000ft)	