



Find your product and get support



AOC

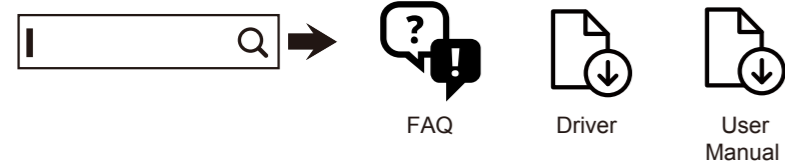


Quick Start

Q27P3CV



www.aoc.com
©2022 AOC. All Rights Reserved

HDMI


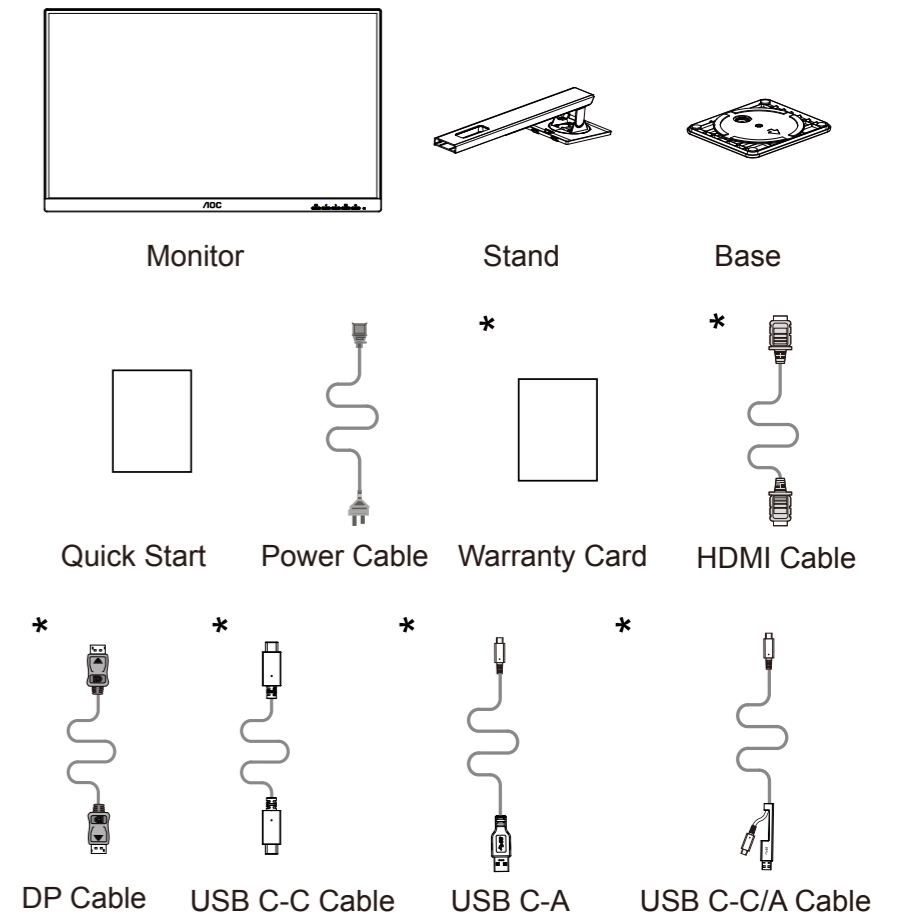


*Different according to countries/regions
Display design may differ from that illustrated


1

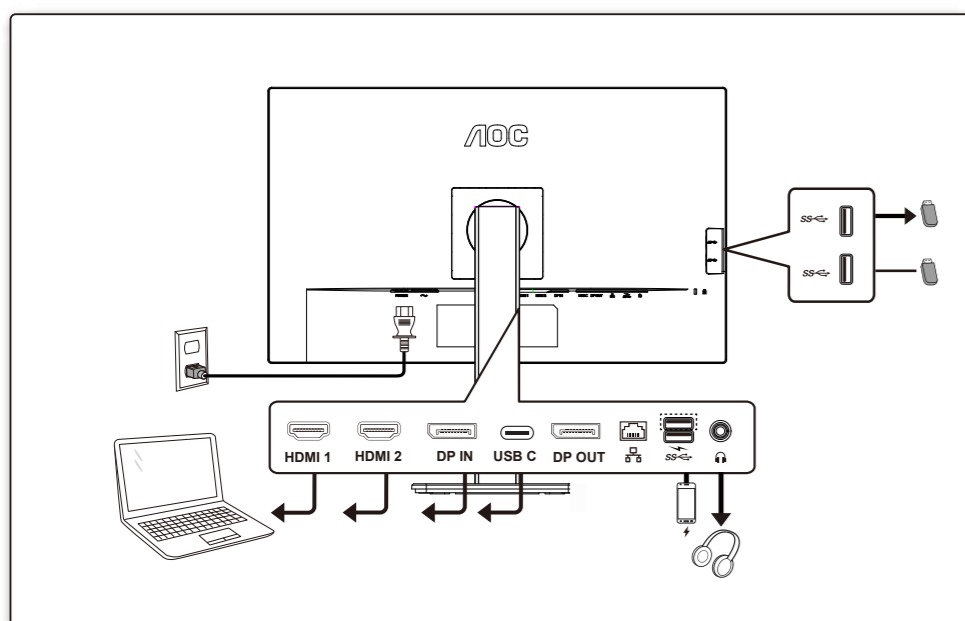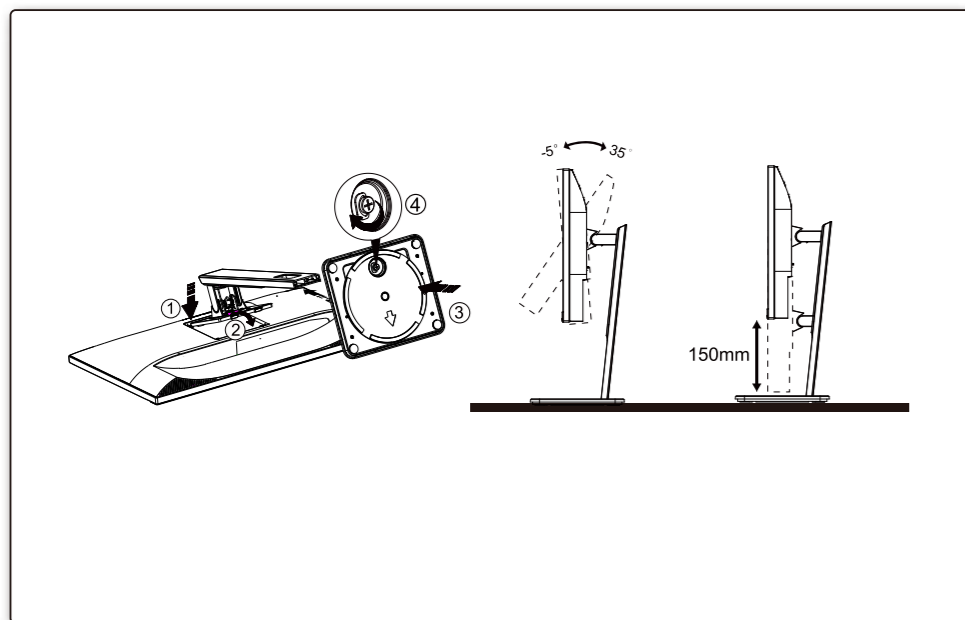

2

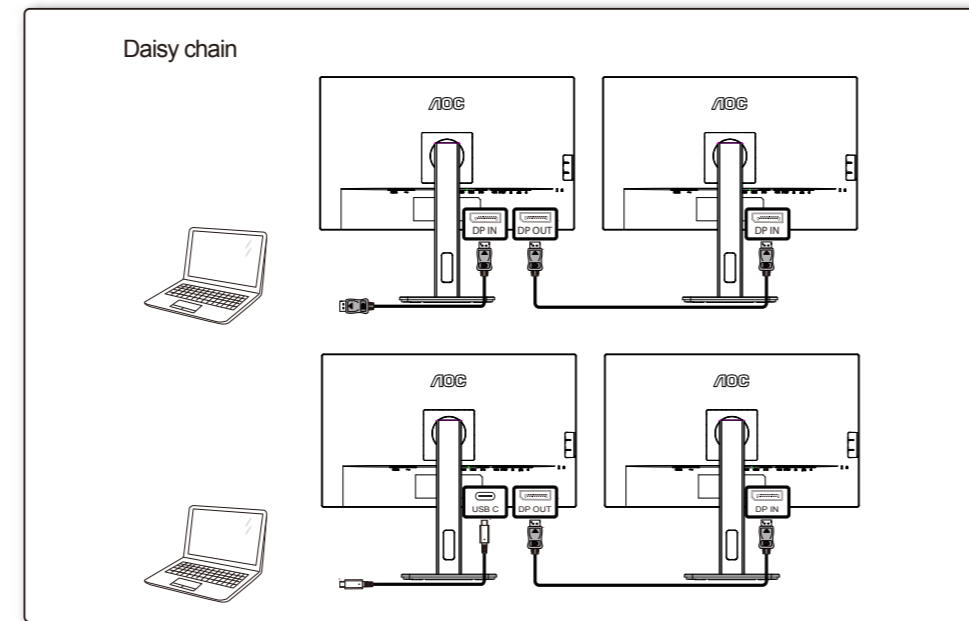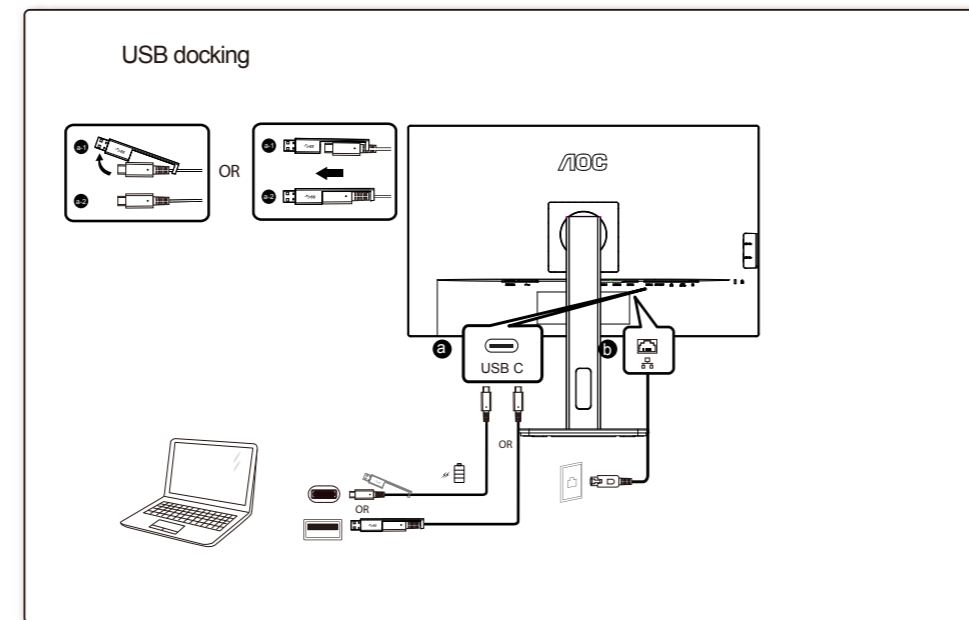

3

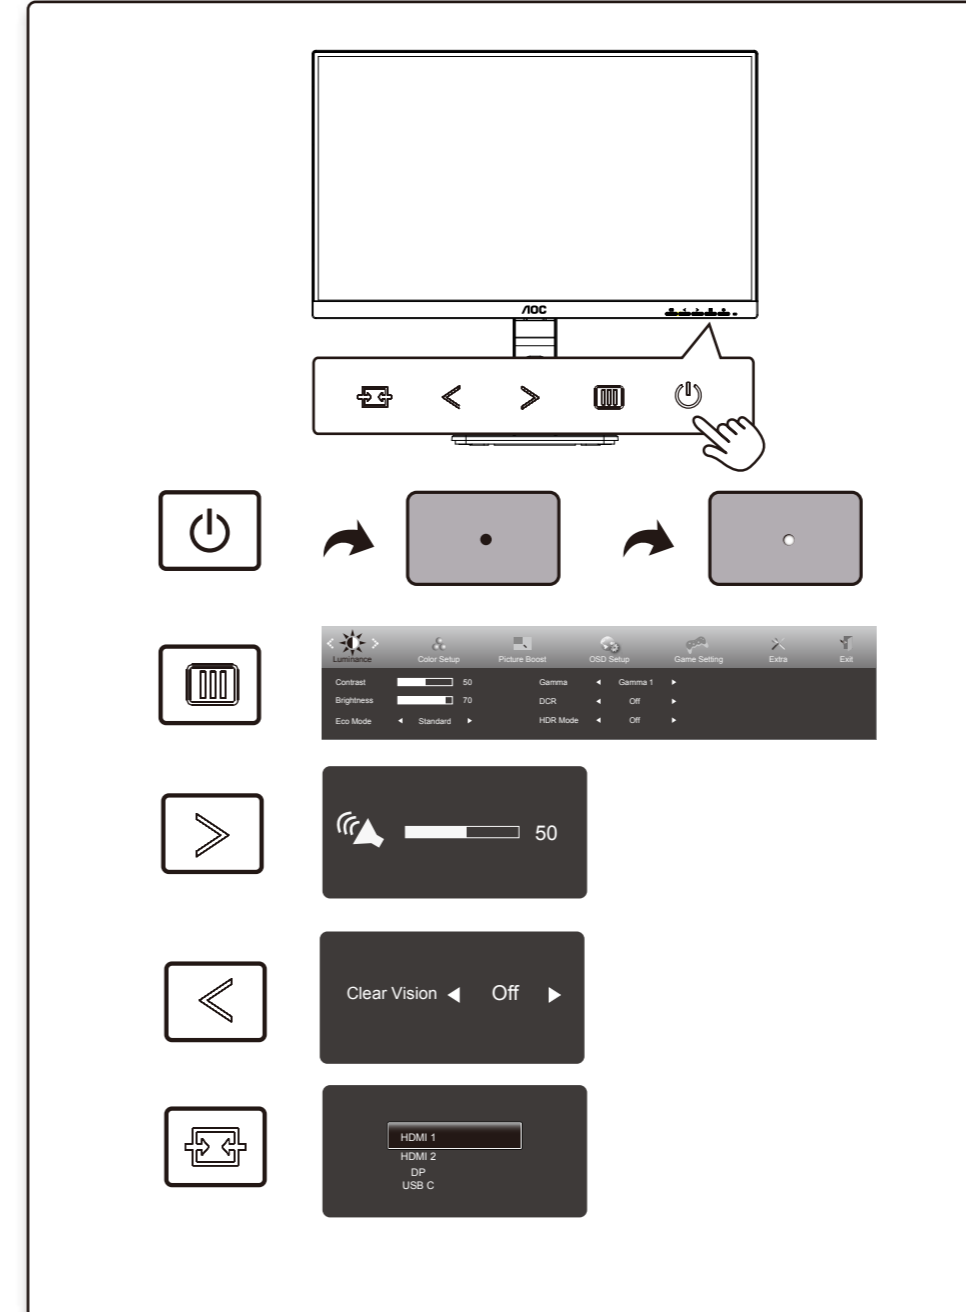

4

General Specification

Panel	Model Name	Q27P3CV	
	Driving System	TFT Color LCD	
Others	Viewable Image Size	68.5cm diagonal(27" Wide Screen)	
	Pixel Pitch	0.2331mm(H) x 0.2331mm(V)	
	Horizontal Scan Range	30k-114kHz	
	Horizontal Scan Size(Maximum)	596.736mm	
	Vertical Scan Range	48-75Hz	
	Vertical Scan Size(Maximum)	335.664mm	
	Max Resolution	2560x1440@75Hz	
	Plug & Play	VESA DDC2B/CI	
	Power Source	100-240V~, 50/60Hz, 1.5A	
	Power Consumption	Typical (Default Brightness And Contrast)	23W
Max. (Brightness =100, Contrast =100)		≤ 152W	
Standby Mode	Standby Mode	≤ 0.5W	
	Dimensions(With Stand)	613.8x(395.7-544.0)x200.2mm(WxHxD)	
Net Weight	Net Weight	6.81kg	
	USB C	USB-C	Double-sided Connectable Plug
Ultra-highSpeed		Data And Video Transmission	
DP		Built-in DP Alt Mode	
Power Supply		USB PD Version 3.0	
Maximum Power Supply	Up to 65W (5V/3A, 7V/3A, 9V/3A, 10V/3A, 12V/3A, 15V/3A, 20V/3.25A)		
Physical Characteristics	Connector Type	HDMIx2/DP IN/DP OUT/USB C/Earphone/RJ45 - input/USB3.2 Gen1x4(Includes 1 Fast Charger)	
	RJ45	Ethernet LAN (10M/100M/1000M)	
Environmental	Signal Cable Type	Detachable	
	Temperature	Operating	0°C~ 40°C
		Non-Operating	-25°C~55°C
	Humidity	Operating	10%~85% (Non-Condensing)
Non-Operating		5%~93% (Non-Condensing)	
Altitude	Operating	0~5000m (0~16404ft)	
Non-Operating	0~12192m (0~40000ft)		