




Find your product and get support



AOC

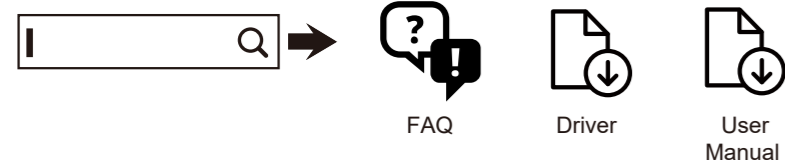


Quick Start

24P3CV



www.aoc.com
©2022 AOC.All Rights Reserved

HDMI
HIGH DEFINITION MULTIMEDIA INTERFACE


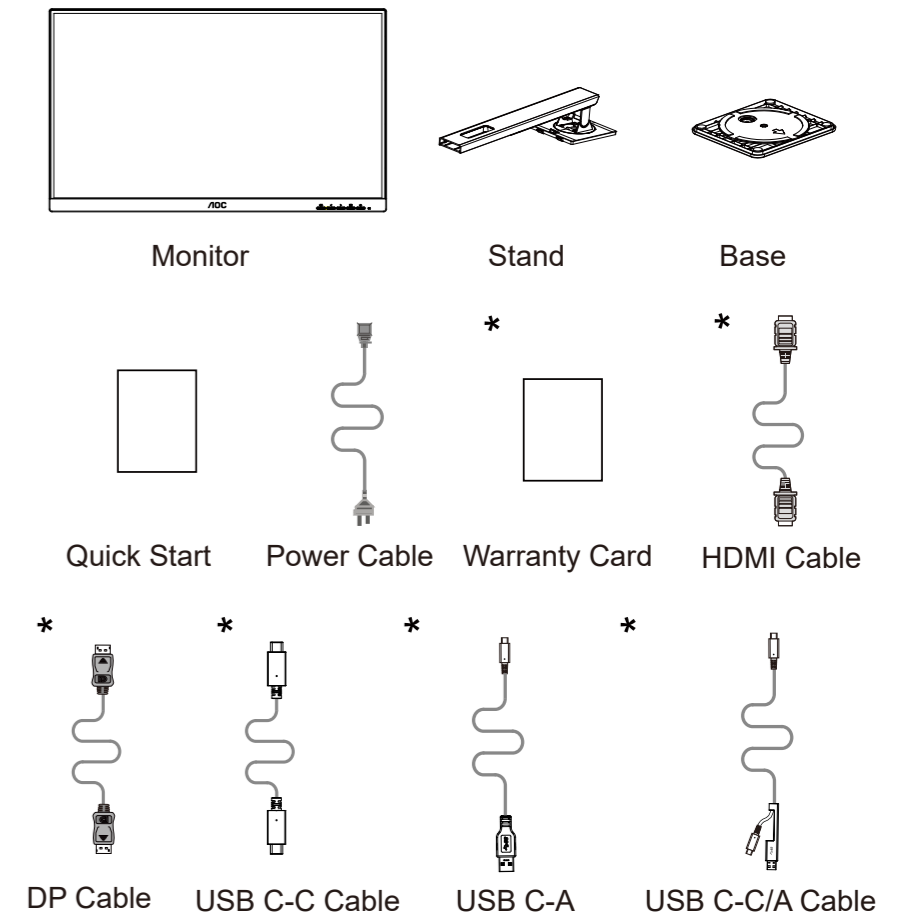


*Different according to countries/regions
Display design may differ from that illustrated


1

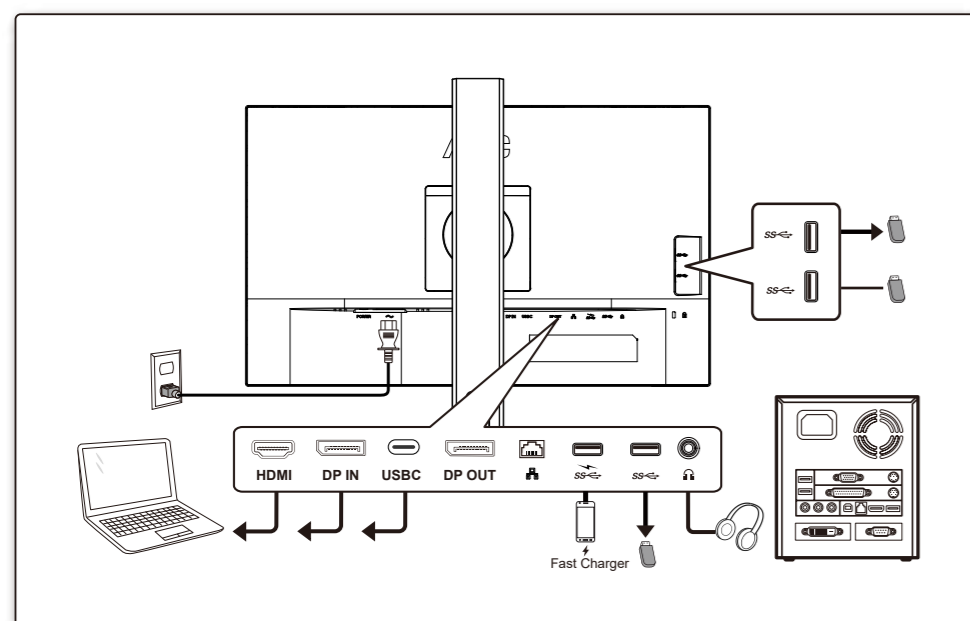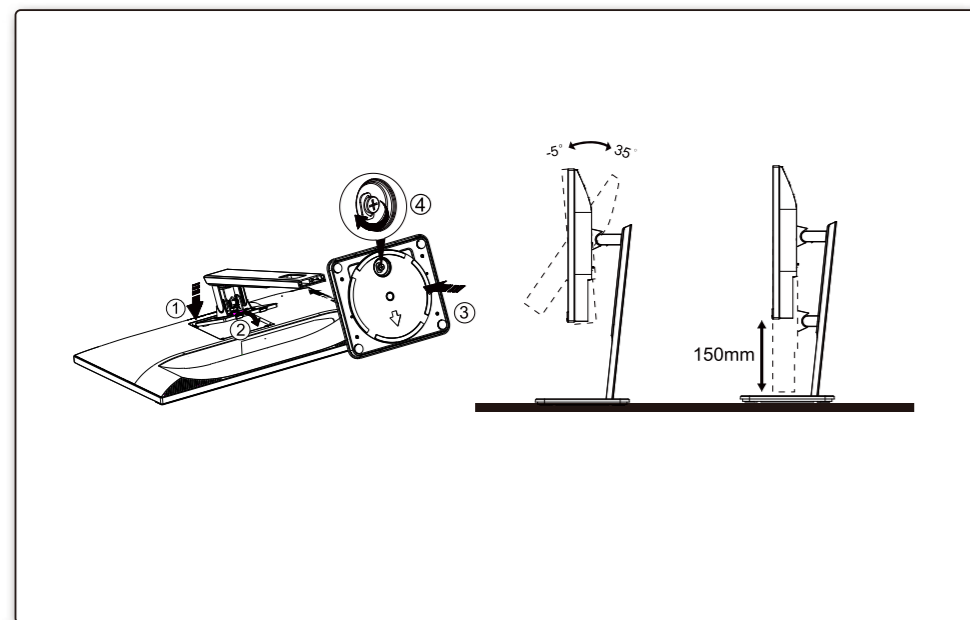

2

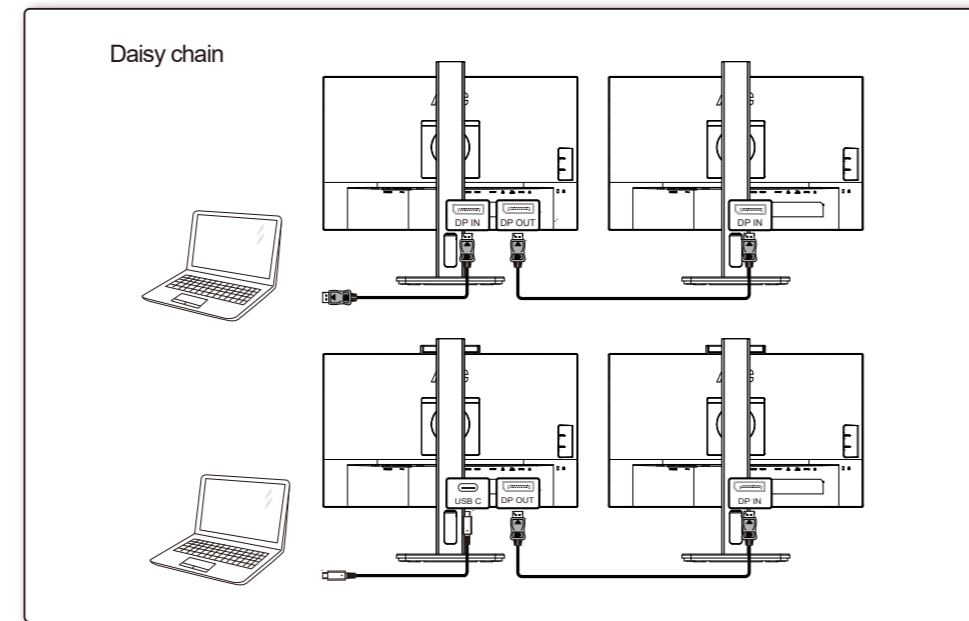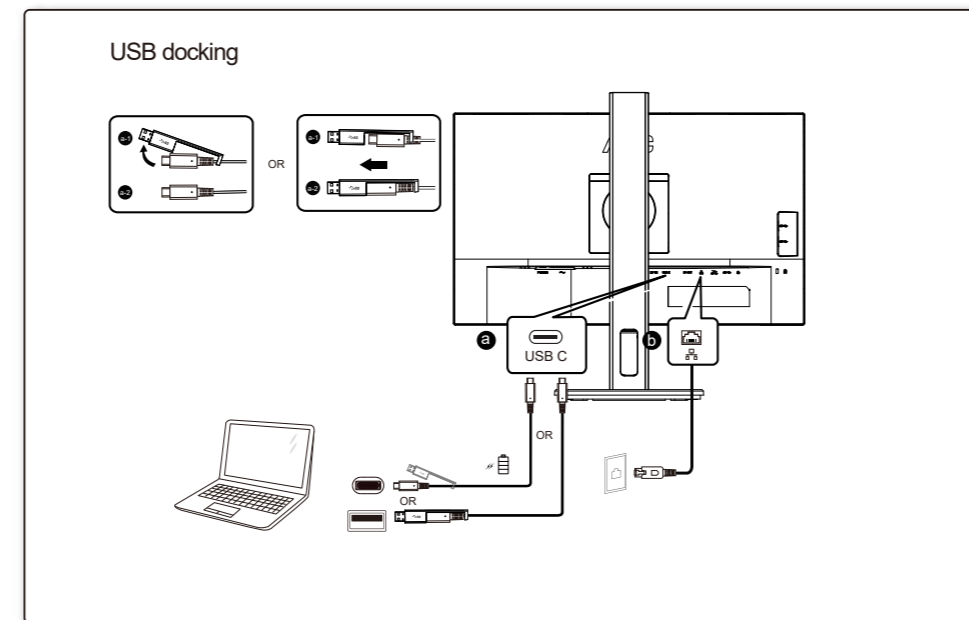

3

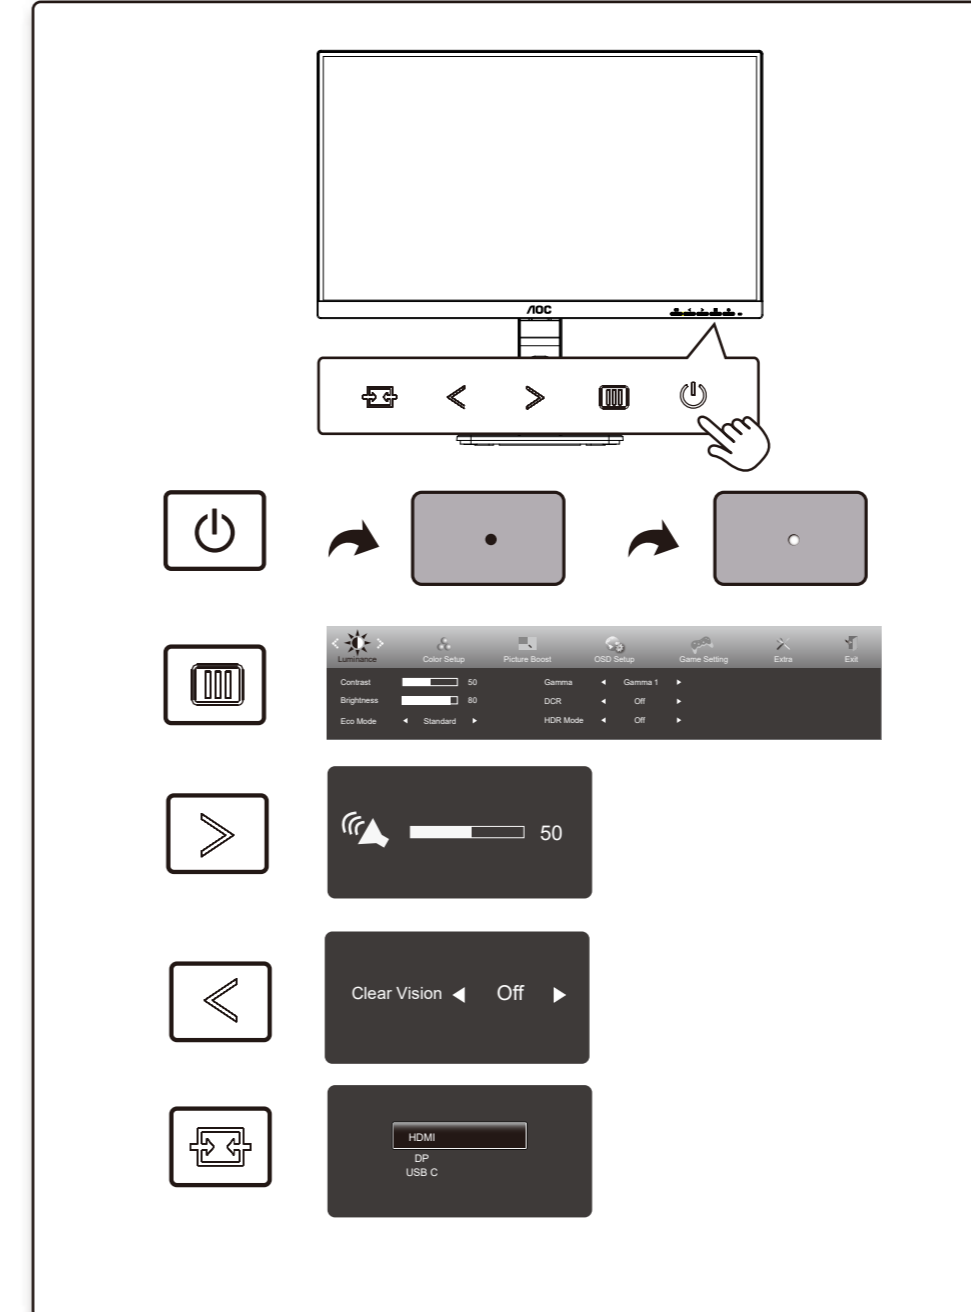

4

General Specification

Panel	Model Name	24P3CV		
	Driving System	TFT Color LCD		
	Viewable Image Size	60.47cm diagonal(23.8" Wide Screen)		
	Pixel Pitch	0.2745mm(H) x 0.2745mm(V)		
Others	Horizontal Scan Range	30k-85kHz		
	Horizontal Scan Size(Maximum)	527.04mm		
	Vertical Scan Range	48-75Hz		
	Vertical Scan Size(Maximum)	296.46mm		
	Max Resolution	1920x1080@75Hz		
	Plug & Play	VESA DDC2B/CI		
	Power Source	100-240V~, 50/60Hz, 1.5A		
	Power Consumption	Typical (default brightness and contrast)	21W	
		Max. (brightness =100, contrast =100)	≤ 135W	
		Standby Mode	≤ 0.5W	
Dimensions(with stand)	540x(384.4-502.9)x200.1mm(WxHxD)			
Net Weight	5.37kg			
USB C	USB-C	Double-sided Connectable Plug		
	Ultra-highSpeed	Data And Video Transmission		
	DP	Built-in DP Alt Mode		
	Power Supply	USB PD Version 3.0		
Maximum Power Supply	Up to 65W (5V/3A, 7V/3A, 9V/3A, 10V/3A, 12V/3A, 15V/3A, 20V/3.25A)			
Physical Characteristics	Connector Type	HDMI/DP IN/USBC/DP OUT/RJ45 -input/USB3.2 Gen1x4(includes 1 fast charger)/Earphone		
	RJ45	Ethernet LAN (10M/100M/1000M)		
	Signal Cable Type	Detachable		
Environmental	Temperature	Operating	0°C~ 40°C	
		Non-Operating	-25°C~55°C	
	Humidity	Operating	10%~85% (non-condensing)	
		Non-Operating	5%~93% (non-condensing)	
Altitude	Operating	0~5000m (0~16404ft)		
	Non-Operating	0~12192m (0~40000ft)		