

### Find your product and get support



- Europe**  
<https://aoc.com/uk/support>
- Россия**  
<https://aoc.com/ru/support>
- Australia**  
[https://au.aoc.com/user\\_manual](https://au.aoc.com/user_manual)
- Hong Kong S.A.R.**  
[https://hk.aoc.com/user\\_manual](https://hk.aoc.com/user_manual)
- 中國台灣**  
[https://tw.aoc.com/user\\_manual](https://tw.aoc.com/user_manual)
- Indonesia**  
[https://id.aoc.com/user\\_manual](https://id.aoc.com/user_manual)
- 日本**  
[https://jp.aoc.com/user\\_manual](https://jp.aoc.com/user_manual)
- 한국**  
[https://kr.aoc.com/user\\_manual](https://kr.aoc.com/user_manual)
- Malaysia**  
[https://my.aoc.com/user\\_manual](https://my.aoc.com/user_manual)
- Myanmar**  
[https://mm.aoc.com/user\\_manual](https://mm.aoc.com/user_manual)
- New Zealand**  
[https://nz.aoc.com/user\\_manual](https://nz.aoc.com/user_manual)
- Philippines**  
[https://ph.aoc.com/user\\_manual](https://ph.aoc.com/user_manual)


- Singapore**  
[https://sg.aoc.com/user\\_manual](https://sg.aoc.com/user_manual)
  - ประเทศไทย**  
[https://th.aoc.com/user\\_manual](https://th.aoc.com/user_manual)
  - Việt Nam**  
[https://vn.aoc.com/user\\_manual](https://vn.aoc.com/user_manual)
  - Middle East**  
[https://me.aoc.com/user\\_manual](https://me.aoc.com/user_manual)
  - South Africa**  
[https://za.aoc.com/user\\_manual](https://za.aoc.com/user_manual)
  - Brasil**  
<https://aoc.portaltpv.com.br/>
  - India**  
<https://aoc.com/in-en/support>
  - US**  
<https://aoc.com/us/support>
  - Canada**  
<https://aoc.com/ca-en/support>
- Product information for EU/UK Energy
- 
- XXXXXXXXXXXX



## Quick Start Guide



AG326UD

www.aoc.com  
©2024 AOC.All Rights Reserved


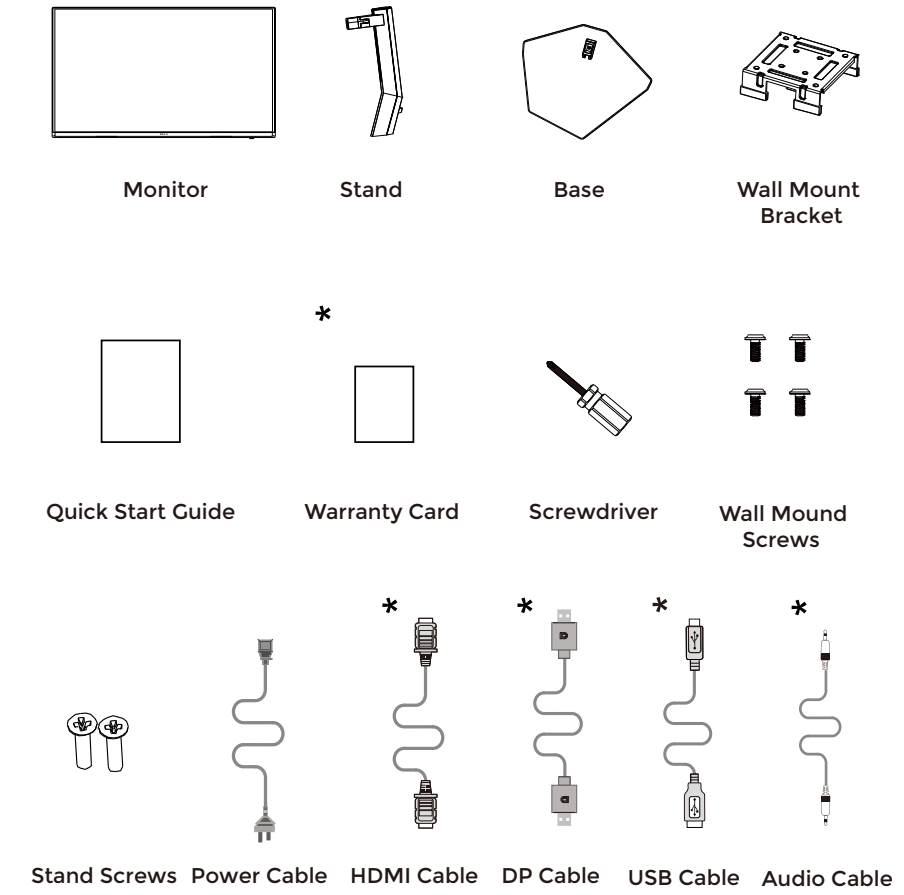


\*Different according to countries/regions  
Display design may differ from that illustrated


1

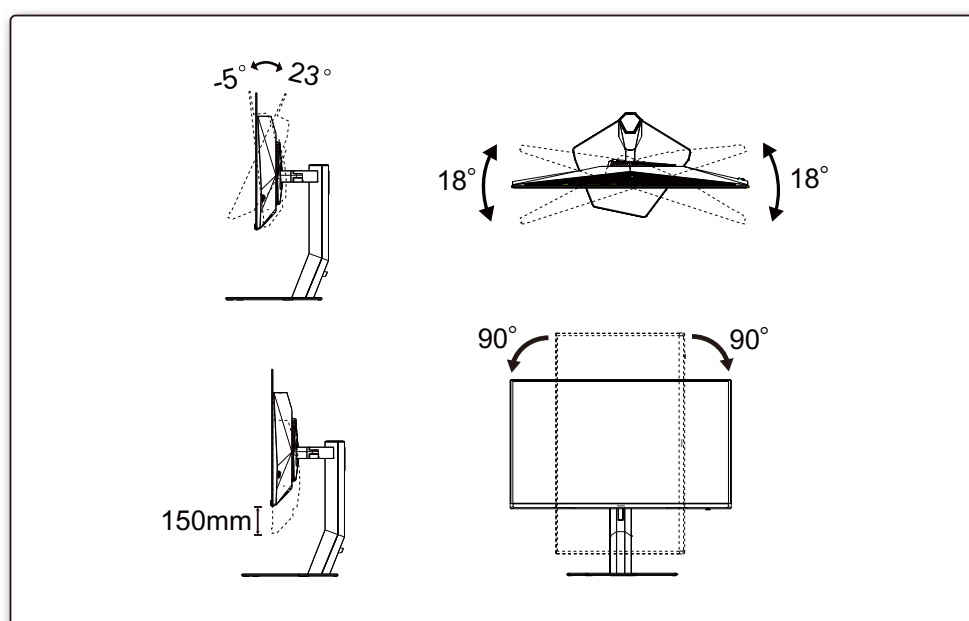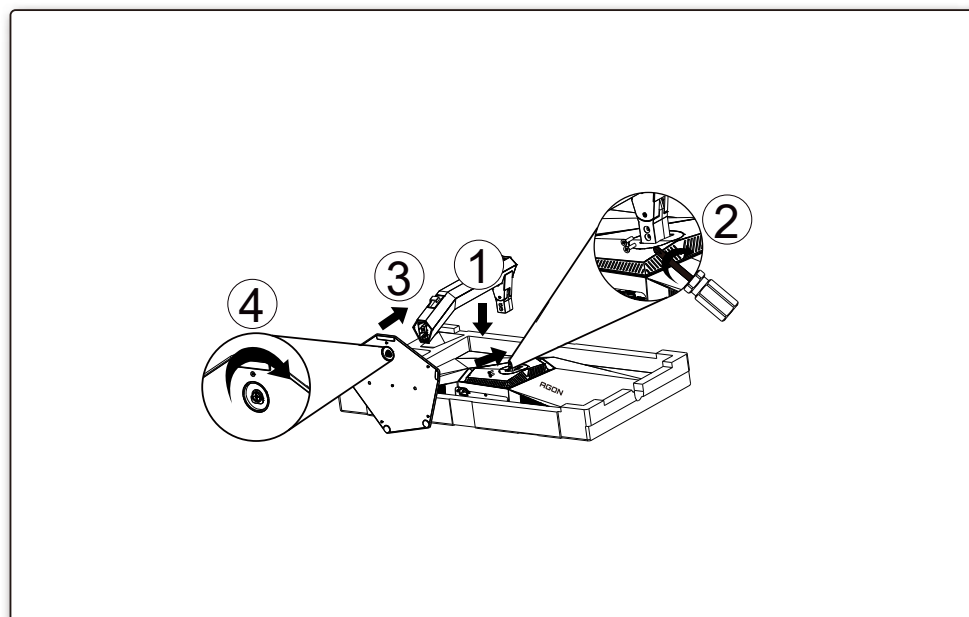

2

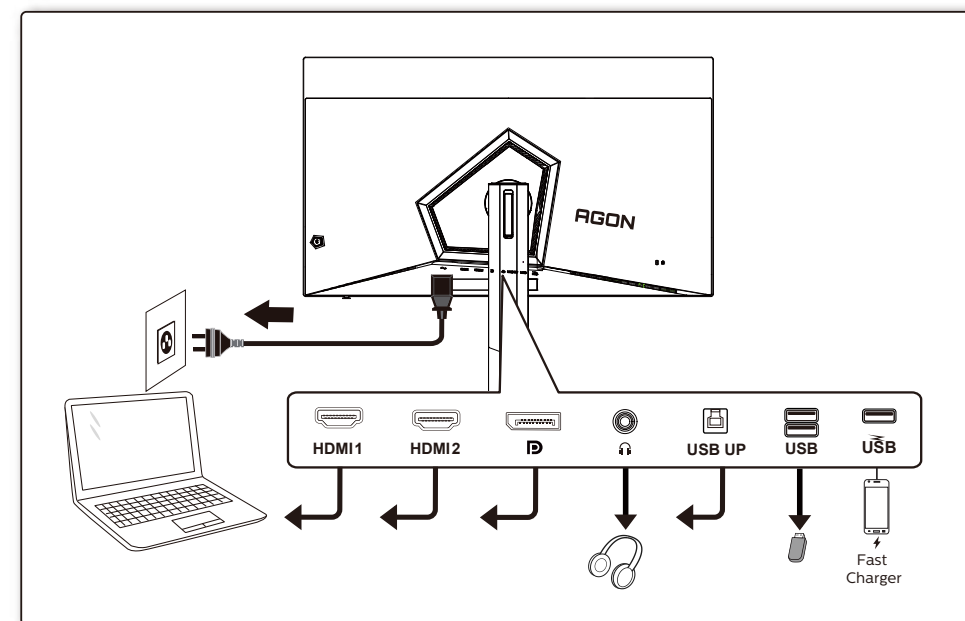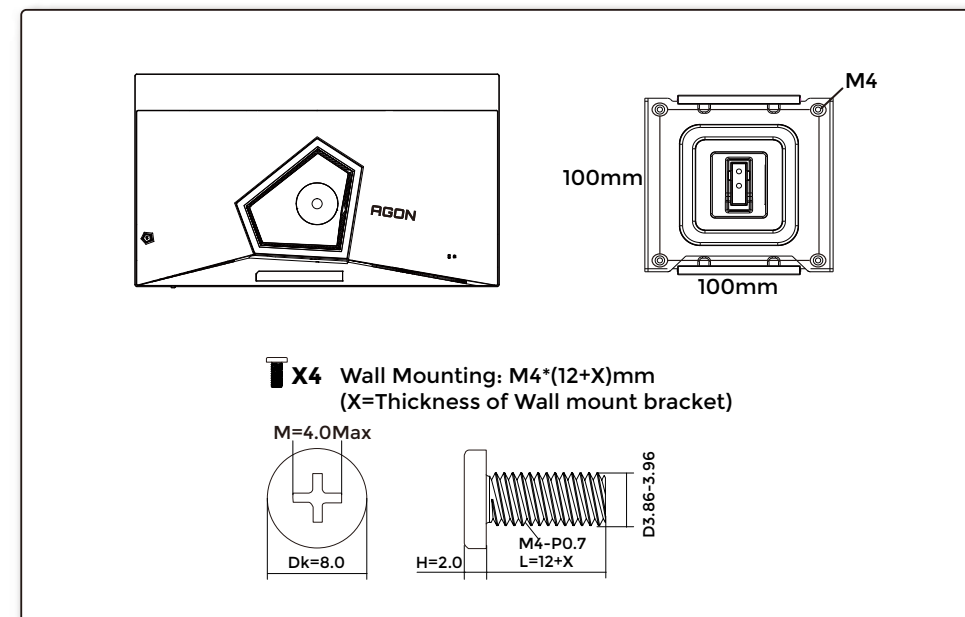

3

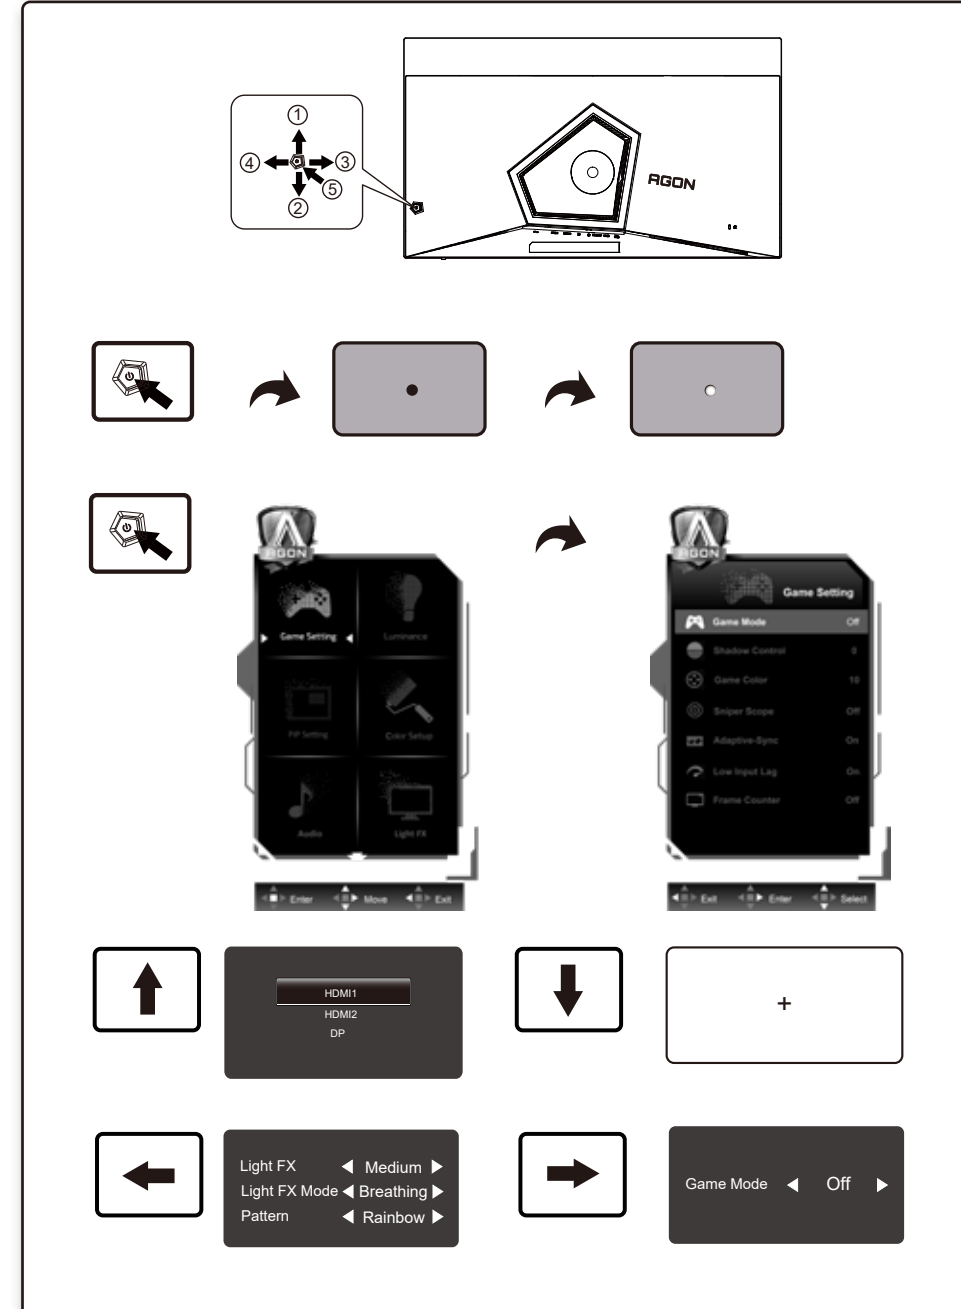

4

### General Specification

Panel	Model Name	AG326UD		
	Driving System	OLED		
Others	Viewable Image Size	80.3cm diagonal(31.5" Wide Screen)		
	Pixel Pitch	0.1814mm(H) x 0.1814mm(V)		
	Horizontal Scan Range	30k-370kHz		
	Horizontal Scan Size(Maximum)	699.48mm		
	Vertical Scan Range	48-165Hz		
	Vertical Scan Size(Maximum)	394.73mm		
	Max Resolution	3840x2160@165Hz		
	Plug & Play	VESA DDC2B/CI		
	Power Source	100-240V- 50/60Hz 2.5A		
	Power Consumption	Typical (default brightness and contrast)	123W	
Max. (brightness =100, contrast =100)		≤ 182W		
Standby Mode	Standby Mode	≤ 0.5W		
	Dimensions(with stand)	717.3*(485.9-635.9)*316.8 (WxHxD)		
Net Weight	10.23kg			
Physical Characteristics	Connector Type	HDMIx2/DP/USBx3/USB Upstream/Earphone		
	Signal Cable Type	Detachable		
Environmental	Temperature	Operating	0°C - 40°C	
		Non-Operating	-25°C -55°C	
	Humidity	Operating	10%-85% (Non-Condensing)	
		Non-Operating	5%-93% (Non-Condensing)	
Altitude	Operating	0m-5000m (0ft-16404ft)		
	Non-Operating	0m-12192m (0ft-40000ft)		