

FAQ Driver User Manual

Europe
<https://aoc.com/uk/support>

Россия
<https://aoc.com/ru/support>

Australia
https://au.aoc.com/user_manual

Hong Kong S.A.R.
https://hk.aoc.com/user_manual

中國台灣
https://tw.aoc.com/user_manual

Indonesia
https://id.aoc.com/user_manual

日本
https://jp.aoc.com/user_manual

한국
https://kr.aoc.com/user_manual

Malaysia
https://my.aoc.com/user_manual


Myanmar
https://mm.aoc.com/user_manual

New Zealand
https://nz.aoc.com/user_manual

Philippines
https://ph.aoc.com/user_manual




ЛОС

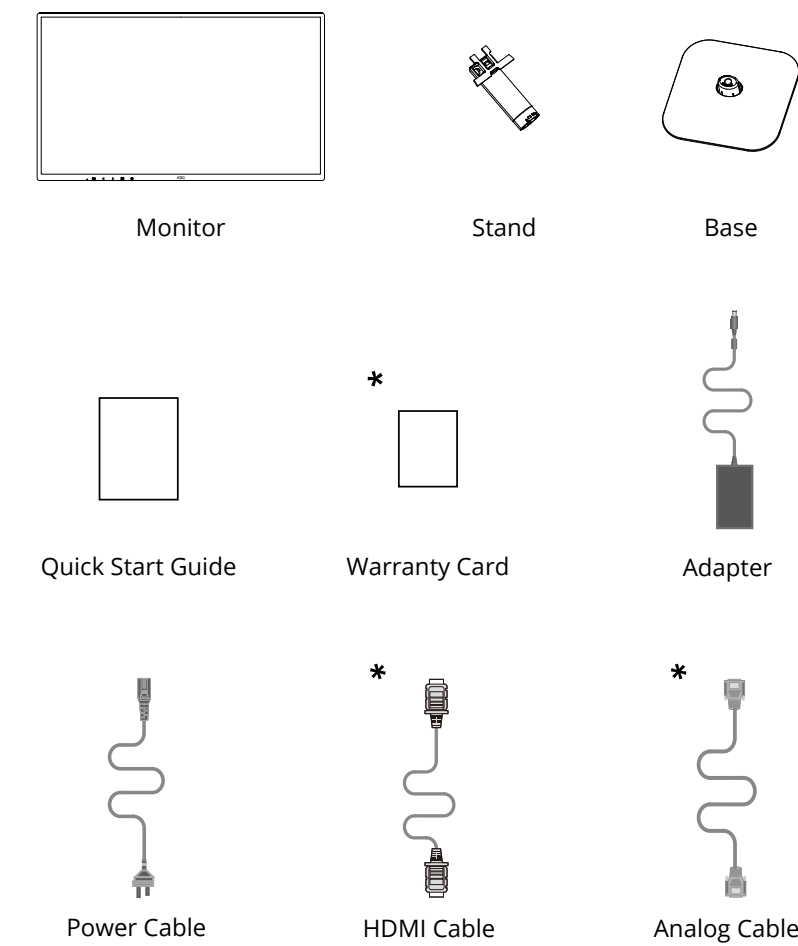

*Different according to countries/regions
Display design may differ from that illustrated

A diagram of a vertical display mounted on a stand. A curved double-headed arrow indicates the range of motion from -5° to 23° , which is a total of 28° .

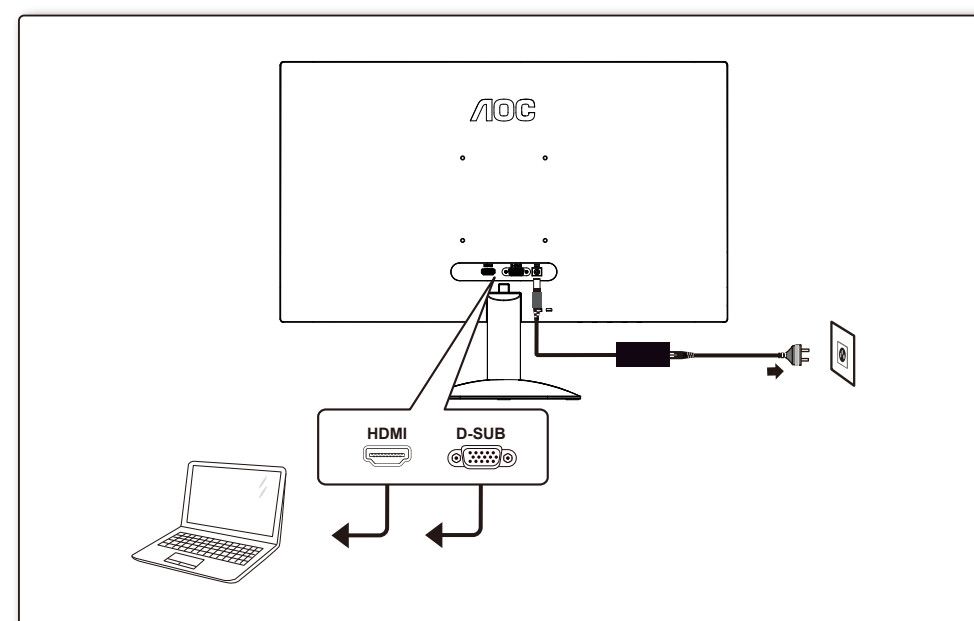

Panel	Model Name	24B31H		
	Driving System	TFT Color LCD		
	Viewable Image Size	60.5cm Diagonal (23.8" Wide Screen)		
	Pixel Pitch	0.2745mm (H) x 0.2745mm (V)		
Others	Horizontal Scan Range	30k~85kHz (D-SUB) 30k~140kHz (HDMI)		
	Horizontal Scan Size (Maximum)	527.04mm		
	Vertical Scan Range	48~75Hz (D-SUB) 48~120Hz (HDMI)		
	Vertical Scan Size (Maximum)	296.46mm		
	Max Resolution	1920x1080@75Hz (D-SUB) 1920x1080@120Hz (HDMI)		
	Plug & Play	VESA DDC2B/CI		
	Power Source	19V  1.31A		
	Power Consumption	Typical(Default Brightness And Contrast)	17W	
		Max. (Brightness = 100, Contrast =100)	≤ 25W	
		Standby Mode	≤ 0.3W	
Dimensions (with stand)	542.4x410.0x185.9mm (WxHxD)			
Net Weight	2.45kg			
Physical Characteristics	Connector Type	D-SUB/ HDMI		
	Signal Cable Type	Detachable		
Environmental	Temperature	Operating	0°C~40°C	
		Non-Operating	-25°C~55°C	
	Humidity	Operating	10%~85% (Non-Condensing)	
		Non-Operating	5%~93% (Non-Condensing)	
	Altitude	Operating	0m~5000m(0ft~16404ft)	
		Non-Operating	0m~12192m(0ft~40000ft)	