

1.0 Reference and Address					
Report Number	2502B1179SHA-1	Original Issued: 15-Apr-2025 Revised: None			
Standard(s)	ENERGY STAR® P	R® Program Requirements for Displays Version 8.0			
Test Methods	All Product Types and Screen Sizes	ENERGY STAR Test Method for Determining Display Energy – Rev. Nov-2021			
	Enhanced Performance Displays	International Committee for Display Metrology (ICDM) Information Display Measurements Standard – Version 1.03			
	Displays Claiming Full Network Connectivity	CTA-2037-A, Determination of Television Set Power Consumption			
	Displays Claiming High Dynamic Range (HDR)	VESA High-performance Monitor and Display Compliance Test Specification (DisplayHDR CTS) Version 1.0			
Test Materials	"IEC 62087:2011 Dynamic Broadcast-Content Signal" shall be used for testing, as specified in IEC 62087:2011, Section 11.6, "On (average) mode testing using dynamic broadcast-contentvideo signal."				
	"VESA FPDM2" shall be used only for products that cannot display the IEC 62087:2011 Dynamic Broadcast-Content Signal.				
Reference Standard	IEC 62301:2011, "Household electrical appliances - Measurement of standby power"				
Applicant	Top Victory Electronics (Taiwan) Co.,Ltd.		Manufacturer 1	TPV Electronics(Fujian) Co., Ltd	
Address	10F.,No.230,Lianche City. Taipei Country		Address	Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province	
Country	Taiwan		Country	P.R.China	
Contact	David.Cheng		Contact	Winter.Feng	
Phone	+886-2-82261668-2375		Phone	+86-591-85285555	
FAX	+886-2-82261668-2375		FAX	+86-591-85285447	
Email	David.cheng@tpv-te	ch.com	Email	winter.feng@tpv-tech.com	



1.0 Reference a	nd Address		
Manufacturer 2	TPV Display Technology (Beihai) Co.,Ltd	Manufacturer 3	TPV Display Technology (China) Co., Ltd.
Address	China Electronic Beihai Industry Park,Northeast of the Crossing between Taiwan Road and Jilin Road Beihai City,Guangxi	Address	No.106 Jinghai 3 Rd., BDA, Beijing City
Country	China	Country	China
Contact	Jiaping Chen	Contact	Nancy.Shang
Phone	86-799-3132666-8255	Phone	86(10)64326699-8312
FAX	86-779-2232270	FAX	NA
Email	jiaping.Chen@tpv-tech.com	Email	lijia.shang@tpv-tech.com
Manufacturer 4	L&T Display Technology (Fujian) Ltd.	Manufacturer 5	TPV Display Technology(Wuhan)Co.,Ltd
Address	Optoelectronic Park, Rongqiao Economic and Technological Development Zone, Fuqing City,Fujian Province	Address	Unique No.11 Zhuankou Development District of Economic Technological Development Zone Wuhan
Country	P.R.China	Country	China
Contact	Elaine Lin	Contact	Zhe.Zhou
Phone	+86-591-86515558	Phone	86(27)-6884 3822
FAX	+86-591-86515555	FAX	86(27)-6884 3822
Email	elaine.lin@Intdisplayfj.com	Email	zhe.zhou@tpv-tech.com

2.0 Product Description Product Display (LCD Monitor) AOC **Brand Name** Description The product covered by this report is a Display (LCD Monitor) 27E4U Models **Model Similarity** NΑ 100-240Vac,50/60Hz,1.5A Ratings NA Other Ratings TPV 03/15/2025 Market Availability Yes Electronics(Fujia Date Available **OEM** n) Co. Ltd Canada, Japan, Switzerland, Taiwan, United States Major Markets Initial Certification: Model Meets ENERGY STAR Requirements Trans Type Notes UPC Reason no UPC UPC Code Not Yet Assigned - Partner Will Provide Later Other reason no UPC Model Name and Number Additional Model **Identifying Information** Details (Optional) Original Certificate Actual Issued Date for Model Tested (Only Applies to Revised Reports) NΑ

Issued: 15-Apr-2025

3.0 Product Photographs

Photo 1 - External View (front)

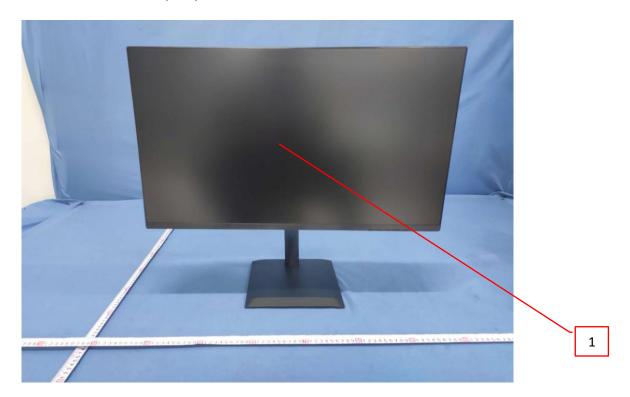


Photo 2 - External View (back)



3.0 Product Photographs

Photo 3 - Main Board (TPV/715GF371)



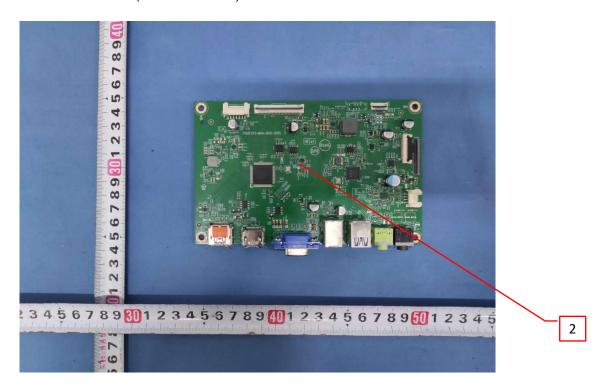


Photo 4 - USB Board (TPV/ 715GB001)

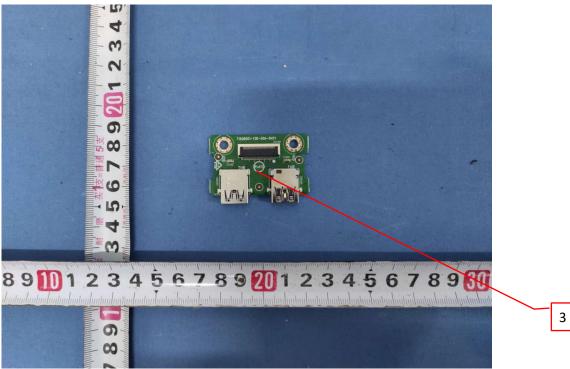

3.0 Product Photographs

Photo 5 - Power Board (TPV/ 715G7610)

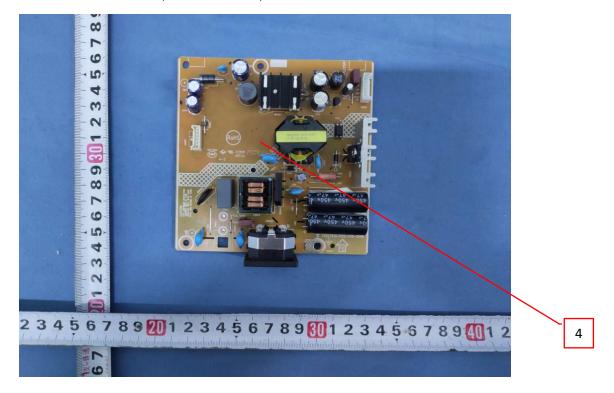

4.0 Critical Components Photo Manufacturer/ Mark(s) of Item Technical data and securement Type / model² Name no.1 trademark² means conformity³ TPM270***(*can 27 inches, TFT type, with LED be 0-9, a-z,A-Z, LCD Panel TPV backlight, TPM270WF1 is tested NR 1 1 |"/", "\", "**+**","-", "." model. or blank) 3 2 Main Board TPV 715GF371 I/P: 19Vdc,2.5A Max NR 4 3 USB board TPV 715GB001 O/P: 5Vdc,2.5A Max NR I/P: 100-240Vac, 1.5A, 50-60Hz 5 TPV 715G7610 4 **Power Board** NR O/P: 19V,2.5A Max

NOTES:

Issued: 15-Apr-2025

¹⁾ Not all item numbers are indicated (called out) in the photos, as their location is obvious.

^{2) &}quot;Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.

³⁾ Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates: a) Unlisted and only visual examination is necessary or b) marks are not required to be verified.

Page 8 of 20

Issued: 15-Apr-2025 Revised: None

5.0 Critical Unlisted CEC Components

Periodic Evaluation of Critical Unlisted Components by the Intertek Component Evaluation Centers (CEC) is not required under the INTERTEK ENERGY STAR Program.

6.0 Critical Features

<u>Critical Features/Components</u> - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the ENERGY STAR ® Program Requirements.

<u>Listed Component</u> - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

<u>Recognized Component</u> - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

<u>Unlisted Component</u> - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

<u>Construction Details</u> - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.


- 1. Product Safety Compliance NA
- 2. EMI Compliance NA
- 3. Schematics NA
- 4. <u>Installation, Operating and Safety Instructions</u> Instructions for installation and use of this product are provided by the manufacturer. Refer to Illustration No(s). 1 for details.
- 5. Package Markings NA
- 6. Warranty Information NA
- 7. Marking Label NA

7.0 Illustrations

Illustration 1 - Installation, Operating and Safety Instructions

Connecting the Monitor

Cable Connections In Back of Monitor and Computer:





- 1. Power
- 2. DisplayPort
- 3. HDMI
- 4. D-SUB
- 5. USB Upstream
- 6. USB3.2 Gen1x2
- 7. AUDIO IN
- 8. Earphone
- 9. USB3.2 Gen1
- 10. USB3.2 Gen1 downstream+chargin

Connect to PC

- 1. Connect the power cord to the back of the display firmly.
- 2. Turn off your computer and unplug its power cable.
- 3. Connect the display signal cable to the video connector on the back of your computer.
- 4. Plug the power cord of your computer and your display into a nearby outlet.
- 5. Turn on your computer and display.

If your monitor displays an image, installation is complete. If it does not display an image, please refer to Troubleshoot.

To protect equipment, always turn off the PC and LCD monitor before connecting.

7.0 Illustrations

Illustration 2 - Installation, Operating and Safety Instructions

Safety

National Conventions

The following subsections describe national conventions used in this document.

Notes, Cautions, and Warnings

Throughout this guide, blocks of text may be accompanied by an icon and printed in bold type or in italic type. These blocks are notes, cautions, and warnings, and they are used as follows:



NOTE: A NOTE indicates important information that helps you make better use of your computer system.



CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.



WARNING: A WARNING indicates the potential for bodily harm and tells you how to avoid the problem. Some warnings may appear in alternate formats and may be unaccompanied by an icon. In such cases, the specific presentation of the warning is mandated by regulatory authority.

Power

🗥 The monitor should be operated only from the type of power source indicated on the label. If you are not sure of the type of power supplied to your home, consult your dealer or local power company.

The monitor is equipped with a three-pronged grounded plug, a plug with a third (grounding) pin. This plug will fit only into a grounded power outlet as a safety feature. If your outlet does not accommodate the three-wire plug, have an electrician install the correct outlet, or use an adapter to ground the appliance safely. Do not defeat the safety purpose of the grounded plug.

Unplug the unit during a lightning storm or when it will not be used for long periods of time. This will protect the monitor from damage due to power surges.



Do not overload power strips and extension cords. Overloading can result in fire or electric shock.

To ensure satisfactory operation, use the monitor only with UL listed computers which have appropriate configured receptacles marked between 100-240V AC, Min. 5A.



The wall socket shall be installed near the equipment and shall be easily accessible.

7.0 Illustrations

Illustration 3 - Installation, Operating and Safety Instructions

Installation

🗥 Do not place the monitor on an unstable cart, stand, tripod, bracket, or table. If the monitor falls, it can injure a person and cause serious damage to this product. Use only a cart, stand, tripod, bracket, or table recommended by the manufacturer or sold with this product. Follow the manufacturer's instructions when installing the product and use mounting accessories recommended by the manufacturer. A product and cart combination should be moved with care.

A Never push any object into the slot on the monitor cabinet. It could damage circuit parts causing a fire or electric shock. Never spill liquids on the monitor.



Do not place the front of the product on the floor.


If you mount the monitor on a wall or shelf, use a mounting kit approved by the manufacturer and follow the kit instructions.

Leave some space around the monitor as shown below. Otherwise, air-circulation may be inadequate hence overheating may cause a fire or damage to the monitor.

To avoid potential damage, for example the panel peeling from the bezel, ensure that the monitor does not tilt downward by more than -5 degrees. If the -5 degree downward tilt angle maximum is exceeded, the monitor damage will not be covered under warranty.

See below the recommended ventilation areas around the monitor when the monitor is installed on the wall or on the stand:

Installed with stand

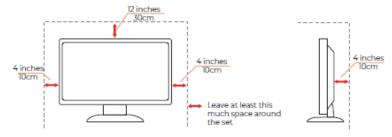

Cleaning




Clean the cabinet regularly with a water-dampened, soft cloth.

Mhen cleaning use a soft cotton or microfiber cloth. The cloth should be damp and almost dry, do not allow liquid into the case.







Please disconnect the power cord before cleaning the product.

7.0 Illustrations

Illustration 4 - Installation, Operating and Safety Instructions

Other

If the product is emitting a strange smell, sound or smoke, disconnect the power plug IMMEDIATELY and contact a Service Center.

Make sure that the ventilating openings are not blocked by a table or curtain.

no not engage the LCD monitor in severe vibration or high impact conditions during operation.

1 Do not knock or drop the monitor during operation or transportation.

The power cords shall be safety approved. For Germany, it shall be H03VV-F, 3C, 0.75 mm², or better. For other countries, the suitable types shall be used accordingly.

Excessive sound pressure from earphones and headphones can cause hearing loss. Adjustment of the equalizer to maximum increases the earphones and headphones output voltage and therefore the sound pressure level.

8.0 Test Summary				
Evaluation Period	03/04/2025 - 04/15/2025	Project No.	2502B1179SHA	
Sample Rec. Date	4-Mar-2025 Condition Prototype		0250304-54-002	
Test Location	Intertek Testing Services [Shanghai FTZ] Co., Ltd. (Building 86, No.1198, Qinzhou North Road, Shangh			
Test Procedure	Testing Lab	Test type	Qualification	
Determination of the r	Determination of the result includes consideration of measurement uncertainty from the test equ			
methods. The produc	ct was tested as indicated below with results in confo	rmance to the releva	nt test criteria.	
The following requirer	nents were evaluated:			
Required Submittal In	formation		Submittal Data	
Model Name and/or N	lumber tested		27E4U	
Date tested			03/04/2025	
Serial number of Unit			1 sample	
ENERGY_STAR_Spe	ecification_Version*		8.0	
Product_Type*			Monitor	
Tiled_Display_System				
Maximum_Tiled_Con	figuration			
Panel_Type*			IPS LCD	
Other_Panel_Type				
Diagonal_Screen_Siz	e_in*		27	
Screen_Area_sq_in*			311.67	
Display_Contrast_Rat			1500	
Native_Vertical_Reso			1080	
Native_Horizontal_Re	_		1920	
Total_Native_Resolut	_ 0:		2.1	
Native_Pixel_Density			6653	
As_Tested_Screen_R			60	
Maximum_Screen_Ro Enhanced_Performar			120	
Color_Gamut	No			
_	atio_at_85_deg_Left_Horiz_Viewing_Angle			
	tatio_at_65_deg_Left_floriz_viewing_Angle			
High_Dynamic_Range	<u> </u>		N/A	
Other Available Inter			IN/A	
Other_Features				
Signal_Interface*			DisplayPort 1.2	
Other_Interface			Diopiayi oit 1.2	
USB_C_with_Power_	Delivery Supported*		No	
Maximum_Power_De				
Other_Power_Source				
	_Forced_Menu_at_Initial_Start_up*		No	
Maximum_Measured	_Luminance_cd_m_2*		317.4	
	Luminance_cd_m_2*		300	
As_shipped_Luminan			261.2	
As_tested_Luminance			200	
On_Mode_Power_at_12_Lux_at_115_Volts_W				
	300_Lux_at_115_Volts_W			
	_Power_at_115_Volts_W		14.81	
	Power_at_115_Volts_W		14.81	
	Maximum_On_Mode_Power_Limit_for_Signage_Certification_W			
	de_Power_at_115_Volts_W		0.18	
	le_Power_at_115_Volts_W		0.18	
_	eted_Sleep_Mode_Power_at_115_Volts_W		0.18	
Maximum_Sleep_Mo	Maximum_Sleep_Mode_Power_Limit_for_Signage_Certification_W			

8.0 Test Summary	
Number_of_Sleep_Modes_in_Addition_to_Default_Sleep_Mode*	0
Other Mechanism for Automatically Entering Sleep or Off Mode	
Default_Delay_Time_to_Sleep_min	
Measured_Off_Mode_Power_at_115_Volts_W	0.14
Reported_Off_Mode_Power_at_115_Volts_W	0.14
Measured_Total_Energy_Consumption_at_115_Volts_kWh	46.42
Reported_Total_Energy_Consumption_at_115_Volts_kWh	46.42
Max_Total_Energy_Consumption_Limit_for_Monitor_kWh	52.06
On_Mode_Power_at_12_Lux_at_230_Volts_W	02.00
On_Mode_Power_at_300_Lux_at_230_Volts_W	
Measured_On_Mode_Power_at_230_Volts_W	14.83
Measured_Sleep_Mode_Power_at_230_Volts_W	0.25
Measured_Disconnected_Sleep_Mode_Power_at_230_Volts_W	0.25
Measured_Off_Mode_Power_at_230_Volts_W	0.23
Measured_Total_Energy_Consumption_at_230_Volts_kWh	46.89
True_Power_Factor_PF_During_On_Mode_Testing_at_115_Volts_W	0.5
True_Power_Factor_PF_During_On_Mode_Testing_at_230_Volts_W	0.39
Color_Spaces_Supported*	None
Coloi_Spaces_Supported	Display,HDMI,US
Available_Signal_or_Data_Interfaces*	B,VGA
Model_Features*	Built-In Speakers
Features_Enabled_in_Default_On_Mode*	Built-In Speakers
Features_Enabled_in_Default_Sleep_Mode*	
Wireless_Technologies_Supported*	None None
Ethernet_Supported*	None
Ethernet_Supported	Ac to dc internal
Power_Source*	
Fower_Source	power supply
	Display Power
Machanian for Automatically Entaring Class or Off Mada*	Management
Mechanism_for_Automatically_Entering_Sleep_or_Off_Mode*	Signaling
On_Mode_Power_at_12_Lux_at_100_Volts_50Hz_W	
On_Mode_Power_at_300_Lux_at_100_Volts_50Hz_W	
Measured_On_Mode_Power_at_100_Volts_50Hz_W	14.88
Measured_Sleep_Mode_Power_at_100_Volts_50Hz_W	0.18
Measured_Disconnected_Sleep_Mode_Power_at_100_Volts_50Hz_W	0.18
Measured_Off_Mode_Power_at_100_Volts_50Hz_W	0.14
Measured_Total_Energy_Consumption_at_100_Volts_50Hz_kWh	46.66
On_Mode_Power_at_12_Lux_at_100_Volts_60Hz_W	40.00
On Mode Power at 300 Lux at 100 Volts 60Hz W	
Measured On Mode Power at 100 Volts 60Hz W	14.97
Measured_Sleep_Mode_Power_at_100_Volts_60Hz_W	
	0.18
Measured_Disconnected_Sleep_Mode_Power_at_100_Volts_60Hz_W	0.18
Measured_Off_Mode_Power_at_100_Volts_60Hz_W	0.14
Measured_Total_Energy_Consumption_at_100_Volts_60Hz_kWh	46.93

8.1 Signatures			
A representative s	ample of the product covered by	this report has been eva	luated and found to comply with the
applicable requirements of the standards indicated in Section 1.0.			
Completed by:	Henry Huang	Reviewed by:	Carl Dong
Title:	Engineer	Title:	Engineer
Signature:	Henry Huang	Signature:	Carl Pong.

Issued: 15-Apr-2025

9.0 Correlation Page For Multiple Listings The following products, which are identical to those identified in this report except for model number and Company name. BASIC LISTEE Top Victory Electronics (Taiwan) Co., Ltd. 10F., No. 230, Liancheng Rd. Zhonghe City. Taipei Country 23553 Address Country EPA ID 1065104 Taiwan Display (LCD Monitor) Product Contact David.Cheng +886-2-82261668-2375 Phone FAX +886-2-82261668-2375 David.cheng@tpv-tech.com Email

MULTIPLE LISTEE 1	None			
Address				
Country		EPA ID		
Contact				
Phone				
FAX				
Email				
Brand Name				
Date Available		Market Availability	OEM	
Major Markets				
Trans Type				
Notes				
UPC				
Reason no UPC				
Other reason no UPC				
ASSOCIATED				
MANUFACTURER				
Address				
Country				
MULTIPLE LISTEE 1 MODELS		BASIC LISTEE MODELS		
_				
Additional Model	Model Name and Number	Identifying Informa	tion	
Details (Optional)				
Details (Optional)				

Issued: 15-Apr-2025

9.0 Correlation Page For Multiple Listings

MULTIPLE LISTEE 2	None			
Address				
Country		EPA ID		
Contact				
Phone				
FAX				
Email				
Brand Name				
Date Available		Market Availability	OEM	
Major Markets				
Trans Type				
Notes				
UPC				
Reason no UPC				
Other reason no UPC				
ASSOCIATED				
MANUFACTURER				
Address				
Country				
MULTIPLE LISTEE 2 MODELS		BASIC LISTEE MODELS		
Additional Model	Model Name and Number	Identifying Informa	tion	
Details (Optional)				
Details (Optional)				

10.0 General Information

The Applicant has agreed to produce products in accordance with the requirements of this report and to maintain compliance with all ENERGY STAR Product Specification requirements.

Changes to Product Design / Alternate Components

As part of this agreement, the Applicant also has agreed to notify Intertek and to request authorization prior to making any changes to the product (including but not limited to using alternate parts, components or materials) which may effect compliance with the ENERGY STAR Product Specification. Those parts, components or materials identified as critical have been listed in Section 4.0 of this report.

Product Surveillance

Under this Program, market surveillance is conducted on an annual basis. For each Product Type defined in the EPA ENERGY STAR Program, Intertek will select 10% of those certified products for Verification Testing in accordance with the requirements of the EPA ENERGY STAR Product Specification.

The primary source for products under Verification Testing will be the retail market. Applicants whose products are selected for Verification Testing are required to provide a list of locations where the product might be obtained. The Applicant is responsible for the cost of procurement and the Verification Tests. Should products not be readily available on the retail market, the Applicant is required to provide access to distribution warehouses to allow selection of those products. Should the product not be available on the retail market or if procurement from the retail market is not feasible, then alternate arrangements for Verification Testing will be made by the Intertek Certification Body.

As a general rule under the Verification Testing requirements, the products must achieve energy values within 5% of the required Tier Limit.

Compliance with ENERGY STAR Product Specifications under Verification Testing

Products found non-compliant with ENERGY STAR Product Specification under Verification Testing, will be reported to the EPA within 48 hours and the product removed from the ENERGY STAR Program. If it is determined during Verification Testing that changes have been made to product design or critical components, the Certification Body may increase Verification Testing frequency of those products.

10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

Note to Intertek Follow Up Inspector: The Component Evaluation Center, CEC, will notify you in writing when these components must be selected and sent to the CEC for re-evaluation

Ship the samples to:

Intertek Testing Services Shanghai Limited

ETL Component Evaluation Center

Building No. 86, 1198 Qinzhou Road (North)

Shanghai 200233, China

Attn: Ms. Angela Han

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

Issued: 15-Apr-2025

Page 19 of 20

Issued: 15-Apr-2025 Revised: None

11.0 Manufacturing and Production Tests

Manufacturing and Production tests are not required under the INTERTEK ENERGY STAR Program. However, Intertek encourages the use of such ongoing product testing to ensure compliance with the EPA ENERGY STAR Product Specifications.

12.0 Revision Summary The following changes are in compliance with the declaration of Section 8.1: Project Handler/ Section Item Description of Change Proj # Site ID Reviewer None

Issued: 15-Apr-2025