

Find your product and get support

FAQ

Driver

User Manual

Europe

<https://aoc.com/uk/support>

Россия

<https://aoc.com/ru/support>

Australia

https://au.aoc.com/user_manual

Hong Kong S.A.R.

https://hk.aoc.com/user_manual

中國台灣

https://tw.aoc.com/user_manual

Indonesia

https://id.aoc.com/user_manual

日本

https://jp.aoc.com/user_manual

한국

https://kr.aoc.com/user_manual

Malaysia

https://my.aoc.com/user_manual

Myanmar

https://mm.aoc.com/user_manual

New Zealand

https://nz.aoc.com/user_manual

Philippines

https://ph.aoc.com/user_manual

Singapore

https://sg.aoc.com/user_manual

ประเทศไทย

https://th.aoc.com/user_manual

Việt Nam

https://vn.aoc.com/user_manual

Middle East

https://me.aoc.com/user_manual

South Africa

https://za.aoc.com/user_manual

Brasil

<https://aoc.portaltpv.com.br/>

India

<https://aoc.com/in-en/support>

US

<https://aoc.com/us/support>

Canada

<https://aoc.com/ca-en/support>



Q41G32M1615A42

AOC GAMING

Quick Start Guide
C32G2ZE2

www.aoc.com
©2023 AOC.All Rights Reserved

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE



Monitor

stand

Base

Quick Start Guide

Warranty Card

Power Cable



HDMI Cable

DP Cable



*Different according to countries/regions

Display design may differ from that illustrated


1

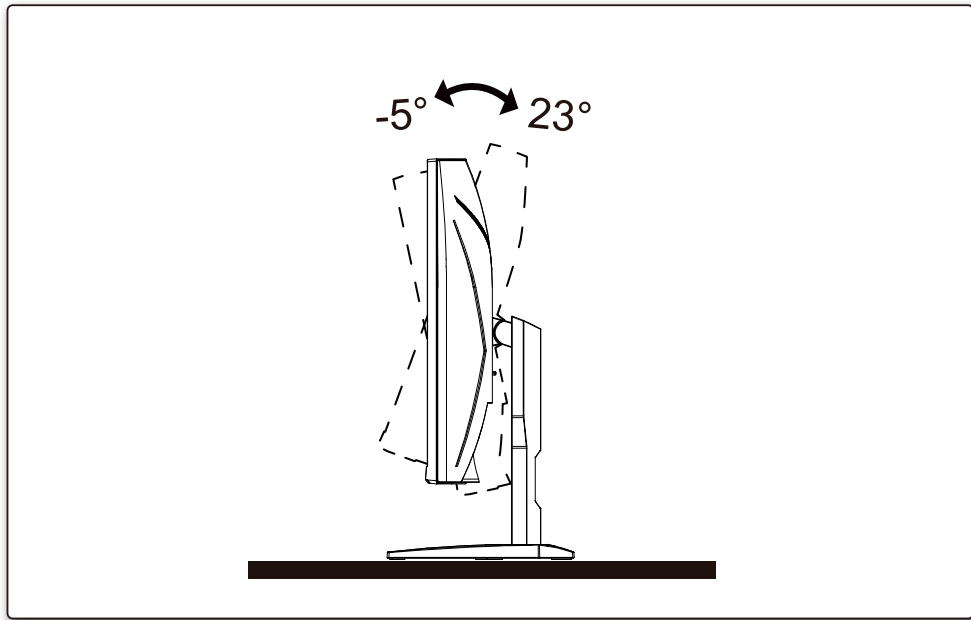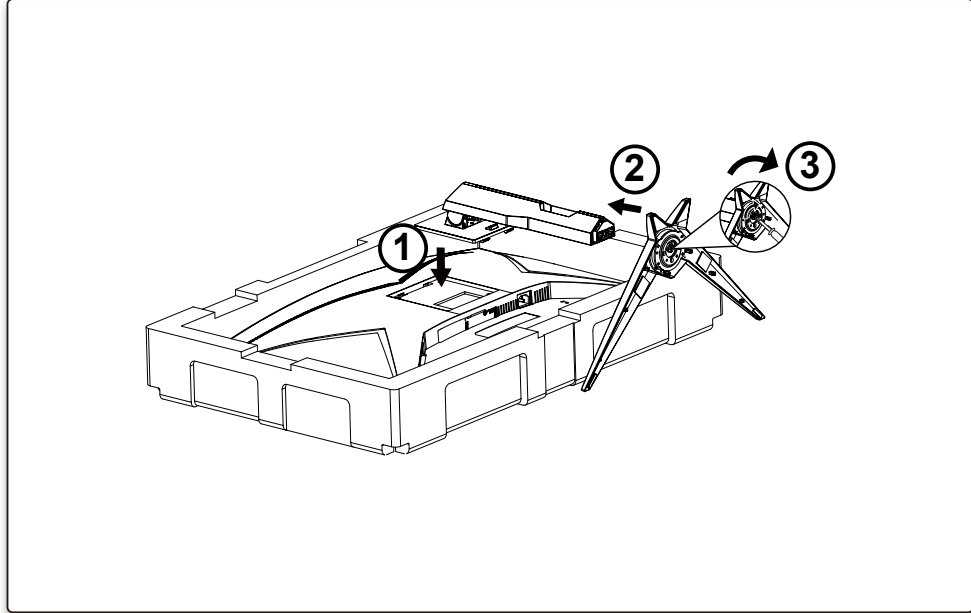

2

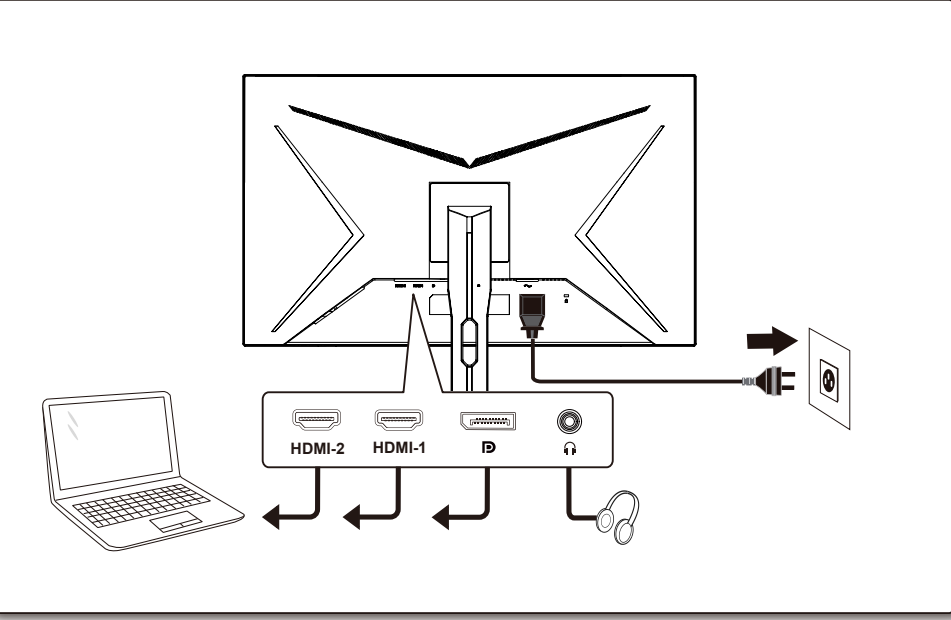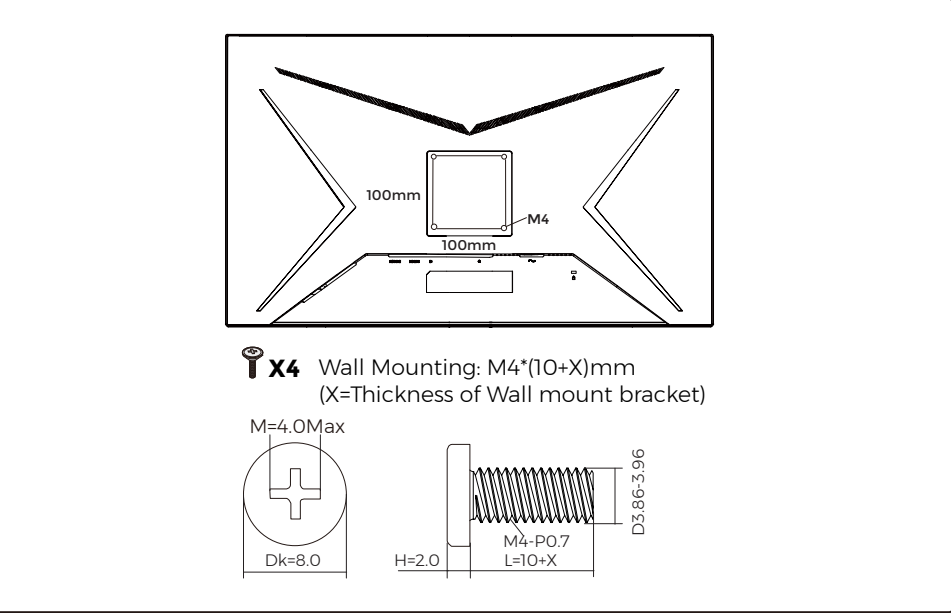

3

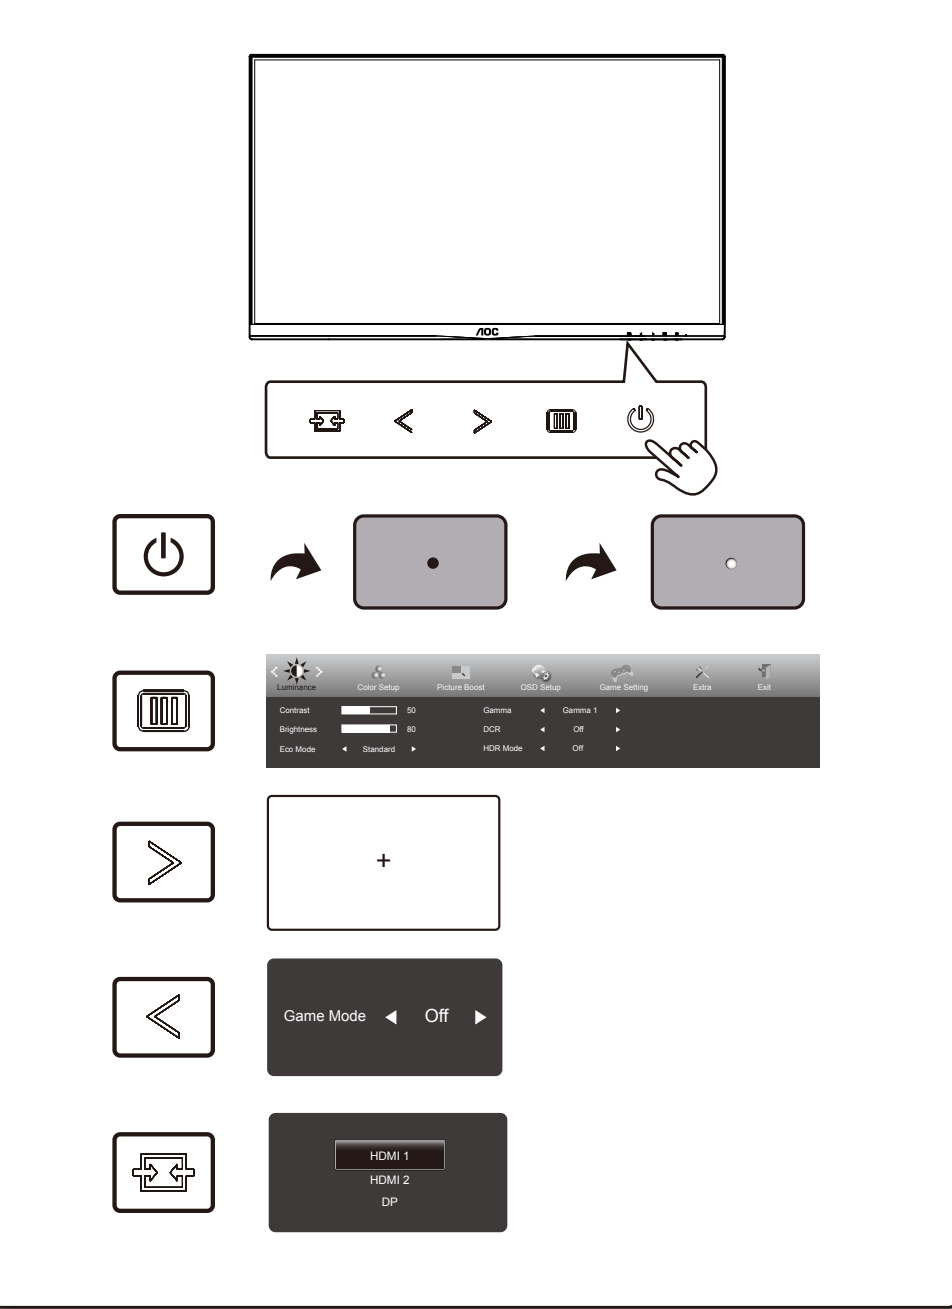

4

General Specification

Panel	Model Name	C32G2ZE2	
	Driving System	TFT Color LCD	
	Viewable Image Size	80.1cm diagonal(31.5" Wide Screen)	
	Pixel Pitch	0.36375mm(H) x 0.36375mm(V)	
Others	Horizontal Scan Range	30k-255kHz	
	Horizontal Scan Size(Maximum)	698.4mm	
	Vertical Scan Range	48-250Hz	
	Vertical Scan Size(Maximum)	392.85mm	
	Max Resolution	1920x1080@250Hz	
	Plug & Play	VESA DDC2B/CI	
	Power Source	100-240V~ 50/60Hz 1.5A	
	Power Consumption	Typical (default brightness and contrast) Max. (brightness =100, contrast =100) Standby Mode	45W ≤ 60W ≤ 0.5W
Physical Characteristics	Dimensions(with stand)	709.9 x 524.4 x 244.9mm(WxHxD)	
	Net Weight	6.83kg	
Physical Characteristics	Connector Type	HDMIx2/DP/Earphone	
	Signal Cable Type	Detachable	
Environmental	Temperature	Operating	0°C~ 40°C
		Non-Operating	-25°C~55°C
	Humidity	Operating	10%~85% (non-condensing)
		Non-Operating	5%~93% (non-condensing)
	Altitude	Operating	0m~5000m (0ft~16404ft)
		Non-Operating	0m~12192m (0ft~40000ft)