


Find your product and get support

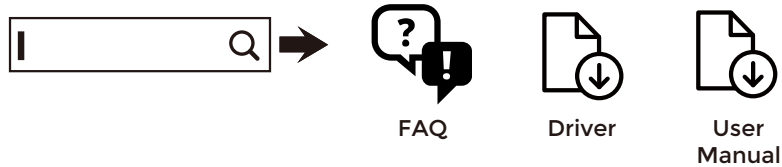

Europe
<https://aoc.com/uk/support>

Россия
<https://aoc.com/ru/support>

Australia
https://au.aoc.com/user_manual

Hong Kong S.A.R.
https://hk.aoc.com/user_manual

中國台灣
https://tw.aoc.com/user_manual

Indonesia
https://id.aoc.com/user_manual

日本
https://jp.aoc.com/user_manual

한국
https://kr.aoc.com/user_manual

Malaysia
https://my.aoc.com/user_manual

Myanmar
https://mm.aoc.com/user_manual

New Zealand
https://nz.aoc.com/user_manual

Philippines
https://ph.aoc.com/user_manual

Singapore
https://sg.aoc.com/user_manual

ประเทศไทย
https://th.aoc.com/user_manual

Việt Nam
https://vn.aoc.com/user_manual

Middle East
https://me.aoc.com/user_manual

South Africa
https://za.aoc.com/user_manual

Brasil
<https://aoc.portaltpv.com.br/>

India
<https://aoc.com/in-en/support>


US
<https://aoc.com/us/support>

Canada
<https://aoc.com/ca-en/support>

Product information for EU/UK Energy

Q41G32M1615A80


AOC
GAMING

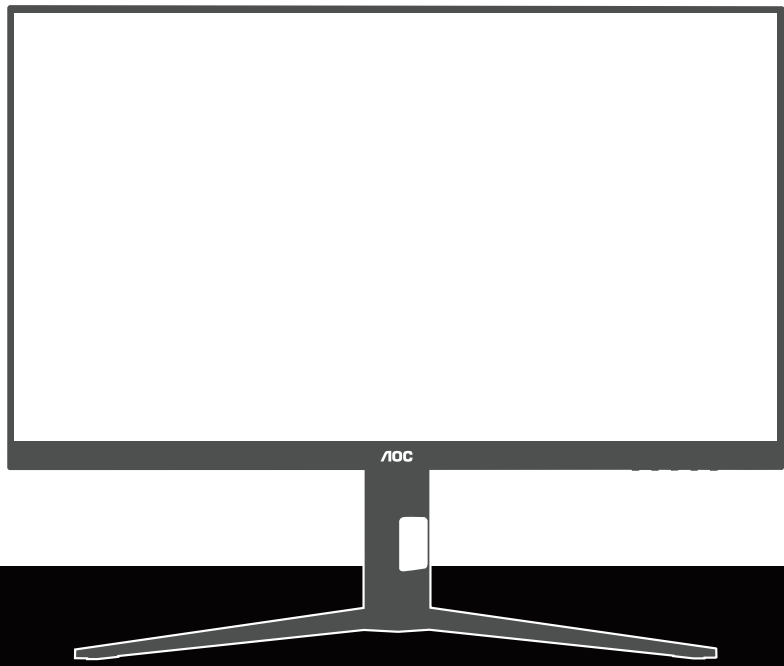

QUICK START GUIDE
U32G4U
AOC GAMING MONITOR



©2025 AOC. All rights reserved

WWW.AOC.COM


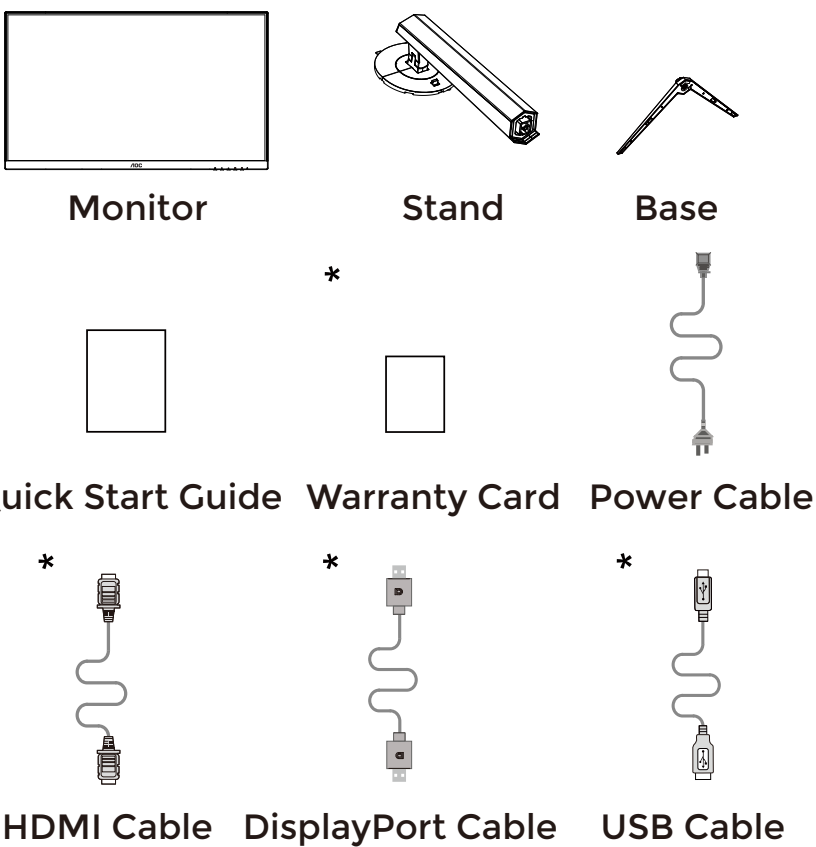


*Different according to countries/regions
Display design may differ from that illustrated


1

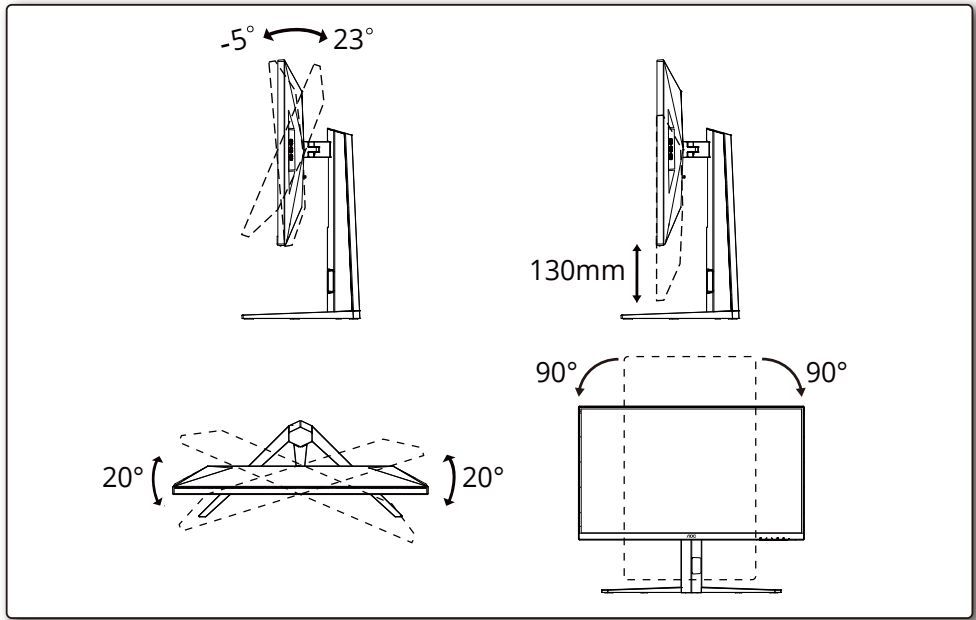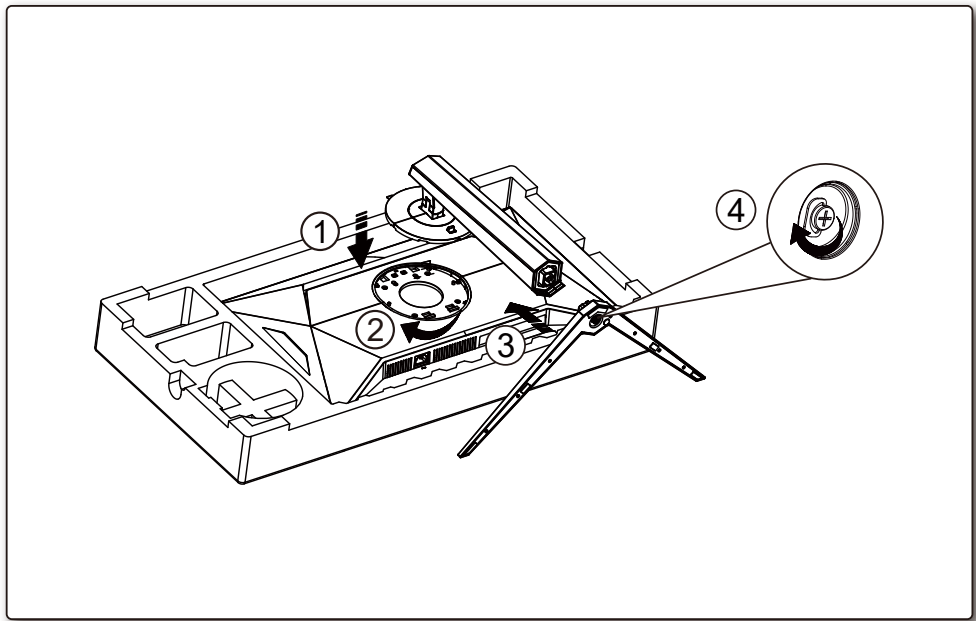

2

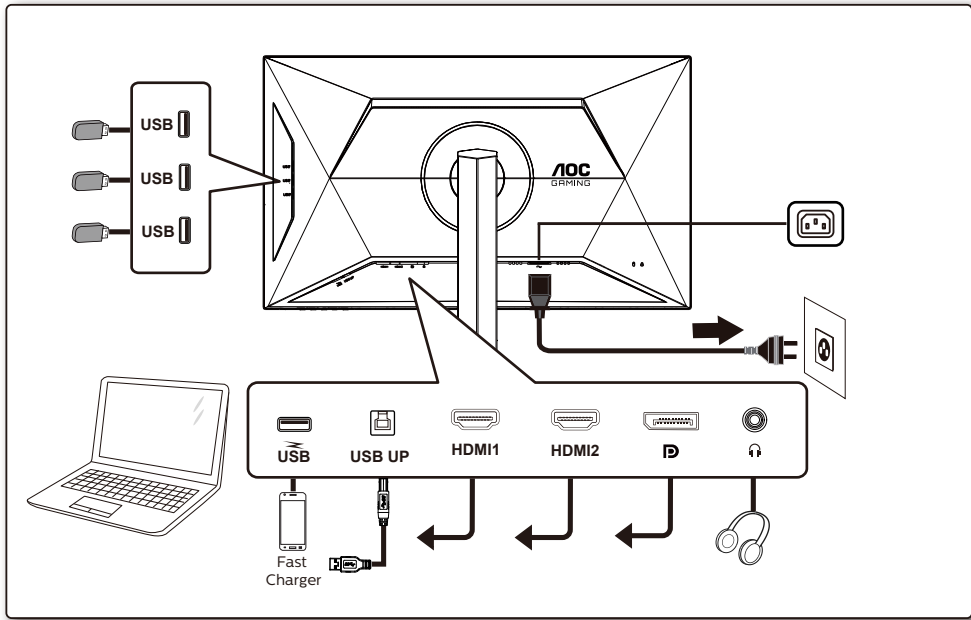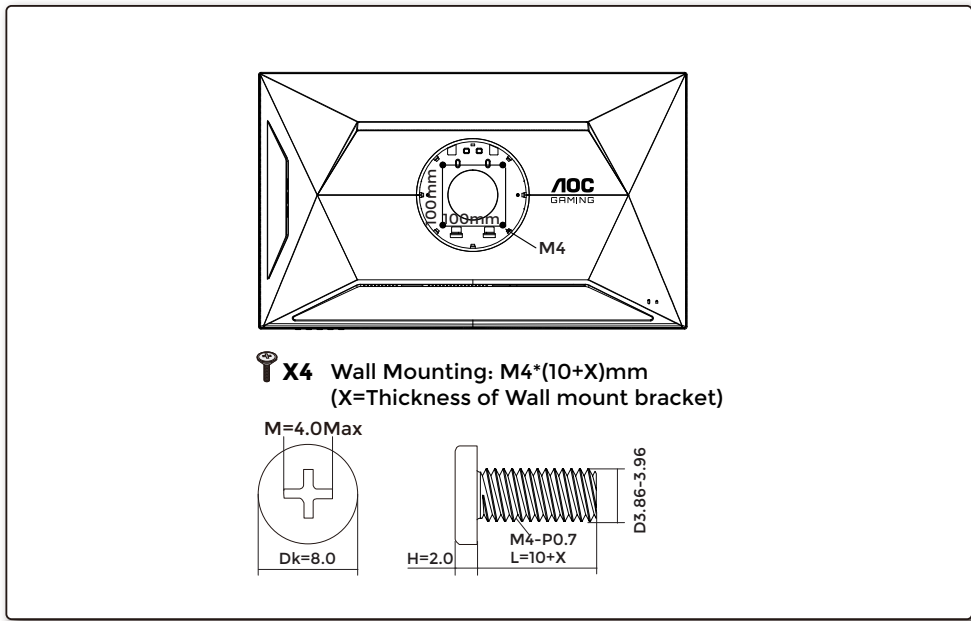

3

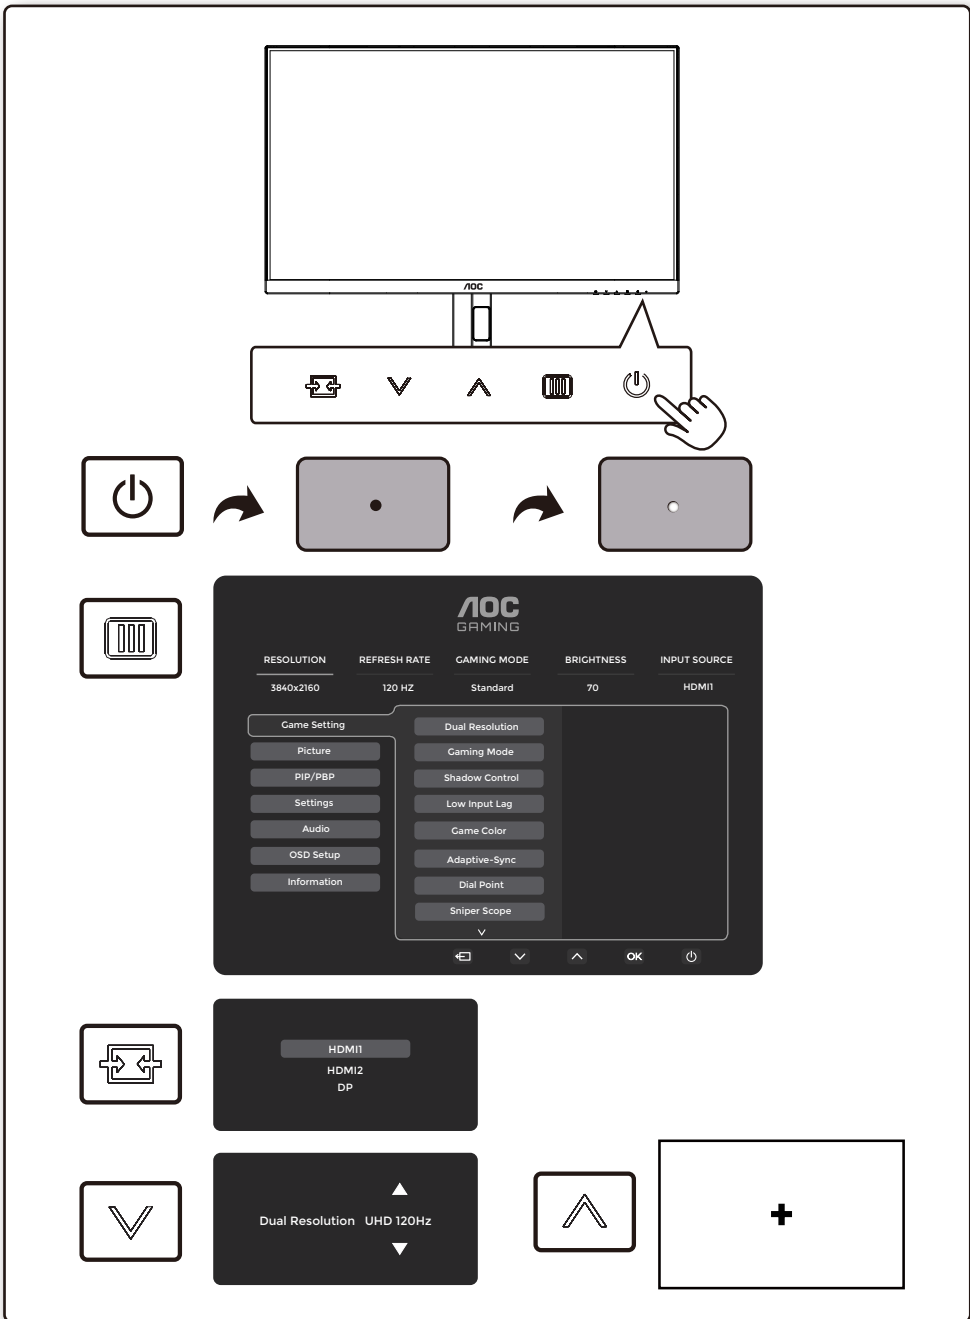

4

General Specification

Panel	Model Name	U32G4U	
	Driving System	TFT Color LCD	
	Viewable Image Size	80.1cm diagonal(31.5" Wide Screen)	
	Pixel Pitch	0.1818mm(H) x 0.1818mm(V)	
Others	Horizontal Scan Range	30k~360kHz	
	Horizontal Scan Size(Maximum)	698.112mm	
	Vertical Scan Range	FHD: 48~320Hz UHD: 48~160Hz	
	Vertical Scan Size(Maximum)	392.688mm	
	Max Resolution	FHD: 1920x1080@320Hz UHD: 3840x2160@160Hz	
	Plug & Play	VESA DDC2B/C1	
	Power Source	100-240V~ 50/60Hz 1.5A	
	Power Consumption	Typical (brightness=70, contrast=50)	43W
		Max. (brightness =100, contrast =100)	≤ 110W
		Standby Mode	≤ 0.5W
Physical Characteristics	Dimensions(with stand)	716.1x(462.0-592.0)x269.6mm(WxHxD)	
	Net Weight	8.01kg	
Environmental	Connector Type	USB UP/USBx4 (include 1 fast charge) HDMIx2/DisplayPort/Earphone	
	Signal Cable Type	Detachable	
Environmental	Temperature	Operating	0°C~ 40°C
		Non-Operating	-25°C~55°C
	Humidity	Operating	10%~85% (Non-Condensing)
		Non-Operating	5%~93% (Non-Condensing)
	Altitude	Operating	0m~5000m (0ft~16404ft)
		Non-Operating	0m~12192m (0ft~40000ft)