

## **Compliance Constructional Data Report (CDR)**

1.0 Reference and Address									
Report Number	160101768SHA-003	Original Issued:	2-Feb-2016	Revised: None					
Standard(s)	ENERGY STAR® Program Requirements for Displays Version 6.0								
Applicant	Top Victory Electronics (Taiwan) Co.,Ltd.		Manufacturer	TPV Electronics(Fujian) Co., Ltd					
Address	10F.,No.230,Liancheng Rd. Zhonghe City. Taipei Country 23553		Address	Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province					
Country	Taiwan		Country	P.R.China					
Contact	David.Cheng		Contact	Lissa Wang					
Phone	+886-02-82261668		Phone	+86-591-85285555					
FAX	+886-02-82261707		FAX	+86-591-85285447					
Email	David.cheng@tpv-tech.com		Email	lissa.wang@tpv-tech.com					
Manufacturer 2	TPV Display Technology (Beihai) Co.,Ltd		Manufacturer 3	TPV Technology(Beijing)Co.,Ltd.					
Address	China Electronic Beihai Industry Park,Northeast of the Crossing between Taiwan Road and Jilin Road Beihai City,Guangxi		Address	No.10 Jiuxianqiao Rd. Chao Yang District Beijing					
Country	China		Country	China					
Contact	Yin Tao		Contact	Jenny Che					
Phone	18277949678		Phone	010-64326699-8601					
FAX	86-779-2232270		FAX	86-10-64371452					
Email	Email yin.tao@tpv-tech.com		Email	jenny.che@tpv-tech.com					
Manufacturer 4			Manufacturer 5	TPV Display Technology(Wuhan)Co.,Ltd					
Address	Economic and Techno	Optoelectronic Park, Rongqiao conomic and Technological Development Zone,Fuqing City,Fujian		Unique No.11 Zhuankou Development District of Economic Technological Development Zone Wuhan					
Country	China		Country	China					
Contact	Shan Xu		Contact	Zhe.Zhou					
Phone	hone 86(591)8651-5556		Phone	86(27)-6884 3822					
FAX	FAX 86(591)8651-5556		FAX	86(27)-6884 3822					
Email	shan.xu@Intdisplayfj.com		Email	zhe.zhou@tpv-tech.com					
Manufacturer 6	TPV Display Technolog	gy (China) Co.,							
Address	No.106 Jinghai 3 Rd., l City	BDA, Beijing							
Country	China								
Contact	Nancy.Shang								
Phone	86(10)64326699-8312								
FAX									
Email	lijia.shang@tpv-tech.co	om							

2.0 Product Description Display(LCD Monitor) **Product** Brand name AOC Description The product covered by this report is a LCD Display (LED backlighting) Models Q2775PQU(270LM00023) Model Name:Q2775PQU Model Similarity Model Number:270LM00023 Ratings 100-240VAC,50/60Hz 1.5A Other Ratings Date available 02/01/2016 Market availability Yes Last Mfg date NA Major Markets Australia, New Zealand, Canada, Europe, Japan, Switzerland, Taiwan, United States Trans Type Initial Certification: Model Meets ENERGY STAR Requirements Notes NΑ Model Name or Number **Identifying Information** Additional model details (optional) Original Certificate actual issued date for model tested (only applies to revised reports) NA

Issued: 2-Feb-2016

## 3.0 Product Photographs

Photo 1 - External View(front)



Photo 2 - External View(back)



## 3.0 Product Photographs

Photo 3 - Main Board



2

Photo 4 - Main Board



3

## 3.0 Product Photographs

Photo 5 - Main Board


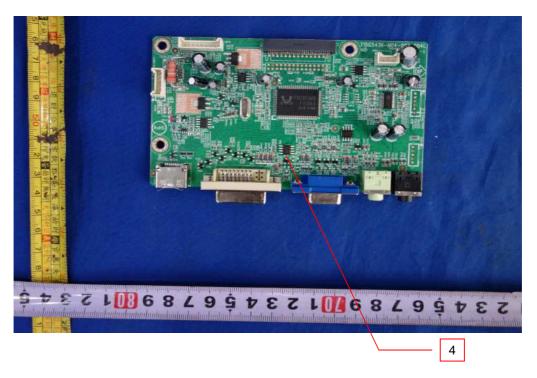


Photo 6 - Main Board

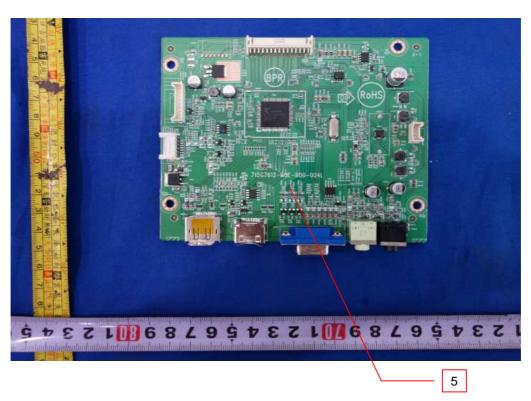

## 3.0 Product Photographs

Photo 7 - Power Board


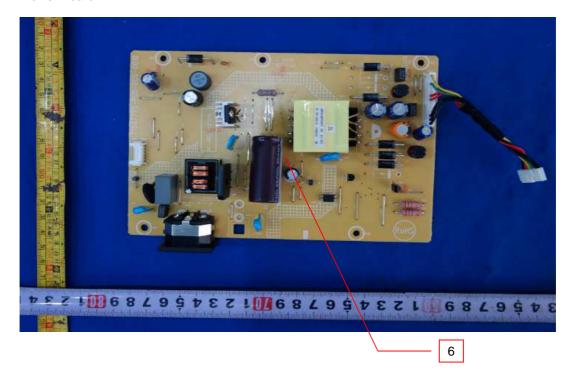


Photo 8 - Power Board

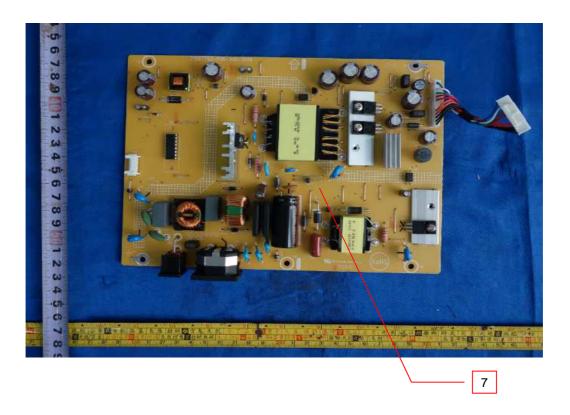

4.0 Critical Components									
Photo #	Item no. <sup>1</sup>	Name	Manufacturer/ trademark <sup>2</sup>	Type / model <sup>2</sup>	Technical data and securement means	Mark(s) of conformity			
1		LCD Panel	TPV	TPM270WF1	27.0inch,TFT type,with LED backlight.Tested model is TPV / M270DAN02.0	NR			
	1		AUO	M270DAN02.0					
3	2		TPV	715G7762	I/P:5Vdc/3.25A maxTested model is 715G7742	NR			
4	3	Main Board		715G7742					
5	4	IVIAITI BOATU		715G5436					
6	5			715G7612					
7	6	Power Board	TPV	715G7775	I/P:100-240VAC,50/60Hz 1.5A max.output:16Vdc/2A 5V,3.5A.	NR			
8				715G7760	I/P:100-240VAC,50/60Hz 1.5A max.output:19Vdc/3.5A 5V,3.5A.This is tested model.				

## NOTES:

Issued: 2-Feb-2016

<sup>1)</sup> Not all item numbers are indicated (called out) in the photos, as their location is obvious.

<sup>2) &</sup>quot;Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.

<sup>3)</sup> Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates: a) Unlisted and only visual examination is necessary or b) marks are not required to be verified.

Page 8 of 19

5.0 Critical Unlisted CEC Components

Periodic Evaluation of Critical Unlisted Components by the Intertek Component Evaluation Centers (CEC) is not required under the INTERTEK ENERGY STAR Program.

Issued: 2-Feb-2016

#### 6.0 Critical Features

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the ENERGY STAR® Program Requirements.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

<u>Unlisted Component</u> - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

- Product Safety Compliance NA
- EMI Compliance NA
- Schematics NA
- 4. Installation, Operating and Safety Instructions Instructions for installation and use of this product are provided by the manufacturer. Refer to Illustration No.1 for details.
- 5. Package Markings NA
- 6. Warranty Information NA
- Marking Label Refer to Illustration No.2. for details.

#### 7.0 Illustrations

#### Illustration 1 - Installation and Safety instruction

# Safety

## **National Conventions**

The following subsections describe notational conventions used in this document.

#### Notes, Cautions, and Warnings

Throughout this guide, blocks of text may be accompanied by an icon and printed in bold type or in italic type. These blocks are notes, cautions, and warnings, and they are used as follows:



NOTE: A NOTE indicates important information that helps you make better use of your computer system.



CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem



WARNING: A WARNING indicates the potential for bodily harm and tells you how to avoid the problem. Some warnings may appear in alternate formats and may be unaccompanied by an icon. In such cases, the specific presentation of the warning is mandated by regulatory authority.

#### Power

The monitor should be operated only from the type of power source indicated on the label. If you are not sure of the type of power supplied to your home, consult your dealer or local power company.

⚠ The monitor is equipped with a three-pronged grounded plug, a plug with a third (grounding) pin. This plug will fit only into a grounded power outlet as a safety feature. If your outlet does not accommodate the three-wire plug, have an electrician install the correct outlet, or use an adapter to ground the appliance safely. Do not defeat the safety purpose of the grounded plug.

Unplug the unit during a lightning storm or when it will not be used for long periods of time. This will protect the monitor from damage due to power surges.




Do not overload power strips and extension cords. Overloading can result in fire or electric shock.

The wall socket shall be installed near the equipment and shall be easily accessible.

## 7.0 Illustrations

## Connecting the Monitor

Cable Connections In Back of Monitor and Computer:



- 1 Power
- 2 HDMI
- DVI
- Analog (D-Sub 15-Pin VGA cable)
- Earphone out

To protect equipment, always turn off the PC and LCD monitor before connecting.

- 1 Connect the power cable to the AC port on the back of the monitor.
- 2 Connect one end of the 15-pin D-Sub cable to the back of the monitor and connect the other end to the computer's D-Sub port.
- 3 Optional (Requires a video card with DVI port) Connect one end of the DVI cable to the back of the monitor and connect the other end to the computer's DVI port.
- 4 Optional (Requires a video card with HDMI port) Connect one end of the HDMI cable to the back of the monitor and connect the other end to the computer's HDMI port.
- 5 Turn on your monitor and computer.

## 7.0 Illustrations

Illustration 2 - Display Marking Label





8.0 Test Summary **Evaluation Period** 2/2/2016-2/2/2016 Project No. 160101768SHA Sample ID. 0160125-78-002 Sample Rec. Date Condition Prototype 25-Jan-2016 Intertek Testing Services Shanghai Limited EPA ID(1105997) **Test Location** Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, China Testing Lab Test type Qualification Test Procedure Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria. The following requirements were evaluated: Required Submittal Information Submittal Data Q2775PQU Model Name and/or Number tested (270LM00023) Date tested 02/02/2016 Serial number of Unit tested NA ENERGY\_STAR\_Specification\_Version\* 6.0 Monitor Product\_Type\* Other\_Product\_Type NA Other Display\_Type\* Other\_Display\_Type TFT LCD Display\_Backlight\_Technology\* LED Other\_Display\_Backlight\_Technology NA Display\_Contrast\_Ratio\* 1000:1 Viewable\_Screen\_Height\_in\* 13.2 Viewable\_Screen\_Width\_in\* 23.5 Diagonal\_Viewable\_Screen\_Size\_in\* 27 Viewable\_Screen\_Area\_sq\_in\* 310.5 1.78 Aspect\_Ratio\* Native Resolution Vertical pixels\* 1440 Native Resolution Horizontal pixels\* 2560 Total\_Native\_Resolution\_megapixels\* 3.686 Maximum\_Resolution\_Vertical\* 1440 Maximum\_Resolution\_Horizontal\* 2560 Native\_Pixel\_Density\_Dp\_pixels\_sq\_in\* 11871 Screen Refresh Rate Hz\* 60 Horizontal\_Viewing\_Angle\_degrees\* 170 Vertical\_Viewing\_Angle\_degrees\* 160 Color\_Gamut\* 72%(Type) Is\_Color\_Gamut\_at\_least\_sRGB\* No Is\_This\_Model\_an\_Enhanced\_Performance\_Display No Reported\_Contrast\_Ratio\_at\_85\_Left\_Horizontal\_Viewing\_Angle NA Reported\_Contrast\_Ratio\_at\_85\_Right\_Horizontal\_Viewing\_Angle NA Is\_This\_Model\_Shipped\_With\_an\_External\_Power\_Supply\_EPS\* No Yes Is\_Model\_Sold\_Through\_Enterprise\_Channels\* Other Available Interfaces Earphone; Audio Other\_Data\_Network\_Peripheral\_Ports NA Other\_Model\_Options None **HDMI** Interface\* NA Other\_Interface Data\_Network\_Connection\* USB 3.x Other Data Network Connected None Power\_Source\* Ac Wall Outlet Other\_Power\_Source NΑ VESA FPDM2 Test Pattern Used\* No Recommended\_Image\_Size\_mm\* 596.7x335.7 Display\_Has\_an\_Integrated\_Television\_Tuner\* No Other\_Mechanism\_for\_Automatically\_Entering\_Sleep\_or\_Off\_Mode None

Issued: 2-Feb-2016

8.0 Test Summary					
Default_Delay_Time_to_Sleep_min					
Does_Model_Have_a_Forced_Menu_at_Initial_Start_up*	No				
Is_Automatic_Brightness_Control_ABC_Present*	No				
Is_Automatic_Brightness_Control_ABC_Enabled_by_Default	No				
Automatic_Brightness_Control_ABC_Disabled_Brightness_Mode	110				
Minimum_Luminance_cd_m_2*	17.9				
Maximum_Measured_Luminance_cd_m_2*	347				
Maximum_Reported_Luminance_cd_m_2*	350				
As_shipped_Luminance_cd_m_2	297				
As tested Luminance cd m 2*	200				
On_Mode_Power_at_10_Lux_at_115_Volts_W	200				
On_Mode_Power_at_300_Lux_at_115_Volts_W					
Measured_On_Mode_Power_at_115_Volts_W	26.46				
Reported_On_Mode_Power_at_115_Volts_W	20.10				
Measured_Sleep_Mode_Power_at_115_Volts_W	0.36				
Reported_Sleep_Mode_Power_at_115_Volts_W	0.00				
Measured_Non_Connected_Sleep_Mode_Power_at_115_Volts_W					
Measured Off Mode Power at 115 Volts W	0.29				
Reported_Off_Mode_Power_at_115_Volts_W	0.20				
On_Mode_Power_at_10_Lux_at_230_Volts_W					
On_Mode_Power_at_300_Lux_at_230_Volts_W					
Measured_On_Mode_Power_at_230_Volts_W	25.59				
Measured_Sleep_Mode_Power_at_230_Volts_W	0.39				
Measured_Non_Connected_Sleep_Mode_Power_at_230_Volts_W	0.00				
Measured_Off_Mode_Power_at_230_Volts_W	0.32				
On_Mode_Limit_Pon_max_W*	38.7				
Sleep_Mode_Limit_Psleep_ap_or_Psleep_max_W*	1.2				
Off_Mode_Limit_Poff_max_W*	0.5				
True_Power_Factor_PF_During_On_Mode_Testing*	0.5				
Low_Voltage_Dc_Source_Power_PI_W	0.5				
Adder_for_an_Enhanced_Performance_Display_W	0				
Adder_for_Automatic_Brightness_Control_W	0				
Number_of_Sleep_Modes_in_Addition_to_Default_Sleep_Mode*	0				
Signal_Technology*	Analog,Digital				
Available_Interfaces*	VGA,DVI,HDMI				
Data_Network_Peripheral_Ports*	USB Hubs/Ports				
Model_Options*	Built-In Speakers				
IMOUGI_Options	Display Power				
	Management				
Mechanism_for_Automatically_Entering_Sleep_or_Off_Mode*	Signaling				
Wednamsm_tot_Automatically_Enterling_olecp_ol_oll_wode	Olgriding				
On Maria Davier at 40 Long at 400 Valta FOLIS W					
On_Mode_Power_at_10_Lux_at_100_Volts_50Hz_W					
On_Mode_Power_at_300_Lux_at_100_Volts_50Hz_W	00.45				
Measured_On_Mode_Power_at_100_Volts_50Hz_W	26.45				
Measured_Sleep_Mode_Power_at_100_Volts_50Hz_W	0.36				
Measured_Non_Connected_Sleep_Mode_Power_at_100_Volts_50Hz_W	0.00				
Measured_Off_Mode_Power_at_100_Volts_50Hz_W	0.28				
On_Mode_Power_at_10_Lux_at_100_Volts_60Hz_W					
On_Mode_Power_at_300_Lux_at_100_Volts_60Hz_W	00.10				
Measured_On_Mode_Power_at_100_Volts_60Hz_W	26.43				
Measured_Sleep_Mode_Power_at_100_Volts_60Hz_W	0.36				
Measured_Non_Connected_Sleep_Mode_Power_at_100_Volts_60Hz_W	0.55				
Measured_Off_Mode_Power_at_100_Volts_60Hz_W	0.29				

Issued: 2-Feb-2016

8.0 Test Summary
8.1 Signatures

A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0.

Completed by: Chris Chen Reviewed by: Jarree Jiang
Title: Engineer Title: Engineer

Signature: Signature:

Issued: 2-Feb-2016

(Optional)

9.0 Correlation Page For Multiple Listings The following products, which are identical to those identified in this report except for model number and Company name. **BASIC LISTEE** Top Victory Electronics (Taiwan) Co.,Ltd. 10F., No. 230, Liancheng Rd. Zhonghe City. Taipei Country 23553 Address Country EPA ID 1065104 Taiwan **Product** Display(LCD Monitor) MULTIPLE LISTEE 1 None Address Country EPA ID Contact Phone FAX **Email Brand Name** Trans Type Notes **ASSOCIATED MANUFACTURER** Address Country MULTIPLE LISTEE 1 MODELS **BASIC LISTEE MODELS** Model Name or Number **Identifying Information** Additional model details (Optional) MULTIPLE LISTEE 2 None Address Country EPA ID Contact Phone FAX Email **Brand Name** Trans Type Notes **ASSOCIATED MANUFACTURER** Address Country **MULTIPLE LISTEE 2 MODELS BASIC LISTEE MODELS** Additional model details Model Name or Number Identifying Information

Issued: 2-Feb-2016

#### 10.0 General Information

The Applicant has agreed to produce products in accordance with the requirements of this report and to maintain compliance with all ENERGY STAR Product Specification requirements.

#### Changes to Product Design / Alternate Components

As part of this agreement, the Applicant also has agreed to notify Intertek and to request authorization prior to making any changes to the product (including but not limited to using alternate parts, components or materials) which may effect compliance with the ENERGY STAR Product Specification. Those parts, components or materials identified as critical have been listed in Section 4.0 of this report.

#### Product Surveillance

Under this Program, market surveillance is conducted on an annual basis. For each Product Type defined in the EPA ENERGY STAR Program, Intertek will select 10% of those certified products for Verification Testing in accordance with the requirements of the EPA ENERGY STAR Product Specification.

The primary source for products under Verification Testing will be the retail market. Applicants whose products are selected for Verification Testing are required to provide a list of locations where the product might be obtained. The Applicant is responsible for the cost of procurement and the Verification Tests. Should products not be readily available on the retail market, the Applicant is required to provide access to distribution warehouses to allow selection of those products. Should the product not be available on the retail market or if procurement from the retail market is not feasible, then alternate arrangements for Verification Testing will be made by the Intertek

As a general rule under the Verification Testing requirements, the products must achieve energy values within 5% of the required Tier Limit.

#### Compliance with ENERGY STAR Product Specifications under Verification Testing

Products found non-compliant with ENERGY STAR Product Specification under Verification Testing, will be reported to the EPA within 48 hours and the product removed from the ENERGY STAR Program. If it is determined during Verification Testing that changes have been made to product design or critical components, the Certification Body may increase Verification Testing frequency of those products.

## 10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

Note to Intertek Follow Up Inspector: The Component Evaluation Center, CEC, will notify you in writing when these components must be selected and sent to the CEC for re-evaluation

Ship the samples to: Intertek Testing Services Shanghai Limited

ETL Component Evaluation Center Building No. 86, 1198 Qinzhou Road (North)

Shanghai 200233, China

Attn: Ms. Dansy Xu

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

Page 18 of 19

op Victory Electronics (Taiwan) Co.,Ltd. Revised: None

## 11.0 Manufacturing and Production Tests

Manufacturing and Production tests are not required under the INTERTEK ENERGY STAR Program. However, Intertek encourages the use of such ongoing product testing to ensure compliance with the EPA ENERGY STAR Product Specifications.

Issued: 2-Feb-2016

12.0 Revision Summary The following changes are in compliance with the declaration of Section 8.1: Project Handler/ Section Description of Change Item Proj # Site ID Reviewer None

Issued: 2-Feb-2016