intertek Total Quality. Assured.

1.0 Reference and Address					
Report Number	r 200801348SHA-002 Original Issued: 18-Aug-2020			Revised: None	
Standard(s)	ENERGY STAR® Program Requirements for Displays Version 8.0				
Applicant	Top Victory Electronics Co.,Ltd.	(Taiwan)	Manufacturer	TPV Electronics(Fujian) Co., Ltd	
Address	10F.,No.230,Liancheng City. Taipei Country 23		Address	Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province	
Country	Taiwan		Country	P.R.China	
Contact	David.Cheng		Contact	Winter.Feng	
Phone	+886-2-82261668-2375	5	Phone	+86-591-85285555	
FAX	+886-2-82261668-2375	5	FAX	+86-591-85285447	
Email	David.cheng@tpv-tech	.com	Email	winter.feng@tpv-tech.com	
Manufacturer 2	TPV Display Technolog Co.,Ltd	gy (Beihai)	Manufacturer 3	TPV Display Technology (China) Co., Ltd.	
Address	China Electronic Beiha Park,Northeast of the C between Taiwan Road Beihai City,Guangxi	Crossing	Address	No.106 Jinghai 3 Rd., BDA, Beijing City	
Country	China		Country	China	
Contact	Yin Tao		Contact	Nancy.Shang	
Phone	18277949678		Phone	86(10)64326699-8312	
FAX	86-779-2232270		FAX	NA	
Email	yin.tao@tpv-tech.com		Email	lijia.shang@tpv-tech.com	
Manufacturer 4	L&T Display Technolog	ıy (Fujian) Ltd.	Manufacturer 5	TPV Display Technology(Wuhan)Co.,Ltd	
Address	Economic and Technol	electronic Park, Rongqiao omic and Technological lopment Zone,Fuqing City,Fujian		Unique No.11 Zhuankou Development District of Economic Technological Development Zone Wuhan	
Country	China		Country	China	
Contact	Shan Xu		Contact	Zhe.Zhou	
Phone	86(591)8651-5556		Phone	86(27)-6884 3822	
FAX	86(591)8651-5556		FAX	86(27)-6884 3822	
Email	shan.xu@Intdisplayfj.co	om	Email	zhe.zhou@tpv-tech.com	

Page 1 of 16

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

2.0 Product Des	2.0 Product Description					
Product	Display (LCD Monit	tor)				
Brand Name	AOC					
Description	The product covere	ed by this re	eport is a Display (L0	CD Monito	or)	
Models	G2490VX(G2490);	G2490VXA	(G2490)			
Model Similarity	Modeel Number:G2	Model Name:G2490VX;G2490VXA Modeel Number:G2490 G2490VXA has speaker G2490VX hasn't speaker				
Ratings	100-240Vac,50/60I	100-240Vac,50/60Hz,1.5A				
Other Ratings	NA	NA				
Date Available	07/20/2020		Market Availability	Yes	OEM	TPV Electronics(Fujian) Co. Ltd
Major Markets	Canada,Japan,Taiv	wan,United	States			
Trans Type	Initial Certification: Model Meets ENERGY STAR Requirements					
Notes	NA					
Additional Model	Model Name and Number Identifying Information					
Details						
(Optional)						
Original Certificat	Original Certificate Actual Issued Date for Model Tested (Only Applies to Revised Reports) NA					

1

3.0 Product Photographs

Photo 1 - External View (front)

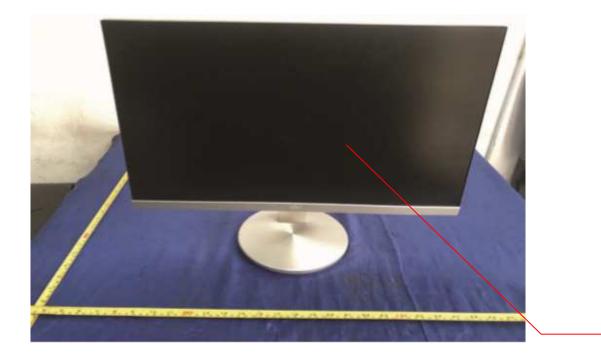


Photo 2 - External View (back)



2

3.0 Product Photographs

Photo 3 - Main Board (TPV/715G9401)


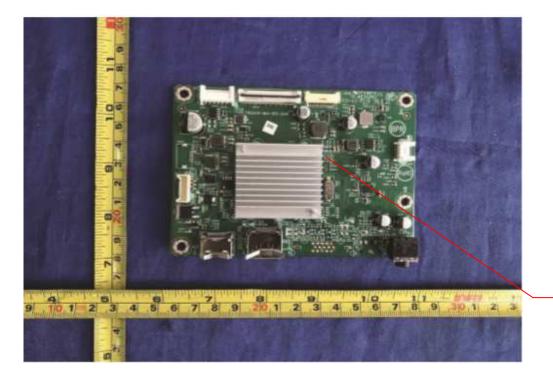


Photo 4- Power Board (TPV/715G7610)

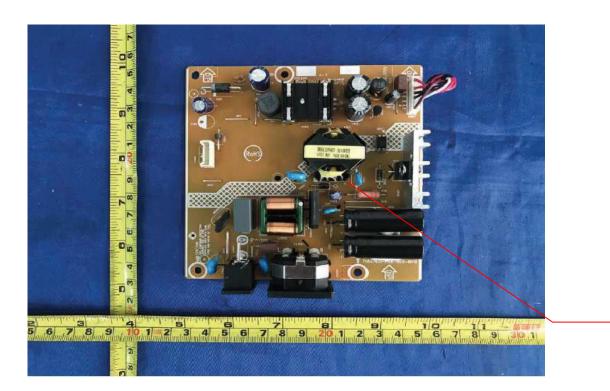

3

4.0 0	4.0 Critical Components					
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
1	1	LCD panel	TPV	TPM238WF1	23.8 inch,TFT type,with LED backlight	NR
3	2	Main Board	TPV	715G9401	I/P: max. 19Vdc, 2.5A	NR
4	3	Power Board	TPV	715G7610	I/P:AC100-240V,50/60Hz,1.5A; O/P:max.19V,2.5A	NR
NOTE	NOTES:					
1) No) Not all item numbers are indicated (called out) in the photos, as their location is obvious					

1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.

2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.

3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates: a) Unlisted and only visual examination is necessary or b) marks are not required to be verified.

5.0 Critical Unlisted CEC Components

Periodic Evaluation of Critical Unlisted Components by the Intertek Component Evaluation Centers (CEC) is not required under the INTERTEK ENERGY STAR Program.

6.0 Critical Features

<u>Critical Features/Components</u> - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the ENERGY STAR® Program Requirements.

<u>Listed Component</u> - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

<u>Recognized Component</u> - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

<u>Unlisted Component</u> - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

<u>Construction Details</u> - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Product Safety Compliance - NA

2. EMI Compliance - NA

- 3. <u>Schematics</u> NA
- 4. <u>Installation, Operating and Safety Instructions</u> Instructions for installation and use of this product are provided by the manufacturer. Refer to Illustration No.1-2 for details.

5. Package Markings - NA

6. Warranty Information - NA

7. Marking Label - Refer to Illustration No.3.for details.

7.0 Illustrations

Illustration 1 - Installation and Safety instruction



National Conventions

The following subsections describe notational conventions used in this document.

Notes, Cautions, and Warnings

Throughout this guide, blocks of text may be accompanied by an icon and printed in bold type or in italic type. These blocks are notes, cautions, and warnings, and they are used as follows:

V

NOTE: A NOTE indicates important information that helps you make better use of your computer system.

À

CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

1


WARNING: A WARNING indicates the potential for bodily harm and tells you how to avoid the problem. Some warnings may appear in alternate formats and may be unaccompanied by an icon. In such cases, the specific presentation of the warning is mandated by regulatory authority.

7.0 Illustrations

Illustration 2 - Installation and Safety instruction (Continued)

Connecting the Monitor

Cable Connections In Back of Monitor and Computer:

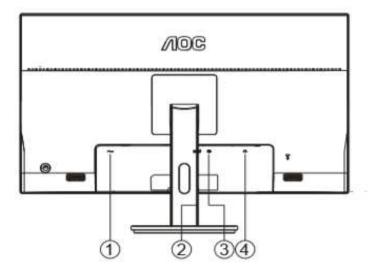

1. Power

- 2. HDMI
- 3. DP
- 4. Earphone

Connect to PC

- 1. Connect the power cord to the back of the display firmly.
- 2. Turn off your computer and unplug its power cable.
- 3. Connect the display signal cable to the video connector on the back of your computer.
- 4. Plug the power cord of your computer and your display into a nearby outlet.
- 5. Turn on your computer and display.

If your monitor displays an image, installation is complete. If it does not display an image, please refer Troubleshooting.

To protect equipment, always turn off the PC and LCD monitor before connecting.

7.0 Illustrations

Illustration 3 - Marking Label



8.0 Test Summary				
Evaluation Period	8/18/2020-8/18/2	2020	Project No.	200801348SHA
Sample Rec. Date	18-Aug-2020	Condition Prototype		0200818-46-036
	Intertek Testing	Services Shanghai Limited EPA ID	(1105997)	
Test Location	Building No.86,	198 Qinzhou Road (North), Shanghai	200233, China	
Test Procedure	Testing Lab		Test type	Qualification
Determination of the r	result includes co	nsideration of measurement uncertaint	y from the test eq	uipment and
		ndicated below with results in conforma		
The following requirer	ments were evalu	ated:		
Required Submittal In				Submittal Data
				G2490VXA(G249
Model Name and/or N	Number tested			0)
Date tested				08/18/2020
Serial number of Unit				1 sample
ENERGY_STAR_Spe	ecification_Versio	n*		8.0
Product_Type*				Monitor
Tiled_Display_System				
Maximum_Tiled_Con	figuration			
Panel_Type*				IPS LCD
Other_Panel_Type				
Diagonal_Screen_Siz	ze_in*			23.8
Screen_Area_sq_in*				242.18
Display_Contrast_Ra				1000
Native_Vertical_Reso				1080
Native_Horizontal_Re				1920
Total_Native_Resolut				2.1
Native_Pixel_Density				8562
As_Tested_Screen_F				60
Maximum_Screen_R				75
Enhanced_Performar	nce_Criteria*			No
Color_Gamut		Left Herin Minuting Angele		
		Left_Horiz_Viewing_Angle		
High_Dynamic_Rang		Right_Horiz_Viewing_Angle		N/A
Other Available Inter				IN/A
Other Features				
Signal_Interface*				DisplayPort 1.2
Other Interface				Displayi Oit 1.2
USB_C_with_Power_	Delivery Support	ed*		No
Maximum_Power_De				110
Other Power Source				
Does_Model_Have_a		at Initial Start un*		No
Maximum Measured				331.2
Maximum_Reported_				250
As_shipped_Luminan		<u></u>		237.3
As_tested_Luminance				200
On_Mode_Power_at		Volts W		
On_Mode_Power_at_300_Lux_at_115_Volts_W				
Measured_On_Mode				13.91
Reported On Mode				13.91
		_Signage_Certification_W		
Measured_Sleep_Mo				0.21
Reported_Sleep_Mod				0.21
		Power_at_115_Volts_W		
		for_Signage_Certification_W		
		_to_Default_Sleep_Mode*		0
		Entering_Sleep_or_Off_Mode		
	/=			

8.0 Test Summary	
Default_Delay_Time_to_Sleep_min	0
Measured Off Mode Power at 115 Volts W	0.15
Reported_Off_Mode_Power_at_115_Volts_W	0.15
Measured Total Energy Consumption at 115 Volts kWh	43.84
Reported_Total_Energy_Consumption_at_115_Volts_kWh	43.84
Max_Total_Energy_Consumption_Limit_for_Monitor_kWh	45.73
On Mode Power at 12 Lux at 230 Volts W	
On_Mode_Power_at_300_Lux_at_230_Volts_W	
Measured_On_Mode_Power_at_230_Volts_W	13.91
Measured_Sleep_Mode_Power_at_230_Volts_W	0.27
Measured_Disconnected_Sleep_Mode_Power_at_230_Volts_W	
Measured_Off_Mode_Power_at_230_Volts_W	0.21
Measured_Total_Energy_Consumption_at_230_Volts_kWh	44.19
True_Power_Factor_PF_During_On_Mode_Testing_at_115_Volts_W	0.49
True_Power_Factor_PF_During_On_Mode_Testing_at_230_Volts_W	0.39
Color_Spaces_Supported*	sRGB
Available_Signal_or_Data_Interfaces*	Display,HDMI
Model_Features*	Built-In Speakers
Features_Enabled_in_Default_On_Mode*	Built-In Speakers
Features_Enabled_in_Default_Sleep_Mode*	None
Wireless_Technologies_Supported*	None
Ethernet_Supported*	None
	Ac to dc internal
Power_Source*	power supply
	Display Power
	Management
Mechanism_for_Automatically_Entering_Sleep_or_Off_Mode*	Signaling
On Made Dewar at 10 Lux at 100 Valta Follo W	
On_Mode_Power_at_12_Lux_at_100_Volts_50Hz_W On_Mode_Power_at_300_Lux_at_100_Volts_50Hz_W	
Measured_On_Mode_Power_at_100_Volts_50Hz_W	13.97
Measured_On_Mode_Power_at_100_Volts_50Hz_W Measured_Sleep_Mode_Power_at_100_Volts_50Hz_W	0.21
Measured Disconnected Sleep Mode Power at 100 Volts 50Hz W	0.21
Measured Off Mode Power at 100 Volts 50Hz W	0.15
Measured_OII_Mode_Power_at_100_volts_50Hz_w Measured_Total_Energy_Consumption_at_100_Volts_50Hz_kWh	44.04
	44.04
On_Mode_Power_at_12_Lux_at_100_Volts_60Hz_W	
On_Mode_Power_at_300_Lux_at_100_Volts_60Hz_W	12.07
Measured_On_Mode_Power_at_100_Volts_60Hz_W	13.97
Measured_Sleep_Mode_Power_at_100_Volts_60Hz_W	0.21
Measured_Disconnected_Sleep_Mode_Power_at_100_Volts_60Hz_W	0.15
Measured_Off_Mode_Power_at_100_Volts_60Hz_W	0.15
Measured_Total_Energy_Consumption_at_100_Volts_60Hz_kWh	44.04

8.1 Signatures					
A representative sa	A representative sample of the product covered by this report has been evaluated and found to comply with the				
applicable requiren	applicable requirements of the standards indicated in Section 1.0.				
Completed by:	Eddie Liu	Reviewed by:	Carl Dong		
Title:	Engineer	Title:	Engineer		
Signature:	Eddie Liu	Signature:	Carl Pong.		

9.0 Correlation Page F	or Multiple Listings		
The following products,	which are identical to those identified in this rep	ort except for model n	umber and
Company name.			
BASIC LISTEE	Top Victory Electronics (Taiwan) Co., Ltd.		
Address	10F.,No.230,Liancheng Rd. Zhonghe City. Tai	pei Country 23553	
Country	Taiwan	EPA ID	1065104
Product	Display (LCD Monitor)		
Contact	David.Cheng		
Phone	+886-2-82261668-2375		
FAX	+886-2-82261668-2375		
Email	David.cheng@tpv-tech.com		
MULTIPLE LISTEE 1	None		
Address			
Country		EPA ID	
Contact			
Phone			
FAX			
Email			
Brand Name			
Date Available	Marke	et Availability	OEM
Major Markets			
Trans Type			
Notes			
ASSOCIATED			

MANUFACIURER		
Address		
Country		
MULTIPLE	LISTEE 1 MODELS	BASIC LISTEE MODELS
Additional Model Details (Optional)	Model Name and Number	Identifying Information

MULTIPLE LISTEE 2	None		
Address			
Country		EPA ID	
Contact			
Phone			
FAX			
Email			
Brand Name			
Date Available		Market Availability	OEM
Major Markets			
Trans Type			
Notes			
ASSOCIATED			
MANUFACTURER			
Address			
Country			
MULTIPLE LISTEE 2 MODELS		BASIC LISTEE MOI	DELS
Additional Model	Model Name and Number	Identifying Informa	ition
Details (Optional)			
Dotano (Optional)			

10.0 General Information

The Applicant has agreed to produce products in accordance with the requirements of this report and to maintain compliance with all ENERGY STAR Product Specification requirements.

Changes to Product Design / Alternate Components

As part of this agreement, the Applicant also has agreed to notify Intertek and to request authorization prior to making any changes to the product (including but not limited to using alternate parts, components or materials) which may effect compliance with the ENERGY STAR Product Specification. Those parts, components or materials identified as critical have been listed in Section 4.0 of this report.

Product Surveillance

Under this Program, market surveillance is conducted on an annual basis. For each Product Type defined in the EPA ENERGY STAR Program, Intertek will select 10% of those certified products for Verification Testing in accordance with the requirements of the EPA ENERGY STAR Product Specification.

The primary source for products under Verification Testing will be the retail market. Applicants whose products are selected for Verification Testing are required to provide a list of locations where the product might be obtained. The Applicant is responsible for the cost of procurement and the Verification Tests. Should products not be readily available on the retail market, the Applicant is required to provide access to distribution warehouses to allow selection of those products. Should the product not be available on the retail market or if procurement from the retail market is not feasible, then alternate arrangements for Verification Testing will be made by the Intertek Certification Body.

As a general rule under the Verification Testing requirements, the products must achieve energy values within 5% of the required Tier Limit.

Compliance with ENERGY STAR Product Specifications under Verification Testing

Products found non-compliant with ENERGY STAR Product Specification under Verification Testing, will be reported to the EPA within 48 hours and the product removed from the ENERGY STAR Program. If it is determined during Verification Testing that changes have been made to product design or critical components, the Certification Body may increase Verification Testing frequency of those products.

10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

Note to Intertek Follow Up Inspector: The Component Evaluation Center, CEC, will notify you in writing when these components must be selected and sent to the CEC for re-evaluation

Ship the samples to: Intertek Testing Services Shanghai Limited ETL Component Evaluation Center Building No. 86, 1198 Qinzhou Road (North) Shanghai 200233, China Attn: Ms. Angela Han Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

11.0 Manufacturing and Production Tests

Manufacturing and Production tests are not required under the INTERTEK ENERGY STAR Program. However, Intertek encourages the use of such ongoing product testing to ensure compliance with the EPA ENERGY STAR Product Specifications.

12.0 Revision	12.0 Revision Summary			
The following	The following changes are in compliance with the declaration of Section 8.1: Date/ Project Handler/ Section Item Description of Change			
Date/ Proj # Site ID	Project Handler/ Reviewer	Section	Item	Description of Change
				None
		ļ		
	<u> </u>			