


label 料号: label Part NO.: J40G0002-615-A43	
版本号Version NO. A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/>	
客户 Customer	AOC
型号 Model	E2476VWM6
销向 Sales Area	EU
包装方式Packing style: 卷状 <input checked="" type="checkbox"/> 片状 <input type="checkbox"/> Coil Piece	
安规签核Safety parts: Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
内销中文字体要求高度1.8mm以上 Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
颜色标注Color Mark	
针对带有UL logo的标签, 其厂家须在最小包装上标示UL Recognized Component Mark  公司名称, 型号及 UL file no.	
版本变更说明: Version Changed Description:	
条码印刷: barcode print: 1.所有条码等级: C级及以上, 客户有特殊要求除外;	
备注Remark:	

NOTE:

- 印刷如上图
Printing as the drawing
- 尺寸: 具体见上图所示(公差: +/-0.2mm)。
Dimension:as the above drawing(Tolerance:+0/-0.2mm).
- 材质: 50#低粘可移白银龙(背面部分覆胶, 贴于边框上, 撕下不可有残胶, 无翘起, 不脱落)
- 颜色: 如图所示
Color:See the drawing
- 贴附位置: 贴于
- 粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。
Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
- 正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。
在塑胶、纸箱上耐温范围为-20~65°C, 在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。
The normal temperature test: The range of temperature on plate is -20 ~ 100 ° C . In 80 ~ 100 ° C to maintain 8 hours , the label should not be warp,delamination,frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 ° C. In 65 ° C to maintain 8 hours ,the label should not be warp, delamination,frothy and so on.
- 耐温湿度循环测试: 循环条件(贴在塑胶胶花面(PET)贴在塑胶胶花面): 温度-20~65°C, 湿度30~90%, 时间96小时后不翘角不分层不脱落不起泡等。
Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture):In temperature of -20 ~ 65 ° C and humidity of 30~90%to maintain 96 hours , the label should not be warp,delamination,frothy and so on.
- 其它测试要求详见(FQ-背胶类产品测试检验规格)
- 裁切需均匀且印刷不可有溢墨及颜色不均等不良现象
Printing ink can not have overflow and printing color can not be uneven etc.

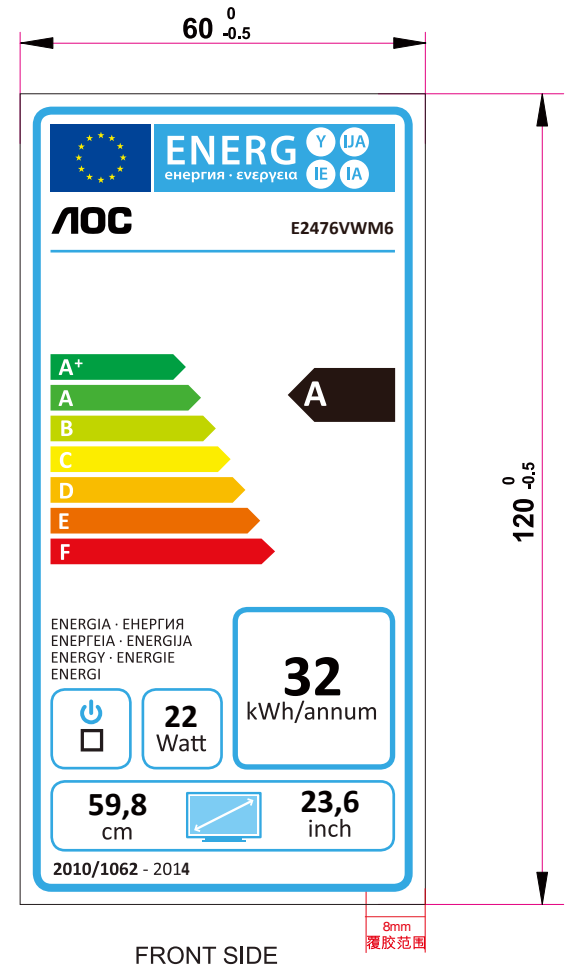

FRONT SIDE

Printing Color Please refer to the Official Journal of the Europe Union and Commission Delegated Regulation (EU) No 1062/2010 of 28 September 2010 supplementing Directive 2010/30/EU of the European Parliament and of the Council with regard to energy labeling of televisions, L314/64.

Diagonal Die-cut 5.0x5.0 mm on release liner. So that this triangular portion is not sticking on the panel. The small triangular release liner still remain on the sticker with the label is pasted on the panel. - Ease for removing the sticker from the panel.

冠捷显示科技(中国)有限公司
TPV DISPLAY TECHNOLOGY(CHINA)Co.,LTD.
地址: 北京市北京经济技术开发区
经海三路106号
电话: (010) 87563536

1) 根据 TPV 推行 RoHS 的有关规定, 所有的原材料及辅助材料必须符合 RoHS 的有关规定
2) 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

1)According to the rule about RoHS of TPV,All raw material and assistant material and assistant material should accord with the rule of RoHS
2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.