

EMC TEST REPORT

Report No. : ACS-E20108

Applicant : TPV Electronics (FuJian) Co., Ltd.
Rongqiao Economic and Technological Development
Zone, Fuqing City, Fujian Province, P.R. China

Product : LCD MONITOR

Model No. : 16T2; 16T2*****
(* = 0-9, A-Z, a-z, +, -, /, \ or blank)

Brand : AOC

Test Lab. : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District, Shenzhen, Guangdong, China
Tel: (0755) 26639496
Fax: (0755) 26632877

Date of Test : Apr.09 ~ May.14, 2020

Date of Report : Jun.01, 2020



TABLE OF CONTENTS

Description	Page
Test Report Verification	5
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT).....	7
2.2. Tested Supporting System Details.....	8
2.3. Block Diagram of connection between EUT and simulators	9
2.4. Test Facility	10
2.5. Measurement Uncertainty (95% confidence levels, k=2).....	11
3. CONDUCTED EMISSION AT MAINS TERMINALS TEST	12
3.1. Test Equipments	12
3.2. Block Diagram of Test Setup.....	12
3.3. Test Standard	12
3.4. Power Line Conducted Emission at Mains Terminals Class B Limit	12
3.5. EUT Configuration on Test	13
3.6. Operating Condition of EUT	13
3.7. Test Procedure	13
3.8. Conducted Emission at Mains Terminals Test Results	14
4. RADIATED EMISSION MEASUREMENT	19
4.1. Test Equipments	19
4.2. Block Diagram of Test Setup.....	20
4.3. Test Standard	20
4.4. Radiated Emission Class B Limit	21
4.5. EUT Configuration on Test	21
4.6. Operating Condition of EUT	21
4.7. Test Procedure	21
4.8. Radiated Emission Test Results.....	22
5. HARMONIC CURRENT TEST	32
5.1. Test Equipments	32
5.2. Block Diagram of Test Setup.....	32
5.3. Test Standard	32
5.4. Limits of Harmonic Current	32
5.5. EUT Configuration on Test	33
5.6. Operating Condition of EUT	33
5.7. Test Procedure	33
5.8. Test Results.....	33
6. VOLTAGE FLUCTUATIONS & FLICKER TEST	40
6.1. Test Equipment	40
6.2. Block Diagram of Test Setup.....	40
6.3. Test Standard	40
6.4. Limits of Voltage Fluctuation and Flick	40
6.5. EUT Configuration on Test	40
6.6. Operating Condition of EUT	40
6.7. Test Procedure	40
6.8. Test Results.....	40
7. IMMUNITY PERFORMANCE CRITERIA	42
8. ELECTROSTATIC DISCHARGE IMMUNITY TEST	43

8.1. Test Equipments	43
8.2. Block Diagram of Test Setup.....	43
8.3. Test Standard	43
8.4. Severity Levels and Performance Criterion.....	43
8.5. EUT Configuration	43
8.6. Operating Condition of EUT	43
8.7. Test Procedure	44
8.8. Test Results.....	44
8.9. ESD TEST POINT PHOTOS	46
9. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....	48
9.1. Test Equipments	48
9.2. Block Diagram of Test Setup.....	49
9.3. Test Standard	50
9.4. Severity Levels and Performance Criterion.....	50
9.5. EUT Configuration	50
9.6. Operating Condition of EUT	50
9.7. Test Procedure	50
9.8. Test Results.....	50
10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	52
10.1. Test Equipments	52
10.2. Block Diagram of Test Setup.....	52
10.3. Test Standard	52
10.4. Severity Levels and Performance Criterion.....	52
10.5. EUT Configuration	52
10.6. Operating Condition of EUT	52
10.7. Test Procedure	53
10.8. Test Results.....	53
11. SURGE TEST	55
11.1. Test Equipments	55
11.2. Block Diagram of Test Setup.....	55
11.3. Test Standard	55
11.4. Severity Levels and Performance Criterion.....	55
11.5. EUT Configuration	55
11.6. Operating Condition of EUT	55
11.7. Test Procedure	56
11.8. Test Results.....	56
12. CONTINUOUS CONDUCTED DISTURBANCE	58
12.1. Test Equipments	58
12.2. Block Diagram of Test Setup.....	58
12.3. Test Standard	58
12.4. Severity Levels and Performance Criterion.....	59
12.5. EUT Configuration	59
12.6. Operating Condition of EUT	59
12.7. Test Procedure	59
12.8. Test Results.....	59
13. MAGNETIC FIELD IMMUNITY TEST	61
13.1. Test Equipment.....	61
13.2. Block Diagram of Test Setup.....	61
13.3. Test Standard	61
13.4. Severity Levels and Performance Criterion.....	61
13.5. EUT Configuration on Test	61
13.6. Operating Condition of EUT	61
13.7. Test Procedure	61
13.8. Test Results.....	61

14. VOLTAGE DIPS AND INTERRUPTIONS TEST	63
14.1. Test Equipment	63
14.2. Block Diagram of Test Setup.....	63
14.3. Test Standard	63
14.4. Severity Levels and Performance Criterion.....	63
14.5. EUT Configuration	63
14.6. Operating Condition of EUT	63
14.7. Test Procedure	63
14.8. Test Results.....	63
15. PHOTOGRAPHS	65
15.1. Photos of Power Line Conducted Emission Test	65
15.2. Photos of Radiated Emission Test (In 10m Anechoic Chamber)	66
15.3. Photo of Harmonic / Flicker Test	68
15.4. Photos of Electrostatic Discharge Immunity Test	68
15.5. Photo of RF Strength Susceptibility Test	69
15.6. Photo of Electrical Fast Transient/Burst Immunity Test	70
15.7. Photo of Surge Test.....	71
15.8. Photo of Continuous Conducted disturbance Test	71
15.9. Photo of Magnetic Field Test	72
15.10. Photo of Voltage Dips and interruptions test.....	72

TEST REPORT VERIFICATION

Applicant : TPV Electronics (FuJian) Co., Ltd.
Product : LCD MONITOR
Model No. : 16T2; 16T2*****(* = 0-9, A-Z, a-z, +, -, \ or blank)
Brand : AOC
Report No. : ACS-E20108
Power Supply : AC 100-240V; 50/60Hz (Via Power Adapter)
DC 3.7V(Via Battery)
DC 5V(Via Notebook)
Test Voltage : AC 230V/50Hz; AC 110V/60Hz; AC 100V/50Hz(Via Power Adapter)
DC 3.7V(Via Battery)
DC 5V(Via Notebook)
Standards : EN 55032: 2012+AC: 2013 (Class B)
EN 55032: 2015
EN 55032: 2015+AC: 2016
CISPR 32: 2012
CISPR 32: 2015+COR1: 2016
AS/NZS CISPR 32: 2015
EN 61000-3-2: 2014, EN 61000-3-3: 2013
EN 55035: 2017
(IEC 61000-4-2: 2008, IEC 61000-4-3: 2010,
IEC 61000-4-4: 2012, IEC 61000-4-5: 2014,
IEC 61000-4-6: 2013, IEC 61000-4-8: 2009
IEC 61000-4-11: 2004, IEC 61000-4-11: 2004+A1: 2017)

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with requirements of the EN 55032, EN 61000-3-2, EN 61000-3-3 and EN 55035 standards.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test : Apr.09 ~ May.14, 2020 Report of date: Jun.01, 2020

Prepared by :

Hally Qiu
Hally Qiu / Assistant

Reviewed by :

Jie Zhang
Fire Zhang / Assistant Manager

EMC 部門 報告 專用 章

Stamp only for EMC Dept. Report

Approved & Authorized Signer :

Signature:

Bensun Chen / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION				
Description of Test Item	Standard	Results	Remark	
Conducted emission at mains terminals	EN 55032: 2012+AC: 2013 EN 55032: 2015 EN 55032: 2015+AC: 2016	PASS	Minimum passing margin is 7.31dB at 0.150MHz	
Conducted emission at telecommunication port	EN 55032: 2012+AC: 2013 EN 55032: 2015 EN 55032: 2015+AC: 2016	N/A	N/A	
Radiated emission (30-1000MHz)	EN 55032: 2012+AC: 2013 EN 55032: 2015 EN 55032: 2015+AC: 2016	PASS	Minimum passing margin is 6.22dB at 940.830MHz	
Radiated emission (1-6GHz)	EN 55032: 2012+AC: 2013 EN 55032: 2015 EN 55032: 2015+AC: 2016	PASS	Minimum passing margin is 7.38dB at 1065.851MHz	
Harmonic current emissions	EN 61000-3-2: 2014	PASS	Meets the Class D requirement	
Voltage fluctuations & flicker	EN 61000-3-3: 2013	PASS	Meets the requirement	
IMMUNITY				
Description of Test Item	Basic Standard	Results	Performance Criteria	Observation
Electrostatic discharge (ESD)	IEC 61000-4-2: 2008	PASS	B	A & B
Radiated, radio-frequency, electromagnetic field immunity test	IEC 61000-4-3: 2010	PASS	A	A
Electrical fast transient (EFT)	IEC 61000-4-4: 2012	PASS	B	B
Surge (Input a.c. power port)	IEC 61000-4-5: 2014	PASS	B	A & B
Surge (Coaxial or Shielding)		N/A	N/A	N/A
Surge (Telecommunication port)		N/A	N/A	N/A
Continuous Conducted disturbance	IEC 61000-4-6: 2013	PASS	A	A
Power frequency magnetic field	IEC 61000-4-8: 2009	PASS	A	A
Voltage dips, >95% reduction	IEC 61000-4-11: 2004 IEC 61000-4-11: 2004+A1: 2017	PASS	B	A
Voltage dips, 30% reduction		PASS	C	A
Voltage interruptions		PASS	C	A
N/A is an abbreviation for Not Applicable.				

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product : LCD MONITOR

Model No. : 16T2; 16T2*****(* = 0-9, A-Z, a-z, +, -, /, \ or blank)
Above all modes difference are in sale marketing.

Test Model No. : 16T2

Brand : AOC

Applicant : TPV Electronics (FuJian) Co., Ltd.
Rongqiao Economic and Technological Development Zone,
Fuqing City, Fujian Province, P.R. China

Max. Resolution : 1920*1080@60Hz

Max. Work Frequency : 180MHz

I/O Port : (1) Two Type-C Ports
(2) One Micro USB Port
(3) One Audio Out Port

Power Adapte : Manufacturer: STK, M/N: X18W-1C-F103-CN
Input: AC 100-240V, 50/60Hz, 0.6A
Output: DC 5V, 3A

Battery : Manufacturer: HUBEI UEE ENERGY TECHNOLOGY CO.,LTD
Model and Capacity: 2878125/ 400mAh/ 3.7V

HDMI to Micro USB Cable : Shielded, Detachable, 1.8m/1.5m

USB Type-C Cable : Shielded, Detachable, 1.8m/1.5m

Date of Test : Apr.09 ~ May.14, 2020

Date of Receipt : Apr.02, 2020


Sample Type : Prototype production

2.2. Tested Supporting System Details


No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Personal Computer	Test PC Q	ACER	Veriton T630	DTVMKCN00560900F6 29600
		Power Cord: Unshielded, Detachable, 1.8m(3 pins) USB to HDMI Cable: Shielded, Undetachable, 1.5m			
2.	USB Keyboard	ACS-EMC-K03R	DELL	SK-8120	CN-ODJ365-71616-2BE-0DCE-A00
		USB Cable: Shielded, Undetachable, 2.0m			
3.	USB Mouse	ACS-EMC-M03R	DELL	M0C5UO	512023253
		USB Cable: Shielded, Undetachable, 1.8m			
4.	Printer	ACS-EMC-PT04	HP	C9079A	--
		USB Cable: Shielded, Detachable, 1.8m Power Cord: Unshielded, Detachable, 1.8m(2 pins)			
5.	HDD	ACS-EMC-HDD01	Terasys	F12-UF	A0100215-5390031
		USB Cable: Shielded, Detachable, 1.8m			
6.	Headphone	ACS-EMC-EP01	OVANN	0V-T880V	---
		Audio Cable: Shielded, Undetachable, 2.0m			
7.	Notebook#1	---	DELL	P54G	---
8.	Notebook#2	---	DELL	Latitude 7400	---

2.3. Block Diagram of connection between EUT and simulators

Adapter Supply:

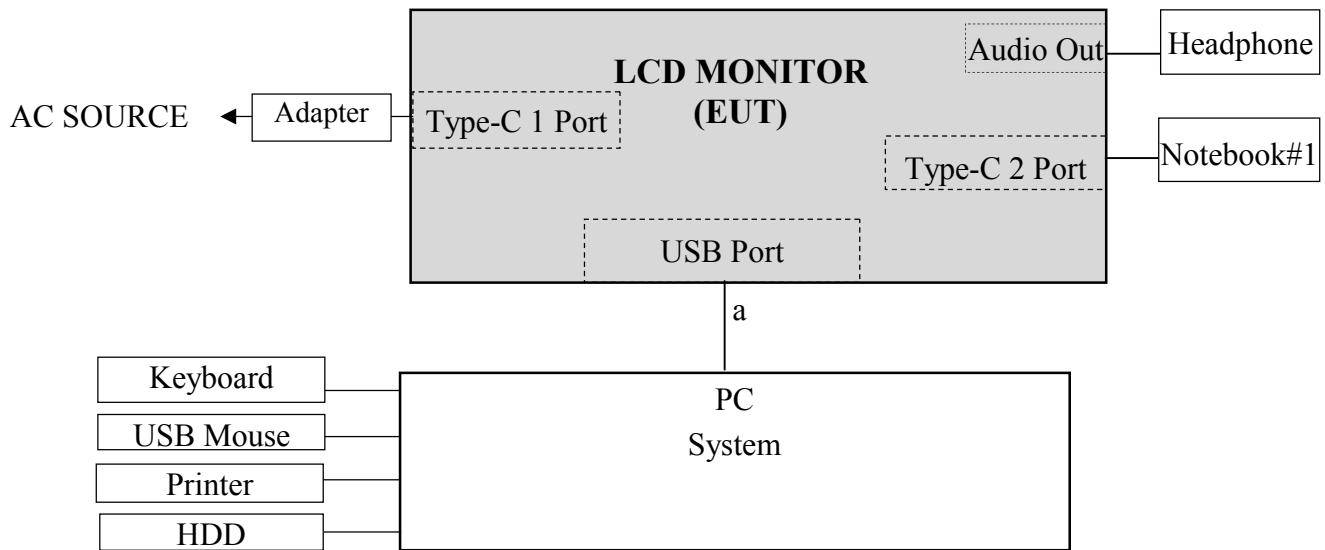

Battery Supply & Notebook Supply:

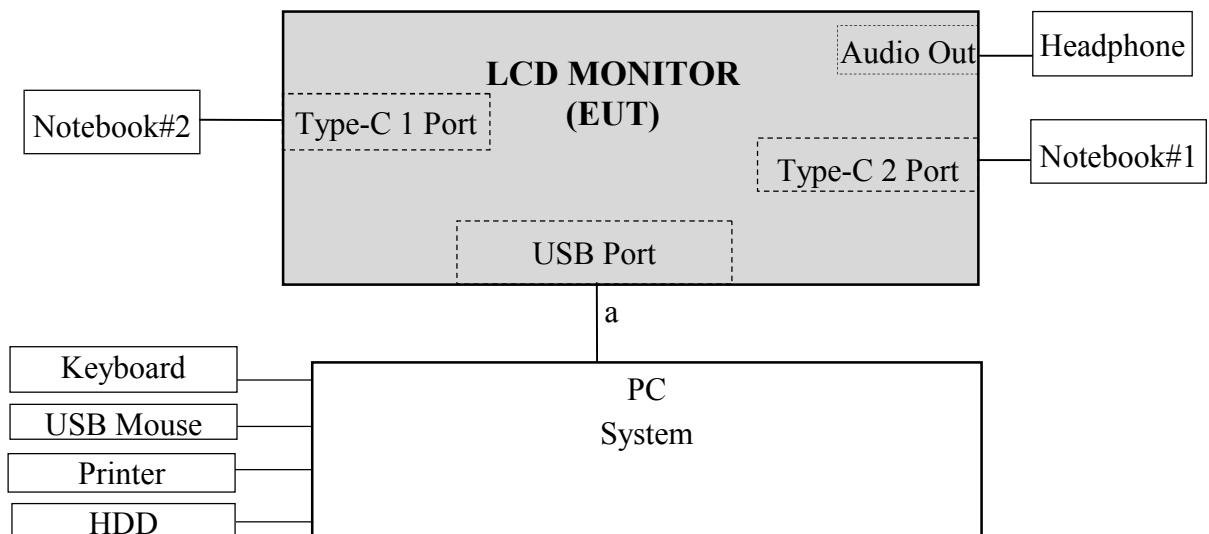

a:HDMI to Micro USB Cable

(EUT: LCD MONITOR)

2.4. Test Facility

Site Description

- Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District, Shenzhen, Guangdong, China
- EMC Lab. : Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021
- Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2021
- Certificated by FCC, USA
Designation No: CN5022
Valid Date: Mar.31, 2021
- Certificated by TAF, Taiwan
Registration No: 1418
Valid Date: Nov.08, 2020

2.5.Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 2 Conduction	2.4dB (150kHz to 30MHz)
Uncertainty for Radiation Emission test in 10m chamber (Distance: 10m)	3.8dB (30~200MHz, Polarization: H)
	3.6dB (30~200MHz, Polarization: V)
	3.6dB (200M~1GHz, Polarization: H)
	3.8dB (200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 10m chamber (1GHz-18GHz)	5.0dB (1-6GHz, Distance: 3m)
	5.0dB (6-18GHz, Distance: 3m)
Uncertainty for S _{VSWR} in 10m Chamber	2.8dB (1-6GHz, Distance: 3m)
	2.8dB (6-18GHz, Distance: 3m)
Uncertainty for Flicker test	1.5%
Uncertainty for Harmonic test	8.0%
Uncertainty for C/S Test	1.4dB (Using CDN test)
	3.2dB (Using EM clamp test)
Uncertainty for R/S Test	2.31dB (80MHz~200MHz)
	2.31dB (200MHz~1000MHz)
	2.55dB(1GHz to 6GHz)
Uncertainty for Magnetic field immunity test	2%
Uncertainty for test site temperature and humidity and Pressure	0.6°C
	3%
	1kPa

Note: EMI uncertainty is evaluated by CISPR16-4-2.

The value of measurement uncertainty of EMI is less than U_{CISPR}.

The value is not calculated in the test results.


3. CONDUCTED EMISSION AT MAINS TERMINALS TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	2# Shielding Room	AUDIX	N/A	N/A	Apr.15,18	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100843	Oct.12,19	1 Year
3.	L.I.S.N. #1	Rohde & Schwarz	ENV4200	100041	Apr.12,20	1 Year
4.	L.I.S.N. #2	Kyoritsu	KNW-407	8-1628-5	Apr.12,20	1 Year
5.	Terminator	Hubersuhner	50Ω	No.4	Apr.12,20	1 Year
6.	Terminator	Hubersuhner	50Ω	No.5	Apr.12,20	1 Year
7.	RF Cable	Fujikura	RG55/U	No.2	Apr.12,20	1 Year
8.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

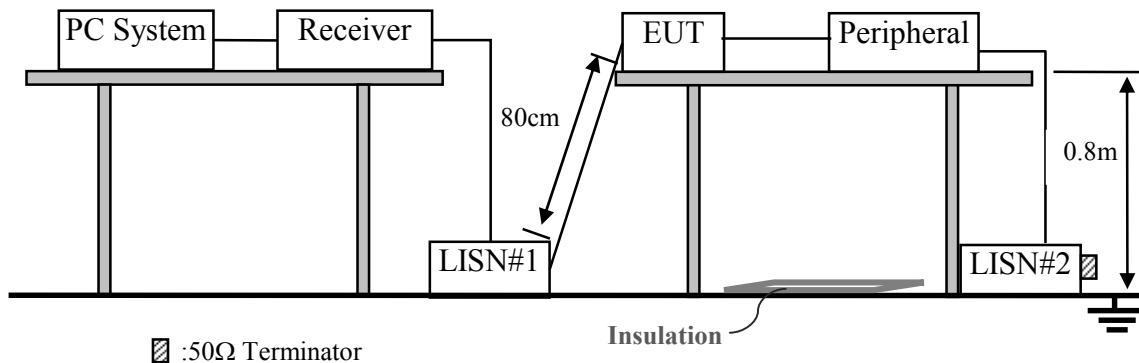

3.3. Test Standard

EN 55032: 2012+AC: 2013

EN 55032: 2015

EN 55032: 2015+AC: 2016

3.4. Power Line Conducted Emission at Mains Terminals Class B Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.5.EUT Configuration on Test

The following equipments are installed on Conducted Emission Test to meet EN 55032 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.5.1. LCD MONITOR (EUT)

Model No. : 16T2

3.5.2. Support Equipment : As Tested Supporting System Detail, in Section 2.2.

3.6.Operating Condition of EUT

3.6.1. Setup the EUT and simulator as shown as Section 3.2.

3.6.2. Turn on the power of all equipments.

3.6.3. For EMI: PC system sent “Color Bars with moving picture element” to LCD MONITOR (EUT) through Micro USB /Type-C Ports.

3.6.4. For EMS: Standard color bar image with a small moving element for(Digital television set, set-top box, personal computer, DVD player, video game player, video camera); Standard color bar for analog TV ;text image for EUT without graphic capability

3.6.5. The PC system was running the program “1kHz signal playing” and sending sound to EUT.

3.6.6. The other peripheral devices were driven and operated in turn during all testing.

3.6.7. The EUT is designed with AC power of rating AC 100V-240V, 50/60Hz. AC 230V/50Hz & AC 110V/60Hz (for EN55032 & CISPR 32 & AS/NZS CISPR 32) had been covered during the pre-test. The worst data was found at AC 230V/50Hz and recorded in the applied test report.

3.7.Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. #2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55032 Class B on conducted Emission test.

The bandwidth of test receiver (R&S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked. These test results of the conducted disturbance are recorded in section 3.8.

3.8.Conducted Emission at Mains Terminals Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

EUT: LCD MONITOR Model No. : 16T2

Test Date: May.13, 2020 Temperature: 21.7°C Humidity: 52% Pressure: 101.6kPa

The EUT with following test modes were pre-tested:

No.	Power Supply	Test Voltage	Test Mode	Input Port	Cable Length	Panel Angle	Resolution & Frequency
1.	Adapter Supply	AC 230V/50Hz	PC Mode	Micro USB	1.8m	90°	640*480@60Hz
2.							1280*1024@75Hz
3.							1920*1080@60Hz
4.						0°	1920*1080@60Hz
5.				Type-C 1	1.8m	90°	1920*1080@60Hz
6.							640*480@60Hz
7.							1280*1024@75Hz
8.							1920*1080@60Hz
9.				Type-C 2	1.8m	90°	640*480@60Hz
10.							1280*1024@75Hz
11.							1920*1080@60Hz
12.			Standby				---
13.		AC 110V/60Hz	PC Mode	Micro USB	1.8m		1920*1080@60Hz
14.	Adapter Supply (Type-C 2)	AC 230V/50Hz	PC Mode	Micro USB	1.8m		1920*1080@60Hz

The result of worst test mode is presented in the report as below and the test data are listed in next pages.


No.	Power Supply	Test Voltage	Cable Length	Panel Angle	Test Mode	Input Port	Resolution & Frequency	Reference Test Data No.	
								Line	Neutral
1.*	Adapter Supply	AC 230V/50Hz	1.8m	90°	PC (Running ITU-R BT 1729)	Micro USB	1920*1080@60Hz	#2	#1
2.					PC (Running ITU-R BT 471-1)		1920*1080@60Hz	#4	#3

(* means the worst test mode)

Data: 2

File: E:\2020 Report Data-CE\TPVA1Z2003180.EM6 (30)

Date: 2020-05-13

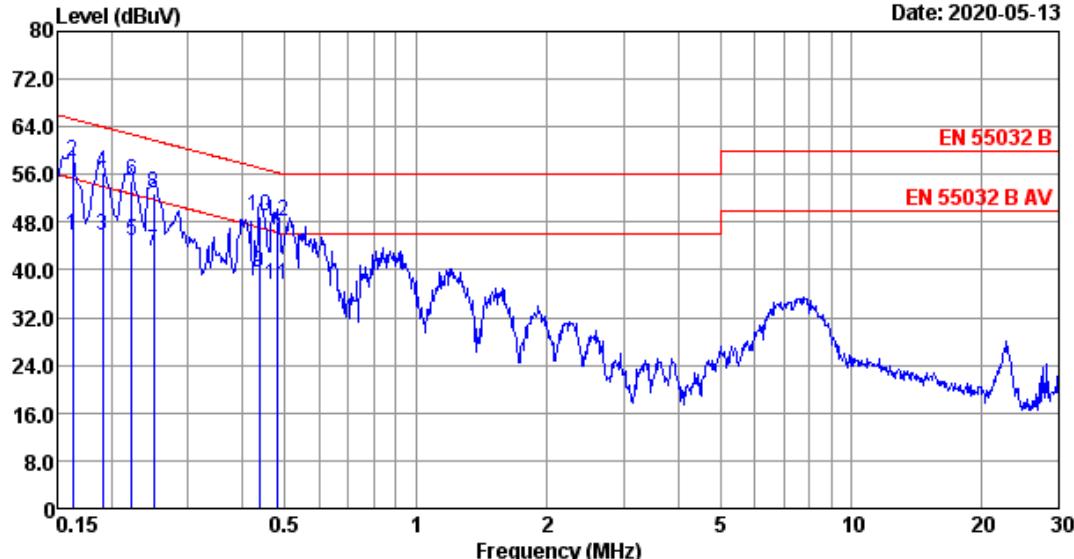

Site no :2# Conduction

Data No :2

Dis./Lisn :2020 ENV4200-L1

LISN phase:LINE

Limit :EN 55032 B

Pressure :101.6kPa

Env./Ins. :21.7°C/52%

Engineer :Gavin

EUT :16T2

Power Rating :AC 230V/50Hz

Test Mode :Running ITU-R BT 1729

HDMI to USB:1920*1080@60Hz

No	Freq (MHz)	LISN	Cable	Emission				Remark
		Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	
1	0.162	10.13	0.23	35.46	45.82	55.34	9.52	Average
2	0.162	10.13	0.23	47.66	58.02	65.34	7.32	QP
3	0.190	10.30	0.23	35.28	45.81	54.02	8.21	Average
4	0.190	10.30	0.23	45.92	56.45	64.02	7.57	QP
5	0.222	10.46	0.23	34.16	44.85	52.74	7.89	Average
6	0.222	10.46	0.23	44.21	54.90	62.74	7.84	QP
7	0.249	10.50	0.23	32.25	42.98	51.78	8.80	Average
8	0.249	10.50	0.23	42.22	52.95	61.78	8.83	QP
9	0.437	10.76	0.23	28.46	39.45	47.11	7.66	Average
10	0.437	10.76	0.23	38.14	49.13	57.11	7.98	QP
11	0.479	10.79	0.23	26.48	37.50	46.36	8.86	Average
12	0.479	10.79	0.23	37.14	48.16	56.36	8.20	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.


2. If the average limit is met when using a quasi-peak detector.

the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 1

File: E:\2020 Report Data\CE\TPVVA1Z2003180.EM6 (30)

Date: 2020-05-13

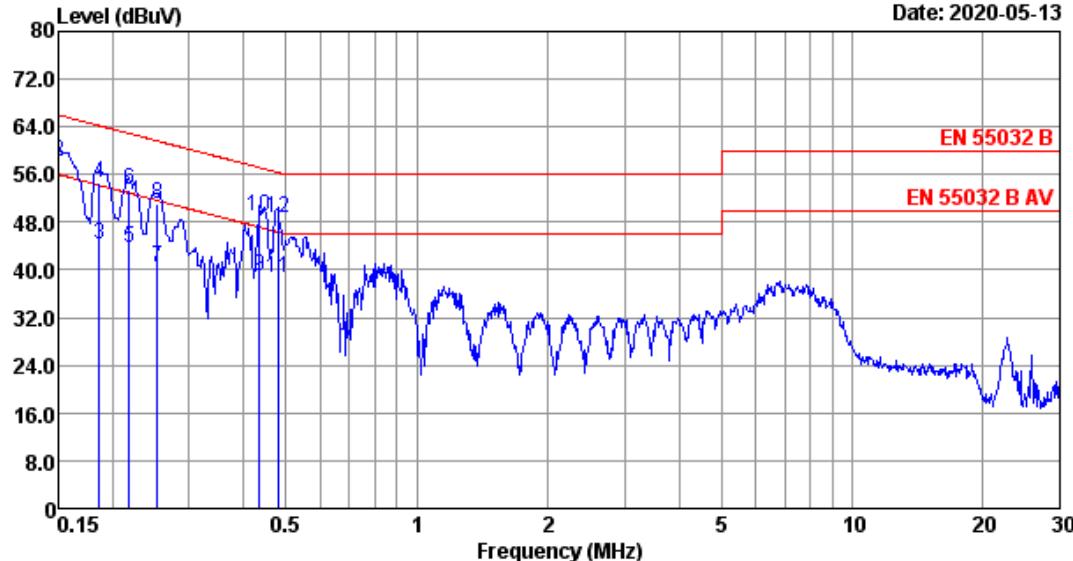

Site no :2# Conduction

Data No :1

Dis./Lisn :2020 ENV4200-N

LISN phase:NEUTRAL

Limit :EN 55032 B

Pressure :101.6kPa

Env./Ins. :21.7°C/52%

Engineer :Gavin

EUT :16T2

Power Rating :AC 230V/50Hz

Test Mode :Running ITU-R BT 1729

HDMI to USB:1920*1080@60Hz

No	Freq (MHz)	LISN	Cable	Emission				Remark
		Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	
1	0.150	10.00	0.23	38.46	48.69	56.00	7.31	Average
2	0.150	10.00	0.23	48.02	58.25	66.00	7.75	QP
3	0.186	9.98	0.23	34.18	44.39	54.20	9.81	Average
4	0.186	9.98	0.23	44.36	54.57	64.20	9.63	QP
5	0.219	9.96	0.23	33.52	43.71	52.88	9.17	Average
6	0.219	9.96	0.23	43.27	53.46	62.88	9.42	QP
7	0.253	9.95	0.23	30.18	40.36	51.64	11.28	Average
8	0.253	9.95	0.23	40.75	50.93	61.64	10.71	QP
9	0.435	9.85	0.23	28.95	39.03	47.15	8.12	Average
10	0.435	9.85	0.23	38.81	48.89	57.15	8.26	QP
11	0.479	9.83	0.23	28.46	38.52	46.36	7.84	Average
12	0.479	9.83	0.23	38.53	48.59	56.36	7.77	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.


2. If the average limit is met when using a quasi-peak detector.

the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 4

File: E:\2020 Report Data-CE\TPVA1Z2003180.EM6 (30)

Date: 2020-05-13

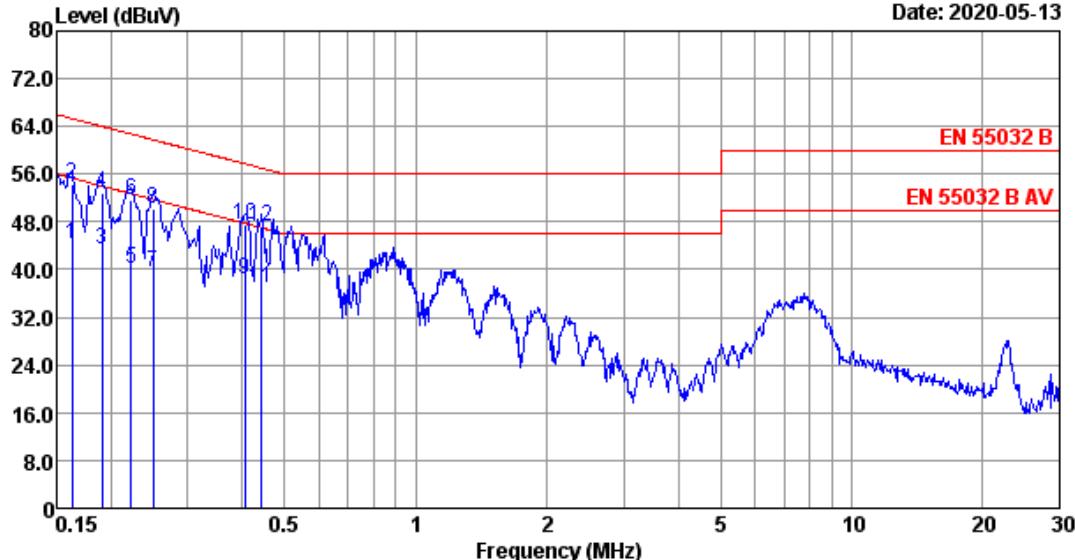

Site no :2# Conduction

Data No :4

Dis./Lisn :2020 ENV4200-L1

LISN phase:LINE

Limit :EN 55032 B

Pressure :101.7kPa

Env./Ins. :21.7°C/52%

Engineer :Gavin

EUT :16T2

Power Rating :AC 230V/50Hz

Test Mode :Running ITU-R BT 471-1

HDMI to USB:1920*1080@60Hz

No	Freq (MHz)	LISN	Cable	Emission				Remark
		Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	
1	0.162	10.13	0.23	33.79	44.15	55.34	11.19	Average
2	0.162	10.13	0.23	44.05	54.41	65.34	10.93	QP
3	0.190	10.30	0.23	32.76	43.29	54.02	10.73	Average
4	0.190	10.30	0.23	42.37	52.90	64.02	11.12	QP
5	0.222	10.46	0.23	29.49	40.18	52.74	12.56	Average
6	0.222	10.46	0.23	41.11	51.80	62.74	10.94	QP
7	0.249	10.50	0.23	28.89	39.62	51.78	12.16	Average
8	0.249	10.50	0.23	39.54	50.27	61.78	11.51	QP
9	0.406	10.72	0.23	27.51	38.46	47.73	9.27	Average
10	0.406	10.72	0.23	36.44	47.39	57.73	10.34	QP
11	0.442	10.76	0.23	25.77	36.76	47.02	10.26	Average
12	0.442	10.76	0.23	36.20	47.19	57.02	9.83	QP


Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.

2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Data: 3

File: E:\2020 Report Data-CE\TPVA1Z2003180.EM6 (30)

Date: 2020-05-13

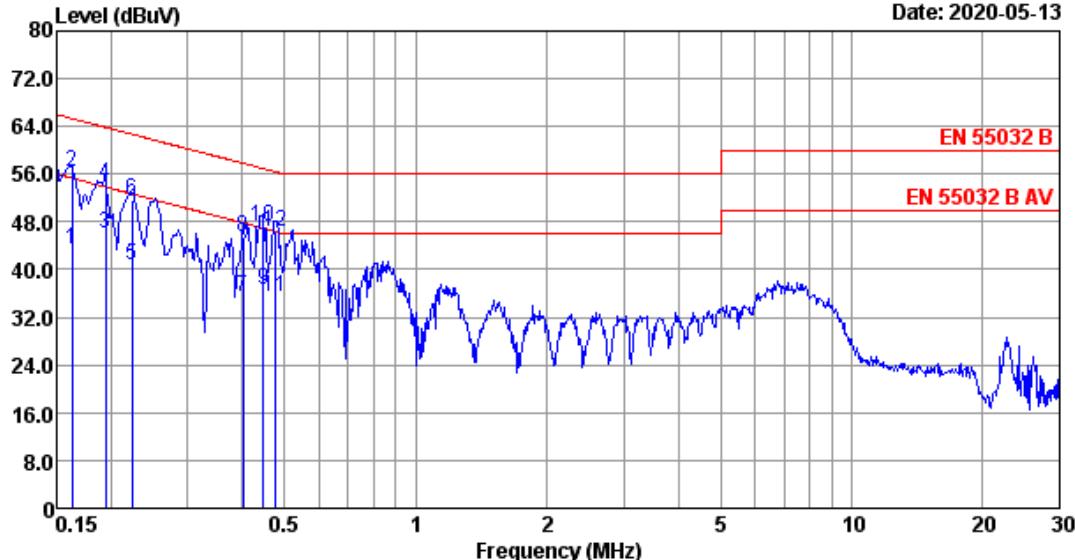

Site no :2# Conduction

Data No :3

Dis./Lisn :2020 ENV4200-N

LISN phase:NEUTRAL

Limit :EN 55032 B

Pressure :101.7kPa

Env./Ins. :21.7°C/52%

Engineer :Gavin

EUT :16T2

Power Rating :AC 230V/50Hz

Test Mode :Running ITU-R BT 471-1

HDMI to USB:1920*1080@60Hz

No	Freq (MHz)	LISN	Cable	Emission				Remark
		Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	
1	0.162	10.00	0.23	33.06	43.29	55.34	12.05	Average
2	0.162	10.00	0.23	46.17	56.40	65.34	8.94	QP
3	0.194	9.98	0.23	35.94	46.15	53.84	7.69	Average
4	0.194	9.98	0.23	44.13	54.34	63.84	9.50	QP
5	0.223	9.96	0.23	30.66	40.85	52.70	11.85	Average
6	0.223	9.96	0.23	41.34	51.53	62.70	11.17	QP
7	0.402	9.88	0.23	25.17	35.28	47.81	12.53	Average
8	0.402	9.88	0.23	35.40	45.51	57.81	12.30	QP
9	0.447	9.85	0.23	26.41	36.49	46.93	10.44	Average
10	0.447	9.85	0.23	37.16	47.24	56.93	9.69	QP
11	0.476	9.83	0.23	25.40	35.46	46.41	10.95	Average
12	0.476	9.83	0.23	36.17	46.23	56.41	10.18	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.

2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipments

4.1.1. For frequency range 30MHz~1000MHz (In 10m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	10m Chamber(NSA)	AUDIX	N/A	N/A	Apr.15,19	1 Year
2.	10m Chamber(SE)	AUDIX	N/A	N/A	Apr.15,18	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	103669	Oct.13,19	1 Year
4.	Signal Analyzer	Rohde & Schwarz	FSV30	103670	Oct.13,19	1 Year
5.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Apr.14,19	1 Year
6.	Amplifier	EMCI	EMC9135	980347	Jun.30,19	1 Year
7.	Amplifier	EMCI	EMC9135	980348	Mar.02,20	1 Year
8.	Tri-log-Broadband Antenna	Schwarzbeck	VULB 9168	710	Sep.24,19	1 Year
9.	Tri-log-Broadband Antenna	Schwarzbeck	VULB 9168	429	May.08,19	1 Year
10.	RF Cable	SPUMA	CFD400NL-LW	No.4	Jun.30,19	1 Year
11.	RF Cable	SPUMA	CFD400-NM-NM	160727+160728	Jun.30,19	1 Year
12.	Coaxial Switch	Anritsu	MP59B	6201397220	Apr.14,19	1 Year
13.	Coaxial Switch	Anritsu	MP59B	6201397221	Apr.14,19	1 Year
14.	Coaxial Switch	Anritsu	MP59B	6201397224	Apr.14,19	1 Year
15.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


4.1.2. For frequency range 1GHz~6GHz (In 10m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	10m Chamber(Svswr)	AUDIX	N/A	N/A	Apr.15,19	1 Year
2.	10m Chamber(SE)	AUDIX	N/A	N/A	Apr.15,18	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	103670	Oct.13,19	1 Year
4.	Horn Antenna	ETS	3117	00218552	Dec.02,19	1 Year
5.	Amplifier	KEYSIGHT	83017A	39500711	Jun.30,19	1 Year
6.	RF Cable	ETS	SMS-100-SMS-350IN	NO.1	May.13,19	1 Year
7.	Test Software	AUDIX	e3	6.100913a	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

4.2.1. In 10m Anechoic Chamber Test Setup Diagram for 30-1000MHz

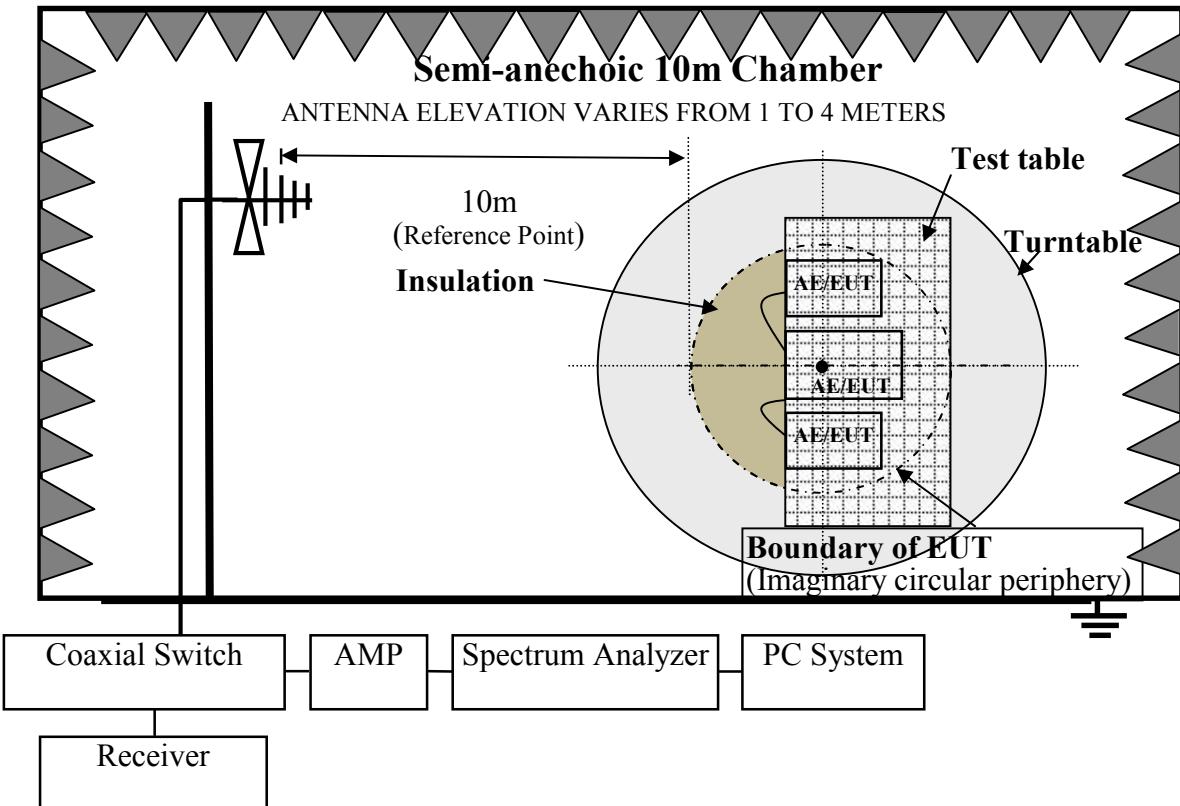

4.2.2. In 10m Anechoic Chamber Test Setup Diagram for 1-6GHz

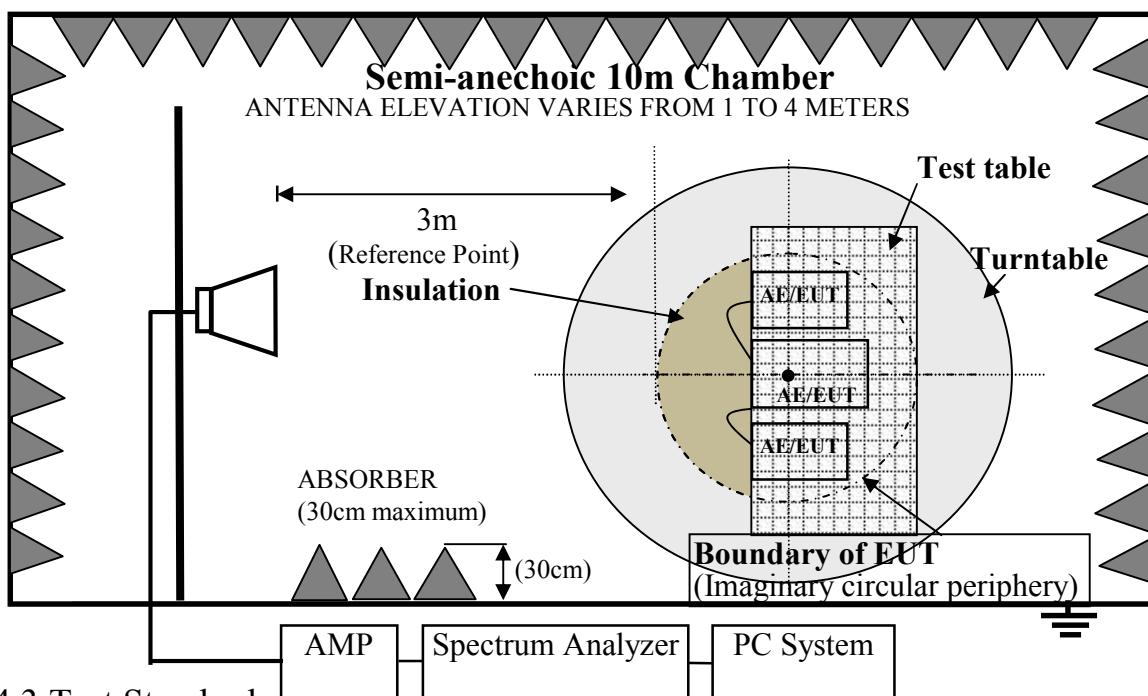

4.3. Test Standard

EN 55032: 2012+AC: 2013

EN 55032: 2015

EN 55032: 2015+AC: 2016

4.4.Radiated Emission Class B Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 230	10	30
230 ~ 1000	10	37
1000~3000	3	70(Peak) 50(Average)
3000~6000	3	74(Peak) 54(Average)

Notes: (1) Emission level = Antenna Factor + Cable Loss + Reading

Emission level = Antenna Factor -Amp Factor +Cable Loss + Reading (above 1000MHz)

(2) The lower limit shall apply at the transition frequencies.

4.5.EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.6.Operating Condition of EUT

Same as Conducted Emission test that listed in Section 4.6. Except the test set up replaced by Section 4.2.

4.7.Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane measurement distance was 10m at a semi-anechoic chamber. An antenna was located 10m from the periphery of test system on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all the interface cables were changed according to EN 55032 Class B on Radiated Emission test.

The bandwidth setting on the test receiver (ESR3) is 120 kHz.

The resolution bandwidth of the Agilent Spectrum Analyzer FSV30 was set at 1MHz. (For above 1GHz)

The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values.

The frequency range from 1GHz to 6GHz was checked and all final readings of measurement were with Peak and Average detector, measurement distance was 3m at semi-anechoic chamber. The EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. The portion of the test volume that was obstructed by absorber placed on the floor (30cm maximum).

Finally, selected operating situations at Anechoic Chamber measurement, all the test results are listed in section 4.8.

4.8.Radiated Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

EUT: LCD MONITOR Model No. : 16T2

For frequency range 30MHz~1000MHz

Test Date: Apr.09. 2020 Temperature: 22.3°C Humidity: 53% Pressure: 101.6kPa

The EUT with following test modes were pre-tested:

No.	Power Supply	Test Voltage	Test Mode	Input Port	Cable Length	Panel Angle	Resolution & Frequency
1.	Adapter Supply & Battery Supply & Notebook Supply	AC 230V/50Hz	PC Mode	Micro USB	1.8m	90°	640*480@60Hz
2.							1280*1024@75Hz
3.							1920*1080@60Hz
4.					0°		1920*1080@60Hz
5.					1.5m	90°	1920*1080@60Hz
6.			Notebook Mode	Type-C 1	1.8m	90°	640*480@60Hz
7.							1280*1024@75Hz
8.				Type-C 2	1.8m		1920*1080@60Hz
9.							640*480@60Hz
10.							1280*1024@75Hz
11.							1920*1080@60Hz
12.	Adapter Supply	AC 110V/60Hz	Standby	---	1.8m	90°	---
13.			PC Mode	Micro USB			1920*1080@60Hz
14.	Adapter Supply (Type-C 2)	AC 230V/50Hz	PC Mode	Micro USB	1.8m		1920*1080@60Hz

The result of worst test mode is presented in the report as below and the test data are listed in next pages.

No.	Power Supply	Test Voltage	Cable Length	Panel Angle	Test Mode	Input Port	Resolution & Frequency	Reference Test Data No.	
								Horizontal	Vertical
1. *	Adapter Supply	AC 230V/50Hz	1.8m	90°	PC (Running ITU-R BT 1729)	Micro USB	1920*1080@60Hz	#2	#1
2.					PC (Running ITU-R BT 471-1)		1920*1080@60Hz	#4	#3

(* means the worst test mode)

For frequency range 1GHz~6GHz

Test Date: Apr.10. 2020 Temperature: 22.3°C Humidity: 53% Pressure: 101.5kPa

The EUT with following test modes were pre-tested:

No.	Power Supply	Test Voltage	Test Mode	Input Port	Cable Length	Panel Angle	Resolution & Frequency
1.	Adapter Supply & Battery Supply & Notebook Supply	AC 230V/50Hz	PC Mode	Micro USB	1.8m	90°	1280*1024@75Hz
2.							1920*1080@60Hz
3.					1.5m	90°	1920*1080@60Hz
4.					1.8m	90°	1920*1080@60Hz
5.			Notebook Mode	Type-C 1	1.8m	90°	1280*1024@75Hz
6.							1920*1080@60Hz
7.				Type-C 2	1.8m	90°	1280*1024@75Hz
8.							1920*1080@60Hz
9.	Adapter Supply	AC 110V/60Hz	Standby	---	1.8m	90°	---
10.			PC Mode	Micro USB			1920*1080@60Hz
11.	Adapter Supply (Type-C 2)	AC 230V/50Hz	PC Mode	Micro USB	1.8m		1920*1080@60Hz

The result of worst test mode is presented in the report as below and the test data are listed in next pages.


No.	Power Supply	Test Voltage	Cable Length	Panel Angle	Test Mode	Input Port	Resolution & Frequency	Reference Test Data No.	
								Horizontal	Vertical
1. *	Adapter Supply	AC 230V/50Hz	1.8m	90°	PC (Running ITU-R BT 1729)	Micro USB	1920*1080@60Hz	#24	#23
2.					PC (Running ITU-R BT 471-1)		1920*1080@60Hz	#26	#25

(* means the worst test mode)

Data: 2

File: E:\2020 Report Data\T\TPVA1Z2003180.EM6 (104)

Date: 2020-04-09

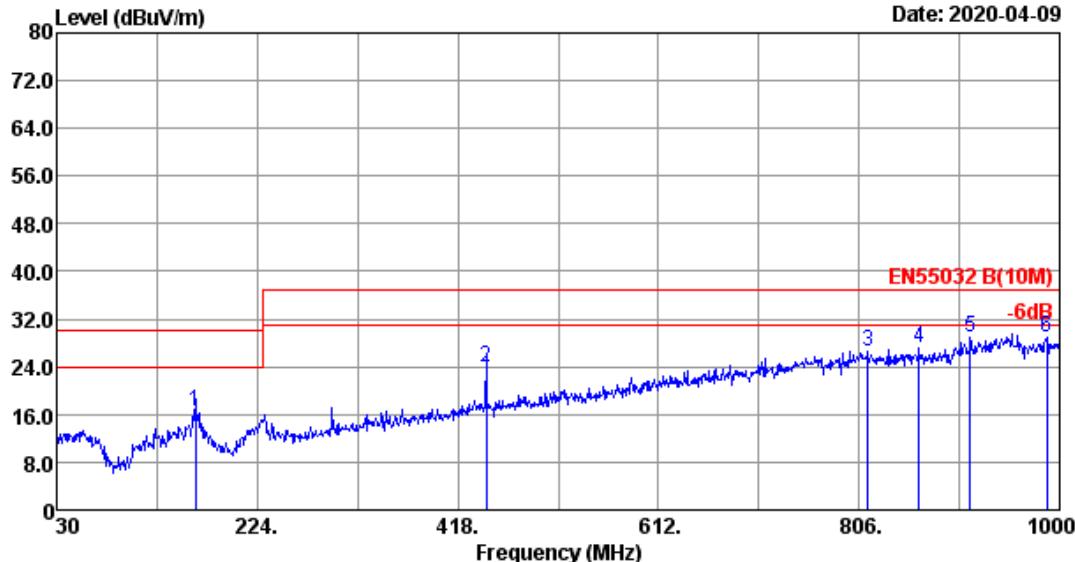

Site no. : 10m Chamber Data no. : 2
 Dis. / Ant. : 10m 2019 VULB9168-429 Ant. pol. : HORIZONTAL
 Limit : EN55032 B(10M) Pressure : 101.6kPa
 Env. / Ins. : 22.3°C/53% Engineer : Johnny
 EUT : 16T2
 Power rating : AC 230V/50Hz
 Test Mode : Running ITU-R BT 1729
 HDMI to USB:1920*1080@60Hz


No.	Freq. (MHz)	Ant.	Cable	Emission				Remark
		Factor (dB/m)	Loss (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	163.860	19.10	1.10	-3.73	16.47	30.00	13.53	QP
2	445.160	22.90	2.07	-1.07	23.90	37.00	13.10	QP
3	814.730	28.60	3.25	-5.28	26.57	37.00	10.43	QP
4	864.200	28.92	3.24	-5.13	27.03	37.00	9.97	QP
5	913.670	29.57	3.25	-3.97	28.85	37.00	8.15	QP
6	987.390	29.91	3.32	-4.20	29.03	37.00	7.97	QP*

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. The worst emission was detected at 987.390MHz with corrected signal level of 29.03dB μ V/m. (Antenna height 1.24m; Turntable degree 166°).
 4. 0° was the table front facing the antenna. Degree is calculated from 0°clockwise facing the antenna.

Data: 1

File: E:\2020 Report Data\T\TPVA1Z2003180.EM6 (104)

Date: 2020-04-09

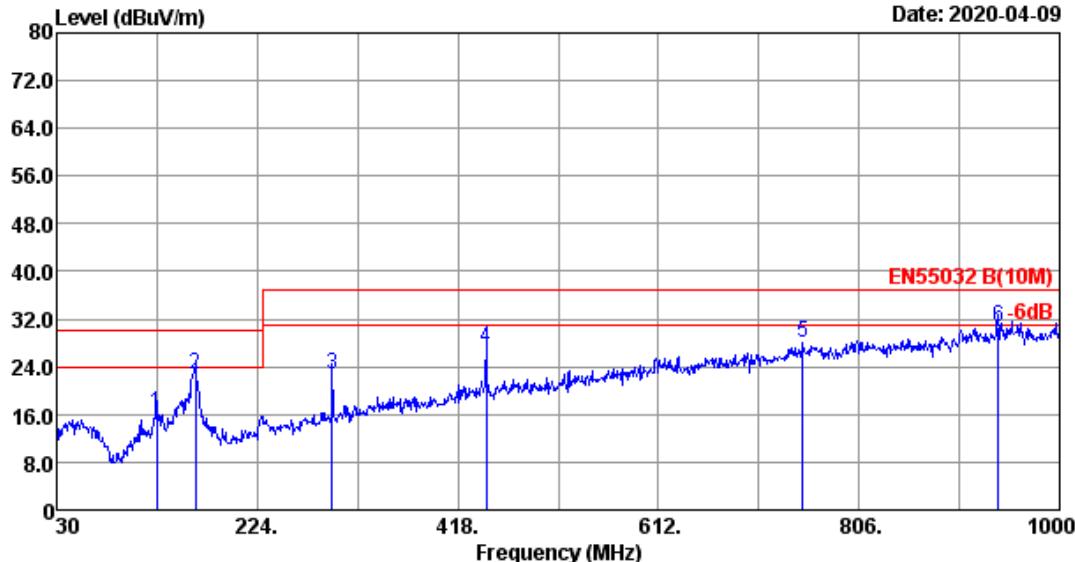

Site no. : 10m Chamber Data no. : 1
 Dis. / Ant. : 10m 2019 VULB9168-710 Ant. pol. : VERTICAL
 Limit : EN55032 B(10M) Pressure : 101.6kPa
 Env. / Ins. : 22.3°C/53% Engineer : Johnny
 EUT : 16T2
 Power rating : AC 230V/50Hz
 Test Mode : Running ITU-R BT 1729
 HDMI to USB:1920*1080@60Hz


No.	Freq. (MHz)	Ant.	Cable	Emission				Remark
		Factor (dB/m)	Loss (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	127.000	17.50	1.51	-2.81	16.20	30.00	13.80	QP
2	163.860	19.10	1.71	2.02	22.83	30.00	7.17	QP
3	296.750	19.04	2.39	1.19	22.62	37.00	14.38	QP
4	445.160	22.90	3.04	1.30	27.24	37.00	9.76	QP
5	751.680	27.74	4.30	-4.12	27.92	37.00	9.08	QP
6	940.830	29.32	4.92	-3.46	30.78	37.00	6.22	QP*

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. The worst emission was detected at 940.830MHz with corrected signal level of 30.78dB μ V/m. (Antenna height 3.42m; Turntable degree 287°).
 4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Data: 4

File: E:\2020 Report Data\T\TPVA1Z2003180.EM6 (104)

Date: 2020-04-09

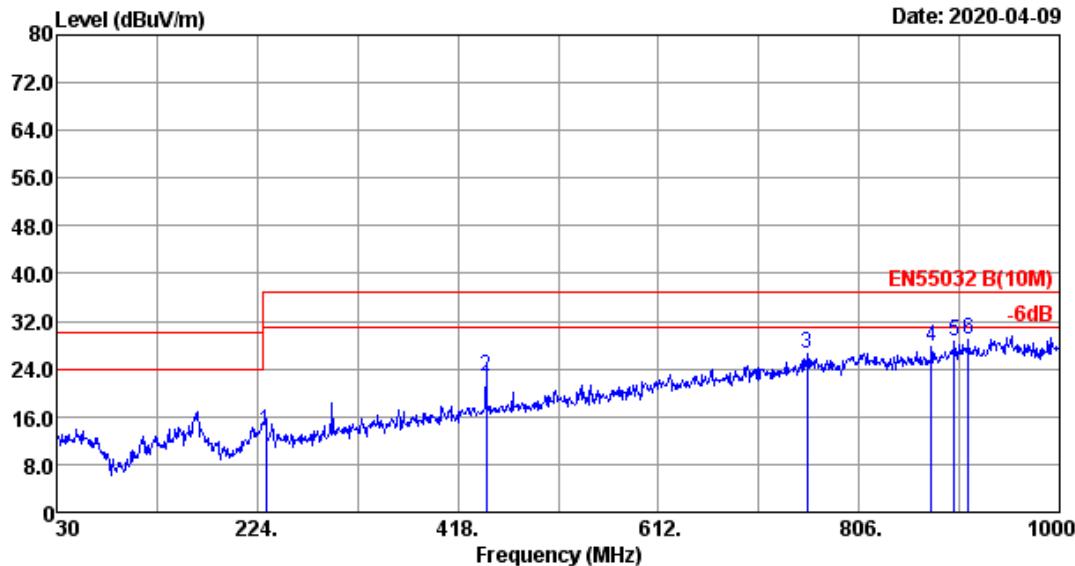

Site no. : 10m Chamber Data no. : 4
 Dis. / Ant. : 10m 2019 VULB9168-429 Ant. pol. : HORIZONTAL
 Limit : EN55032 B(10M) Pressure : 101.6kPa
 Env. / Ins. : 22.3°C/53% Engineer : Johnny
 EUT : 16T2
 Power rating : AC 230V/50Hz
 Test Mode : Running ITU-R BT 471-1
 HDMI to USB:1920*1080@60Hz


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission				
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	232.730	16.46	1.32	-4.27	13.51	37.00	23.49	QP
2	445.160	22.90	2.07	-2.35	22.62	37.00	14.38	QP
3	755.560	28.29	3.17	-4.79	26.67	37.00	10.33	QP
4	875.840	28.98	3.24	-4.60	27.62	37.00	9.38	QP
5	898.150	29.27	3.24	-3.85	28.66	37.00	8.34	QP
6	911.730	29.53	3.25	-3.98	28.80	37.00	8.20	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 3

File: E:\2020 Report Data\T\TPVA1Z2003180.EM6 (104)

Date: 2020-04-09

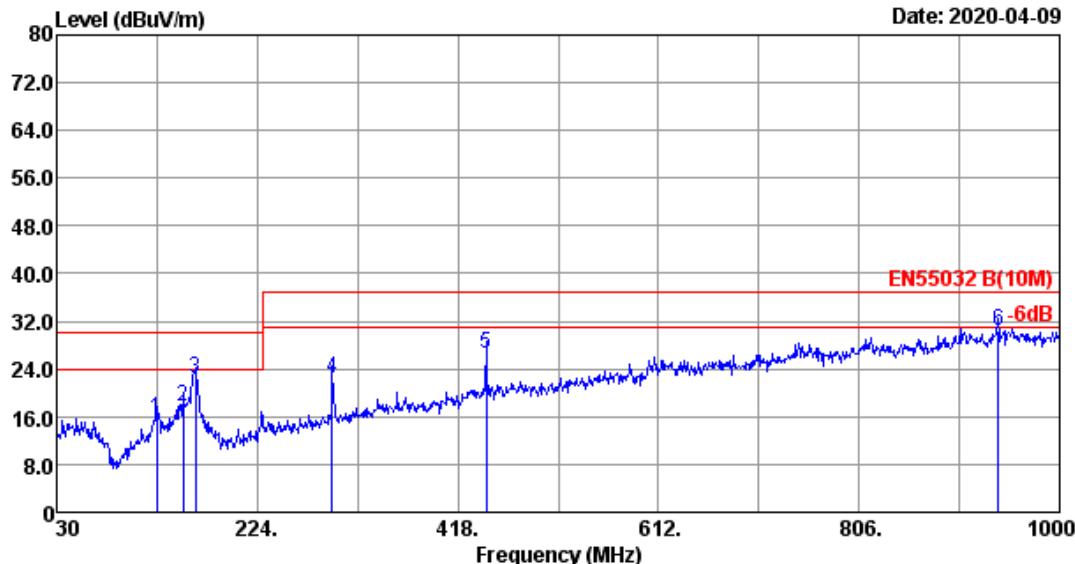

Site no. : 10m Chamber Data no. : 3
 Dis. / Ant. : 10m 2019 VULB9168-710 Ant. pol. : VERTICAL
 Limit : EN55032 B(10M) Pressure : 101.6kPa
 Env. / Ins. : 22.3°C/53% Engineer : Johnny
 EUT : 16T2
 Power rating : AC 230V/50Hz
 Test Mode : Running ITU-R BT 471-1
 HDMI to USB:1920*1080@60Hz


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission				
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	127.000	17.50	1.51	-3.32	15.69	30.00	14.31	QP
2	152.220	19.50	1.64	-3.55	17.59	30.00	12.41	QP
3	163.860	19.10	1.71	1.50	22.31	30.00	7.69	QP
4	296.750	19.04	2.39	1.05	22.48	37.00	14.52	QP
5	445.160	22.90	3.04	0.64	26.58	37.00	10.42	QP
6	940.830	29.32	4.92	-3.71	30.53	37.00	6.47	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 24

File: E:\2020 Report Data\T\TPVA1Z2003180.EM6 (104)

Date: 2020-04-10

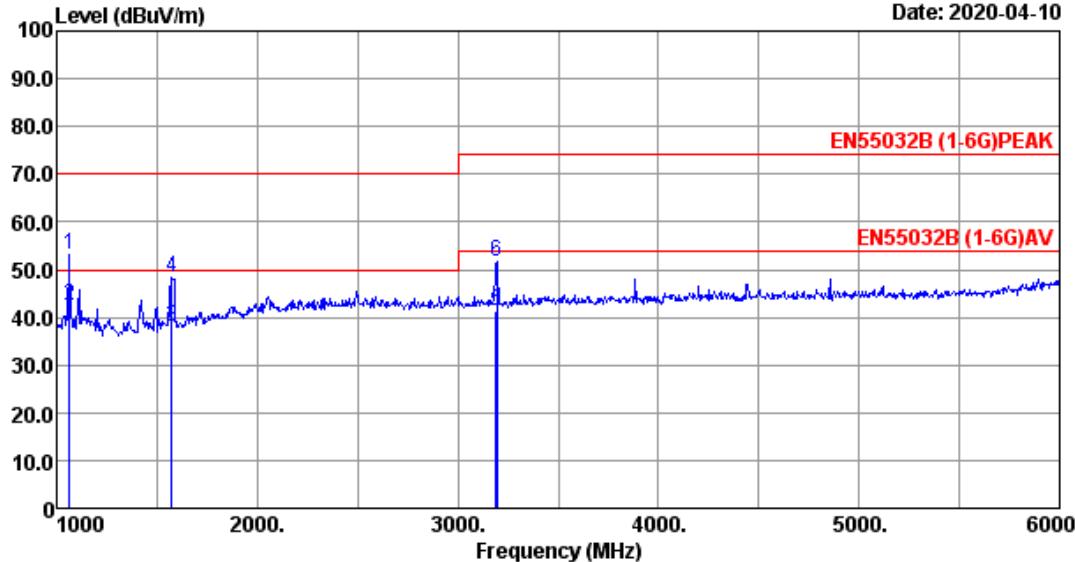

Site no. : 10m Chamber Data no. : 24
 Dis. / Ant. : 3m 2019 3117 Ant. pol. : HORIZONTAL
 Limit : EN55032B (1-6G) PEAK Pressure : 101.5kPa
 Env. / Ins. : 22.3°C/53% Engineer : Fire
 EUT : 16T2
 Power rating : AC 230V/50Hz
 Test Mode : Running ITU-R BT 1729
 HDMI to USB:1920*1080@60Hz

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dB _{UV})	Emission			
						Level (dB _{UV} /m)	Limits (dB _{UV} /m)	Margin (dB)	Remark
1	1065.152	28.33	2.41	35.41	57.63	52.96	70.00	17.04	Peak
2	1065.851	28.33	2.41	35.41	47.29	42.62	50.00	7.38	Average
3	1572.635	28.50	2.91	33.99	40.76	38.18	50.00	11.82	Average
4	1575.216	28.50	2.91	33.99	50.91	48.33	70.00	21.67	Peak
5	3192.186	32.95	4.22	31.97	36.28	41.48	54.00	12.52	Average
6	3195.518	32.95	4.22	31.97	46.37	51.57	74.00	22.43	Peak


Remarks:

- Emission Level = Antenna Factor + Cable Loss + Reading - Amp Factor
- The emission levels that are 20dB below the official limit are not reported.

Data: 23

File: E:\2020 Report Data\T\TPVA1Z2003180.EM6 (104)

Date: 2020-04-10

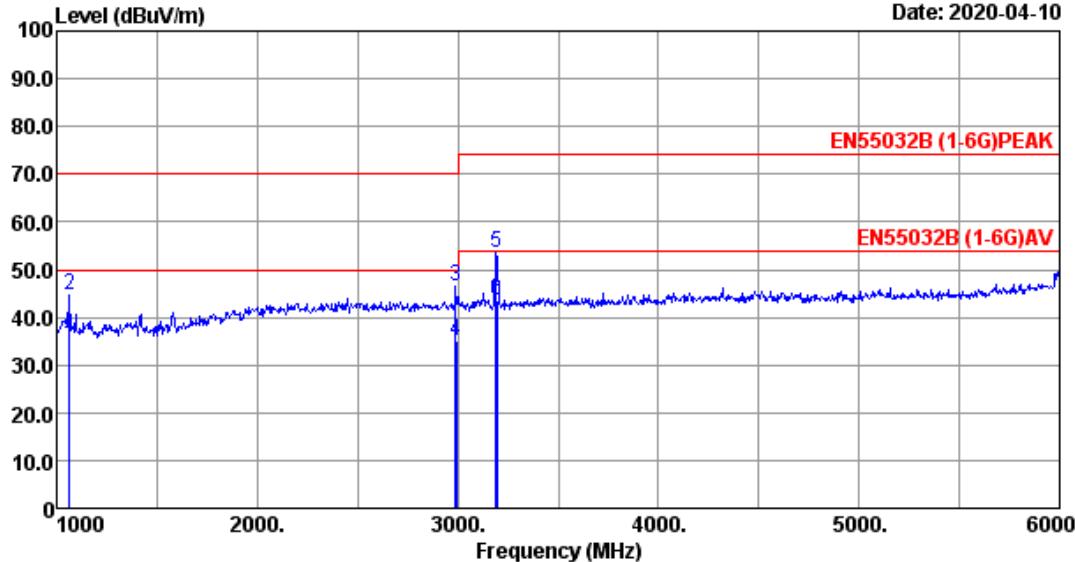

Site no. : 10m Chamber Data no. : 23
 Dis. / Ant. : 3m 2019 3117 Ant. pol. : VERTICAL
 Limit : EN55032B (1-6G) PEAK Pressure : 101.5kPa
 Env. / Ins. : 22.3°C/53% Engineer : Fire
 EUT : 16T2
 Power rating : AC 230V/50Hz
 Test Mode : Running ITU-R BT 1729
 HDMI to USB:1920*1080@60Hz


No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
1	1062.186	28.33	2.41	35.41	39.16	34.49	50.00	15.51 Average
2	1065.152	28.33	2.41	35.41	49.33	44.66	70.00	25.34 Peak
3	2990.185	32.79	4.08	32.11	41.57	46.33	70.00	23.67 Peak
4	2992.637	32.79	4.08	32.11	30.26	35.02	50.00	14.98 Average
5	3190.185	32.95	4.22	31.97	48.14	53.34	74.00	20.66 Peak
6	3192.485	32.95	4.22	31.97	38.26	43.46	54.00	10.54 Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 26

File: E:\2020 Report Data\T\TPVA1Z2003180.EM6 (104)

Date: 2020-04-10

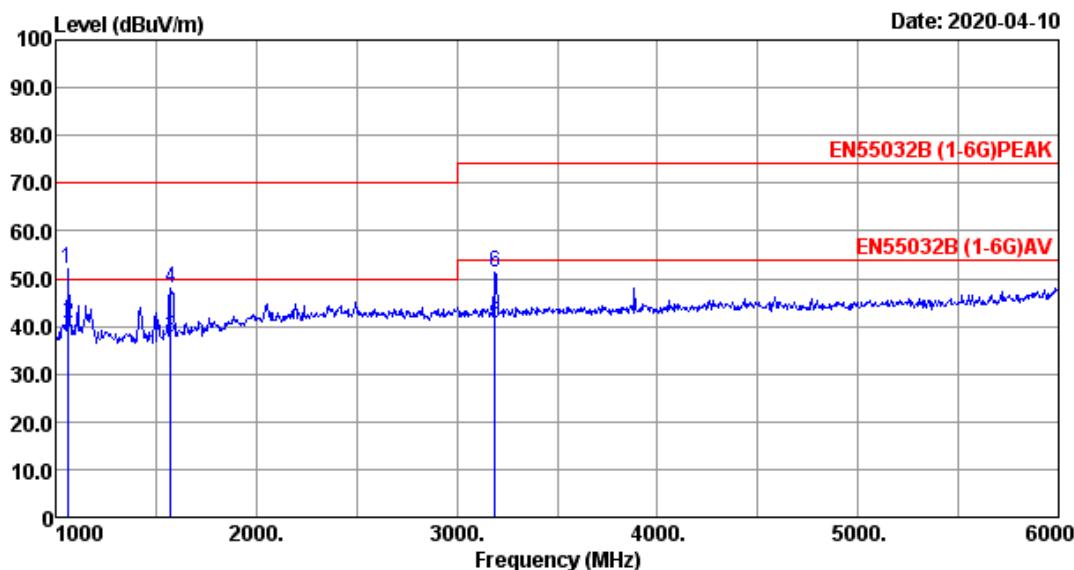

Site no. : 10m Chamber
 Dis. / Ant. : 3m 2019 3117
 Limit : EN55032B (1-6G) PEAK
 Env. / Ins. : 22.3°C/53%
 EUT : 16T2
 Power rating : AC 230V/50Hz
 Test Mode : Running ITU-R BT 471-1
 HDMI to USB:1920*1080@60Hz

Data no. : 26
 Ant. pol. : HORIZONTAL
 Pressure : 101.5kPa
 Engineer : Fire

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1060.418	28.33	2.41	35.41	56.88	52.21	70.00	17.79	Peak
2	1062.626	28.33	2.41	35.41	45.29	40.62	50.00	9.38	Average
3	1572.638	28.50	2.91	33.99	40.29	37.71	50.00	12.29	Average
4	1575.212	28.50	2.91	33.99	50.44	47.86	70.00	22.14	Peak
5	3190.419	32.95	4.22	31.97	35.26	40.46	54.00	13.54	Average
6	3190.745	32.95	4.22	31.97	45.91	51.11	74.00	22.89	Peak


Remarks:

- Emission Level = Antenna Factor + Cable Loss + Reading -Amp Factor
- The emission levels that are 20dB below the official limit are not reported.

Data: 25

File: E:\2020 Report Data\T\TPVA1Z2003180.EM6 (104)

Date: 2020-04-10

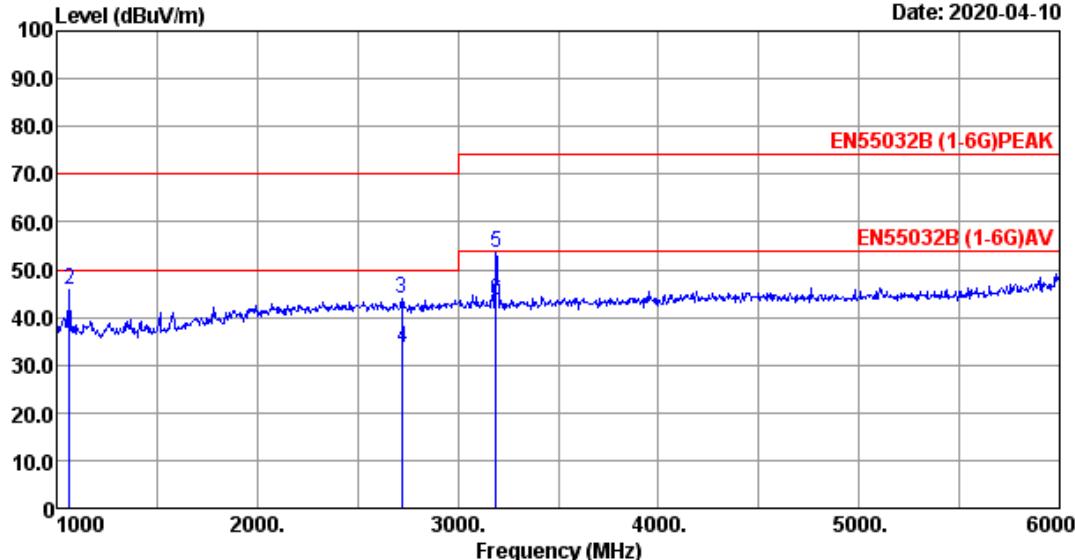

Site no. : 10m Chamber Data no. : 25
 Dis. / Ant. : 3m 2019 3117 Ant. pol. : VERTICAL
 Limit : EN55032B (1-6G) PEAK Pressure : 101.5kPa
 Env. / Ins. : 22.3°C/53% Engineer : Fire
 EUT : 16T2
 Power rating : AC 230V/50Hz
 Test Mode : Running ITU-R BT 471-1
 HDMI to USB:1920*1080@60Hz

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1062.186	28.33	2.41	35.41	40.29	35.62	50.00	14.38	Average
2	1065.749	28.33	2.41	35.41	50.40	45.73	70.00	24.27	Peak
3	2720.218	32.69	3.87	32.30	39.72	43.98	70.00	26.02	Peak
4	2722.635	32.69	3.87	32.30	29.23	33.49	50.00	16.51	Average
5	3190.749	32.95	4.22	31.97	48.49	53.69	74.00	20.31	Peak
6	3192.325	32.95	4.22	31.97	38.23	43.43	54.00	10.57	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


5. HARMONIC CURRENT TEST

5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	H/F Room	AUDIX	N/A	N/A	Apr.16,19	3 Year
2.	AC Power Source	California Instruments	500Lix	58481	Oct.13,19	1 Year
3.	Impedance Network	California Instruments	OMNI 1-18i	1247A02235	Oct.15,19	1 Year
4.	Power Analyzer	California Instruments	PACS-1	72627	Oct.15,19	1 Year

Note: N/A means Not applicable.

5.2. Block Diagram of Test Setup

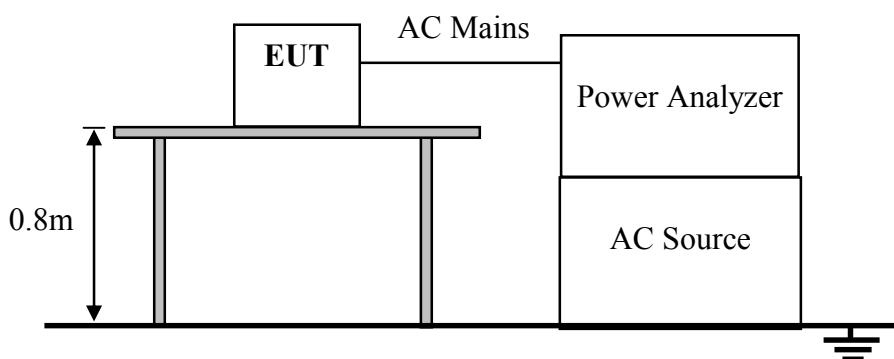

5.3. Test Standard

EN 61000-3-2: 2014; Class D

5.4. Limits of Harmonic Current

Limits for Class D Equipment		
Harmonic order (n)	Maximum permissible harmonic current per watt (mA/W)	Maximum permissible harmonic current (A)
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13	0.30	0.21
$15 \leq n \leq 39$ (odd harmonic only)	$3.85/n$	$0.15 \times 15/n$

Remark: if the EUT Power level is below 75 Watts and therefore has no defined limits.

5.5.EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

5.6.Operating Condition of EUT

Same as Conducted Emission test that listed in Section 5.6. except the test set up replaced by Section 5.2.

5.7.Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.

5.8.Test Results

PASS. (Test results are recorded in next page)

Harmonics – Class-D per Ed. 4.0 (2014)(Run time) incl. inter-harmonics

EUT: 16T2

Test category: Class-D per Ed. 4.0 (2014) (European limits)

Tested by: Kennen

Test date: 2020-5-12

Start time: 0:35:06

Test Margin: 100

Test duration (min): 2.5

Data file name: H-000267.cts_data



End time: 0:37:47

Comment: Running "H" Pattern And 1KHz Playing

Customer: TPV

Test Result: N/L

Source qualification: Normal

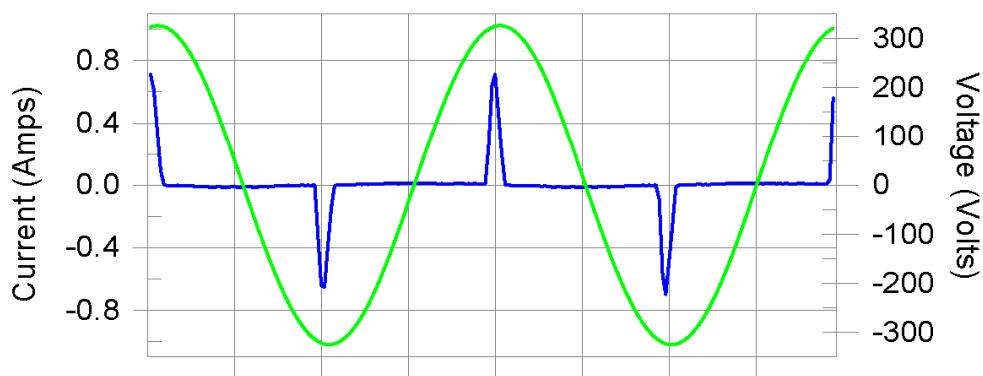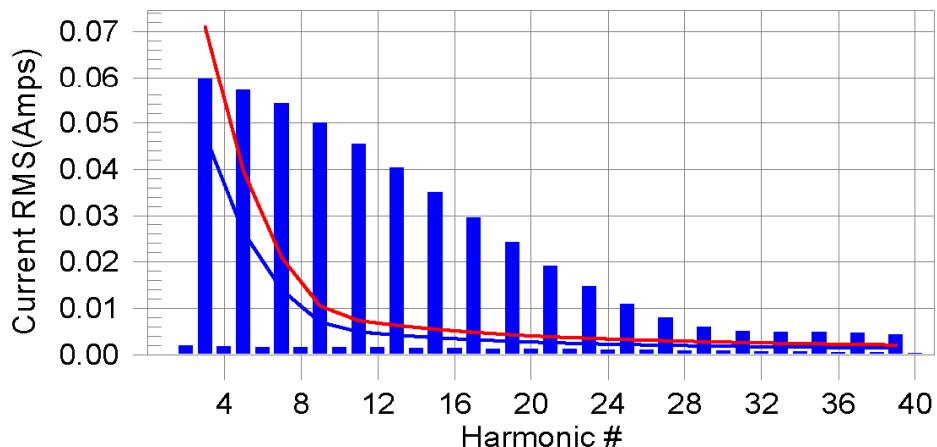Current & voltage waveformsHarmonics and Class D limit lineEuropean LimitsTest result: N/L Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

Current Test Result Summary (Run time)

EUT: 16T2
 Test category: Class-D per Ed. 4.0 (2014) (European limits)
 Test date: 2020-5-12 Start time: 0:35:06 End time: 0:37:47
 Test duration (min): 2.5 Data file name: H-000267.cts_data
 Comment: Running "H" Pattern And 1KHz Playing
 Customer: TPV

Test Result: N/L Source qualification: Normal
 THC(A): 0.140 I-THD(%): 225.4 POHC(A): 0.030 POHC Limit(A): 0.006

Highest parameter values during test:

V_RMS (Volts):	230.09	Frequency(Hz):	50.00
I_Peak (Amps):	0.770	I_RMS (Amps):	0.153
I_Fund (Amps):	0.062	Crest Factor:	5.028
Power (Watts):	13.9	Power Factor:	0.397

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.003	0.000	N/A	N/L
3	0.060	0.047	N/A	0.060	0.071	N/A	N/L
4	0.002	0.000	N/A	0.002	0.000	N/A	N/L
5	0.057	0.026	N/A	0.057	0.040	N/A	N/L
6	0.002	0.000	N/A	0.002	0.000	N/A	N/L
7	0.054	0.014	N/A	0.055	0.021	N/A	N/L
8	0.002	0.000	N/A	0.002	0.000	N/A	N/L
9	0.050	0.007	N/A	0.050	0.010	N/A	N/L
10	0.002	0.000	N/A	0.002	0.000	N/A	N/L
11	0.045	0.005	N/A	0.046	0.007	N/A	N/L
12	0.001	0.000	N/A	0.002	0.000	N/A	N/L
13	0.040	0.004	N/A	0.041	0.006	N/A	N/L
14	0.001	0.000	N/A	0.002	0.000	N/A	N/L
15	0.035	0.004	N/A	0.035	0.005	N/A	N/L
16	0.001	0.000	N/A	0.002	0.000	N/A	N/L
17	0.029	0.003	N/A	0.030	0.005	N/A	N/L
18	0.001	0.000	N/A	0.001	0.000	N/A	N/L
19	0.024	0.003	N/A	0.024	0.004	N/A	N/L
20	0.001	0.000	N/A	0.001	0.000	N/A	N/L
21	0.019	0.003	N/A	0.019	0.004	N/A	N/L
22	0.001	0.000	N/A	0.001	0.000	N/A	N/L
23	0.015	0.002	N/A	0.015	0.003	N/A	N/L
24	0.001	0.000	N/A	0.001	0.000	N/A	N/L
25	0.011	0.002	N/A	0.011	0.003	N/A	N/L
26	0.001	0.000	N/A	0.001	0.000	N/A	N/L
27	0.008	0.002	N/A	0.008	0.003	N/A	N/L
28	0.001	0.000	N/A	0.001	0.000	N/A	N/L
29	0.006	0.002	N/A	0.006	0.003	N/A	N/L
30	0.001	0.000	N/A	0.001	0.000	N/A	N/L
31	0.005	0.002	N/A	0.005	0.003	N/A	N/L
32	0.001	0.000	N/A	0.001	0.000	N/A	N/L
33	0.005	0.002	N/A	0.005	0.002	N/A	N/L
34	0.001	0.000	N/A	0.001	0.000	N/A	N/L
35	0.005	0.002	N/A	0.005	0.002	N/A	N/L
36	0.001	0.000	N/A	0.001	0.000	N/A	N/L
37	0.005	0.001	N/A	0.005	0.002	N/A	N/L
38	0.000	0.000	N/A	0.000	0.000	N/A	N/L
39	0.004	0.001	N/A	0.004	0.002	N/A	N/L
40	0.000	0.000	N/A	0.000	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Source Verification Data (Run time)

EUT: 16T2
Test category: Class-D per Ed. 4.0 (2014) (European limits)
Test date: 2020-5-12 Start time: 0:35:06 Test Margin: 100
Test duration (min): 2.5 Data file name: H-000267.cts_data
Comment: Running "H" Pattern And 1KHz Playing
Customer: TPV

Test Result: N/L Source qualification: Normal

Highest parameter values during test:

Voltage (Vrms):	230.09	Frequency(Hz):	50.00
I_Peak (Amps):	0.770	I_RMS (Amps):	0.153
I_Fund (Amps):	0.062	Crest Factor:	5.028
Power (Watts):	13.9	Power Factor:	0.397

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.087	0.460	18.89	OK
3	0.459	0.270	22.18	OK
4	0.057	0.460	12.33	OK
5	0.048	0.920	5.25	OK
6	0.035	0.460	7.53	OK
7	0.046	0.690	6.68	OK
8	0.014	0.460	3.09	OK
9	0.036	0.460	7.77	OK
10	0.014	0.460	3.13	OK
11	0.029	0.230	12.63	OK
12	0.014	0.230	6.16	OK
13	0.034	0.230	14.63	OK
14	0.009	0.230	3.77	OK
15	0.026	0.230	11.20	OK
16	0.009	0.230	3.99	OK
17	0.026	0.230	11.12	OK
18	0.017	0.230	7.54	OK
19	0.026	0.230	11.27	OK
20	0.013	0.230	5.46	OK
21	0.024	0.230	10.46	OK
22	0.004	0.230	1.83	OK
23	0.018	0.230	7.71	OK
24	0.006	0.230	2.43	OK
25	0.015	0.230	6.38	OK
26	0.005	0.230	2.26	OK
27	0.013	0.230	5.54	OK
28	0.005	0.230	2.21	OK
29	0.010	0.230	4.54	OK
30	0.005	0.230	2.30	OK
31	0.009	0.230	3.89	OK
32	0.004	0.230	1.87	OK
33	0.010	0.230	4.22	OK
34	0.004	0.230	1.93	OK
35	0.009	0.230	3.98	OK
36	0.004	0.230	1.60	OK
37	0.008	0.230	3.44	OK
38	0.003	0.230	1.35	OK
39	0.009	0.230	3.87	OK
40	0.003	0.230	1.41	OK

Harmonics – Class-D per Ed. 4.0 (2014)(Run time) incl. inter-harmonics

EUT: 16T2

Test category: Class-D per Ed. 4.0 (2014) (European limits)

Tested by: Kennen

Test date: 2020-5-12

Start time: 0:31:51

Test Margin: 100

Test duration (min): 2.5

Data file name: H-000266.cts_data



End time: 0:34:32

Comment: Default Mode

Customer: TPV

Test Result: N/L

Source qualification: Normal

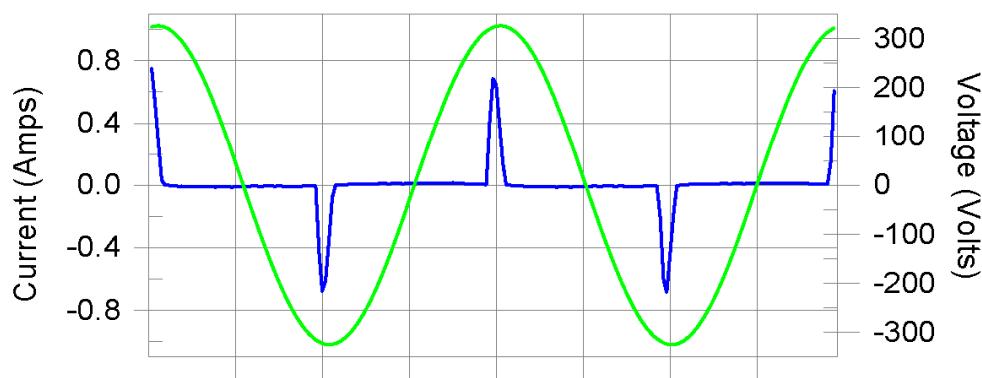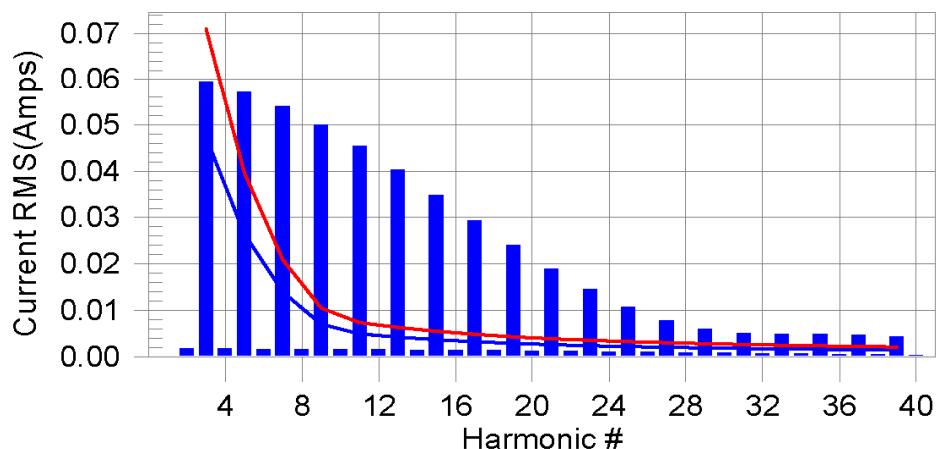Current & voltage waveformsHarmonics and Class D limit lineEuropean LimitsTest result: N/L Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

Current Test Result Summary (Run time)

EUT: 16T2
 Test category: Class-D per Ed. 4.0 (2014) (European limits)
 Test date: 2020-5-12 Start time: 0:31:51 End time: 0:34:32
 Test duration (min): 2.5 Data file name: H-000266.cts_data
 Comment: Default Mode
 Customer: TPV

Test Result: N/L Source qualification: Normal
 THC(A): 0.140 I-THD(%): 224.7 POHC(A): 0.030 POHC Limit(A): 0.006

Highest parameter values during test:

V_RMS (Volts):	230.09	Frequency(Hz):	50.00
I_Peak (Amps):	0.769	I_RMS (Amps):	0.153
I_Fund (Amps):	0.062	Crest Factor:	5.030
Power (Watts):	13.9	Power Factor:	0.398

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.003	0.000	N/A	N/L
3	0.059	0.047	N/A	0.060	0.071	N/A	N/L
4	0.002	0.000	N/A	0.002	0.000	N/A	N/L
5	0.057	0.026	N/A	0.057	0.040	N/A	N/L
6	0.002	0.000	N/A	0.002	0.000	N/A	N/L
7	0.054	0.014	N/A	0.054	0.021	N/A	N/L
8	0.002	0.000	N/A	0.002	0.000	N/A	N/L
9	0.050	0.007	N/A	0.050	0.010	N/A	N/L
10	0.002	0.000	N/A	0.002	0.000	N/A	N/L
11	0.045	0.005	N/A	0.045	0.007	N/A	N/L
12	0.002	0.000	N/A	0.002	0.000	N/A	N/L
13	0.040	0.004	N/A	0.040	0.006	N/A	N/L
14	0.001	0.000	N/A	0.002	0.000	N/A	N/L
15	0.035	0.004	N/A	0.035	0.005	N/A	N/L
16	0.001	0.000	N/A	0.002	0.000	N/A	N/L
17	0.029	0.003	N/A	0.029	0.005	N/A	N/L
18	0.001	0.000	N/A	0.001	0.000	N/A	N/L
19	0.024	0.003	N/A	0.024	0.004	N/A	N/L
20	0.001	0.000	N/A	0.001	0.000	N/A	N/L
21	0.019	0.003	N/A	0.019	0.004	N/A	N/L
22	0.001	0.000	N/A	0.001	0.000	N/A	N/L
23	0.014	0.002	N/A	0.015	0.003	N/A	N/L
24	0.001	0.000	N/A	0.001	0.000	N/A	N/L
25	0.011	0.002	N/A	0.011	0.003	N/A	N/L
26	0.001	0.000	N/A	0.001	0.000	N/A	N/L
27	0.008	0.002	N/A	0.008	0.003	N/A	N/L
28	0.001	0.000	N/A	0.001	0.000	N/A	N/L
29	0.006	0.002	N/A	0.006	0.003	N/A	N/L
30	0.001	0.000	N/A	0.001	0.000	N/A	N/L
31	0.005	0.002	N/A	0.005	0.003	N/A	N/L
32	0.001	0.000	N/A	0.001	0.000	N/A	N/L
33	0.005	0.002	N/A	0.005	0.002	N/A	N/L
34	0.001	0.000	N/A	0.001	0.000	N/A	N/L
35	0.005	0.002	N/A	0.005	0.002	N/A	N/L
36	0.001	0.000	N/A	0.001	0.000	N/A	N/L
37	0.005	0.001	N/A	0.005	0.002	N/A	N/L
38	0.000	0.000	N/A	0.001	0.000	N/A	N/L
39	0.004	0.001	N/A	0.004	0.002	N/A	N/L
40	0.000	0.000	N/A	0.000	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Source Verification Data (Run time)

EUT: 16T2
Test category: Class-D per Ed. 4.0 (2014) (European limits)
Test date: 2020-5-12 Start time: 0:31:51 End time: 0:34:32
Test duration (min): 2.5 Data file name: H-000266.cts_data
Comment: Default Mode
Customer: TPV

Test Result: N/L Source qualification: Normal

Highest parameter values during test:

Voltage (Vrms):	230.09	Frequency(Hz):	50.00
I_Peak (Amps):	0.769	I_RMS (Amps):	0.153
I_Fund (Amps):	0.062	Crest Factor:	5.030
Power (Watts):	13.9	Power Factor:	0.398

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.092	0.460	20.03	OK
3	0.451	0.270	21.79	OK
4	0.058	0.460	12.55	OK
5	0.049	0.920	5.28	OK
6	0.033	0.460	7.26	OK
7	0.045	0.690	6.50	OK
8	0.015	0.460	3.34	OK
9	0.034	0.460	7.31	OK
10	0.016	0.460	3.45	OK
11	0.028	0.230	12.07	OK
12	0.012	0.230	5.28	OK
13	0.032	0.230	13.93	OK
14	0.009	0.230	3.75	OK
15	0.023	0.230	10.20	OK
16	0.009	0.230	3.91	OK
17	0.025	0.230	10.81	OK
18	0.016	0.230	7.04	OK
19	0.025	0.230	10.85	OK
20	0.011	0.230	4.90	OK
21	0.023	0.230	10.01	OK
22	0.005	0.230	1.98	OK
23	0.018	0.230	7.65	OK
24	0.006	0.230	2.60	OK
25	0.015	0.230	6.34	OK
26	0.004	0.230	1.78	OK
27	0.013	0.230	5.56	OK
28	0.004	0.230	1.93	OK
29	0.010	0.230	4.46	OK
30	0.005	0.230	2.26	OK
31	0.008	0.230	3.69	OK
32	0.005	0.230	1.96	OK
33	0.008	0.230	3.69	OK
34	0.005	0.230	2.31	OK
35	0.008	0.230	3.53	OK
36	0.004	0.230	1.63	OK
37	0.008	0.230	3.33	OK
38	0.003	0.230	1.37	OK
39	0.009	0.230	3.71	OK
40	0.003	0.230	1.21	OK

6. VOLTAGE FLUCTUATIONS & FLICKER TEST

6.1. Test Equipment

Same as Section 5.1.

6.2. Block Diagram of Test Setup

Same as Section 5.2.

6.3. Test Standard

EN 61000-3-3: 2013

6.4. Limits of Voltage Fluctuation and Flick

Test Item	Limit	Note
P _{st}	1.0	P _{st} means Short-term flicker indicator
P _{lt}	0.65	P _{lt} means long-term flicker indicator
T _{max}	500ms	T _{max} means maximum time that d(t) exceeds 3.3%
d _{max} (%)	4%	d _{max} means maximum relative voltage change.
d _c (%)	3.3%	d _c means relative steady-state voltage change.

6.5. EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

6.6. Operating Condition of EUT

Same as Section 5.6.

6.7. Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal conditions. During the flick measurement, the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

6.8. Test Results

PASS. (Test results are recorded in next page)

Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)

EUT: 16T2

Test category: All parameters (European limits)

Tested by: Kennen

Test Margin: 100

Test date: 2020-5-12

Start time: 0:10:27

End time: 0:20:54

Test duration (min): 10



Data file name: F-000265.cts_data

Comment: Running "H" Pattern And 1KHz Playing

Customer: TPV

Test Result: Pass

Status: Test Completed

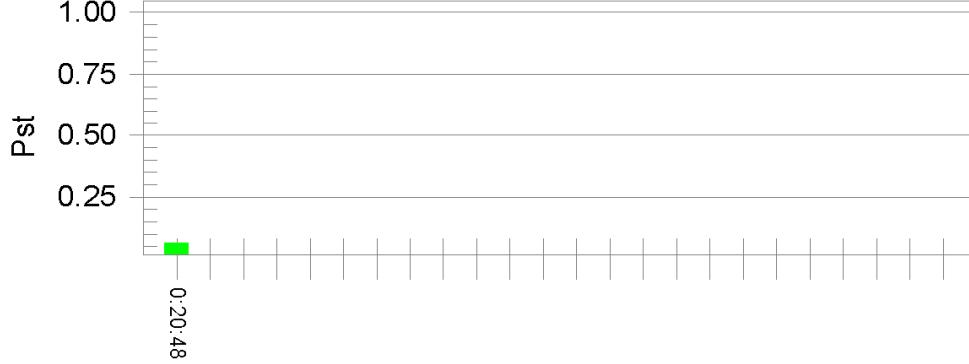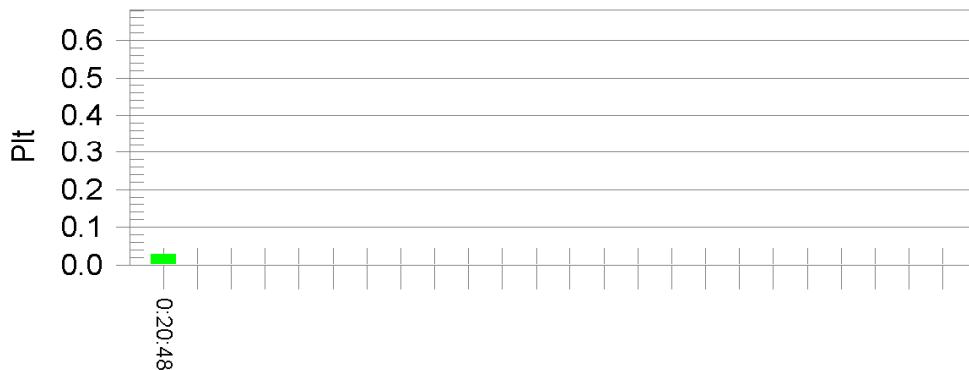Pst and limit lineEuropean LimitsPlt and limit line

Parameter values recorded during the test:

Vrms at the end of test (Volt): 229.68

T-max (mS):	0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest P_{st} (10 min. period):	0.064	Test limit:	1.000	Pass
Highest P_{lt} (2 hr. period):	0.028	Test limit:	0.650	Pass

7. IMMUNITY PERFORMANCE CRITERIA

Performance Level

Performance Level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level by its manufacturer or the requestor of the test, or the agreed between the manufacturer and the purchaser of the product.

Definition related to the performance level:

1. Based on the used product standard
2. Based on the declaration of the manufacturer, requestor or purchaser

For EN 55035

Performance criterion A:

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B:

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion C:

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

Performance criteria for audio output function


Performance criterion for all other devices	
Criteria A	The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be -20 dB or better.
Criteria B	Use the general performance criterion B.
Criteria C	Use the general performance criterion C

8. ELECTROSTATIC DISCHARGE IMMUNITY TEST

8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Room	AUDIX	N/A	N/A	Apr.16,19	3 Year
1.	ESD Tester	EM Test	Dito	P1723199429	Oct.25,19	1 Year

8.2. Block Diagram of Test Setup

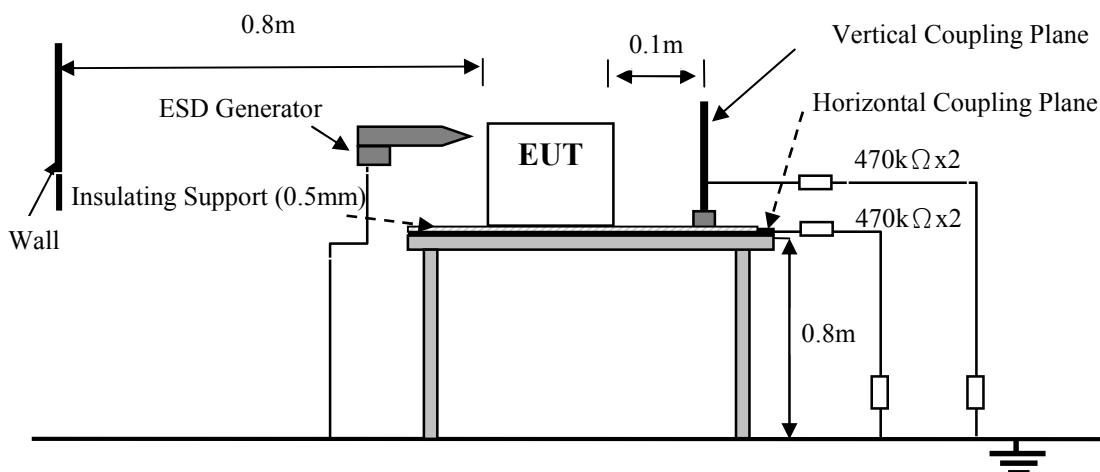

8.3. Test Standard

IEC 61000-4-2: 2008

(Severity for Air Discharge was Level 1 at ± 2 kV & Level 2 at ± 4 kV & Level 3 at ± 8 kV
for Contact Discharge was Level 2 at ± 4 kV)

8.4. Severity Levels and Performance Criterion

Severity Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)	Performance criterion
1.	2	2	B
2.	4	4	
3.	6	8	
4.	8	15	
X	Special	Special	

8.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

8.6. Operating Condition of EUT

Same as Conducted Emission test that listed in Section 3.6. except the test set up replaced by Section 8.2.

8.7. Test Procedure

8.7.1. Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed

8.7.2. Contact Discharge:

All the procedure was same as Section 8.7.1. except that the generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

8.7.3. Indirect discharge for horizontal coupling plane:

At least 10 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

8.7.4. Indirect discharge for vertical coupling plane:

At least 10 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

8.8. Test Results



PASS. (Test results are recorded in next page)

Electrostatic Discharge Test Results

Audix Technology (Shenzhen) Co., Ltd.


EUT	LCD MONITOR						Model No.	16T2								
Test Date	May.14, 2020						Temperature	22.9±0.6°C								
Input Power	AC 230V/50Hz; AC 100V/50Hz						Humidity	50±3%								
Test Mode	PC Mode						Pressure	101.5±1kPa								
Tested By	Kennen						Result	Pass								
Air Discharge	Voltage Level Kv / Discharge per polarity 10 / Observation															
Test Location	+2	-2	+4	-4	+8	-8	---	Comments								
Type-C Ports(1)	A	A	A	A	B*	B*	---	---								
Micro USB Port(2)	A	A	A	A	B*	B*	---	---								
Audio Out Port(3)	A	A	A	A	A	A	---	---								
Slots(4)	ND	ND	ND	ND	ND	ND	---	---								
Screen(5)	ND	ND	ND	ND	B*	B*	---	---								
LED (6)	ND	ND	ND	ND	ND	ND	---	---								
Buttons(7)	ND	ND	ND	ND	A	A	---	---								
Keylock(8)	ND	ND	ND	ND	ND	ND	---	---								
Contact Discharge	Voltage Level Kv / Discharge per polarity 10 / Observation															
Test Location	+4	-4	---	---	---	---	---	Comments								
Indirect Contact	Voltage kV Level / Discharge per polarity 10 / Observation															
Test Location	+4	-4	---	---	---	---	---	Comments								
VCP Front	A	A	---	---	---	---	---	---								
VCP Right	A	A	---	---	---	---	---	---								
VCP Left	A	A	---	---	---	---	---	---								
VCP Back	A	A	---	---	---	---	---	---								
HCP Bottom	A	A	---	---	---	---	---	---								
Additional Notes																
Measurement Points	Please refer to the Photos of ESD Test Points															
ND=No Discharge; Meets criteria but unable to obtain an electrostatic discharge (ESD) at this test point.																
Note: The class "B*" means the screen of EUT will be twinkle during test, but it can recover by itself after test.																

After discharge to the ungrounded part of EUT, it needs the bleeder resistor to remove the charge prior to next ESD pulse.
Discharge was considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).

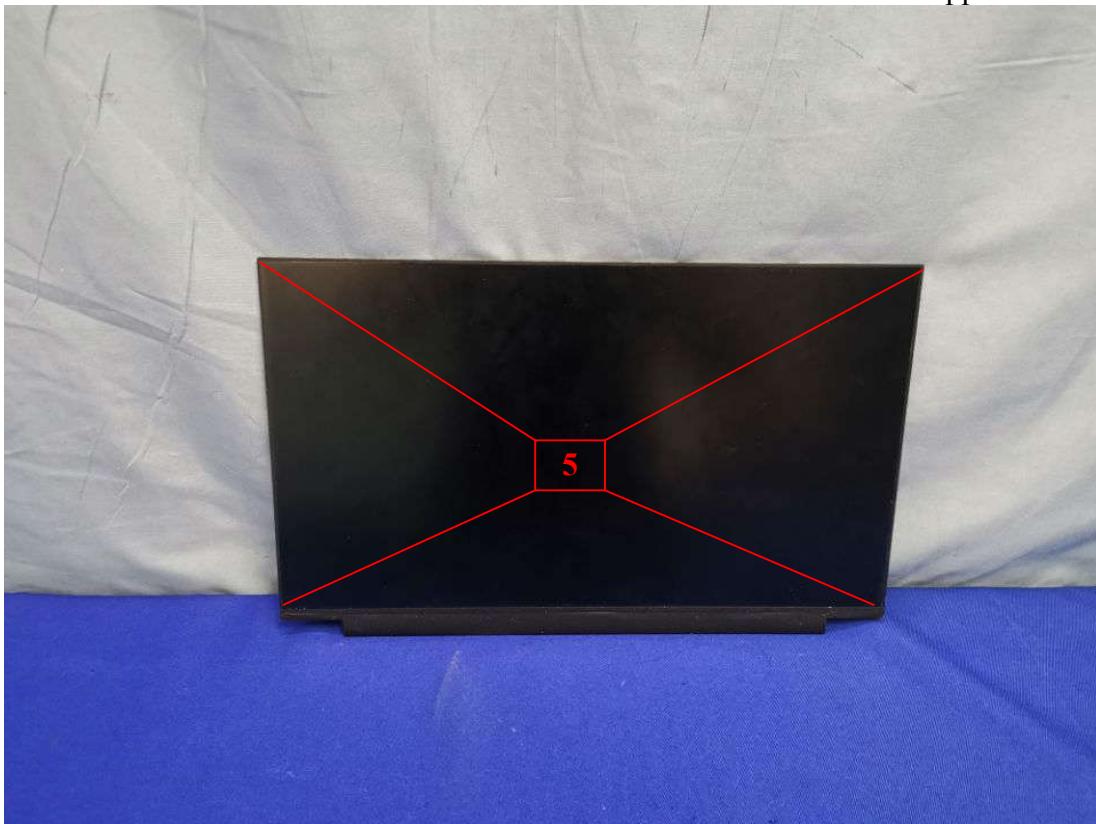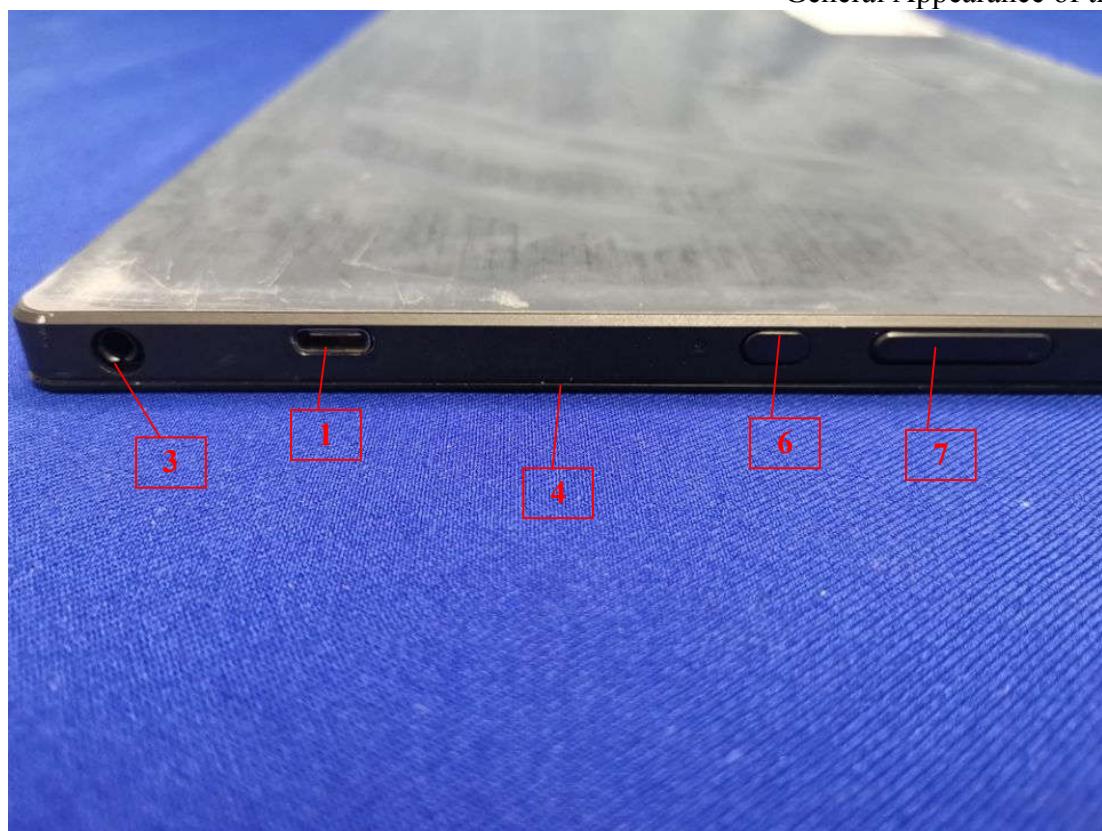8.9.ESD TEST POINT PHOTOS**ESD Figure 1**
General Appearance of the EUT**ESD Figure 2**
General Appearance of the EUT

ESD Figure 3

General Appearance of the EUT

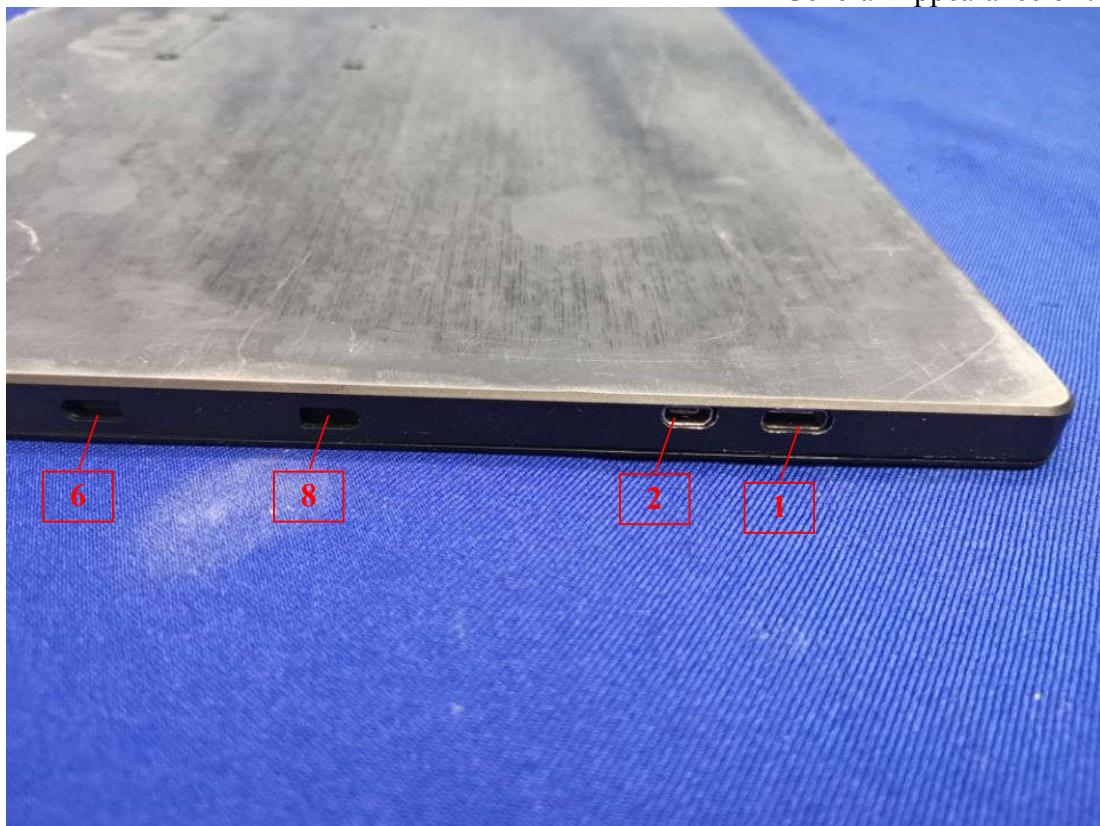

9. RF FIELD STRENGTH SUSCEPTIBILITY TEST

9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	RS Chamber(FU)	AUDIX	N/A	N/A	Apr.13,20	1 Year
2.	RS Chamber(SE)	AUDIX	N/A	N/A	Apr.16,19	3 Year
3.	MXG Analog Signal Generator	Agilent	N5181A	MY49061013	Oct.13,19	1 Year
4.	Amplifier	R flight	NTWPA-00810 200E	19053131	Apr.12,20	1 Year
5.	Power Meter	Anritsu	ML2487A	6K00002472	Apr.11,20	1 Year
6.	Power Sensor	Anritsu	MA2491A	033005	Apr.11,20	1 Year
7.	Log-periodic Antenna	A&R	AT1080	16512	NCR	NCR
8.	RF Cable	STORM	MFR-57500	NO.2	NCR	NCR
9.	RF Cable	EMCI	EMCCFD400-NM-NM-5000	190410	NCR	NCR
10.	Audio Analyzer	Rohde & Schwarz	UPL	100687	Apr.22,20	1 Year
11.	Test Software	AUDIX	i2	3.2010-1-7	N/A	N/A

Notes: NCR means no calibration required(calibrated with system).

Notes: N/A means Not applicable.


For frequency range above 1GHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	RS Chamber(FU)	AUDIX	N/A	N/A	Apr.13,20	1 Year
2.	RF Chamber(FU)	AUDIX	N/A	N/A	Apr.13,20	1 Year
3.	RS Chamber(SE)	AUDIX	N/A	N/A	Apr.16,19	3 Year
4.	MXG Analog Signal Generator	Agilent	N5181A	MY49061013	Oct.13,19	1 Year
5.	Amplifier	R flight	NTWPA-1060 100E	19053151	Apr.12,20	1 Year
6.	MICROWAVE HORN ANTENNA	SCHWARZBEC K	STLP9149	00600	NCR	NCR
7.	Power Meter	Anritsu	ML2487A	6K00002472	Apr.11,20	1 Year
8.	Power Sensor	Anritsu	MA2491A	033005	Apr.11,20	1 Year
9.	RF Cable	STORM	MFR-57500	NO.2	NCR	NCR
10.	RF Cable	EMCI	EMCCFD400-NM-NM-5000	190410	NCR	NCR
11.	Audio Analyzer	Rohde & Schwarz	UPL	100687	Apr.22,20	1 Year
12.	Test Software	AUDIX	i2	3.2010-1-7	N/A	N/A


Notes: NCR means no calibration required (calibrated with system).

Notes: N/A means Not applicable.

9.2. Block Diagram of Test Setup

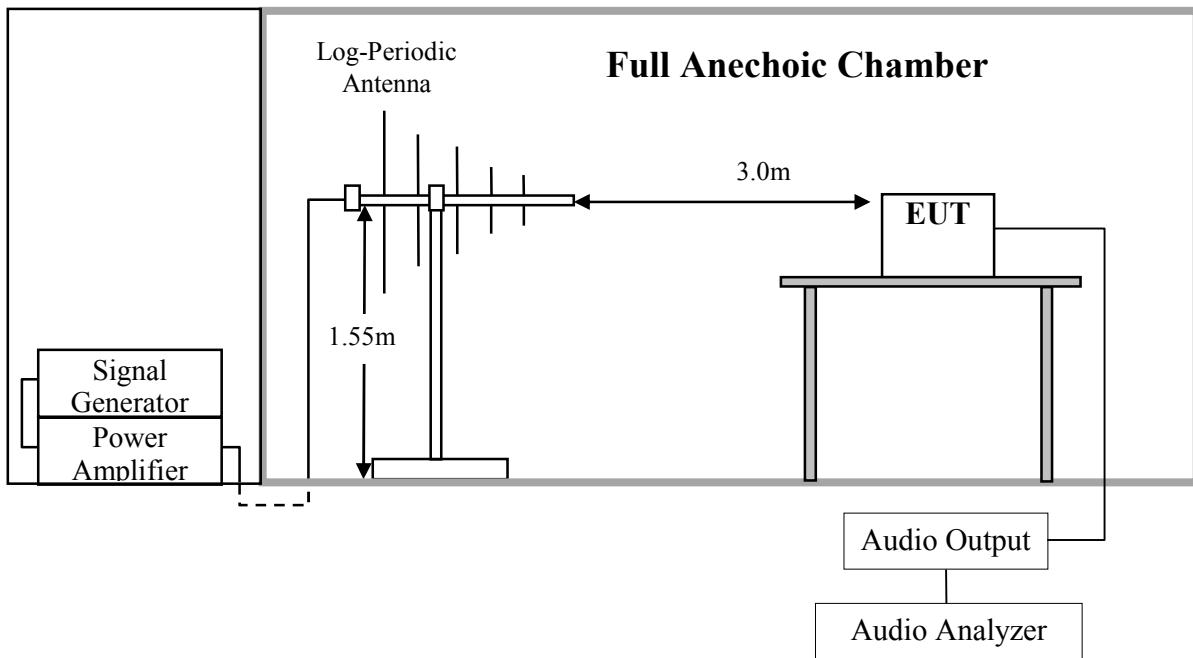

For frequency range above 1GHz

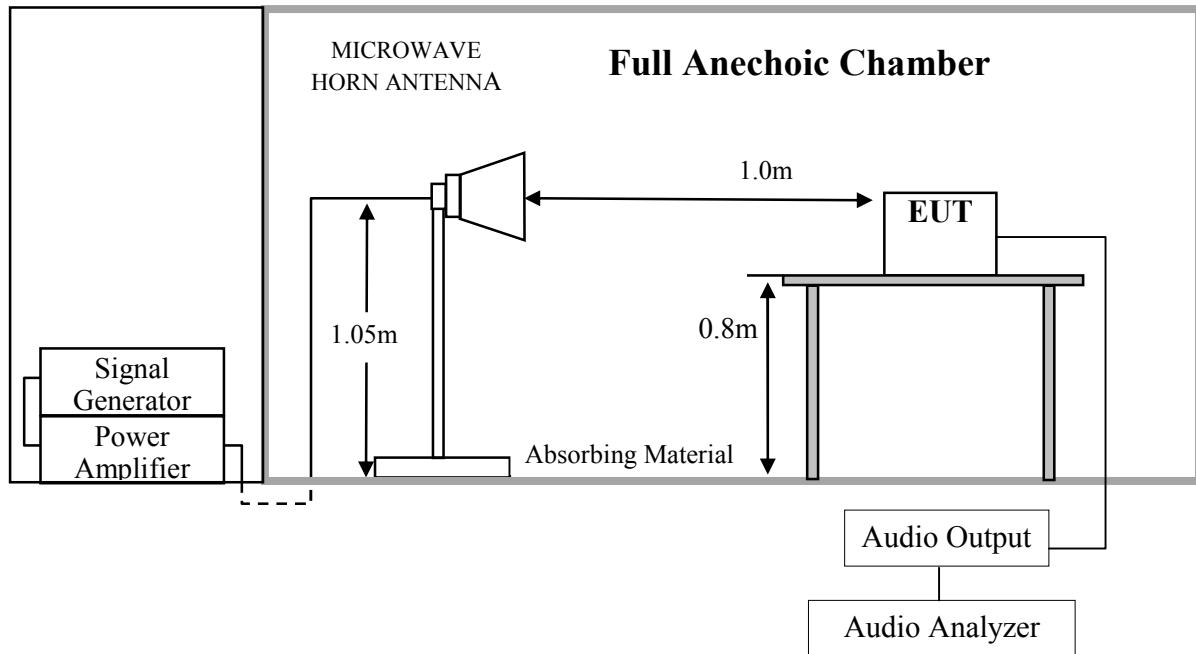

9.3. Test Standard

IEC 61000-4-3: 2010
(Severity Level: 2 at 3V / m)

9.4. Severity Levels and Performance Criterion

Severity Level	Test Field Strength V/m	Performance Criteria
1.	1	A
2.	3	
3.	10	
X.	Special	

9.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

9.6. Operating Condition of EUT

Same as Conducted Emission test that listed in Section 3.6. Except the test set up replaced by Section 9.2.

9.7. Test Procedure

Testing was performed in a fully anechoic chamber as recommended by IEC 61000-4-3. The EUT was placed on an 80cm high non-conductive table located in the area of field uniformity. The radiating antenna was placed 3m & 1m in front of the EUT and Support system, and dwell time of the radiated interference was controlled by an automated, computer-controlled system. The signal source was stepped through the applicable frequency range at a rate no faster than 1% of the fundamental. The signal was amplitude modulated 80% over the frequency range 80MHz-1GHz; 1.8GHz; 2.6GHz; 3.5GHz; 5GHz at a level of 3V/m. The dwell time was set at 3s. Field presence was monitored during testing via a field probe placed in close proximity to the EUT. Throughout testing, the EUT was closely monitored for signs of susceptibility. The test was performed with the antennae oriented in both a horizontal and vertical polarization.

All the scanning conditions are as follows:

Test conditions	
Frequency	80MHz-1GHz; 1.8GHz; 2.6GHz; 3.5GHz; 5GHz
Frequency increments step	1% of momentary used
Test level	3V/m (un-modulated)
Dwell time	3s
Test signal	80% amplitude modulated by 1kHz sinusoidal audio signal

9.8. Test Results

PASS. (Test results are recorded in next page)

RF Field Strength Susceptibility Test Results

Audix Technology(Shenzhen) Co.,Ltd.

EUT	LCD MONITOR	Model No.	16T2		
Test Date	May.11, 2020	Temperature	23.2±0.6°C		
Input Power	AC 230V/50Hz; AC 100V/50Hz	Humidity	51±3%		
Test Mode	PC Mode	Pressure	101.7±1kPa		
Tested By	Hogen	Result	Pass		
		Test Field Strength	3V/m		
Modulation:	<input checked="" type="checkbox"/> AM 1kHz 80%	<input type="checkbox"/> Pulse	<input type="checkbox"/> none		
	Frequency Range : 80MHz-1GHz; 1.8GHz; 2.6GHz; 3.5GHz; 5GHz				
	Horizontal		Vertical		Result
	Required	Observation	Required	Observation	(Pass / Fail)
Front	A	A	A	A	Pass
Right	A	A	A	A	Pass
Rear	A	A	A	A	Pass
Left	A	A	A	A	Pass


10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

10.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Room	AUDIX	N/A	N/A	Apr.17,19	3 Year
2.	Burst Tester	TESEQ	NSG3025	28017	Jun.30,19	1 Year
3.	Test Software	Schaffner	Win3025	V 4.00	N/A	N/A

Note:N/A means Not applicable.

10.2. Block Diagram of Test Setup

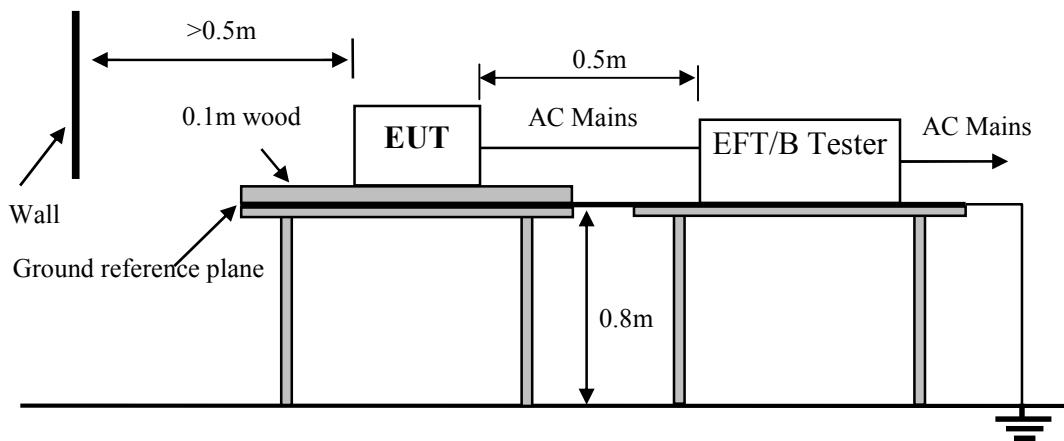

10.3. Test Standard

IEC 61000-4-4: 2012

(Severity Level: Level 1 at 0.5kV, Level 2 at 1kV)

10.4. Severity Levels and Performance Criterion

Open Circuit Output Test Voltage ±10%			
Severity Level	On Power Supply Lines	On I/O (Input / Output) Signal data and control lines	Performance criterion
1.	0.5 kV	0.25 kV	B
2.	1 kV	0.5 kV	
3.	2 kV	1 kV	
4.	4 kV	2 kV	
X	Special	Special	

10.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

10.6. Operating Condition of EUT

Same as Conducted Emission test that listed in Section 3.6. except the test set up replaced by Section 10.2.

10.7 Test Procedure

The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support $0.1m \pm 0.01m$ thick. The ground reference plane was $1m * 1m$ metallic sheet with 0.65mm minimum thickness. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

10.7.1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device that couples the EFT interference signal to AC power lines. Both positive transients and negative transients of test voltage were applied during compliance test and the duration of the test can't less than 1min.

10.7.2. For signal lines and control lines ports:

It's unnecessary to test.

10.7.3. For DC input and DC output power ports:

It's unnecessary to test.

10.8 Test Results

PASS. (Test results are recorded in next page)

Electrical Fast Transient/Burst Test Results

Audix Technology (Shenzhen) Co., Ltd.

EUT	LCD MONITOR	Model No.	16T2
Test Date	May.14, 2020	Temperature	23.3±0.6°C
Input Power	AC 230V/50Hz; AC 100V/50Hz	Humidity	50±3%
Test Mode	PC Mode	Pressure	101.7±1kPa
Tested By	Kennen	Result	Pass

Repetition Frequency : 5 kHz Burst Duration : 15ms Burst Period: 300ms

Inject Time(s): 120s

Inject Line(Inject Method): AC Mains(Direct) DC Supply Signal(Capacitive Clamp)

Line	Test Voltage	Performance			Result (Pass/Fail)
		Required	Observation(+)	Observation(-)	
L	0.5kV	B	B*	B*	Pass
	1kV	B	B*	B*	Pass
N	0.5kV	B	B*	B*	Pass
	1kV	B	B*	B*	Pass
PE	0.5kV	B	B*	B*	Pass
	1kV	B	B*	B*	Pass
L N	0.5kV	B	B*	B*	Pass
	1kV	B	B*	B*	Pass
L PE	0.5kV	B	B*	B*	Pass
	1kV	B	B*	B*	Pass
N PE	0.5kV	B	B*	B*	Pass
	1kV	B	B*	B*	Pass
L N PE	0.5kV	B	B*	B*	Pass
	1kV	B	B*	B*	Pass
Signal Line	---	---	---	---	---

Remark: The class "B*" means the screen of EUT will be twinkle during test, but it can recover by itself after test.


11. SURGE TEST

11.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Room	AUDIX	N/A	N/A	Apr.17,19	3 Year
2.	Transient Test System	EMC PARTNER	TRANSIENT 2000	TRA2006 F-S-T-D-R -1500	Apr,11,20	1 Year
3.	Test Software	EMC PARTNER	Genecs	V3.25	N/A	N/A

Note:N/A means Not applicable.

11.2. Block Diagram of Test Setup

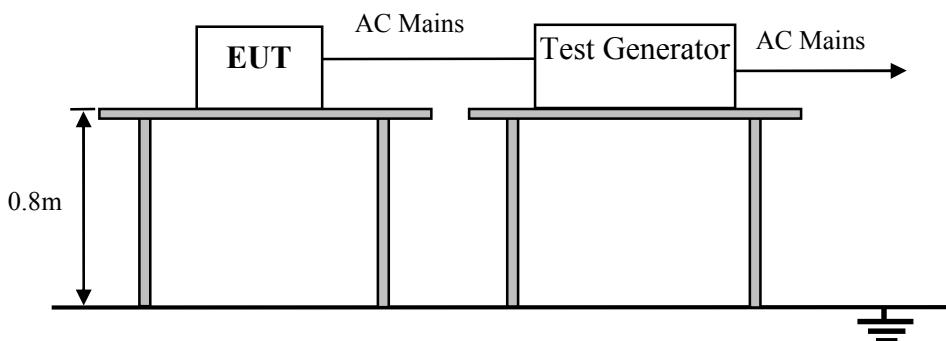

11.3. Test Standard

IEC 61000-4-5: 2014

(Severity Level: Line to Line was Level 2 at 1kV,
Line to Ground Level 2 at 1kV& Level 3 at 2kV)

11.4. Severity Levels and Performance Criterion

Severity Level	Open-Circuit Test Voltage kV	Performance criterion
1	0.5	
2	1.0	
3	2.0	
4	4.0	B
*	Special	

11.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

11.6. Operating Condition of EUT

Same as Conducted Emission test that listed in Section 3.6. except the test set up replaced by Section 11.2

11.7. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 11.2.
- 2) For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

11.8. Test Results

PASS. (Test results are recorded in next page)

Surge Immunity Test Results

Audix Technology (Shenzhen) Co., Ltd.

EUT	LCD MONITOR	Model No.	16T2
Test Date	May.14, 2020	Temperature	23.2±0.6°C
Input Power	AC 230V/50Hz; AC 100V/50Hz	Humidity	51±3%
Test Mode	PC Mode	Pressure	101.6±1kPa
Tested By	Kennen	Result	Pass

Repetition: 5 times per test Interval:60 Seconds

Line : AC Mains DC Supply Signal(LAN)

Location	Volt	1kV			2kV			Result
		Performance			Performance			
	Phase	Required	+	-	Required	+	-	(Pass/Fail)
L-N	0°	B	A	A	---	---	---	Pass
	90°	B	A	A	---	---	---	Pass
	180°	B	A	A	---	---	---	Pass
	270°	B	A	A	---	---	---	Pass
L-PE	0°	B	A	A	B*	B*	B*	Pass
	90°	B	A	A	B*	B*	B*	Pass
	180°	B	A	A	B*	B*	B*	Pass
	270°	B	A	A	B*	B*	B*	Pass
N-PE	0°	B	A	A	B*	B*	B*	Pass
	90°	B	A	A	B*	B*	B*	Pass
	180°	B	A	A	B*	B*	B*	Pass
	270°	B	A	A	B*	B*	B*	Pass
Signal Line	---	---	---	---	---	---	---	---

Remark: The class “B*” means the screen of EUT will be twinkle during test, but it can recover by itself after test.

12. CONTINUOUS CONDUCTED DISTURBANCE


12.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	MXG Analog Signal Generator	Agilent	N5181A	MY49061013	Oct.13,19	1 Year
2.	Amplifier	AR	100A250	19368	Oct.13,19	1 Year
3.	Power meter	HP	436A	2016A07891	Apr.11,20	1 Year
4.	Power sensor	Agilent	8482B	MY41090514	Apr.11,20	1 Year
5.	CDN	FCC	FCC-801-M 3-25A	07045	Apr.11,20	1 Year
6.	CDN	TESEQ	CDN M016	34609	Apr.12,20	1 Year
7.	Attenuator	Weinschel	40-6-34	LJ092	Apr.12,20	1 Year
8.	Terminator	Hubersuhner	50Ω	No.3	Apr.12,20	1 Year
9.	RF Cable	MICABLE	A04-07-07- 7M	09111341	NCR	NCR
10.	RF Cable	STORM	MFR-57500	NO.2	NCR	NCR
11.	RF Cable	STORM	MFR-57500	NO.3	NCR	NCR
12.	Test Software	AUDIX	i2	3.2010-1-7	N/A	N/A
13.	Audio Analyzer	Rohde & Schwarz	UPL	100687	Apr.22,20	1 Year

Notes: NCR means no calibration required (calibrated with system).

Notes: N/A means Not applicable.

12.2. Block Diagram of Test Setup

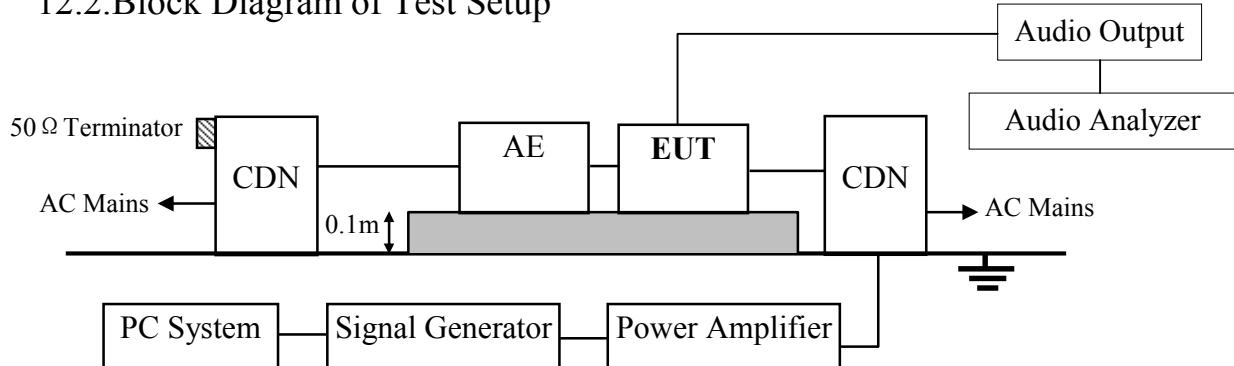

12.3. Test Standard

IEC 61000-4-6: 2013

12.4. Severity Levels and Performance Criterion

Severity Level	Voltage Level (e.m.f.) V	Performance criterion
1	1	A
2	3	
3	10	
X	Special	

12.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

12.6. Operating Condition of EUT

Same as Conducted Emission test that listed in Section 3.6. except the test set up replaced by Section 12.2.

12.7. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 12.2.
- 2) Let the EUT work in test mode and measure it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 0.150MHz to 10MHz using 3V signal level, from 10MHz to 30MHz using 3V to 1V signal level, from 30MHz to 80MHz using 1V signal level and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 9) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

12.8. Test Results

PASS. (Test results are recorded in next page)

Continuous Conducted disturbance Test Results

Audix Technology (Shenzhen)Co.,Ltd.


EUT	LCD MONITOR		Model No.		16T2
Test Date	May.11, 2020		Temperature		23.2±0.6°C
Input Power	AC 230V/50Hz; AC 100V/50Hz		Humidity		50±3%
Test Mode	PC Mode		Pressure		101.6±1kPa
Tested By	Hogen		Result		Pass
Frequency Range (MHz)	Injected Position	Voltage Level (e.m.f.)	Required	Observation	Result (Pass / Fail)
0.15 ~ 10	AC Main	3V	A	A	PASS
10 ~ 30	AC Main	3V ~ 1V	A	A	PASS
30 ~ 80	AC Main	1V	A	A	PASS
Modulation Signal:1kHz 80% AM					
Dwell time: 3s					

13. MAGNETIC FIELD IMMUNITY TEST

13.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	H/F Room	AUDIX	N/A	N/A	Apr.16,19	3 Year
2.	Magnetic Field Tester	HAEFELY	Mag100.1	083858-10	Apr.29,20	1 Year
3.	Line Disturbances Tester	HAEFELY	PLINE 1610	083690-05	Apr.11,20	1 Year

13.2. Block Diagram of Test Setup

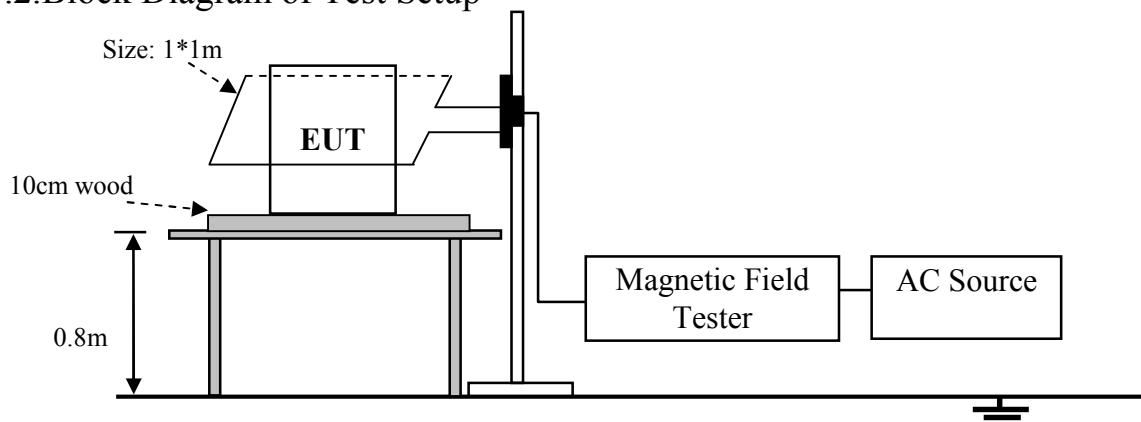

13.3. Test Standard

IEC 61000-4-8: 2009
(Severity Level 1 at 1A/m)

13.4. Severity Levels and Performance Criterion

Severity Level	Magnetic Field Strength A/m	Performance criterion
1.	1	A
2.	3	
3.	10	
4.	30	
5.	100	
X.	Special	

13.5. EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

13.6. Operating Condition of EUT

Same as Conducted Emission test that listed in Section 3.6. except the test set up replaced by Section 13.2.

13.7. Test Procedure

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m) and shown in Section 13.2. The induction coil was then rotated by 90° in order to expose the EUT to the test field with different orientations.

13.8. Test Results

PASS. (Test results are recorded in next page)

Magnetic Field Immunity Test Results

Audix Technology (Shenzhen) Co., Ltd.


EUT	LCD MONITOR		Model No.	16T2	
Test Date	May.13, 2020		Temperature	23.3±0.6°C	
Input Power	AC 230V/50Hz; AC 100V/50Hz		Humidity	50±3%	
Test Mode	PC Mode		Pressure	101.6±1kPa	
Tested By	Hogen		Result	Pass	
Test Level	Testing Duration	Coil Orientation	Required	Observation	Result (Pass/Fail)
1A/m	5 min / coil	X-axis	A	A	PASS
1A/m	5 min / coil	Y-axis	A	A	PASS
1A/m	5 min / coil	Z-axis	A	A	PASS

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	H/F Room	AUDIX	N/A	N/A	Apr.16,19	3 Year
2.	Line Disturbances Tester	HAEFELY	PLINE 1610	083690-05	Apr.11,20	1 Year

14.2. Block Diagram of Test Setup

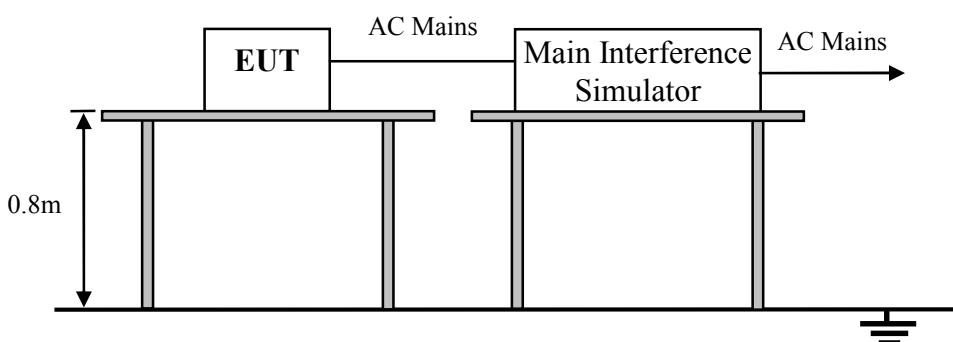

14.3. Test Standard

IEC 61000-4-11: 2004, IEC 61000-4-11: 2004+A1: 2017

14.4. Severity Levels and Performance Criterion

Test Level %U _T	Voltage dip and short interruptions %U _T	Duration (in period)	Performance Criterion
0	100	250/300 ^{Note}	C
0	100	0.5	B
70	30	25/30 ^{Note}	C

Note: "25/30 Cycles" means "25 cycles for 50Hz test" and "30 cycles for 60Hz test".

"250/300 Cycles" means "250 cycles for 50Hz test" and "300 cycles for 60Hz test"

14.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

14.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 14.2.

14.7. Test Procedure

- 1) The EUT and test generator were setup as shown on Section 14.2.
- 2) The interruption is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

14.8. Test Results

PASS. (Test results are recorded in next page)

Voltage Dips And Interruptions Test Results

Audix Technology (Shenzhen) Co., Ltd.

EUT	LCD MONITOR	Model No.	16T2; 16T2*****
Test Date	Apr.10, 2020	Temperature	22.9±0.6°C
Input Power	AC 230V/50Hz & AC 100V/50Hz	Humidity	49±3%
Test Mode	PC Mode	Pressure	101.5±1kPa
Tested By	Hogen	Result	Pass

AC 230V/50Hz

Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in period)	Phase Angle	Required	Observation	Result
						(Pass / Fail)
0	100	0.5P	0°·90°·180°·270°	B	A	PASS
70	30	25P	0°·90°·180°·270°	C	A	PASS
0	100	250P	0°·90°·180°·270°	C	A	PASS

AC 100V/50Hz

Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in period)	Phase Angle	Required	Observation	Result
						(Pass / Fail)
0	100	0.5P	0°·90°·180°·270°	B	A	PASS
70	30	25P	0°·90°·180°·270°	C	A	PASS
0	100	250P	0°·90°·180°·270°	C	A	PASS

Note 1: U_T is the rated voltage for the equipment.

Note 2: The frequency of the test voltage shall be within ±2% of the rated frequency, the output voltage shall be within ±5% of the rated voltage.



Remark: The Class “C*”means the EUT black screen when power off and data transmitting interrupted, it need to recover to normal by manual.

15. PHOTOGRAPHS



15.1.Photos of Power Line Conducted Emission Test



15.2.Photos of Radiated Emission Test (In 10m Anechoic Chamber)

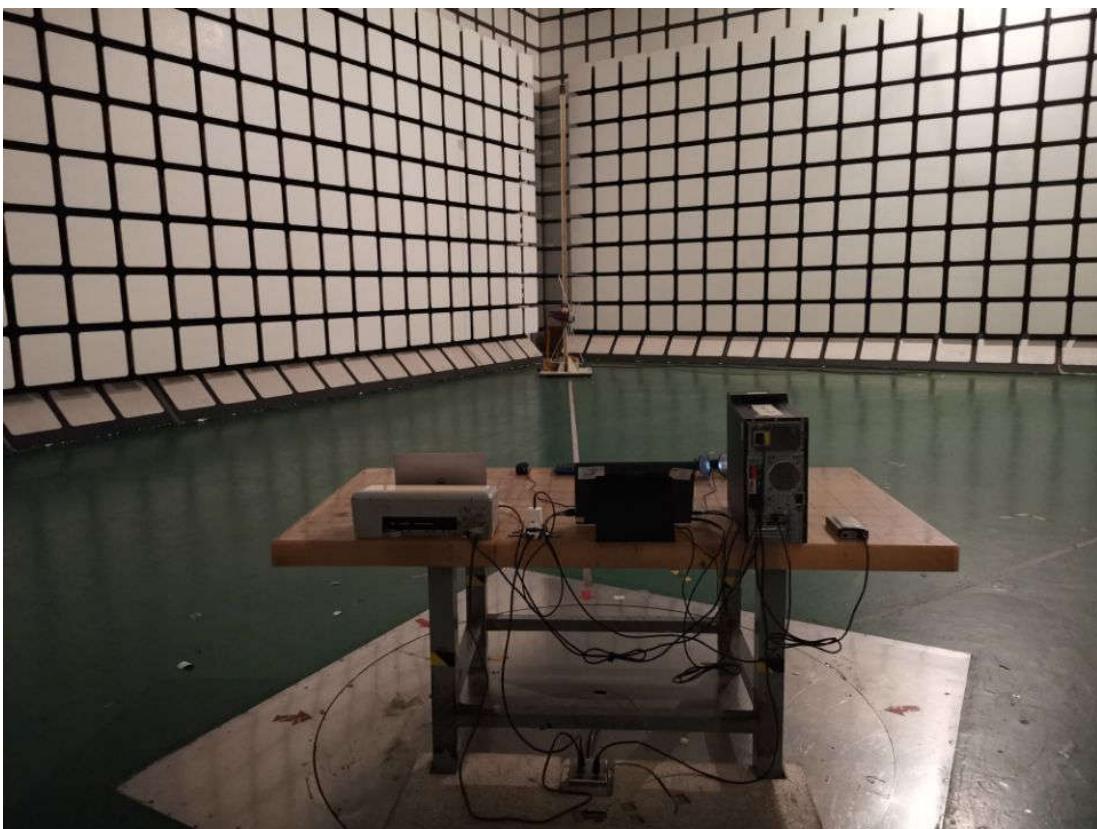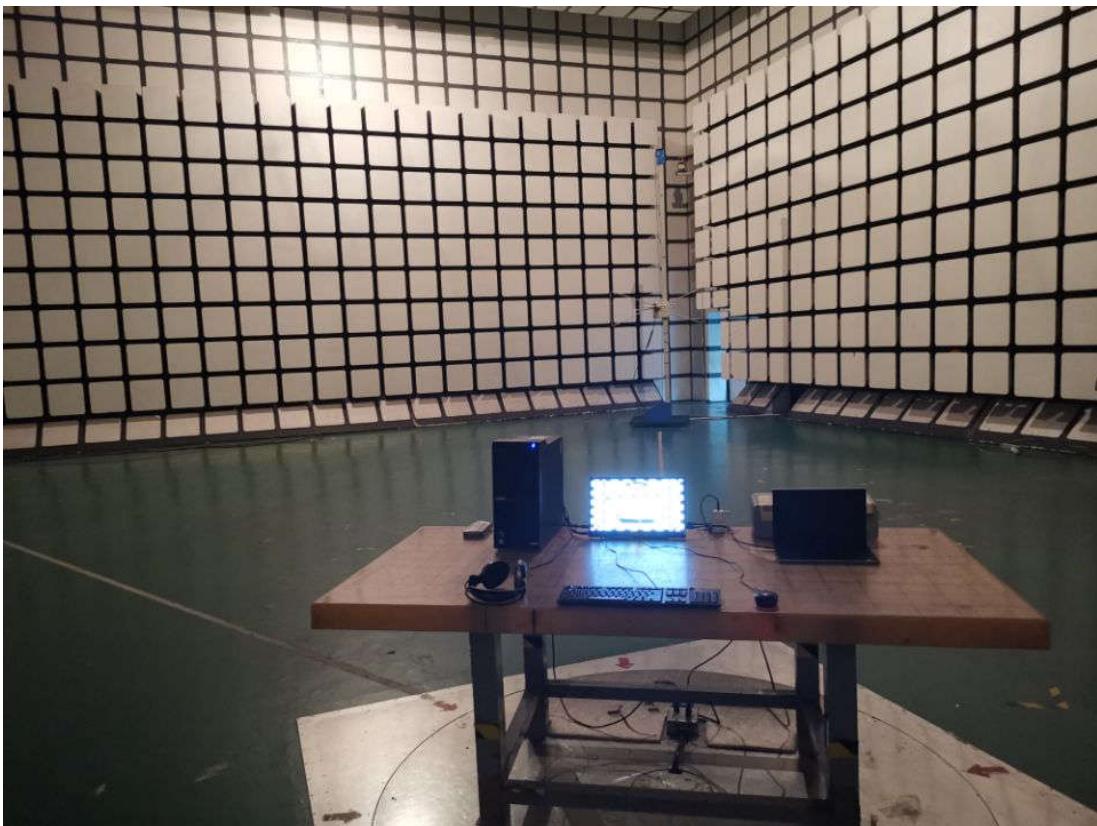

In 10m Anechoic Chamber Test 1GHz – 6GHz

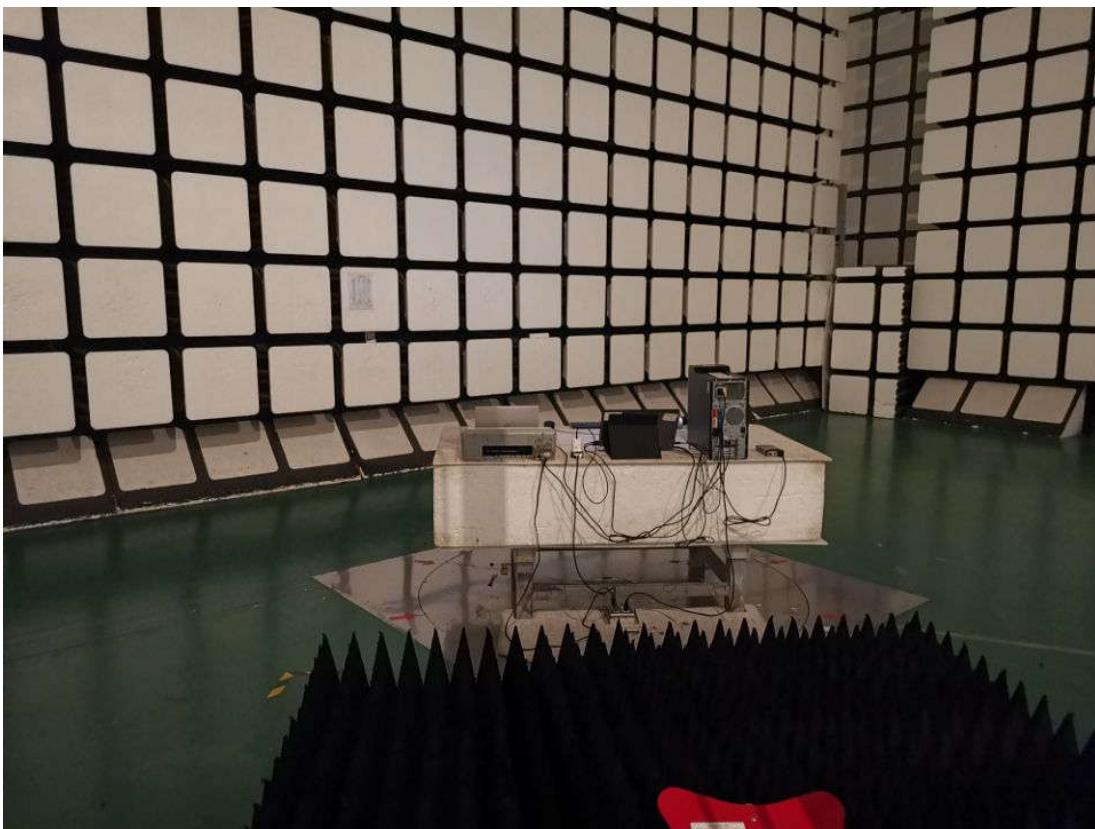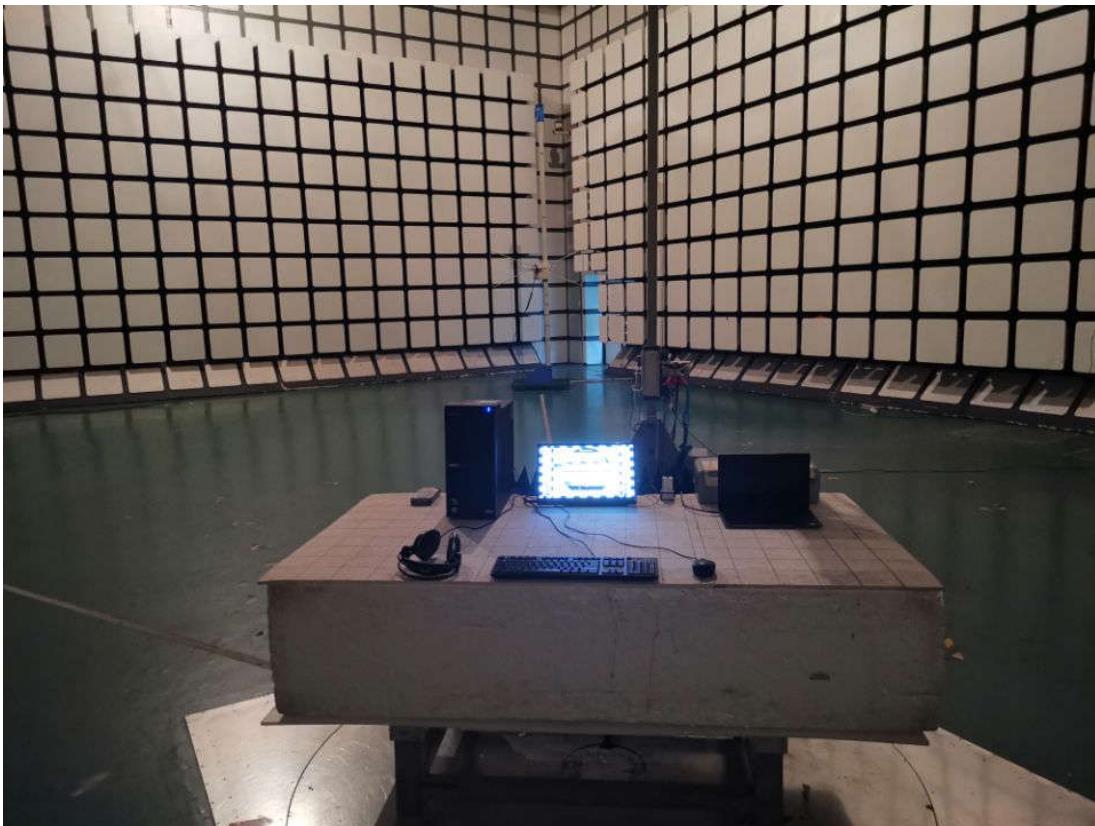

15.3.Photo of Harmonic / Flicker Test**15.4.Photos of Electrostatic Discharge Immunity Test**



15.5.Photo of RF Strength Susceptibility Test




For frequency range above 1GHz



15.6.Photo of Electrical Fast Transient/Burst Immunity Test



15.7.Photo of Surge Test

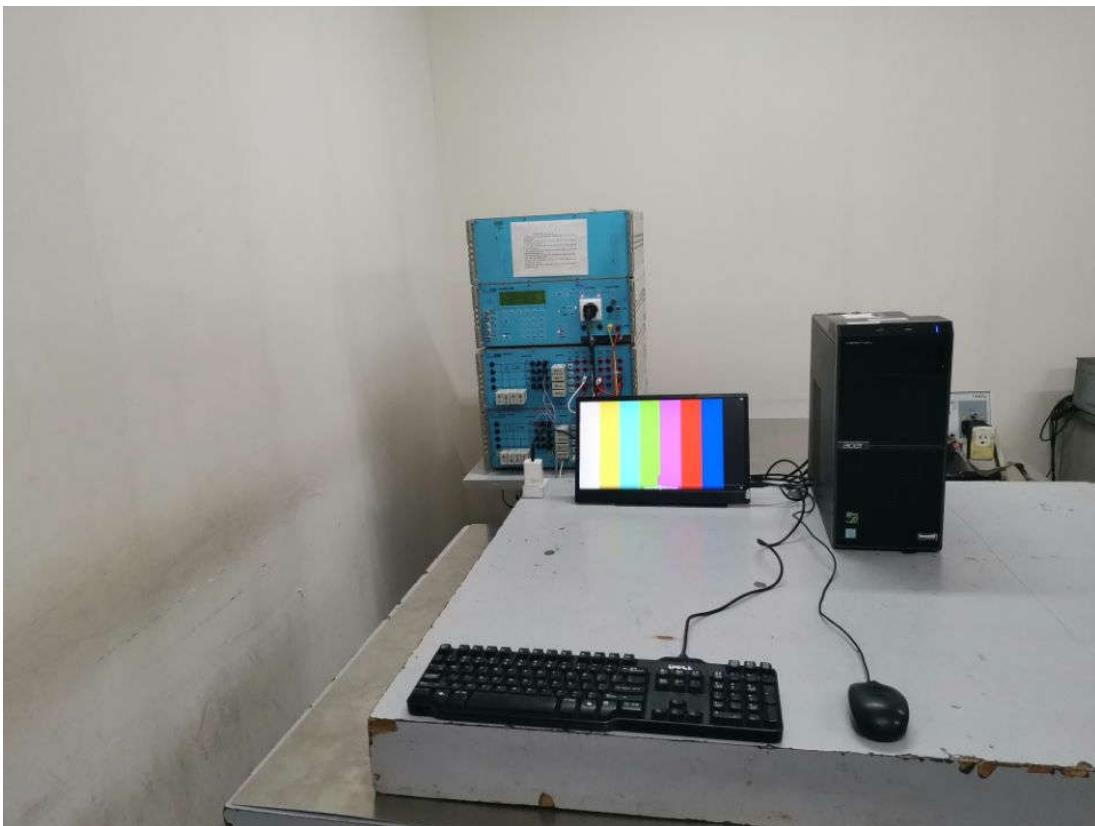

15.8.Photo of Continuous Conducted disturbance Test



15.9.Photo of Magnetic Field Test



15.10. Photo of Voltage Dips and interruptions test



THE END
