



CE&UKCA EMC Test Report

Project No. : 2412C173A
Equipment : LCD Monitor
Brand Name : N/A
Model Name : 24G4H
Series Model : **24G4*****(*=0-9,A-Z,a-z,+,-,/,\ or blank), 24G4HX
Applicant : TPV Electronics (Fujian) Co., Ltd.
Address : Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China
Date of Receipt : Dec. 11, 2024
Date of Test : Dec. 12, 2024 ~ Jan. 06, 2025
Issued Date : Jan. 17, 2025
Report Version : R00
Test Sample : Engineering Sample No.: DG2024121127
Standard(s) : Please refer to Page 2.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Albe Zhou

Prepared by : _____
Albe Zhou

Kang Zhang

Approved by : _____
Kang Zhang

Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City,
Guangdong, People's Republic of China

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Standard(s) : EN 55032:2015
EN 55032:2015+A11:2020
EN 55032:2015+A1:2020
CISPR 32:2015+AMD1:2019
AS/NZS CISPR 32:2015+AMD1:2020
EN 61000-3-2:2014
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013
EN 61000-3-3:2013+A1:2019
EN 61000-3-3:2013+A2:2021
EN 55035:2017/CISPR 35:2016
EN 55035:2017+A11:2020

BS EN 55032:2015
BS EN 55032:2015+A11:2020
BS EN 55032:2015+A1:2020
BS EN 61000-3-2:2014
BS EN IEC 61000-3-2:2019+A1:2021
BS EN 61000-3-3:2013
BS EN 61000-3-3:2013+A1:2019
BS EN 61000-3-3:2013+A2:2021
BS EN 55035:2017
BS EN 55035:2017+A11:2020

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	8
1 . SUMMARY OF TEST RESULTS	9
1.1 TEST FACILITY	11
1.2 MEASUREMENT UNCERTAINTY	11
1.3 TEST ENVIRONMENT CONDITIONS	12
2 . GENERAL INFORMATION	13
2.1 GENERAL DESCRIPTION OF EUT	13
2.2 DESCRIPTION OF TEST MODES	14
2.3 EUT OPERATING CONDITIONS	16
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
2.5 DESCRIPTION OF SUPPORT UNITS	16
3 . EMC EMISSION TEST- EN 55032:2015	18
3.1 RADIATED EMISSIONS UP TO 1 GHZ	18
3.1.1 LIMITS	18
3.1.2 MEASUREMENT INSTRUMENTS LIST	18
3.1.3 TEST PROCEDURE	19
3.1.4 DEVIATION FROM TEST STANDARD	19
3.1.5 TEST SETUP	19
3.1.6 MEASUREMENT DISTANCE	20
3.1.7 TEST RESULTS	21
3.2 RADIATED EMISSIONS ABOVE 1 GHZ	23
3.2.1 LIMITS	23
3.2.2 MEASUREMENT INSTRUMENTS LIST	23
3.2.3 TEST PROCEDURE	24
3.2.4 DEVIATION FROM TEST STANDARD	24
3.2.5 TEST SETUP	24
3.2.6 MEASUREMENT DISTANCE	25
3.2.7 TEST RESULTS	26
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	28
3.3.1 LIMITS	28
3.3.2 MEASUREMENT INSTRUMENTS LIST	28
3.3.3 TEST PROCEDURE	28
3.3.4 DEVIATION FROM TEST STANDARD	28
3.3.5 TEST SETUP	29
3.3.6 TEST RESULTS	30
4 . EMC EMISSION TEST- EN 55032:2015+A11:2020	32
4.1 RADIATED EMISSIONS UP TO 1 GHZ	32
4.1.1 LIMITS	32
4.1.2 MEASUREMENT INSTRUMENTS LIST	32

Table of Contents	Page
4.1.3 TEST PROCEDURE	33
4.1.4 DEVIATION FROM TEST STANDARD	33
4.1.5 TEST SETUP	33
4.1.6 MEASUREMENT DISTANCE	34
4.1.7 TEST RESULTS	35
4.2 RADIATED EMISSIONS ABOVE 1 GHZ	45
4.2.1 LIMITS	45
4.2.2 MEASUREMENT INSTRUMENTS LIST	45
4.2.3 TEST PROCEDURE	46
4.2.4 DEVIATION FROM TEST STANDARD	46
4.2.5 TEST SETUP	46
4.2.6 MEASUREMENT DISTANCE	47
4.2.7 TEST RESULTS	48
4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	58
4.3.1 LIMITS	58
4.3.2 MEASUREMENT INSTRUMENTS LIST	58
4.3.3 TEST PROCEDURE	58
4.3.4 DEVIATION FROM TEST STANDARD	58
4.3.5 TEST SETUP	59
4.3.6 TEST RESULTS	60
4.4 HARMONIC CURRENT EMISSIONS TEST	68
4.4.1 LIMITS	68
4.4.2 MEASUREMENT INSTRUMENTS LIST	68
4.4.3 TEST PROCEDURE	68
4.4.4 DEVIATION FROM TEST STANDARD	68
4.4.5 TEST SETUP	68
4.4.6 TEST RESULTS	69
4.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST	72
4.5.1 LIMITS	72
4.5.2 MEASUREMENT INSTRUMENTS LIST	72
4.5.3 TEST PROCEDURE	72
4.5.4 DEVIATION FROM TEST STANDARD	72
4.5.5 TEST SETUP	73
4.5.6 TEST RESULTS	74
5 . EMC IMMUNITY TEST	75
5.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	75
5.2 GENERAL PERFORMANCE CRITERIA	78
5.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION	79
5.3.1 PERFORMANCE CRITERIA	79
5.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION	80
5.4.1 PERFORMANCE CRITERIA	80
5.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	81

Table of Contents	Page
5.5.1 TEST SPECIFICATION	81
5.5.2 MEASUREMENT INSTRUMENTS	81
5.5.3 TEST PROCEDURE	81
5.5.4 DEVIATION FROM TEST STANDARD	81
5.5.5 TEST SETUP	82
5.5.6 TEST RESULTS	83
5.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	87
5.6.1 TEST SPECIFICATION	87
5.6.2 MEASUREMENT INSTRUMENTS	87
5.6.3 TEST PROCEDURE	87
5.6.4 DEVIATION FROM TEST STANDARD	88
5.6.5 TEST SETUP	88
5.6.6 TEST RESULTS	90
5.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)	95
5.7.1 TEST SPECIFICATION	95
5.7.2 MEASUREMENT INSTRUMENTS	95
5.7.3 TEST PROCEDURE	95
5.7.4 DEVIATION FROM TEST STANDARD	95
5.7.5 TEST SETUP	96
5.7.6 TEST RESULTS	97
5.8 SURGE IMMUNITY TEST (SURGE)	98
5.8.1 TEST SPECIFICATION	98
5.8.2 MEASUREMENT INSTRUMENTS	98
5.8.3 TEST PROCEDURE	98
5.8.4 DEVIATION FROM TEST STANDARD	98
5.8.5 TEST SETUP	99
5.8.6 TEST RESULTS	100
5.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY	
FIELDS TEST (CS)	101
5.9.1 TEST SPECIFICATION	101
5.9.2 MEASUREMENT INSTRUMENTS	101
5.9.3 TEST PROCEDURE	101
5.9.4 DEVIATION FROM TEST STANDARD	102
5.9.5 TEST SETUP	102
5.9.6 TEST RESULTS	104
5.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)	107
5.10.1 TEST SPECIFICATION	107
5.10.2 MEASUREMENT INSTRUMENTS	107
5.10.3 TEST PROCEDURE	107
5.10.4 DEVIATION FROM TEST STANDARD	107
5.10.5 TEST SETUP	108
5.10.6 TEST RESULTS	109
5.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY	

Table of Contents	Page
TEST (DIPS)	110
5.11.1 TEST SPECIFICATION	110
5.11.2 MEASUREMENT INSTRUMENTS	110
5.11.3 TEST PROCEDURE	110
5.11.4 DEVIATION FROM TEST STANDARD	110
5.11.5 TEST SETUP	110
5.11.6 TEST RESULTS	111
6 . EUT TEST PHOTO	112

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-EMC-1-2412C173A	R00	<p>This is a supplementary report to the original test report (BTL-EMC-1-2412C173).</p> <ol style="list-style-type: none"> Added a new main board (Model: 715GF246-MOA-B00-004L). Add a Series Model. <p>So all test items have been re-evaluated with the worst case base (Base A) of the original and recorded. In this report only recorded the new test results. The original test results please refer to original report.</p>	Jan. 17, 2025	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission			
Standard(s)	Test Item		Result
EN 55032:2015 EN 55032:2015+A11:2020 EN 55032:2015+A1:2020 CISPR 32:2015+AMD1:2019 AS/NZS CISPR 32:2015+AMD1:2020 BS EN 55032:2015 BS EN 55032:2015+A11:2020 BS EN 55032:2015+A1:2020	Radiated emissions up to 1 GHz		PASS
	Radiated emissions above 1 GHz		PASS
	Radiated emissions from FM receivers		N/A
	Conducted emissions AC mains power port		PASS
	Asymmetric mode conducted emissions	AAN	N/A
		Current Probe	N/A
		CP+CVP	N/A
	Conducted differential voltage emissions		N/A

Standard(s)	Test Item	Result
EN 61000-3-2:2014 EN IEC 61000-3-2:2019+A1:2021 BS EN 61000-3-2:2014 BS EN IEC 61000-3-2:2019+A1:2021	Harmonic current	PASS
EN 61000-3-3:2013 EN 61000-3-3:2013+A1:2019 EN 61000-3-3:2013+A2:2021 BS EN 61000-3-3:2013 BS EN 61000-3-3:2013+A1:2019 BS EN 61000-3-3:2013+A2:2021	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017 BS EN 55035:2017+A11:2020	IEC 61000-4-2:2008 EN 61000-4-2:2009	ESD	PASS
	IEC 61000-4-3:2020 EN IEC 61000-4-3:2020	RS	PASS
	IEC 61000-4-4:2012 EN 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+AMD1:2017 EN 61000-4-5:2014+A1:2017	Surge	PASS
	IEC 61000-4-6:2023 EN 61000-4-6:2014+AC:2015	CS	PASS
	IEC 61000-4-8:2009 EN 61000-4-8:2010	PFMF	PASS
	IEC 61000-4-11:2020 EN IEC 61000-4-11:2020	Dips	PASS

Standard(s)	Section	Test Item	Result
EN 55035:2017/CISPR 35:2016 EN 55035:2017+A11:2020 BS EN 55035:2017 BS EN 55035:2017+A11:2020	4.2.7	BIN-R	N/A
	4.2.7	BIN-I	N/A

NOTE:

(1) "N/A" denotes test is not applicable to this device.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is:

1# For ESD / RS / CS / Dips test items: Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

2# For other test items: 1-2/F, 4/F, Building A, 1-2/F, Building B, 3/F, Building C, No.3, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.48
		30MHz ~ 200MHz	H	4.50
		200MHz ~ 1,000MHz	V	4.60
		200MHz ~ 1,000MHz	H	4.84

B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	U , (dB)
DG-CB08 (3m)	CISPR	1GHz ~ 6GHz	4.24

C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	U , (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

D. Harmonic current / Voltage fluctuations (Flicker) measurement:

Test Site	Method	Item	U (%)
DG-C01	EN 61000-3-2 EN 61000-3-3	Current	0.757
		Voltage	0.592

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By	Test Date
Radiated emissions up to 1 GHz	22°C	50%	Zinco Chen	Dec. 28, 2024
Radiated emissions above 1 GHz	22°C	50%	Carrey Wang	Dec. 29, 2024
Conducted emissions AC mains power port	25°C	48%	Axel Huang	Dec. 19, 2024- Dec. 20, 2024
Harmonic current	20°C	45%	Lance Chen	Dec. 20, 2024
Voltage fluctuations (Flicker)	20°C	45%	Lance Chen	Dec. 20, 2024

Test Item	Temperature	Humidity	Pressure	Tested By	Test Date
ESD	23°C	44%	1022hPa	Niko Ning	Dec. 13, 2024
RS	19°C	52%	/	Kieran Huang	Dec. 13, 2024
EFT	22°C	52%	/	Sean Wan	Dec. 20, 2024
Surge	22°C	52%	/	Sean Wan	Dec. 20, 2024
CS	21°C	48%	/	Edison Yi	Dec. 18, 2024
PFMF	22°C	52%	/	Sean Wan	Dec. 20, 2024
Dips	18°C	35%	/	Leonard Li	Dec. 24, 2024

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	LCD Monitor
Brand Name	N/A
Model Name	24G4H
Series Model	**24G4*****(*=0-9,A-Z,a-z,+,-,/,\ or blank), 24G4HX
Model Difference(s)	Only differ in model name due to marketing purpose.
Identification No. of EUT(S/N)	N/A
Component unit of EUT	<input checked="" type="checkbox"/> Single unit <input type="checkbox"/> Multiple unit
Sample Status	<input checked="" type="checkbox"/> Engineering sample <input type="checkbox"/> Final shipment prototype
Power Source	AC Mains.
Power Rating	100-240V~ 50/60Hz 1.5A
Connecting I/O Port(s)	1* AC port 1* Earphone port 1* DP port 2* HDMI port
Classification of EUT	Class B
Highest Internal Frequency(Fx)	475.9MHz

Cable Type	Shielded Type	Ferrite Core	Length(m)	Note
AC Power Cord	Non-shielded	NO	1.8/1.5/1.2	-
HDMI	Shielded	YES	1.8/1.5/1.2	Bonded two Ferrite Cores
DP	Shielded	NO	1.8/1.5/1.2	-

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	HDMI 1 1920*1080/200Hz PC 1.8m H
Mode 2	HDMI 1 1920*1080/60Hz PC 1.8m H
Mode 3	HDMI 2 1920*1080/200Hz PC 1.8m H
Mode 4	DP 1920*1080/200Hz PC 1.8m H
Mode 5	HDMI 1 1080P DVD 1.8m H
Mode 6	HDMI 1 800*600/60Hz PC 1.8m H
Mode 7	HDMI 1 640*480/60Hz PC 1.8m H
Mode 8	HDMI 1 1920*1080/200Hz PC 1.5m H
Mode 9	HDMI 2 1920*1080/200Hz PC 1.5m H
Mode 10	DP 1920*1080/200Hz PC 1.5m H
Mode 11	HDMI 1 1920*1080/200Hz PC 1.2m H
Mode 12	HDMI 2 1920*1080/200Hz PC 1.2m H
Mode 13	DP 1920*1080/200Hz PC 1.2m H
Mode 14	HDMI 1 1920*1080/200Hz PC 1.8m V
Mode 15	HDMI 1 1920*1080/200Hz PC 1.8m H (Without Earphone)

Radiated emissions up to 1 GHz Test	
Final Test Mode	Description
Mode 1	HDMI 1 1920*1080/200Hz PC 1.8m H
Mode 4	DP 1920*1080/200Hz PC 1.8m H
Mode 5	HDMI 1 1080P DVD 1.8m H
Mode 15	HDMI 1 1920*1080/200Hz PC 1.8m H (Without Earphone)

Radiated emissions Above 1 GHz Test	
Final Test Mode	Description
Mode 1	HDMI 1 1920*1080/200Hz PC 1.8m H
Mode 4	DP 1920*1080/200Hz PC 1.8m H
Mode 5	HDMI 1 1080P DVD 1.8m H
Mode 15	HDMI 1 1920*1080/200Hz PC 1.8m H (Without Earphone)

Conducted emissions AC mains power port Test	
Final Test Mode	Description
Mode 1	HDMI 1 1920*1080/200Hz PC 1.8m H
Mode 4	DP 1920*1080/200Hz PC 1.8m H
Mode 5	HDMI 1 1080P DVD 1.8m H

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 1	HDMI 1 1920*1080/200Hz PC 1.8m H

Immunity Test	
Final Test Mode	Description
Mode 1	HDMI 1 1920*1080/200Hz PC 1.8m H
Mode 2	HDMI 1 1920*1080/60Hz PC 1.8m H
Mode 3	HDMI 2 1920*1080/200Hz PC 1.8m H
Mode 4	DP 1920*1080/200Hz PC 1.8m H
Mode 5	HDMI 1 1080P DVD 1.8m H
Mode 8	HDMI 1 1920*1080/200Hz PC 1.5m H
Mode 9	HDMI 2 1920*1080/200Hz PC 1.5m H
Mode 10	DP 1920*1080/200Hz PC 1.5m H
Mode 11	HDMI 1 1920*1080/200Hz PC 1.2m H
Mode 12	HDMI 2 1920*1080/200Hz PC 1.2m H
Mode 13	DP 1920*1080/200Hz PC 1.2m H

Note:


1. For EMI: the standard of EN 55032:2015+A11:2020 tested all the modes, and the EN 55032:2015 tested the worst case and recorded in the test report.
2. For Radiated emissions test: Evaluated mode 1-15. According to the client's requirement, choose mode 1, mode 4, mode 5 and mode 15 and recorded in test report.
3. For Conducted emissions test: Evaluated mode 1-13. According to the client's requirement, choose mode 1, mode 4 and mode 5 and recorded in test report.
4. RS Acoudtic: The Front, Rear, Left and Right were evaluated. The worst placement direction is Front and recorded in this report.
5. The audio output function of CS/RS was recorded the worst case.

2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. EUT connected to PC via HDMI & DP Cable.
2. EUT connected to Earphone via Earphone Cable.
3. Mouse and Keyboard connected to PC via USB Cable.

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

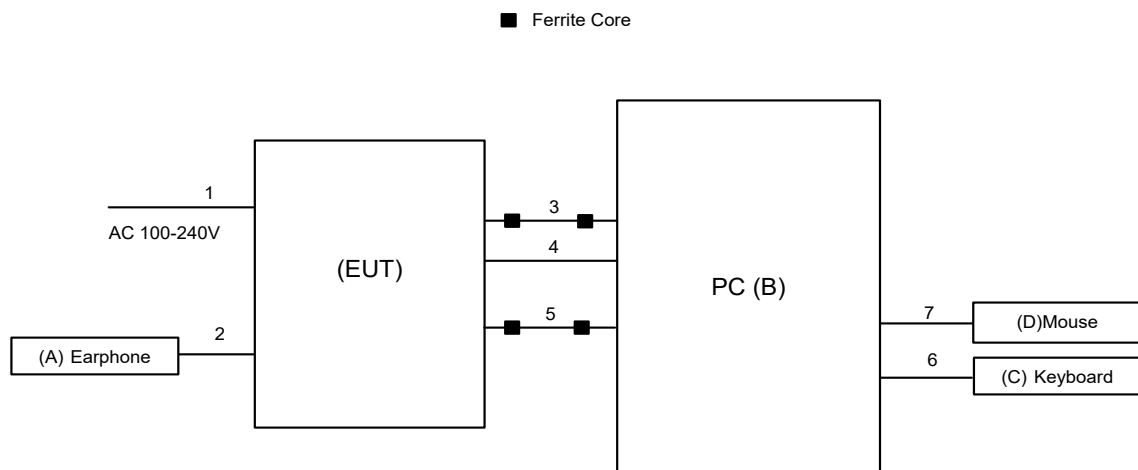

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For ESD / RS / CS / Dips test items:

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Earphone	Apple	N/A	N/A
B	PC	DELL	optiplex 7080	72FZWF3
		DELL	VOSTOR 3910	F705YQ3
		DELL	8920-D16N8S	C817GL2
C	Keyboard	DELL	KB216T	N/A
D	Mouse	DELL	MS11611	N/A

For other test items:

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Earphone	Apple	N/A	N/A
B	PC	DELL	8920-D16N8S	GZS91L2
C	Keyboard	DELL	KB212-B	CN0HTXH97158125004DXA01
D	Mouse	DELL	MS111-P	CN011D3V71581279OLOT

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	AC Cable	NO	NO	1.8/1.5/1.2m
2	Earphone Cable	NO	NO	1.2m
3	HDMI Cable	YES	YES	1.8/1.5/1.2m
4	DP Cable	YES	NO	1.8/1.5/1.2m
5	HDMI Cable	YES	YES	1.8/1.5/1.2m
6	USB Cable	YES	NO	1.8m
7	USB Cable	YES	NO	1.8m

3. EMC EMISSION TEST- EN 55032:2015

3.1 RADIATED EMISSIONS UP TO 1 GHZ

3.1.1 LIMITS

Class B equipment up to 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jun. 01, 2025
2	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jun. 01, 2025
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	May 31, 2025
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	May 31, 2025
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 06, 2025
6	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Nov. 06, 2025
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	1461	Nov. 27, 2025
8	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06010	Nov. 27, 2025
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF780208159	N/A
12	Cable	RW	LMR400-NMNM-10M	N/A	Dec. 01, 2025
13	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 01, 2025
14	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 01, 2025
15	Cable	RW	LMR400-NMNM-8M	N/A	Sep. 04, 2025
16	Cable	RW	LMR400-NMNM-3.5M	N/A	Sep. 04, 2025
17	Cable	RW	LMR400-NMNM-14M	N/A	Sep. 04, 2025

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.1.3 TEST PROCEDURE

- The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

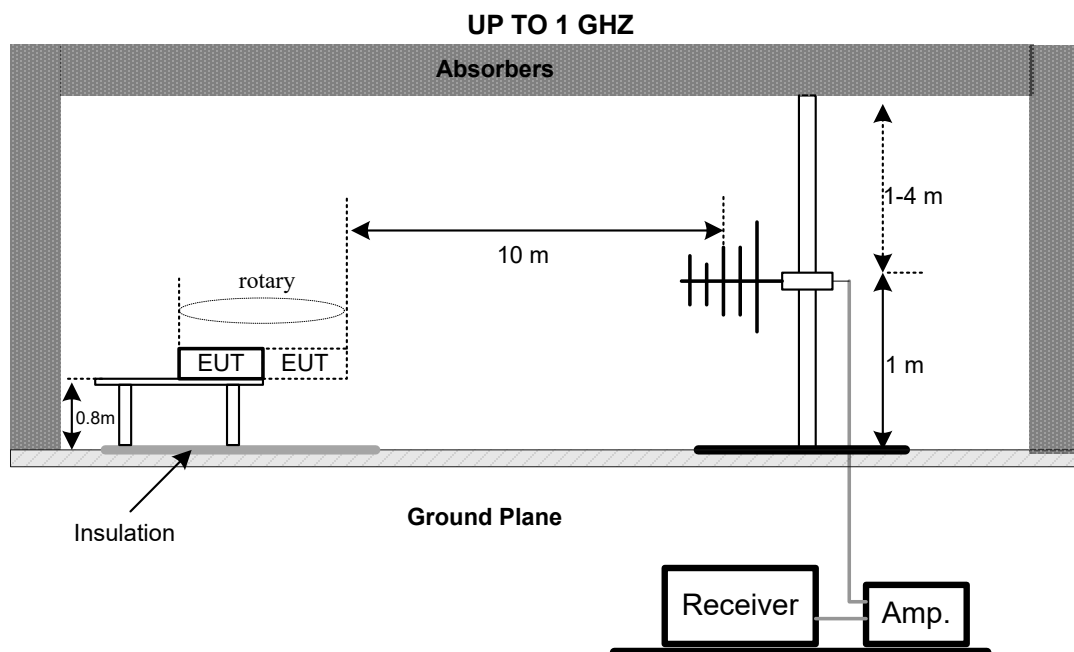

3.1.6 MEASUREMENT DISTANCE

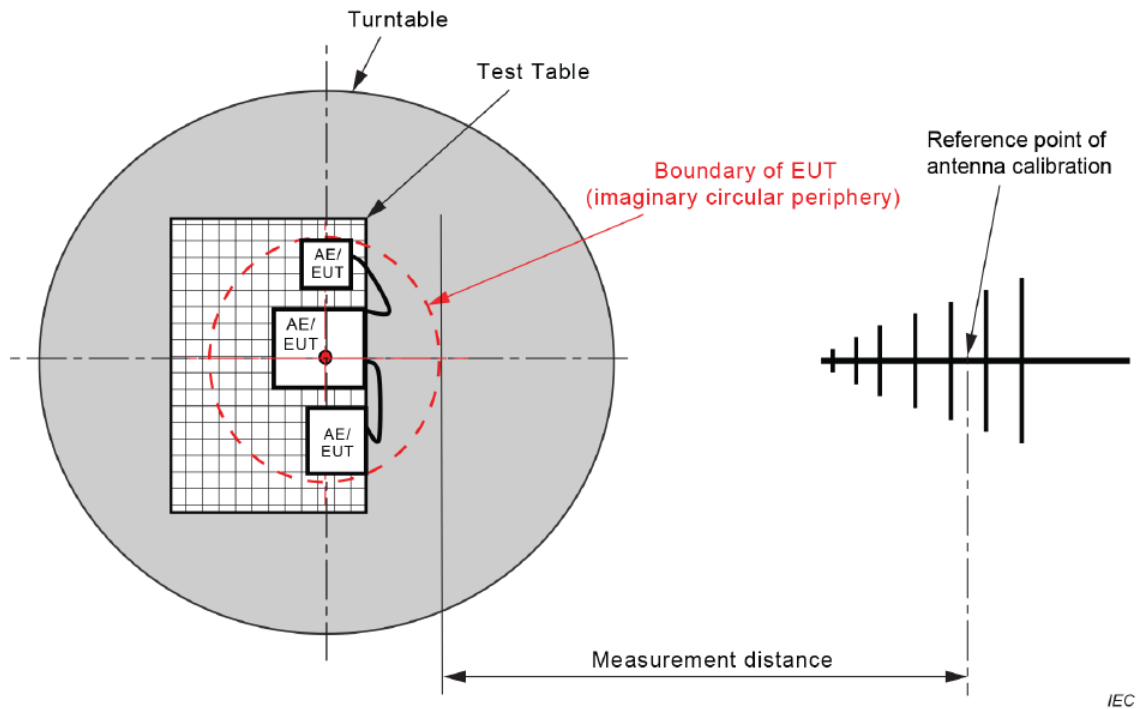


Figure C.1 – Measurement distance


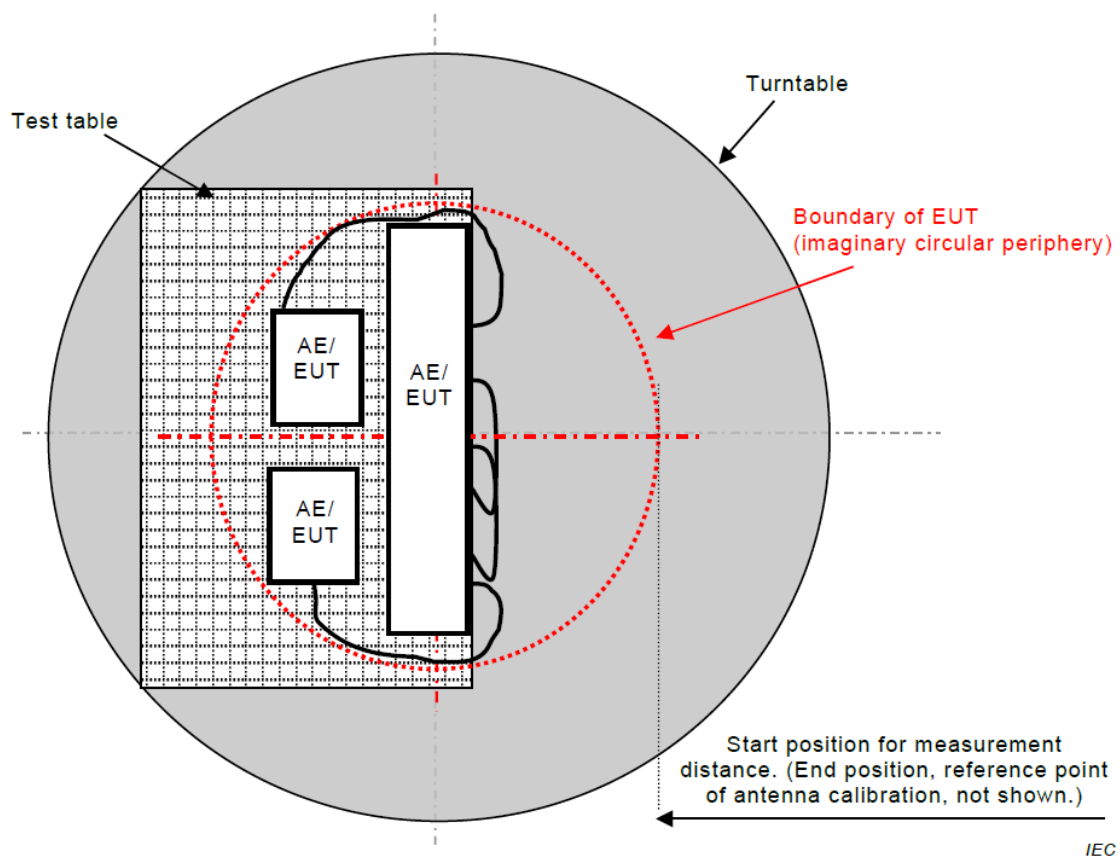


Figure C.2 – Boundary of EUT, Local AE and associated cabling


3.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

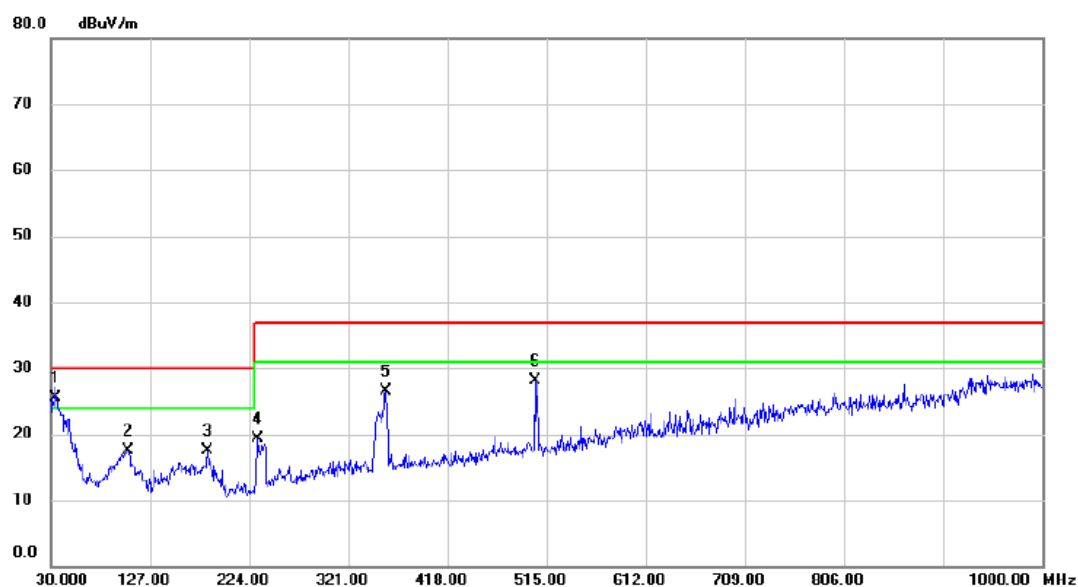

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.8800	44.85	-19.31	25.54	30.00	-4.46	QP	
2		105.6600	38.10	-20.52	17.58	30.00	-12.42	QP	
3		183.2600	34.86	-17.43	17.43	30.00	-12.57	QP	
4		232.7300	36.84	-17.56	19.28	37.00	-17.72	QP	
5		357.8600	39.53	-13.04	26.49	37.00	-10.51	QP	
6		503.3600	38.50	-10.34	28.16	37.00	-8.84	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

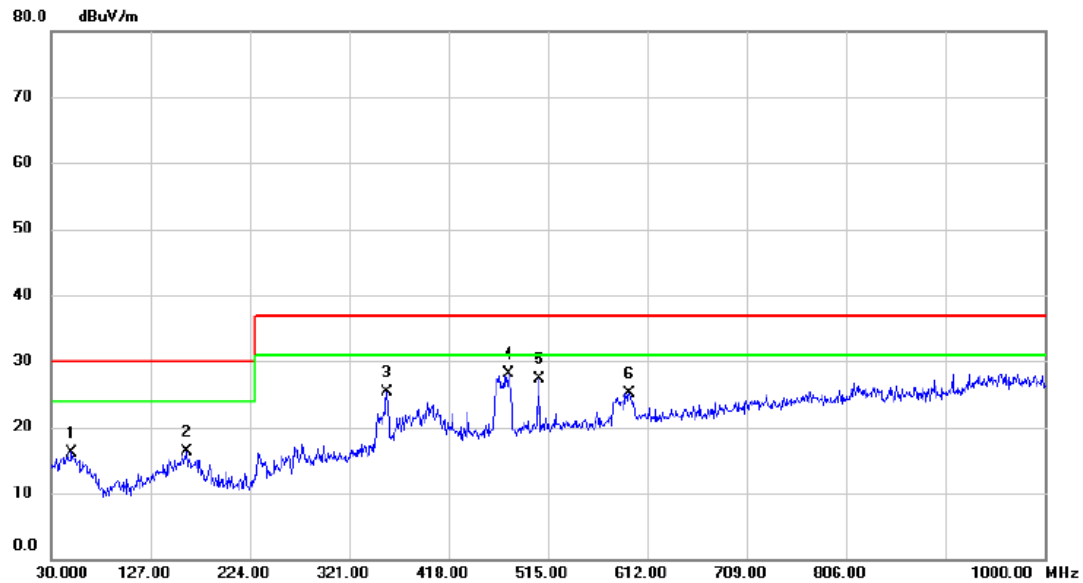

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		50.3700	33.99	-17.79	16.20	30.00	-13.80	QP	
2		162.8900	33.41	-17.10	16.31	30.00	-13.69	QP	
3		357.8600	39.76	-14.48	25.28	37.00	-11.72	QP	
4	*	476.2000	39.57	-11.40	28.17	37.00	-8.83	QP	
5		506.2700	38.30	-10.99	27.31	37.00	-9.69	QP	
6		594.5400	34.45	-9.42	25.03	37.00	-11.97	QP	

3.2 RADIATED EMISSIONS ABOVE 1 GHZ

3.2.1 LIMITS

Class B equipment above 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000				54
1000 - 3000			Peak / 1 MHz	70
3000 - 6000				74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F _x)	Highest measured frequency
F _x ≤ 108 MHz	1 GHz
108 < F _x ≤ 500 MHz	2 GHz
500 < F _x ≤ 1000 MHz	5 GHz
F _x > 1 GHz	5 x F _x up to a maximum of 6 GHz

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	ETS	3115	9605-4803	Jul. 07, 2025
2	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jun. 01, 2025
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981003	Oct. 29, 2025
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	RegalWay	RWLP50-4.0A-S MSM-9M	N/A	Sep. 02, 2025
8	Cable	RW	RWLP50-4.0A-N MRASM-1M	N/A	Sep. 02, 2025
9	Cable	RW	RWLP50-4.0A-N MRASM-4M	N/A	Sep. 02, 2025

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.2.3 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation

3.2.5 TEST SETUP

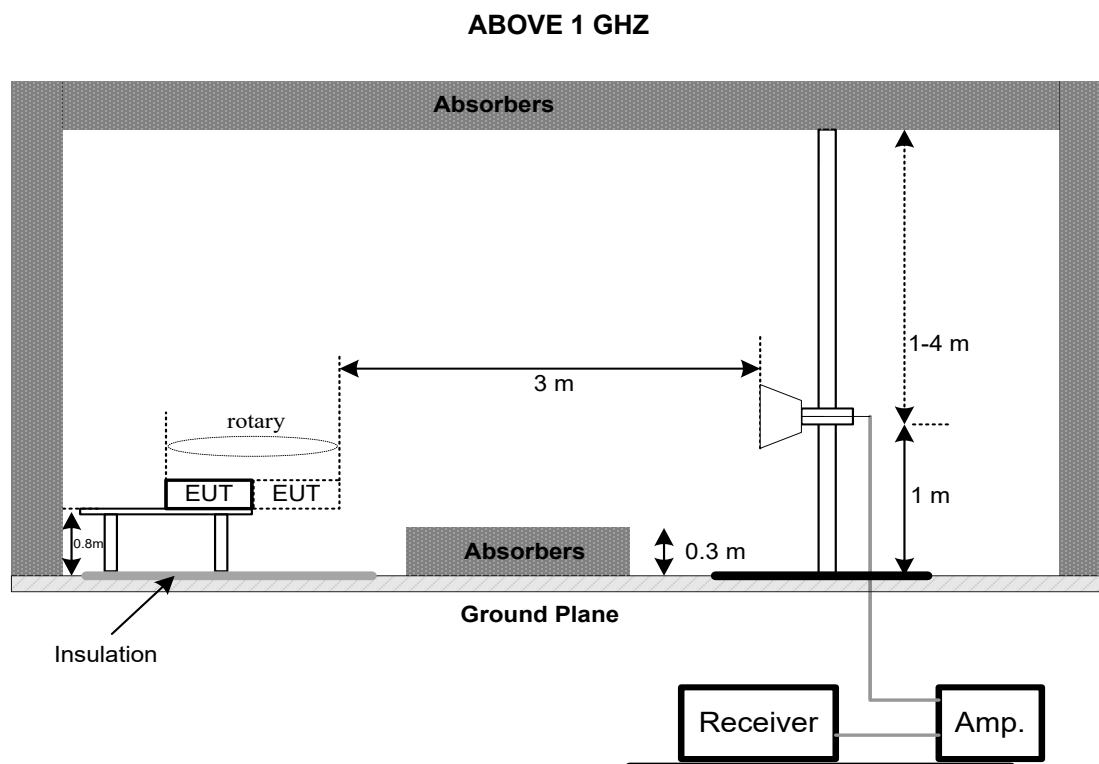

3.2.6 MEASUREMENT DISTANCE

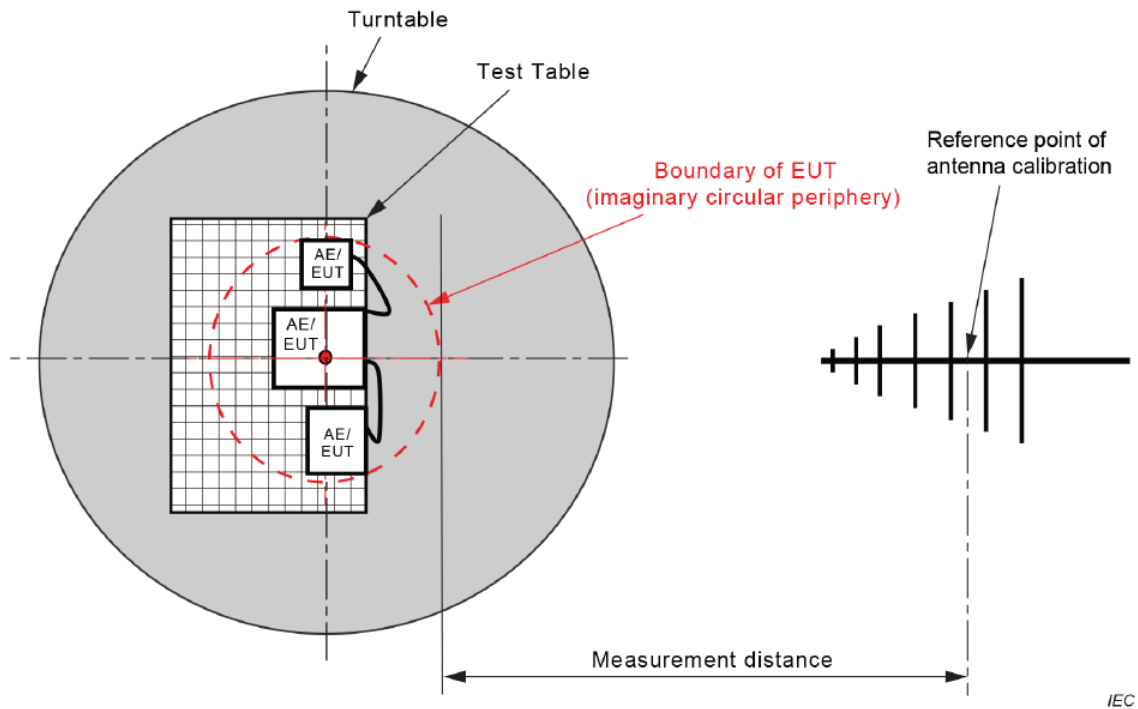


Figure C.1 – Measurement distance


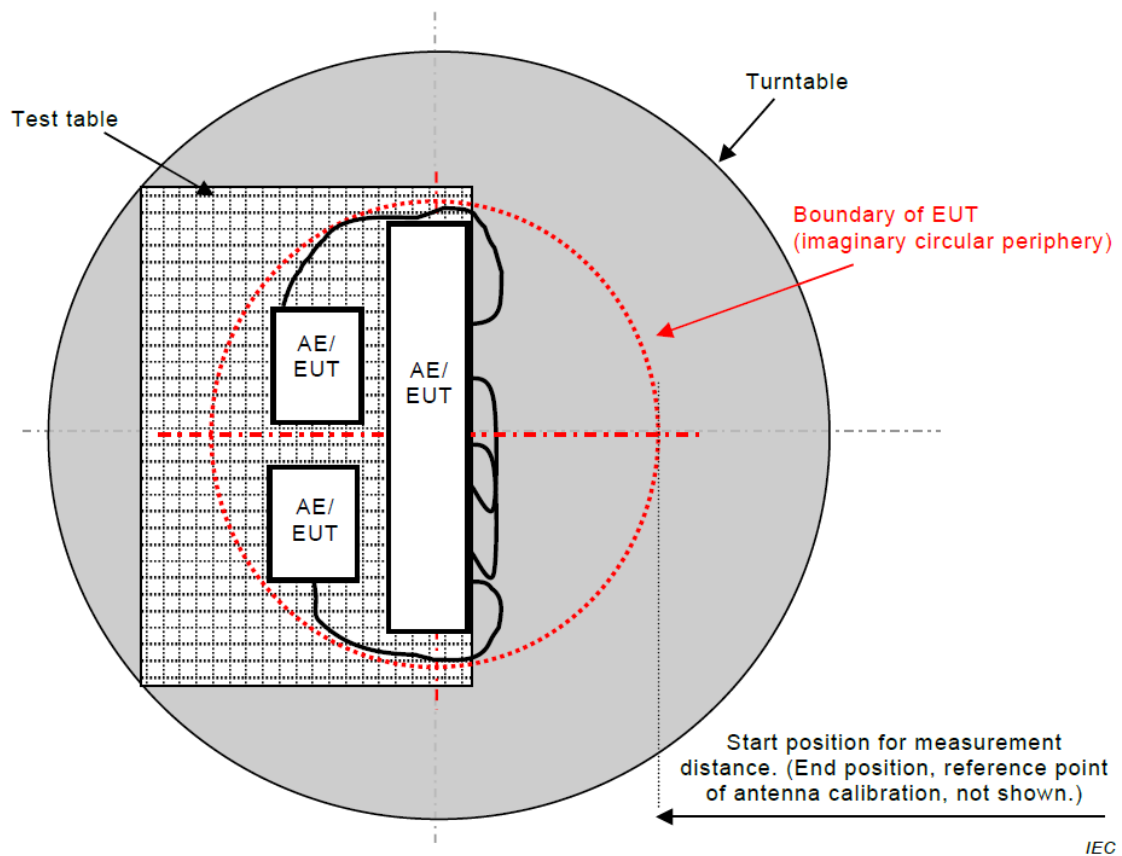


Figure C.2 – Boundary of EUT, Local AE and associated cabling


3.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

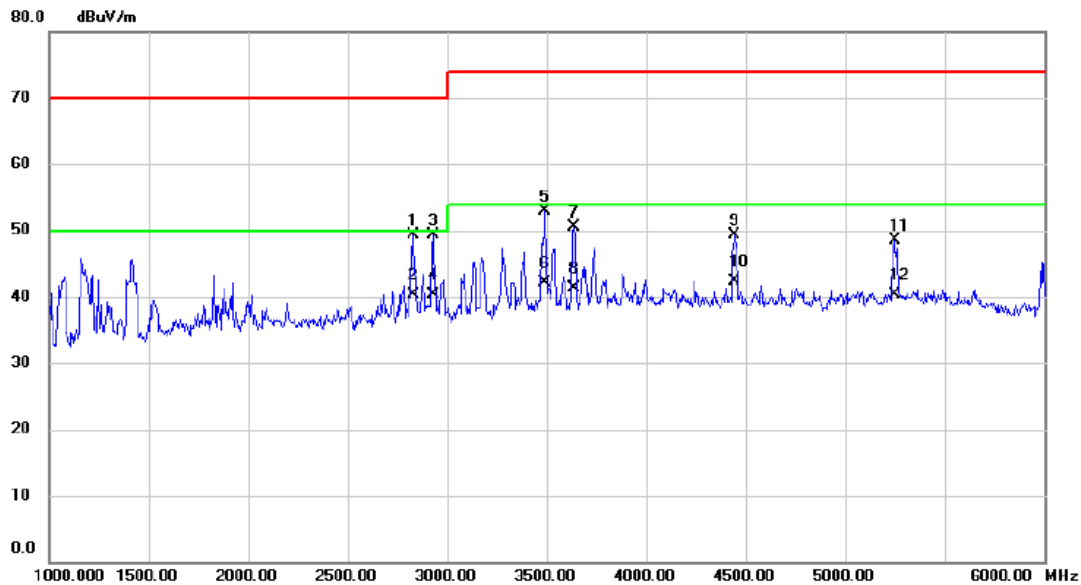

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2827.500	49.51	-0.17	49.34	70.00	-20.66	peak	
2	*	2827.500	40.38	-0.17	40.21	50.00	-9.79	AVG	
3		2927.500	49.10	0.18	49.28	70.00	-20.72	peak	
4		2927.500	40.03	0.18	40.21	50.00	-9.79	AVG	
5		3492.500	51.34	1.54	52.88	74.00	-21.12	peak	
6		3492.500	40.57	1.54	42.11	54.00	-11.89	AVG	
7		3635.000	48.50	1.91	50.41	74.00	-23.59	peak	
8		3635.000	39.30	1.91	41.21	54.00	-12.79	AVG	
9		4445.000	46.60	2.66	49.26	74.00	-24.74	peak	
10		4445.000	39.66	2.66	42.32	54.00	-11.68	AVG	
11		5247.500	44.55	3.87	48.42	74.00	-25.58	peak	
12		5247.500	36.34	3.87	40.21	54.00	-13.79	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

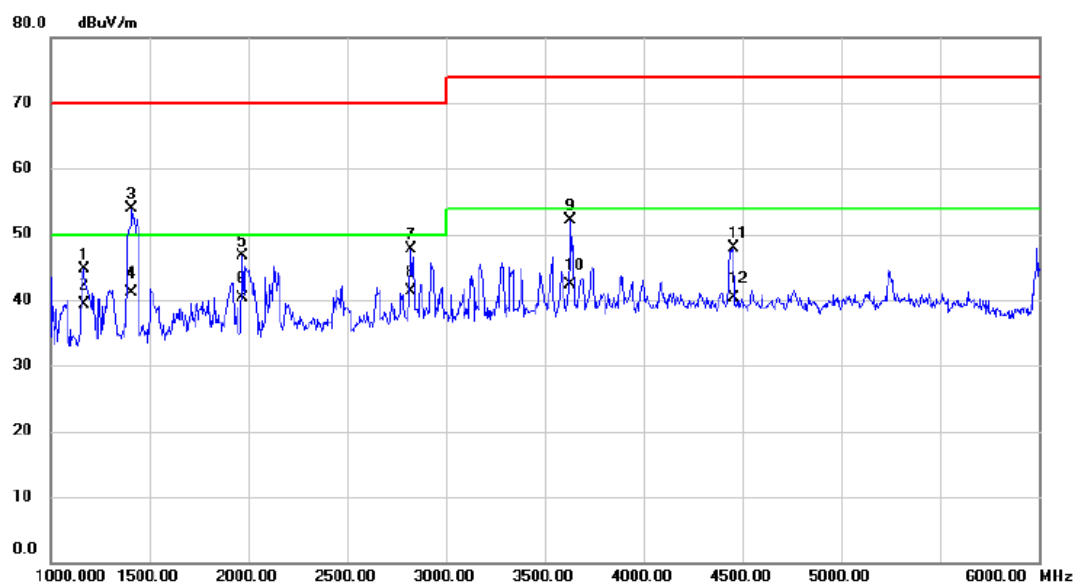

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1170.000	50.05	-5.44	44.61	70.00	-25.39	peak	
2		1170.000	44.80	-5.44	39.36	50.00	-10.64	AVG	
3		1412.500	58.61	-4.80	53.81	70.00	-16.19	peak	
4		1412.500	45.92	-4.80	41.12	50.00	-8.88	AVG	
5		1970.000	49.29	-2.67	46.62	70.00	-23.38	peak	
6		1970.000	42.90	-2.67	40.23	50.00	-9.77	AVG	
7		2822.500	47.84	-0.20	47.64	70.00	-22.36	peak	
8	*	2822.500	41.41	-0.20	41.21	50.00	-8.79	AVG	
9		3632.500	50.10	1.91	52.01	74.00	-21.99	peak	
10		3632.500	40.40	1.91	42.31	54.00	-11.69	AVG	
11		4455.000	45.24	2.66	47.90	74.00	-26.10	peak	
12		4455.000	37.55	2.66	40.21	54.00	-13.79	AVG	

3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 22, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	102974	Dec. 22, 2024
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.3.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.4 DEVIATION FROM TEST STANDARD


No deviation

3.3.5 TEST SETUP

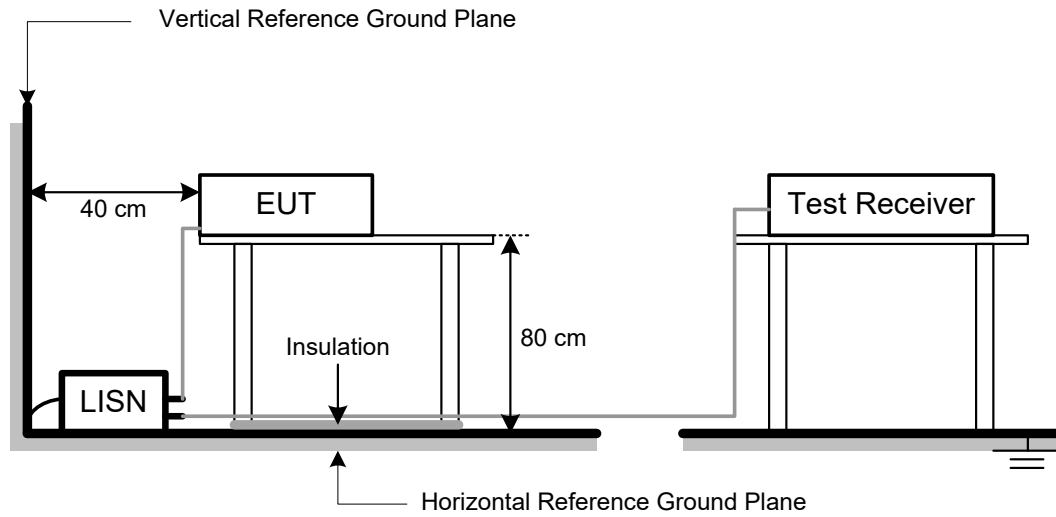


3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

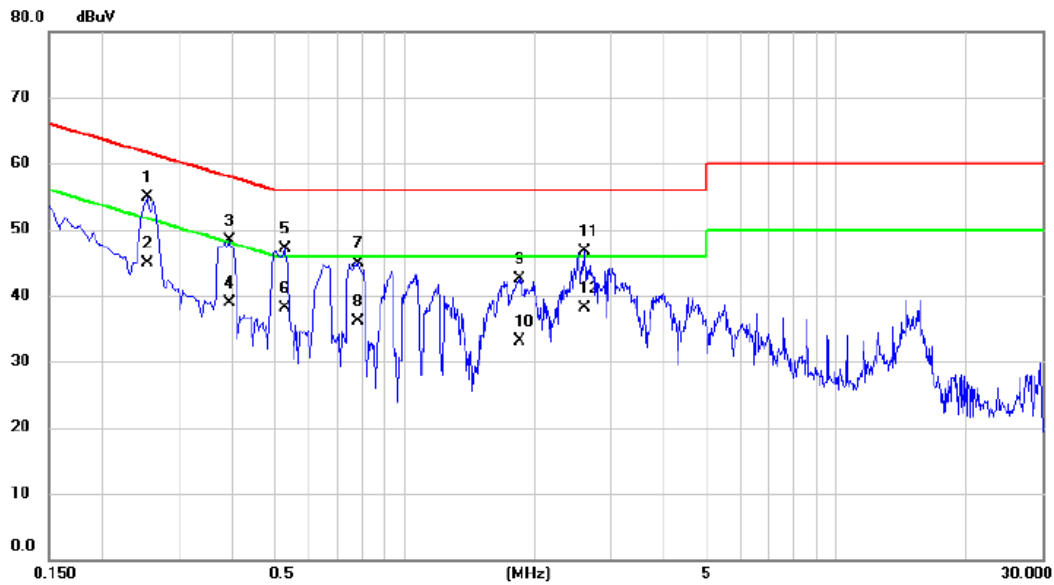

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2535	45.06	9.76	54.82	61.64	-6.82	QP	
2 *	0.2535	35.20	9.76	44.96	51.64	-6.68	AVG	
3	0.3930	38.46	9.78	48.24	58.00	-9.76	QP	
4	0.3930	29.10	9.78	38.88	48.00	-9.12	AVG	
5	0.5280	37.37	9.80	47.17	56.00	-8.83	QP	
6	0.5280	28.40	9.80	38.20	46.00	-7.80	AVG	
7	0.7800	35.02	9.85	44.87	56.00	-11.13	QP	
8	0.7800	26.30	9.85	36.15	46.00	-9.85	AVG	
9	1.8510	32.64	9.91	42.55	56.00	-13.45	QP	
10	1.8510	23.10	9.91	33.01	46.00	-12.99	AVG	
11	2.6160	36.81	9.95	46.76	56.00	-9.24	QP	
12	2.6160	28.10	9.95	38.05	46.00	-7.95	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

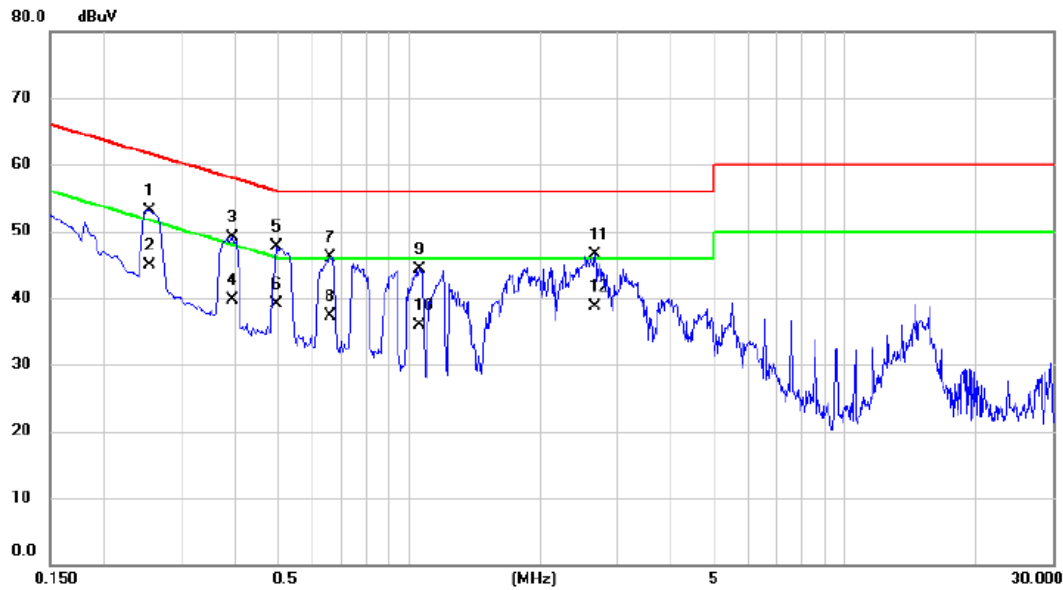

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2535	43.52	9.62	53.14	61.64	-8.50	QP	
2	*	0.2535	35.20	9.62	44.82	51.64	-6.82	AVG	
3		0.3930	39.38	9.65	49.03	58.00	-8.97	QP	
4		0.3930	30.10	9.65	39.75	48.00	-8.25	AVG	
5		0.4965	38.04	9.66	47.70	56.06	-8.36	QP	
6		0.4965	29.50	9.66	39.16	46.06	-6.90	AVG	
7		0.6584	36.49	9.69	46.18	56.00	-9.82	QP	
8		0.6584	27.60	9.69	37.29	46.00	-8.71	AVG	
9		1.0590	34.65	9.72	44.37	56.00	-11.63	QP	
10		1.0590	26.10	9.72	35.82	46.00	-10.18	AVG	
11		2.6700	36.79	9.80	46.59	56.00	-9.41	QP	
12		2.6700	28.90	9.80	38.70	46.00	-7.30	AVG	

4. EMC EMISSION TEST- EN 55032:2015+A11:2020

4.1 RADIATED EMISSIONS UP TO 1 GHz

4.1.1 LIMITS

Class B equipment up to 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	10	Quasi peak / 120 kHz	30
230 - 1000				37

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBμV/m)=20log Emission level (μV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Keysight	N9038A	MY54450004	Jun. 01, 2025
2	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jun. 01, 2025
3	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980284	May 31, 2025
4	Pre-Amplifier	EMC INSTRUMENT	EMC 9135	980283	May 31, 2025
5	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Nov. 06, 2025
6	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Nov. 06, 2025
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	1461	Nov. 27, 2025
8	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06010	Nov. 27, 2025
9	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
10	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
11	Controller	MF	MF-7802	MF78020815 9	N/A
12	Cable	RW	LMR400-NMNM-10M	N/A	Dec. 01, 2025
13	Cable	RW	LMR400-NMNM-7M	N/A	Dec. 01, 2025
14	Cable	RW	LMR400-NMNM-3.5M	N/A	Dec. 01, 2025
15	Cable	RW	LMR400-NMNM-8M	N/A	Sep. 04, 2025
16	Cable	RW	LMR400-NMNM-3.5M	N/A	Sep. 04, 2025
17	Cable	RW	LMR400-NMNM-14M	N/A	Sep. 04, 2025

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

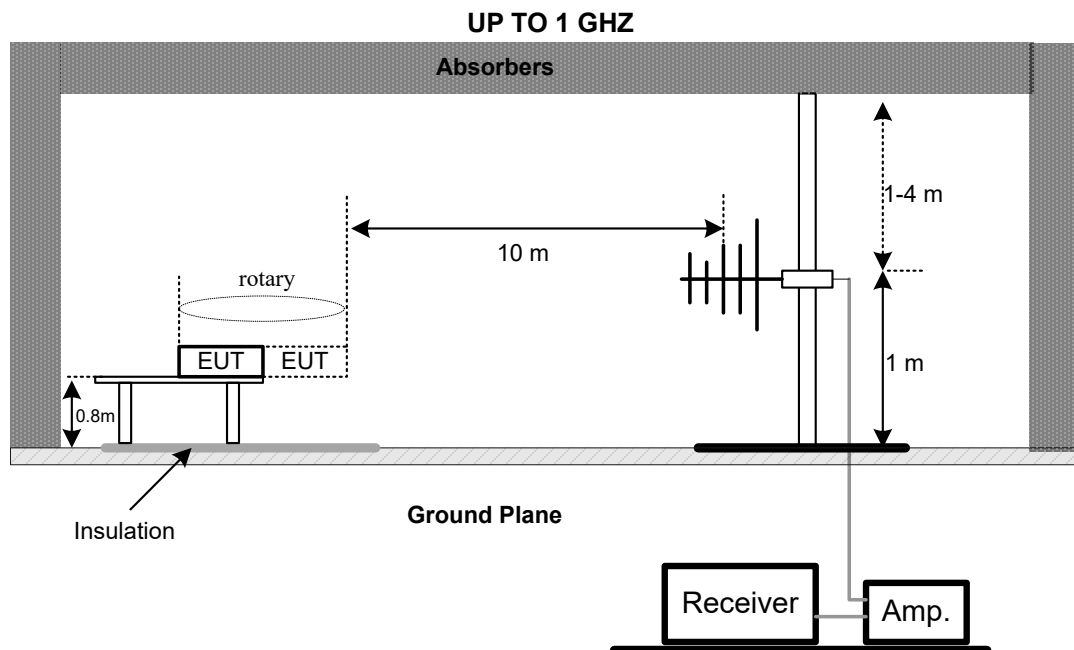

4.1.6 MEASUREMENT DISTANCE

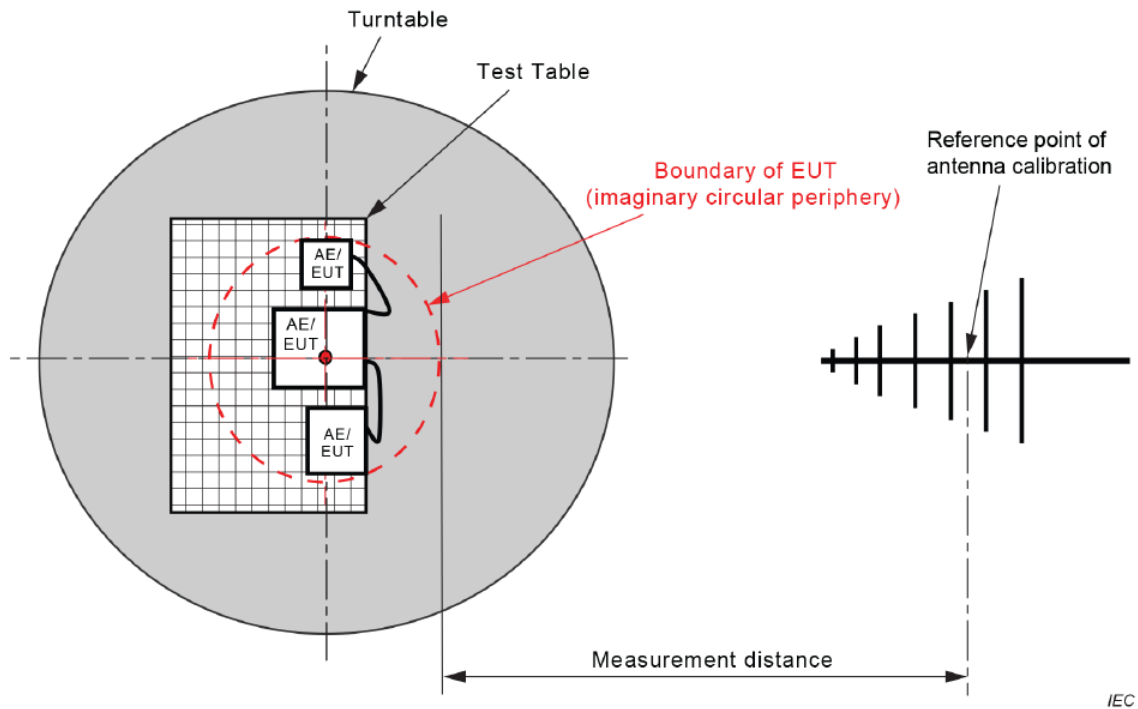


Figure C.1 – Measurement distance


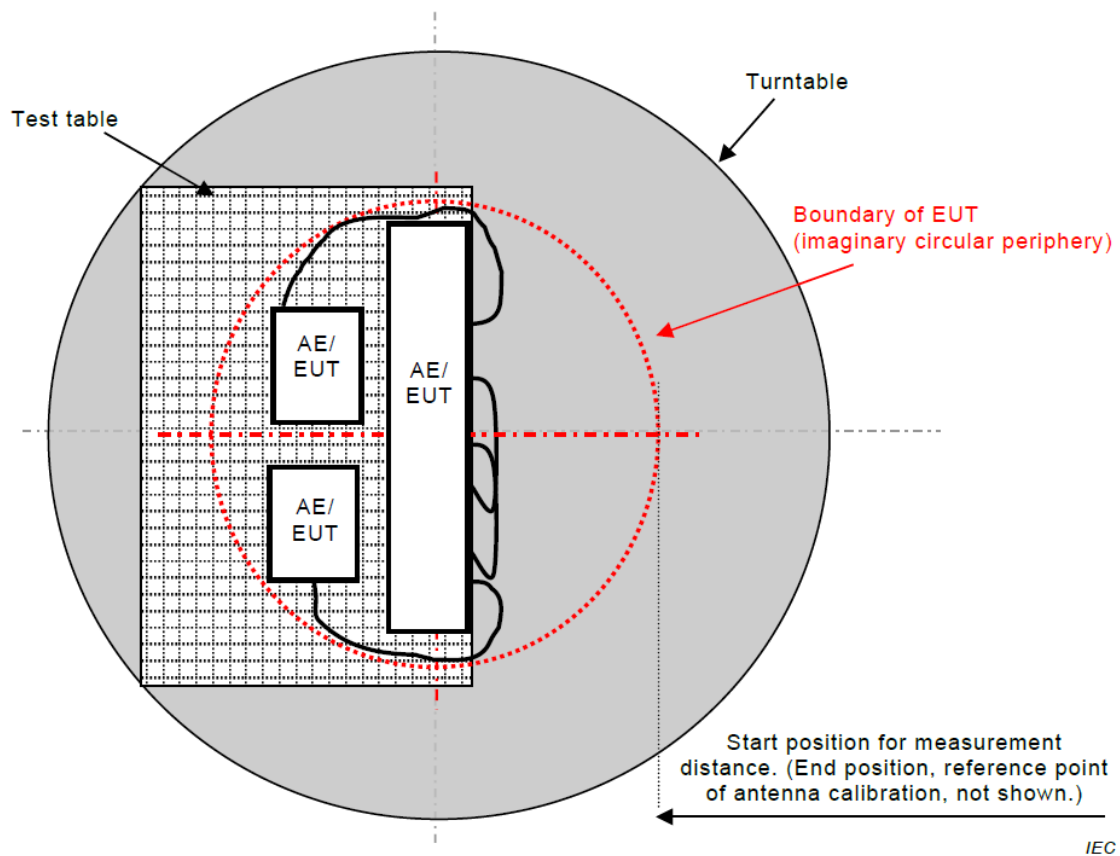


Figure C.2 – Boundary of EUT, Local AE and associated cabling


4.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

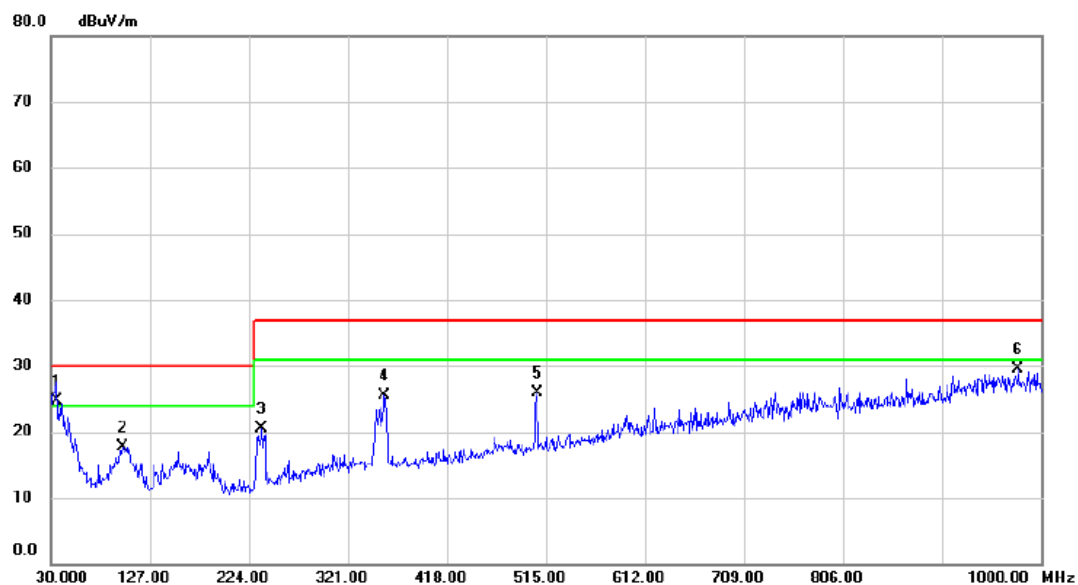


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	35.8200	43.65	-18.96	24.69	30.00	-5.31	QP	
2		99.8400	39.08	-21.31	17.77	30.00	-12.23	QP	
3		236.6100	37.71	-17.23	20.48	37.00	-16.52	QP	
4		356.8900	38.48	-13.05	25.43	37.00	-11.57	QP	
5		506.2700	36.20	-10.30	25.90	37.00	-11.10	QP	
6		977.6900	34.26	-4.69	29.57	37.00	-7.43	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

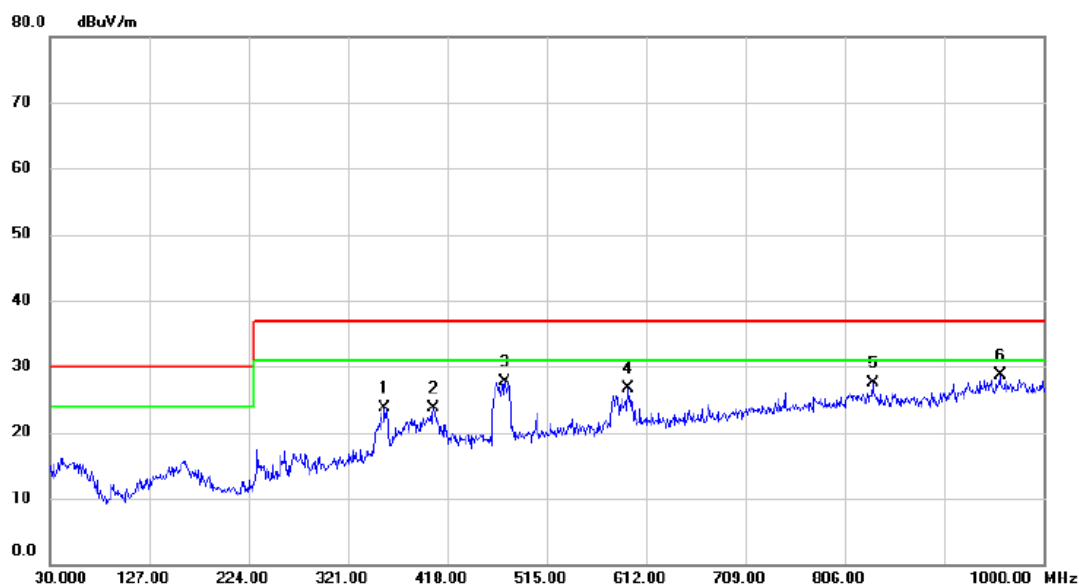


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		356.8900	38.16	-14.50	23.66	37.00	-13.34	QP	
2		404.4200	36.84	-13.10	23.74	37.00	-13.26	QP	
3		474.2600	39.06	-11.43	27.63	37.00	-9.37	QP	
4		594.5400	36.13	-9.42	26.71	37.00	-10.29	QP	
5		833.1600	34.86	-7.43	27.43	37.00	-9.57	QP	
6	*	957.3200	34.21	-5.45	28.76	37.00	-8.24	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 4		

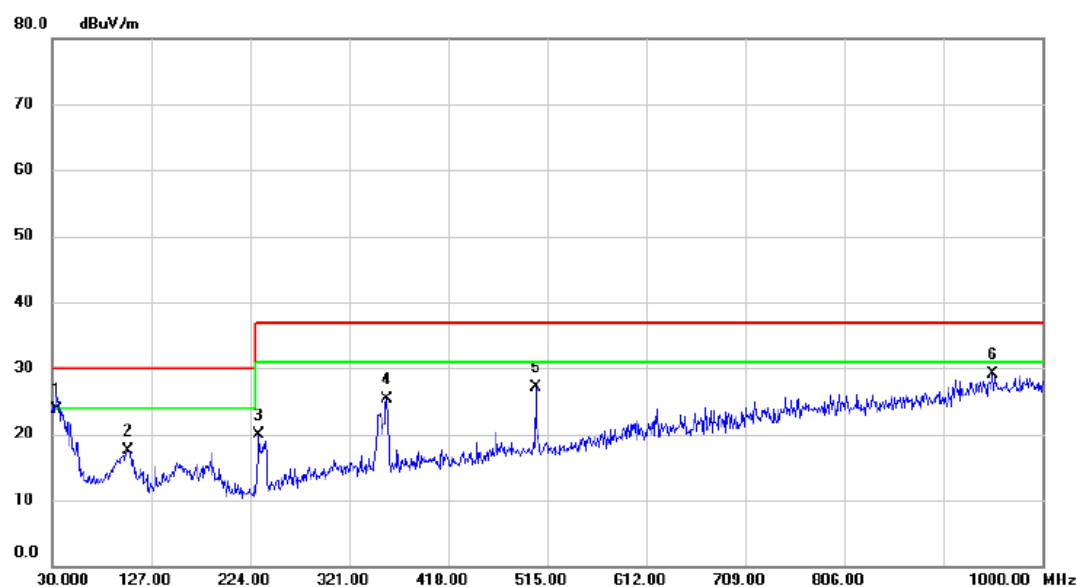


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.8800	43.00	-19.31	23.69	30.00	-6.31	QP	
2		103.7200	38.35	-20.78	17.57	30.00	-12.43	QP	
3		232.7300	37.49	-17.56	19.93	37.00	-17.07	QP	
4		357.8600	38.26	-13.04	25.22	37.00	-11.78	QP	
5		503.3600	37.41	-10.34	27.07	37.00	-9.93	QP	
6		951.5000	34.00	-4.93	29.07	37.00	-7.93	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 4		

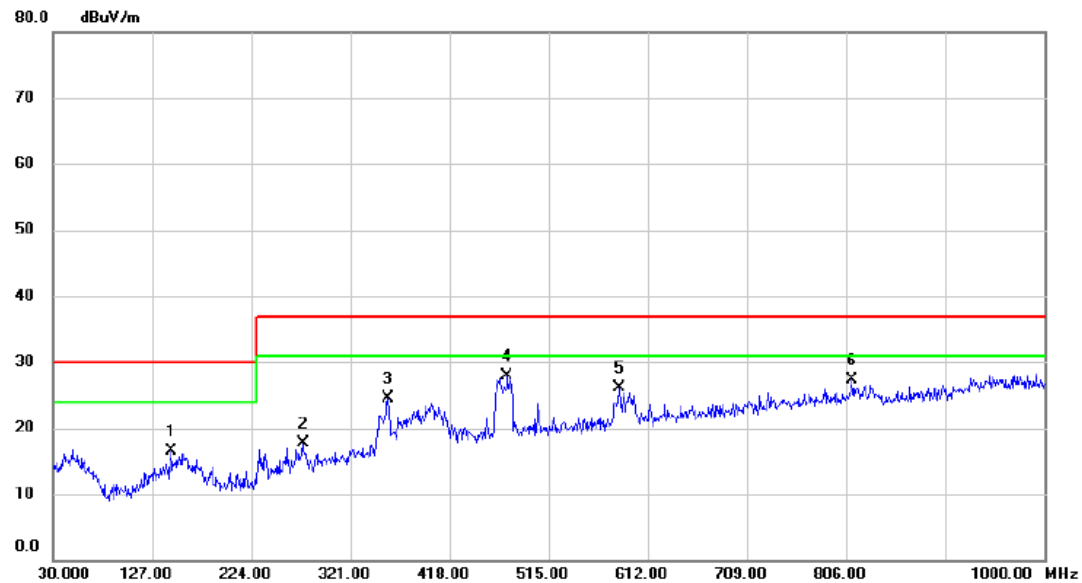


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		145.4300	33.92	-17.45	16.47	30.00	-13.53	QP	
2		274.4400	34.41	-16.70	17.71	37.00	-19.29	QP	
3		357.8600	38.96	-14.48	24.48	37.00	-12.52	QP	
4	*	474.2600	39.36	-11.43	27.93	37.00	-9.07	QP	
5		583.8700	35.85	-9.69	26.16	37.00	-10.84	QP	
6		811.8200	34.83	-7.53	27.30	37.00	-9.70	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 5		

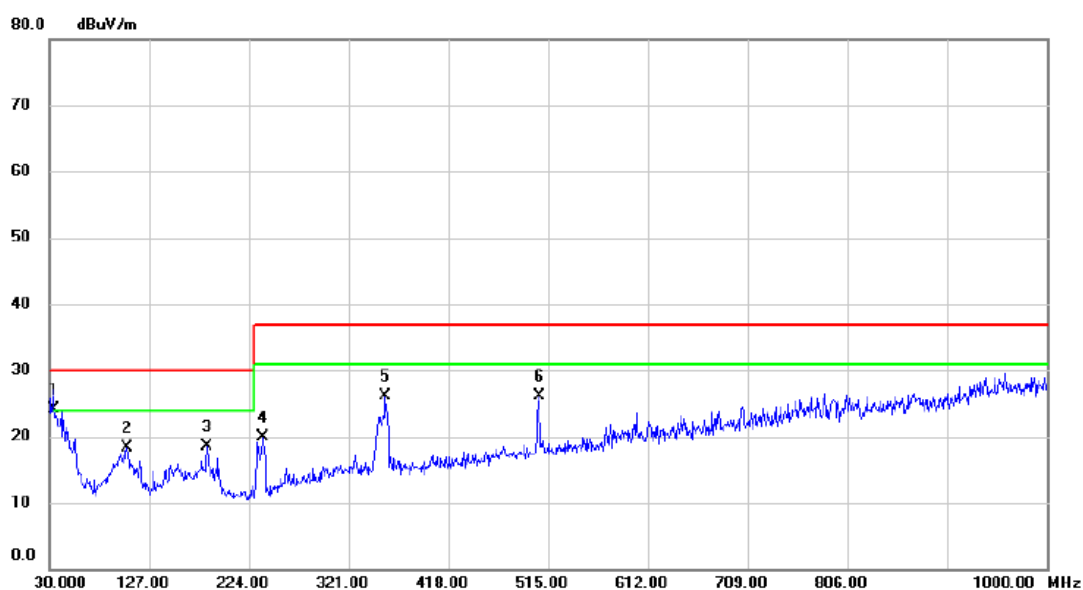


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.8800	43.37	-19.31	24.06	30.00	-5.94	QP	
2		106.1450	38.74	-20.46	18.28	30.00	-11.72	QP	
3		183.2600	35.88	-17.43	18.45	30.00	-11.55	QP	
4		237.5800	37.15	-17.15	20.00	37.00	-17.00	QP	
5		356.8900	39.14	-13.05	26.09	37.00	-10.91	QP	
6		506.2700	36.39	-10.30	26.09	37.00	-10.91	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 5		

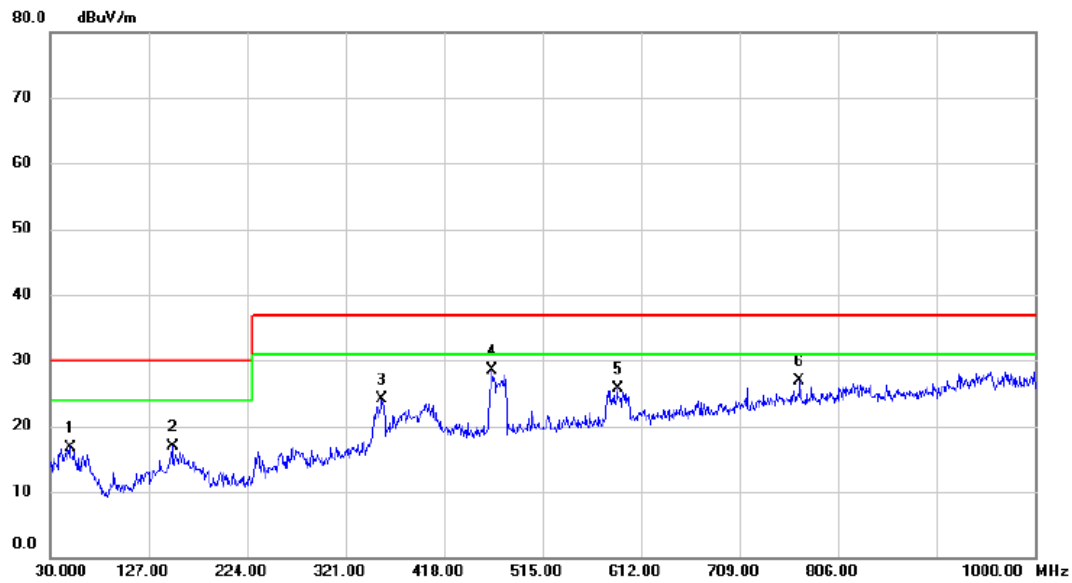


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		49.4000	34.57	-17.77	16.80	30.00	-13.20	QP	
2		150.2800	33.96	-17.12	16.84	30.00	-13.16	QP	
3		356.8900	38.67	-14.50	24.17	37.00	-12.83	QP	
4	*	465.5300	40.08	-11.56	28.52	37.00	-8.48	QP	
5		588.7200	35.33	-9.55	25.78	37.00	-11.22	QP	
6		768.1700	34.47	-7.59	26.88	37.00	-10.12	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 15		

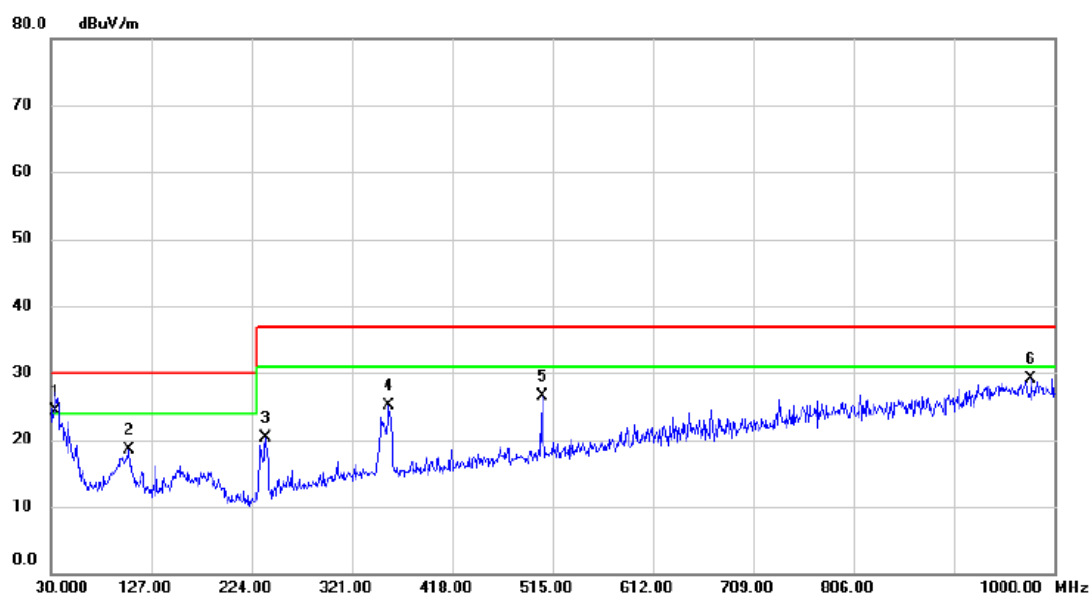


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	34.8500	43.35	-19.11	24.24	30.00	-5.76	QP	
2		105.6600	38.98	-20.52	18.46	30.00	-11.54	QP	
3		237.5800	37.54	-17.15	20.39	37.00	-16.61	QP	
4		356.8900	38.19	-13.05	25.14	37.00	-11.86	QP	
5		505.3000	36.77	-10.32	26.45	37.00	-10.55	QP	
6		977.6900	33.82	-4.69	29.13	37.00	-7.87	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 15		

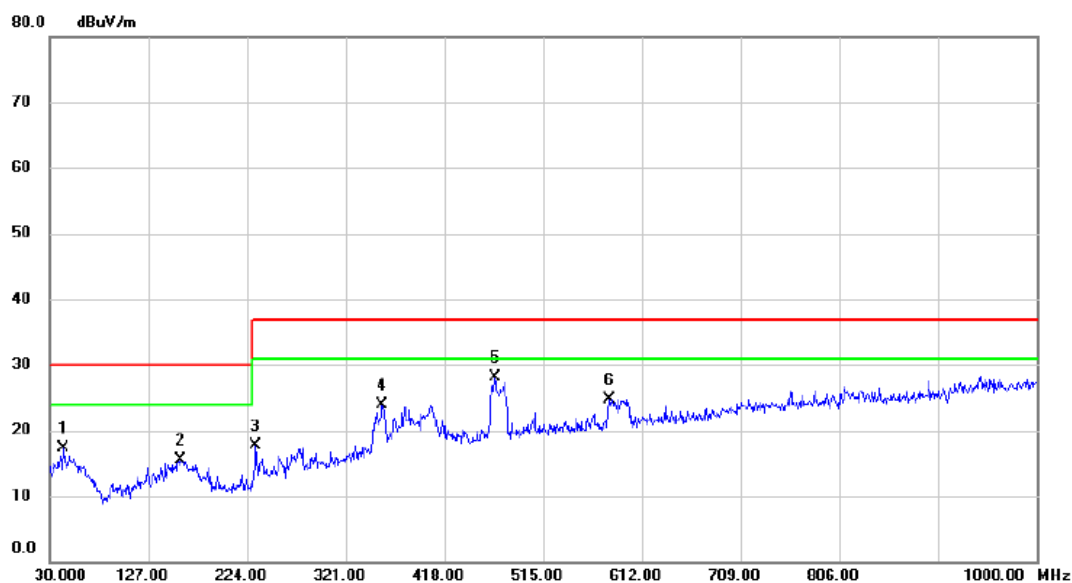


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		43.5800	35.34	-18.07	17.27	30.00	-12.73	QP	
2		159.0100	32.49	-16.98	15.51	30.00	-14.49	QP	
3		232.7300	36.77	-19.09	17.68	37.00	-19.32	QP	
4		356.8900	38.46	-14.50	23.96	37.00	-13.04	QP	
5	*	467.4700	39.63	-11.53	28.10	37.00	-8.90	QP	
6		579.9900	34.58	-9.78	24.80	37.00	-12.20	QP	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

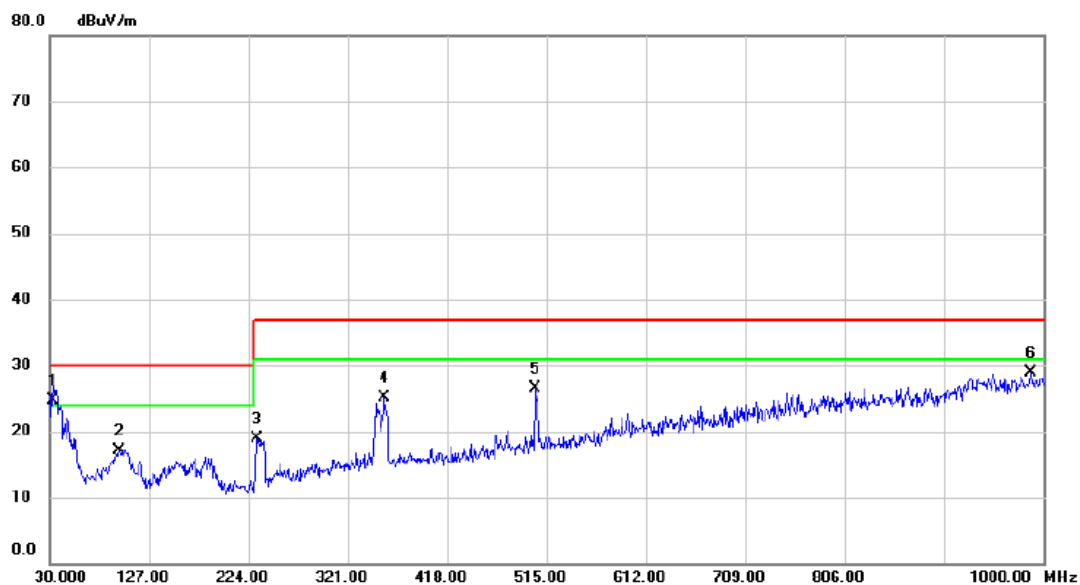

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.9100	44.19	-19.50	24.69	30.00	-5.31	QP	
2		97.9000	38.79	-21.60	17.19	30.00	-12.81	QP	
3		231.7600	36.49	-17.63	18.86	37.00	-18.14	QP	
4		356.8900	38.08	-13.05	25.03	37.00	-11.97	QP	
5		503.3600	36.83	-10.34	26.49	37.00	-10.51	QP	
6		987.3900	33.51	-4.59	28.92	37.00	-8.08	QP	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

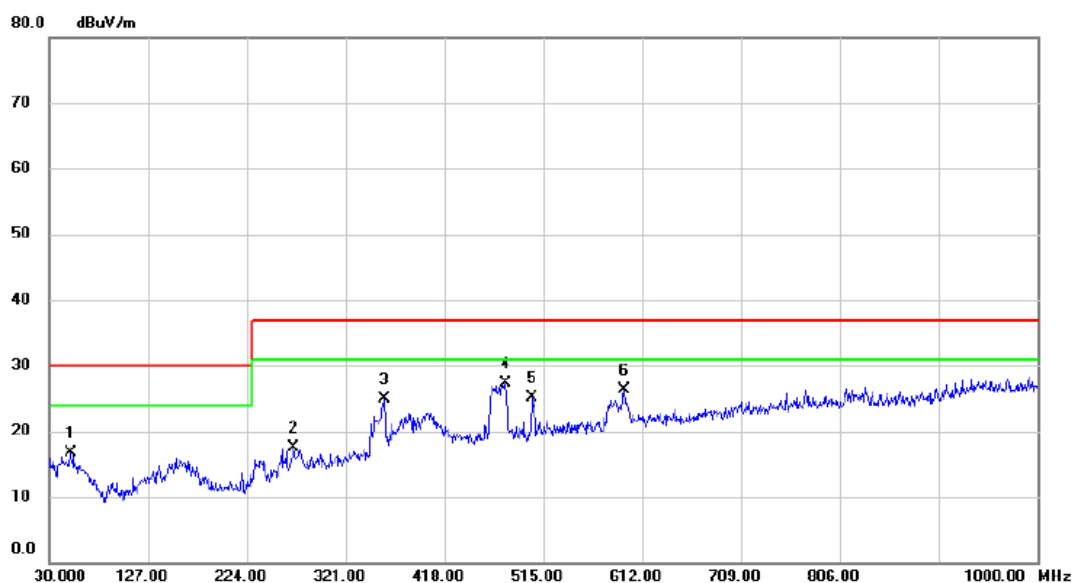

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		51.3400	34.47	-17.78	16.69	30.00	-13.31	QP	
2		269.5900	34.54	-16.96	17.58	37.00	-19.42	QP	
3		358.8300	39.43	-14.46	24.97	37.00	-12.03	QP	
4	*	478.1400	38.59	-11.37	27.22	37.00	-9.78	QP	
5		503.3600	36.20	-11.01	25.19	37.00	-11.81	QP	
6		594.5400	35.66	-9.42	26.24	37.00	-10.76	QP	

4.2 RADIATED EMISSIONS ABOVE 1 GHZ

4.2.1 LIMITS

Class B equipment above 1 GHz

Frequency Range MHz	Measurement			Class B limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000				54
1000 - 3000			Peak / 1 MHz	70
3000 - 6000				74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F_x)	Highest measured frequency
$F_x \leq 108$ MHz	1 GHz
$108 < F_x \leq 500$ MHz	2 GHz
$500 < F_x \leq 1000$ MHz	5 GHz
$F_x > 1$ GHz	5 x F_x up to a maximum of 6 GHz

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	ETS	3115	9605-4803	Jul. 07, 2025
2	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jun. 01, 2025
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981003	Oct. 29, 2025
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
6	Controller	MF	MF-7802	MF780208159	N/A
7	Cable	RegalWay	RWLP50-4.0A-S MSM-9M	N/A	Sep. 02, 2025
8	Cable	RW	RWLP50-4.0A-N MRASM-1M	N/A	Sep. 02, 2025
9	Cable	RW	RWLP50-4.0A-N MRASM-4M	N/A	Sep. 02, 2025

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD

The limit of the EN 55032:2015+A1:2020&AS/NZS CISPR 32:2015+AMD1:2020&CISPR 32:2015+AMD1:2019 standard deviates from the requirements, but the limit of the EN 55032:2015+A1:2020 standard is more stringent and can be covered, so the test data meets the EN 55032:2015+A1:2020 &AS/NZS CISPR 32:2015+AMD1:2020&CISPR 32:2015+AMD1:2019 standard.

4.2.5 TEST SETUP

ABOVE 1 GHZ

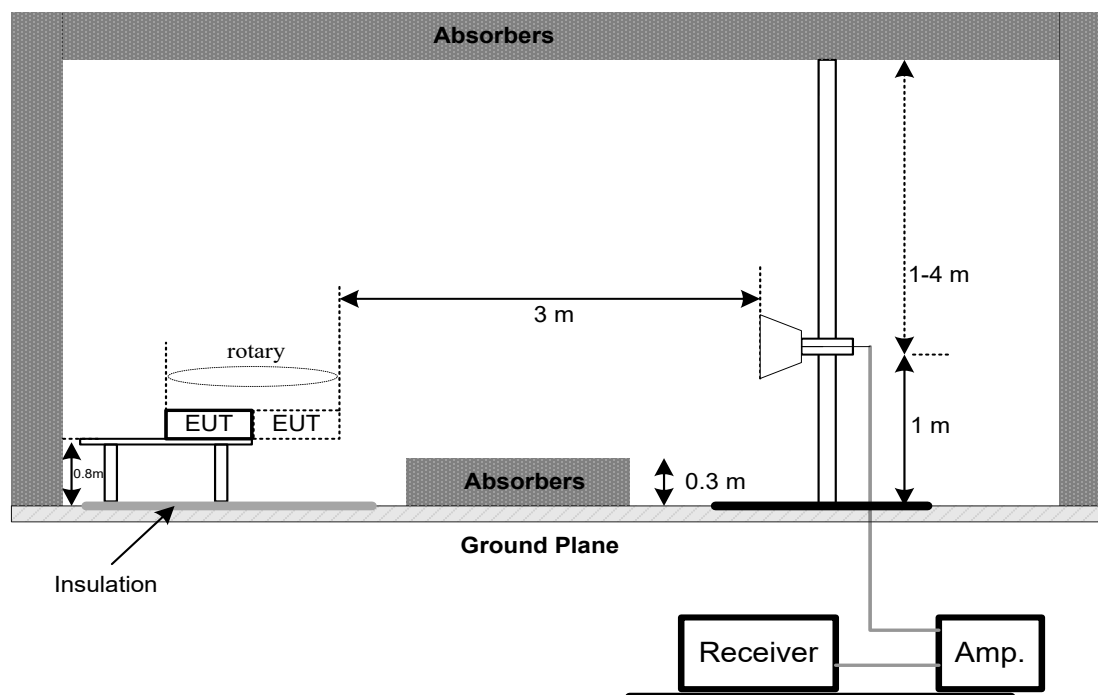

4.2.6 MEASUREMENT DISTANCE

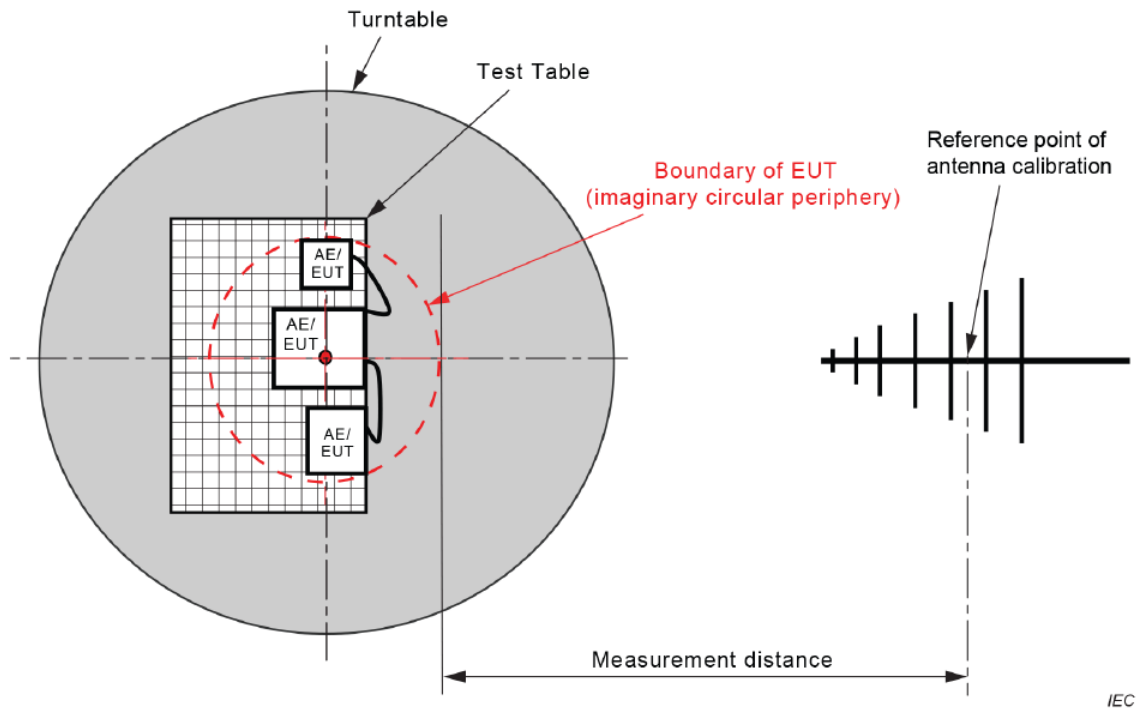


Figure C.1 – Measurement distance


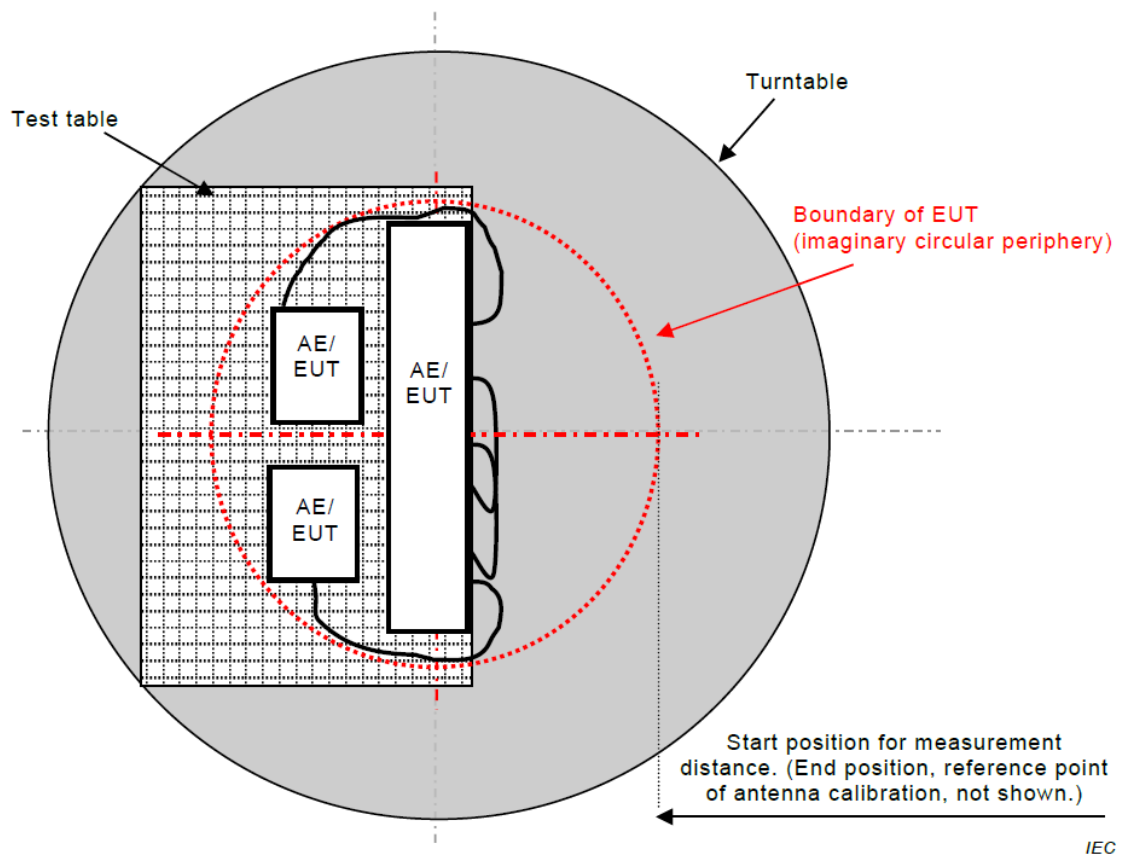


Figure C.2 – Boundary of EUT, Local AE and associated cabling


4.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

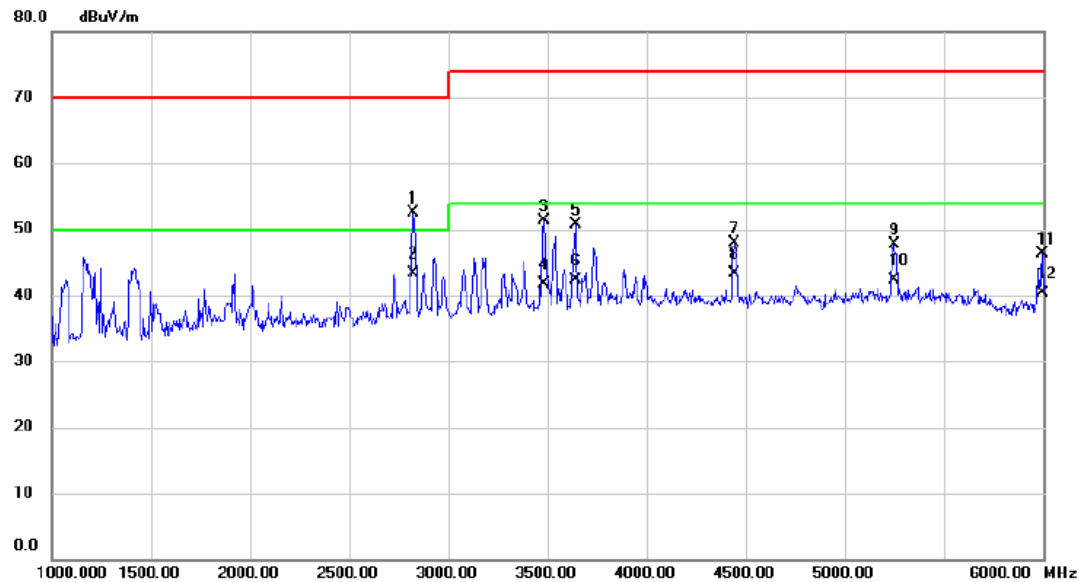


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2825.000	52.78	-0.19	52.59	70.00	-17.41	peak	
2 *	2825.000	43.51	-0.19	43.32	50.00	-6.68	AVG	
3	3482.500	49.80	1.52	51.32	74.00	-22.68	peak	
4	3482.500	40.13	1.52	41.65	54.00	-12.35	AVG	
5	3640.000	48.76	1.93	50.69	74.00	-23.31	peak	
6	3640.000	40.39	1.93	42.32	54.00	-11.68	AVG	
7	4440.000	45.28	2.66	47.94	74.00	-26.06	peak	
8	4440.000	40.55	2.66	43.21	54.00	-10.79	AVG	
9	5247.500	43.77	3.87	47.64	74.00	-26.36	peak	
10	5247.500	38.45	3.87	42.32	54.00	-11.68	AVG	
11	5995.000	41.65	4.66	46.31	74.00	-27.69	peak	
12	5995.000	35.55	4.66	40.21	54.00	-13.79	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

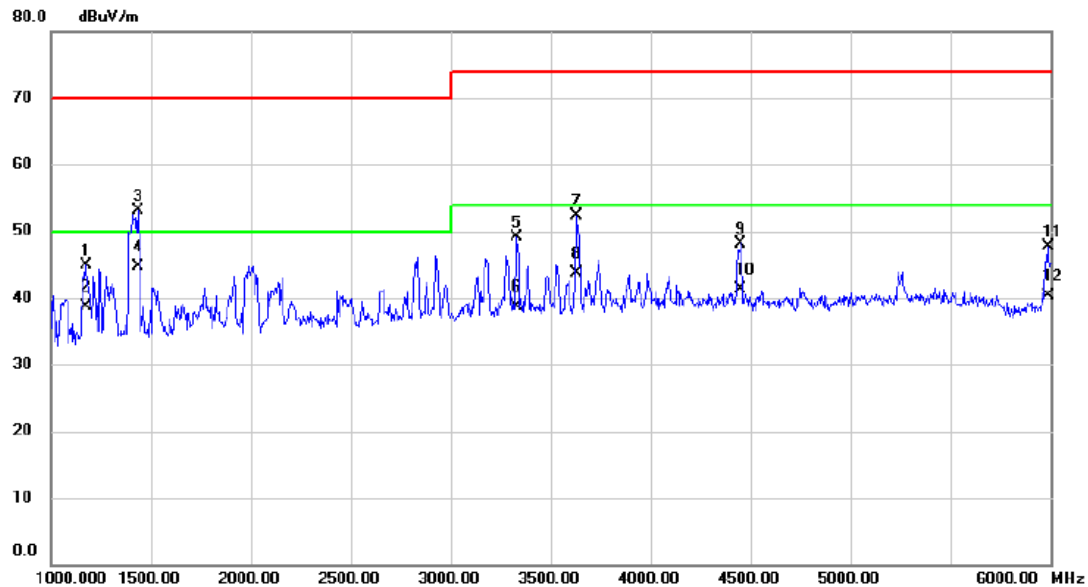


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1175.000	50.39	-5.43	44.96	70.00	-25.04	peak	
2		1175.000	44.08	-5.43	38.65	50.00	-11.35	AVG	
3		1437.500	57.90	-4.72	53.18	70.00	-16.82	peak	
4	*	1437.500	49.51	-4.72	44.79	50.00	-5.21	AVG	
5		3330.000	47.86	1.18	49.04	74.00	-24.96	peak	
6		3330.000	37.47	1.18	38.65	54.00	-15.35	AVG	
7		3627.500	50.43	1.90	52.33	74.00	-21.67	peak	
8		3627.500	41.75	1.90	43.65	54.00	-10.35	AVG	
9		4450.000	45.53	2.67	48.20	74.00	-25.80	peak	
10		4450.000	38.54	2.67	41.21	54.00	-12.79	AVG	
11		5987.500	43.07	4.65	47.72	74.00	-26.28	peak	
12		5987.500	35.56	4.65	40.21	54.00	-13.79	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 4		

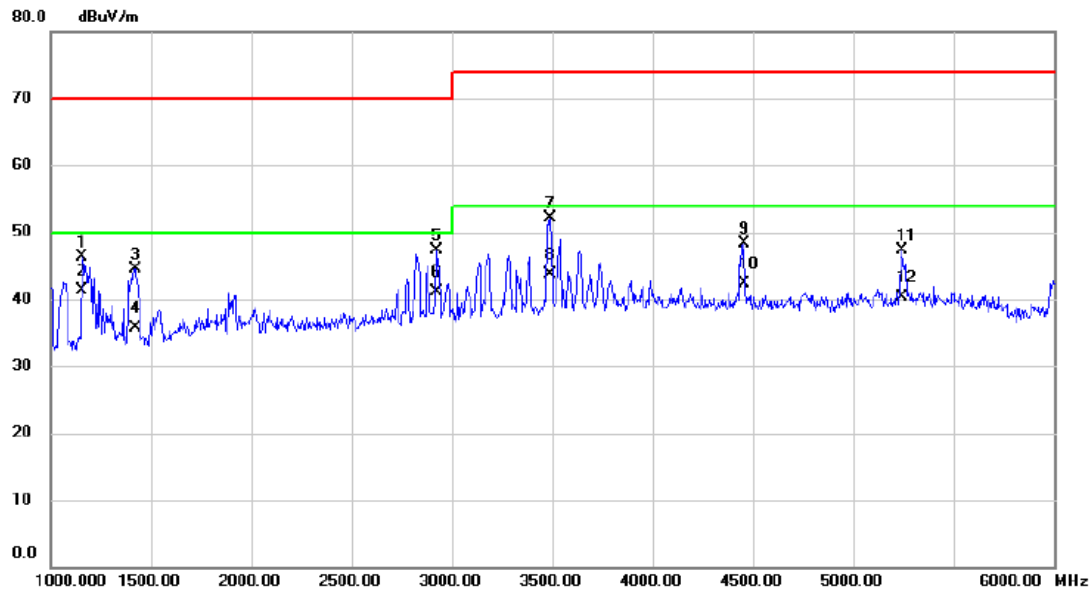


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1157.500	51.71	-5.48	46.23	70.00	-23.77	peak	
2	*	1157.500	46.69	-5.48	41.21	50.00	-8.79	AVG	
3		1420.000	49.30	-4.77	44.53	70.00	-25.47	peak	
4		1420.000	40.42	-4.77	35.65	50.00	-14.35	AVG	
5		2922.500	47.09	0.16	47.25	70.00	-22.75	peak	
6		2922.500	40.96	0.16	41.12	50.00	-8.88	AVG	
7		3492.500	50.48	1.54	52.02	74.00	-21.98	peak	
8		3492.500	42.11	1.54	43.65	54.00	-10.35	AVG	
9		4455.000	45.60	2.66	48.26	74.00	-25.74	peak	
10		4455.000	39.66	2.66	42.32	54.00	-11.68	AVG	
11		5245.000	43.48	3.86	47.34	74.00	-26.66	peak	
12		5245.000	36.35	3.86	40.21	54.00	-13.79	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 4		

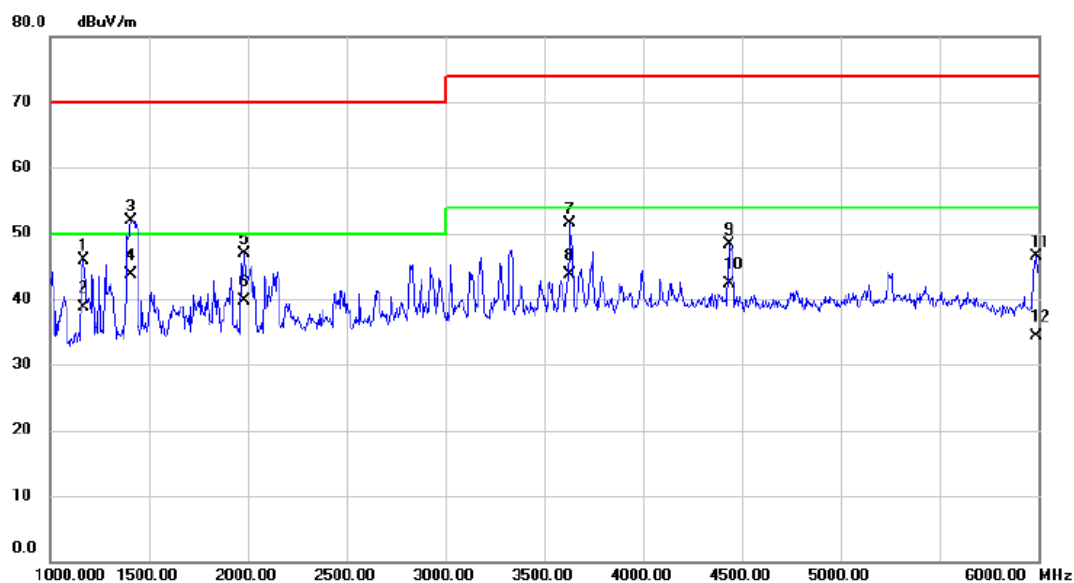


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1170.000	51.30	-5.44	45.86	70.00	-24.14	peak	
2		1170.000	44.09	-5.44	38.65	50.00	-11.35	AVG	
3		1410.000	56.74	-4.80	51.94	70.00	-18.06	peak	
4	*	1410.000	48.45	-4.80	43.65	50.00	-6.35	AVG	
5		1982.500	49.55	-2.62	46.93	70.00	-23.07	peak	
6		1982.500	42.27	-2.62	39.65	50.00	-10.35	AVG	
7		3630.000	49.67	1.90	51.57	74.00	-22.43	peak	
8		3630.000	41.75	1.90	43.65	54.00	-10.35	AVG	
9		4437.500	45.70	2.67	48.37	74.00	-25.63	peak	
10		4437.500	39.65	2.67	42.32	54.00	-11.68	AVG	
11		5990.000	41.93	4.65	46.58	74.00	-27.42	peak	
12		5990.000	29.56	4.65	34.21	54.00	-19.79	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 5		

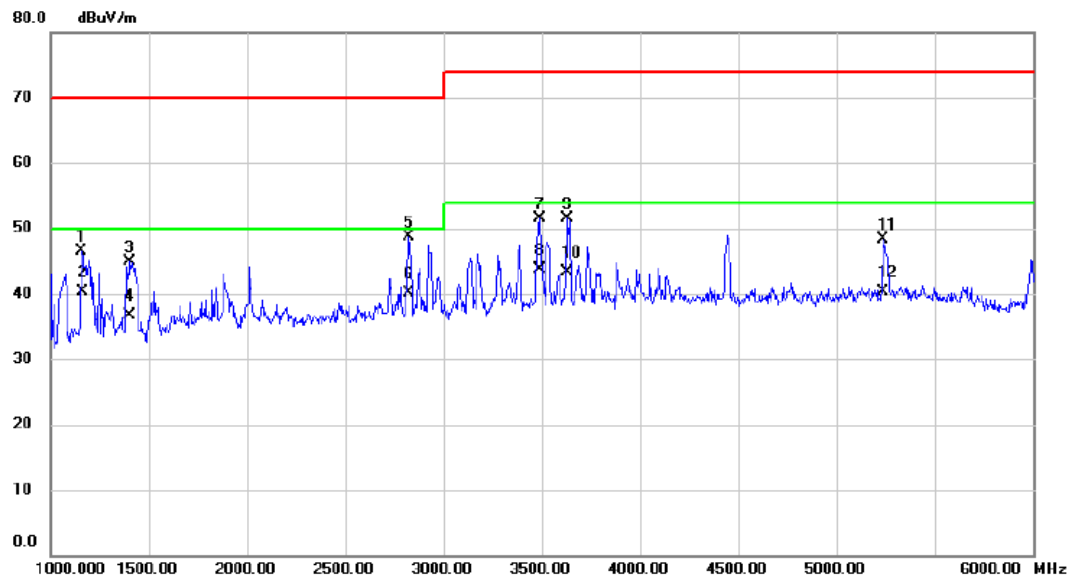


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1157.500	52.00	-5.48	46.52	70.00	-23.48	peak	
2	*	1160.000	45.68	-5.47	40.21	50.00	-9.79	AVG	
3		1405.000	49.70	-4.82	44.88	70.00	-25.12	peak	
4		1405.000	41.47	-4.82	36.65	50.00	-13.35	AVG	
5		2822.500	48.89	-0.20	48.69	70.00	-21.31	peak	
6		2822.500	40.32	-0.20	40.12	50.00	-9.88	AVG	
7		3492.500	50.02	1.54	51.56	74.00	-22.44	peak	
8		3492.500	42.11	1.54	43.65	54.00	-10.35	AVG	
9		3632.500	49.62	1.91	51.53	74.00	-22.47	peak	
10		3632.500	41.41	1.91	43.32	54.00	-10.68	AVG	
11		5237.500	44.43	3.86	48.29	74.00	-25.71	peak	
12		5237.500	36.35	3.86	40.21	54.00	-13.79	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 5		

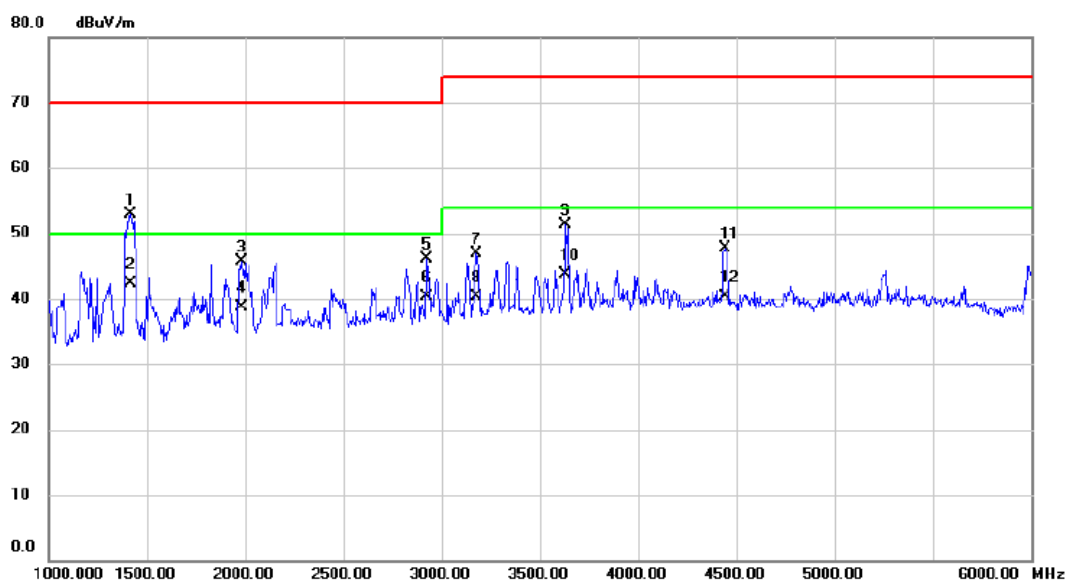


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1415.000	57.73	-4.78	52.95	70.00	-17.05	peak	
2 *	1415.000	46.99	-4.78	42.21	50.00	-7.79	AVG	
3	1980.000	48.32	-2.63	45.69	70.00	-24.31	peak	
4	1980.000	41.28	-2.63	38.65	50.00	-11.35	AVG	
5	2925.000	45.96	0.17	46.13	70.00	-23.87	peak	
6	2925.000	40.05	0.17	40.22	50.00	-9.78	AVG	
7	3175.000	46.00	0.83	46.83	74.00	-27.17	peak	
8	3175.000	39.38	0.83	40.21	54.00	-13.79	AVG	
9	3632.500	49.39	1.91	51.30	74.00	-22.70	peak	
10	3632.500	41.74	1.91	43.65	54.00	-10.35	AVG	
11	4442.500	45.03	2.66	47.69	74.00	-26.31	peak	
12	4442.500	37.55	2.66	40.21	54.00	-13.79	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 15		

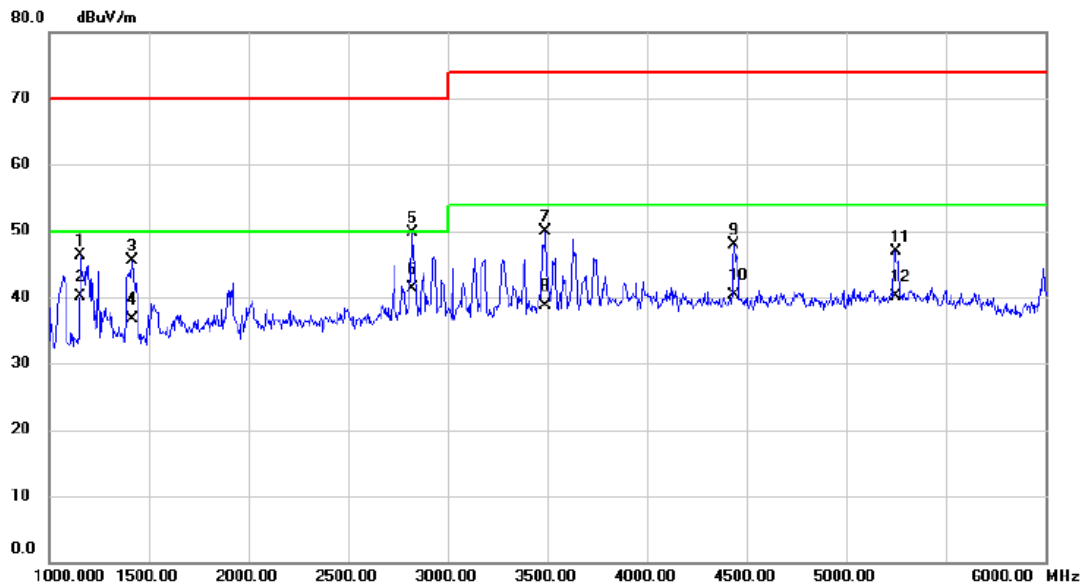


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1157.500	51.83	-5.48	46.35	70.00	-23.65	peak	
2		1157.500	45.60	-5.48	40.12	50.00	-9.88	AVG	
3		1415.000	50.21	-4.78	45.43	70.00	-24.57	peak	
4		1415.000	41.43	-4.78	36.65	50.00	-13.35	AVG	
5		2820.000	49.96	-0.20	49.76	70.00	-20.24	peak	
6	*	2820.000	41.41	-0.20	41.21	50.00	-8.79	AVG	
7		3490.000	48.44	1.54	49.98	74.00	-24.02	peak	
8		3490.000	37.11	1.54	38.65	54.00	-15.35	AVG	
9		4437.500	45.28	2.67	47.95	74.00	-26.05	peak	
10		4437.500	37.54	2.67	40.21	54.00	-13.79	AVG	
11		5247.500	43.11	3.87	46.98	74.00	-27.02	peak	
12		5247.500	36.25	3.87	40.12	54.00	-13.88	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 15		

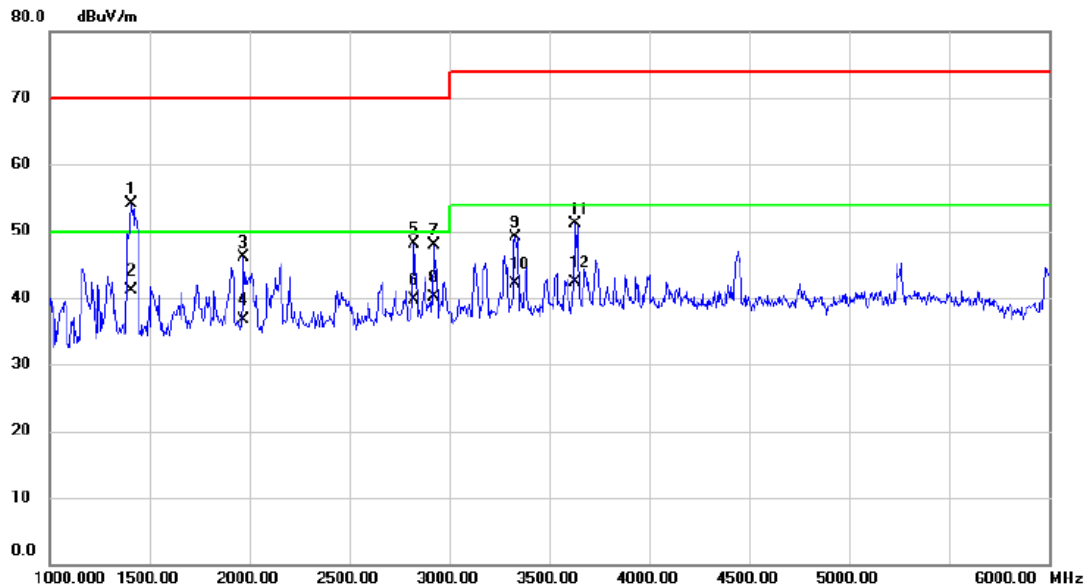


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1410.000	58.93	-4.80	54.13	70.00	-15.87	peak	
2	*	1410.000	45.92	-4.80	41.12	50.00	-8.88	AVG	
3		1972.500	48.85	-2.66	46.19	70.00	-23.81	peak	
4		1972.500	39.31	-2.66	36.65	50.00	-13.35	AVG	
5		2822.500	48.26	-0.20	48.06	70.00	-21.94	peak	
6		2822.500	39.85	-0.20	39.65	50.00	-10.35	AVG	
7		2922.500	47.71	0.16	47.87	70.00	-22.13	peak	
8		2922.500	39.96	0.16	40.12	50.00	-9.88	AVG	
9		3330.000	47.85	1.18	49.03	74.00	-24.97	peak	
10		3330.000	40.93	1.18	42.11	54.00	-11.89	AVG	
11		3632.500	49.21	1.91	51.12	74.00	-22.88	peak	
12		3632.500	40.30	1.91	42.21	54.00	-11.79	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

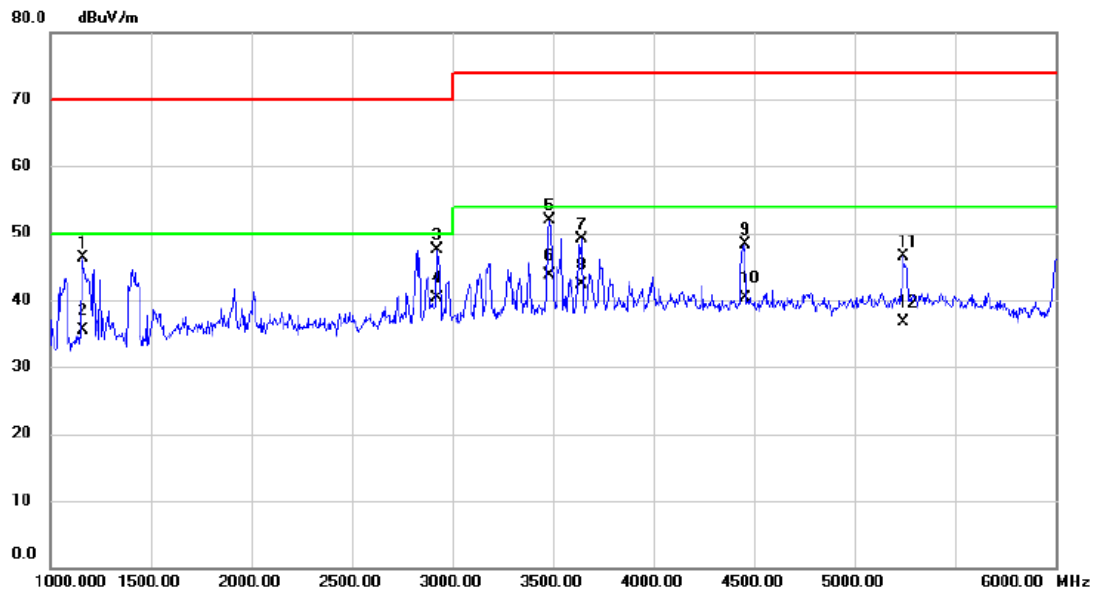

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1160.000	51.86	-5.47	46.39	70.00	-23.61	peak	
2		1160.000	41.03	-5.47	35.56	50.00	-14.44	AVG	
3		2922.500	47.35	0.16	47.51	70.00	-22.49	peak	
4	*	2922.500	40.05	0.16	40.21	50.00	-9.79	AVG	
5		3482.500	50.40	1.52	51.92	74.00	-22.08	peak	
6		3482.500	42.13	1.52	43.65	54.00	-10.35	AVG	
7		3642.500	47.18	1.93	49.11	74.00	-24.89	peak	
8		3642.500	40.39	1.93	42.32	54.00	-11.68	AVG	
9		4455.000	45.58	2.66	48.24	74.00	-25.76	peak	
10		4455.000	37.55	2.66	40.21	54.00	-13.79	AVG	
11		5240.000	42.72	3.87	46.59	74.00	-27.41	peak	
12		5240.000	32.76	3.87	36.63	54.00	-17.37	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

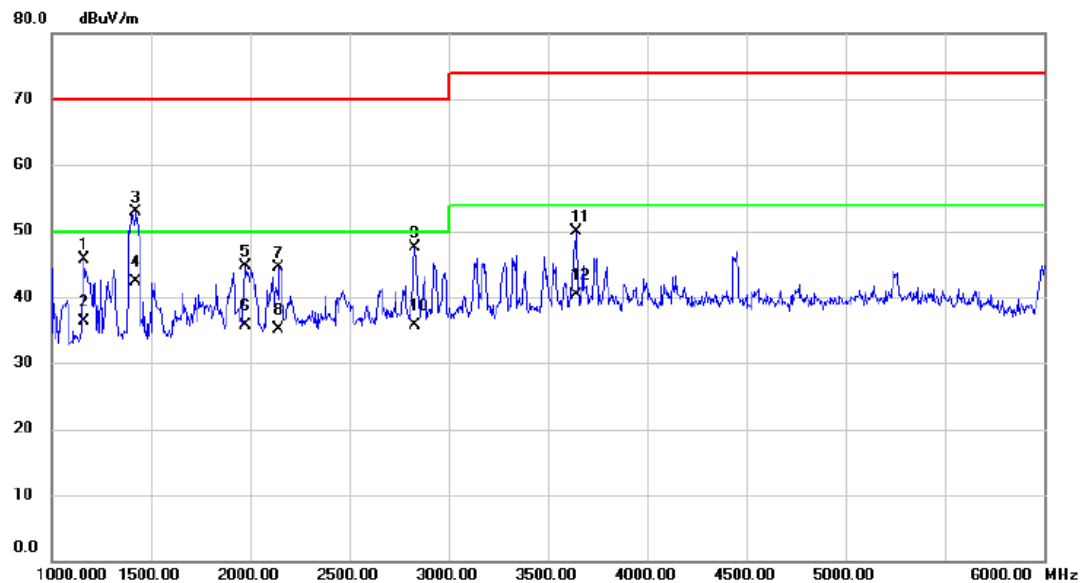

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1160.000	51.19	-5.47	45.72	70.00	-24.28	peak	
2		1160.000	41.70	-5.47	36.23	50.00	-13.77	AVG	
3		1425.000	57.62	-4.77	52.85	70.00	-17.15	peak	
4	*	1425.000	47.09	-4.77	42.32	50.00	-7.68	AVG	
5		1977.500	47.30	-2.64	44.66	70.00	-25.34	peak	
6		1977.500	38.29	-2.64	35.65	50.00	-14.35	AVG	
7		2145.000	46.60	-2.19	44.41	70.00	-25.59	peak	
8		2145.000	37.31	-2.19	35.12	50.00	-14.88	AVG	
9		2830.000	47.73	-0.16	47.57	70.00	-22.43	peak	
10		2830.000	35.81	-0.16	35.65	50.00	-14.35	AVG	
11		3645.000	48.03	1.94	49.97	74.00	-24.03	peak	
12		3645.000	38.27	1.94	40.21	54.00	-13.79	AVG	

4.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

4.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

4.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 22, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	102974	Dec. 22, 2024
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	Cable	N/A	SFT205-NMNM-9M-0 01	9M	Nov. 11, 2025

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


4.3.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation

4.3.5 TEST SETUP

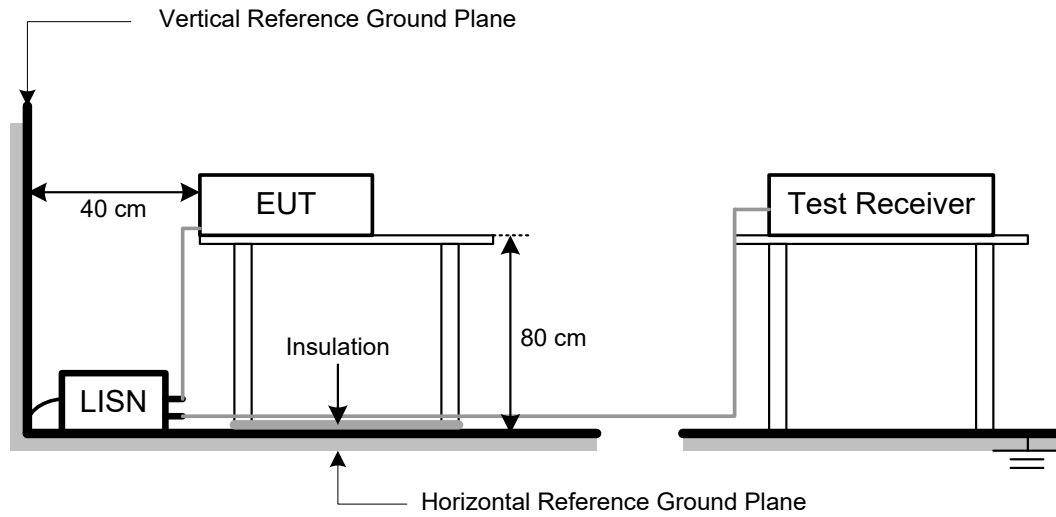


4.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 1		

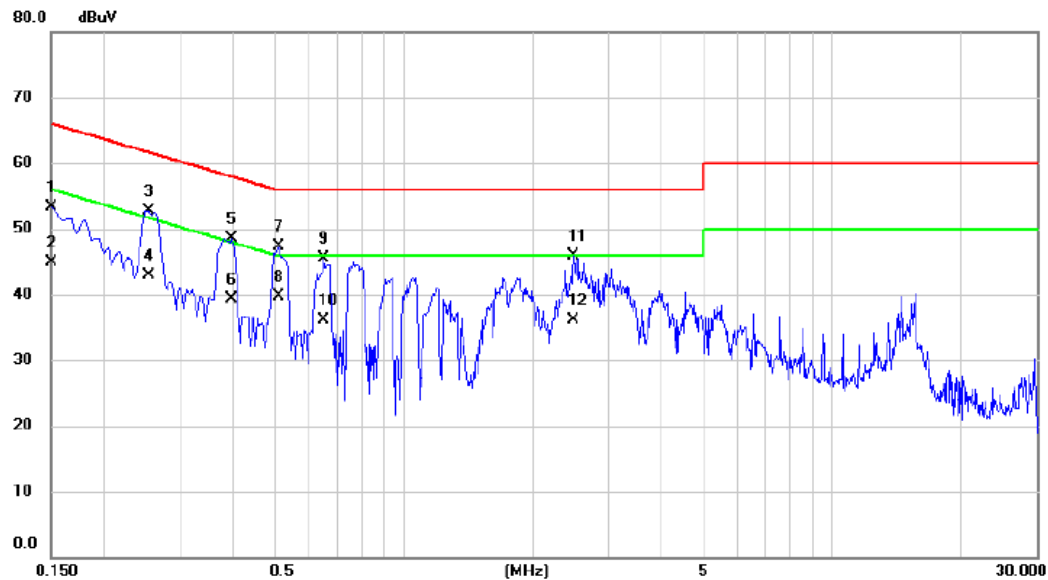


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	43.64	9.74	53.38	66.00	-12.62	QP	
2	0.1500	35.20	9.74	44.94	56.00	-11.06	AVG	
3	0.2535	42.88	9.76	52.64	61.64	-9.00	QP	
4	0.2535	33.10	9.76	42.86	51.64	-8.78	AVG	
5	0.3975	38.77	9.78	48.55	57.91	-9.36	QP	
6	0.3975	29.50	9.78	39.28	47.91	-8.63	AVG	
7	0.5100	37.54	9.80	47.34	56.00	-8.66	QP	
8 *	0.5100	29.90	9.80	39.70	46.00	-6.30	AVG	
9	0.6495	35.60	9.81	45.41	56.00	-10.59	QP	
10	0.6495	26.30	9.81	36.11	46.00	-9.89	AVG	
11	2.4900	35.95	9.94	45.89	56.00	-10.11	QP	
12	2.4900	26.10	9.94	36.04	46.00	-9.96	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 1		

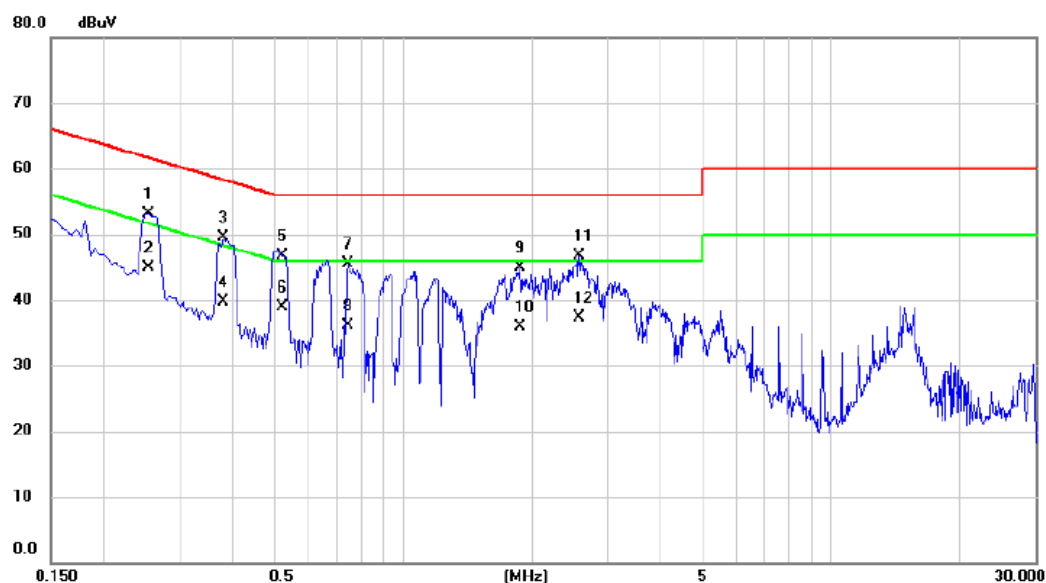


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2535	43.50	9.62	53.12	61.64	-8.52	QP	
2	*	0.2535	35.20	9.62	44.82	51.64	-6.82	AVG	
3		0.3795	39.93	9.65	49.58	58.29	-8.71	QP	
4		0.3795	30.10	9.65	39.75	48.29	-8.54	AVG	
5		0.5237	36.98	9.66	46.64	56.00	-9.36	QP	
6		0.5237	29.30	9.66	38.96	46.00	-7.04	AVG	
7		0.7440	35.74	9.70	45.44	56.00	-10.56	QP	
8		0.7440	26.40	9.70	36.10	46.00	-9.90	AVG	
9		1.8735	35.07	9.76	44.83	56.00	-11.17	QP	
10		1.8735	26.10	9.76	35.86	46.00	-10.14	AVG	
11		2.5755	36.90	9.80	46.70	56.00	-9.30	QP	
12		2.5755	27.50	9.80	37.30	46.00	-8.70	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 4		

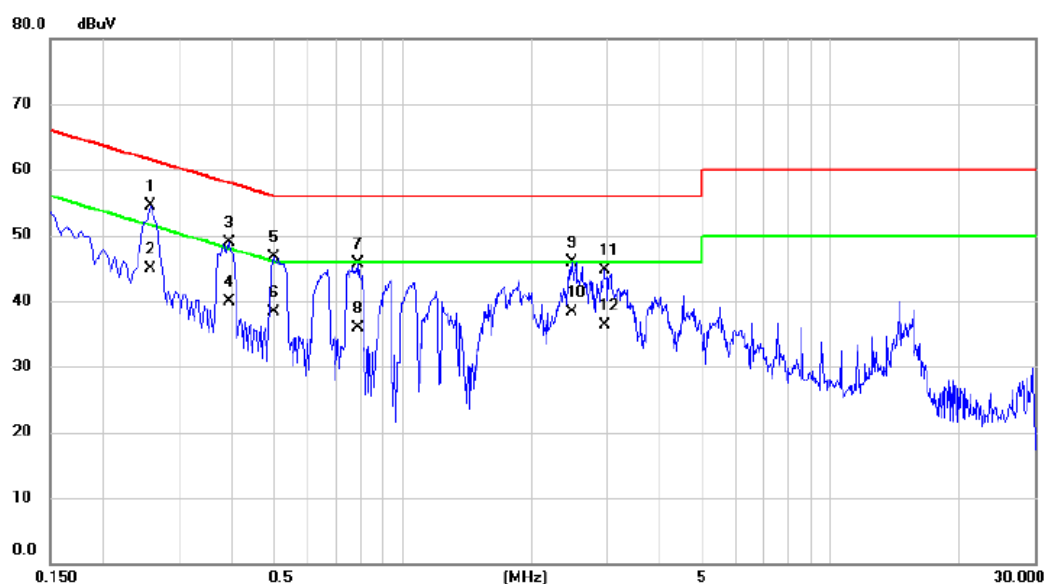


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2580	44.84	9.76	54.60	61.50	-6.90	QP	
2	*	0.2580	35.20	9.76	44.96	51.50	-6.54	AVG	
3		0.3930	39.03	9.78	48.81	58.00	-9.19	QP	
4		0.3930	30.10	9.78	39.88	48.00	-8.12	AVG	
5		0.5010	36.86	9.80	46.66	56.00	-9.34	QP	
6		0.5010	28.60	9.80	38.40	46.00	-7.60	AVG	
7		0.7890	35.85	9.86	45.71	56.00	-10.29	QP	
8		0.7890	26.10	9.86	35.96	46.00	-10.04	AVG	
9		2.4855	36.01	9.94	45.95	56.00	-10.05	QP	
10		2.4855	28.40	9.94	38.34	46.00	-7.66	AVG	
11		2.9580	34.73	9.97	44.70	56.00	-11.30	QP	
12		2.9580	26.30	9.97	36.27	46.00	-9.73	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 4		

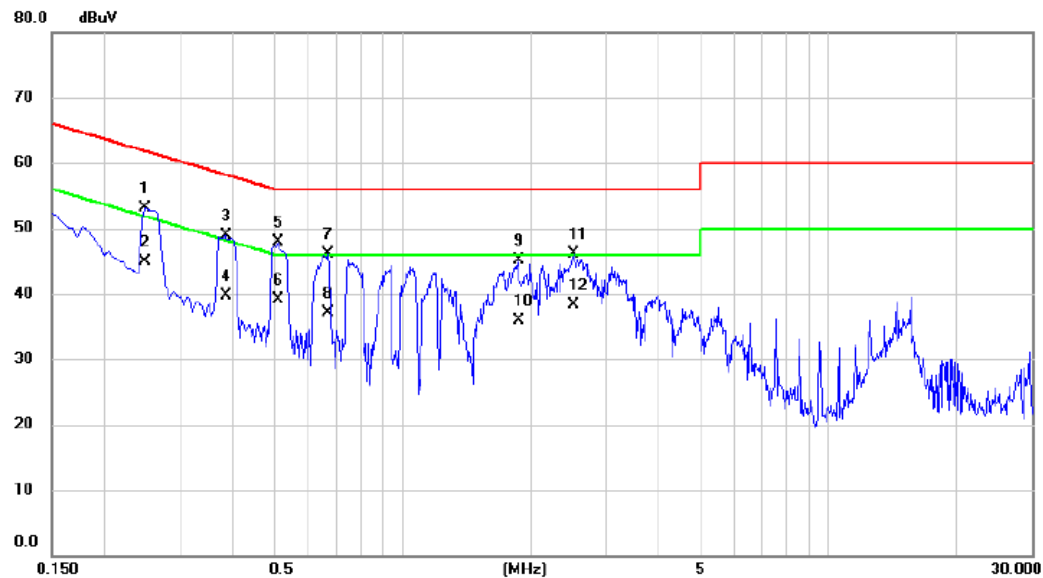


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2490	43.53	9.62	53.15	61.79	-8.64	QP	
2		0.2490	35.20	9.62	44.82	51.79	-6.97	AVG	
3		0.3840	39.23	9.65	48.88	58.19	-9.31	QP	
4		0.3840	30.10	9.65	39.75	48.19	-8.44	AVG	
5		0.5100	38.29	9.66	47.95	56.00	-8.05	QP	
6	*	0.5100	29.50	9.66	39.16	46.00	-6.84	AVG	
7		0.6675	36.34	9.69	46.03	56.00	-9.97	QP	
8		0.6675	27.40	9.69	37.09	46.00	-8.91	AVG	
9		1.8690	35.28	9.76	45.04	56.00	-10.96	QP	
10		1.8690	26.10	9.76	35.86	46.00	-10.14	AVG	
11		2.5170	36.39	9.80	46.19	56.00	-9.81	QP	
12		2.5170	28.60	9.80	38.40	46.00	-7.60	AVG	

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 5		

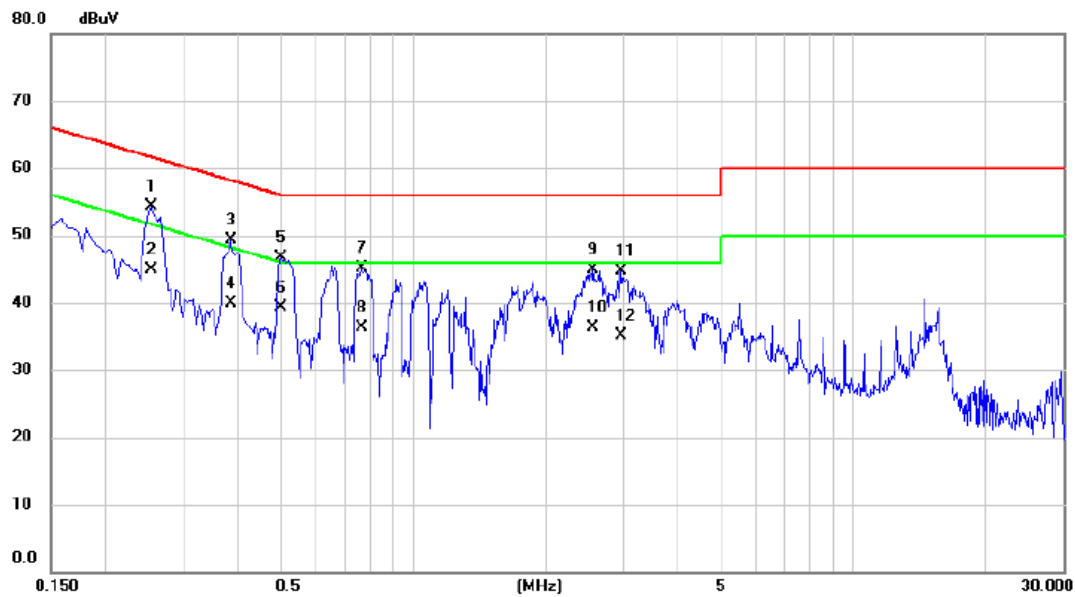


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2535	44.63	9.76	54.39	61.64	-7.25	QP	
2	*	0.2535	35.20	9.76	44.96	51.64	-6.68	AVG	
3		0.3840	39.43	9.78	49.21	58.19	-8.98	QP	
4		0.3840	30.10	9.78	39.88	48.19	-8.31	AVG	
5		0.5010	36.98	9.80	46.78	56.00	-9.22	QP	
6		0.5010	29.50	9.80	39.30	46.00	-6.70	AVG	
7		0.7620	35.32	9.85	45.17	56.00	-10.83	QP	
8		0.7620	26.40	9.85	36.25	46.00	-9.75	AVG	
9		2.5574	35.05	9.95	45.00	56.00	-11.00	QP	
10		2.5574	26.30	9.95	36.25	46.00	-9.75	AVG	
11		2.9670	34.76	9.97	44.73	56.00	-11.27	QP	
12		2.9670	25.10	9.97	35.07	46.00	-10.93	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 5		

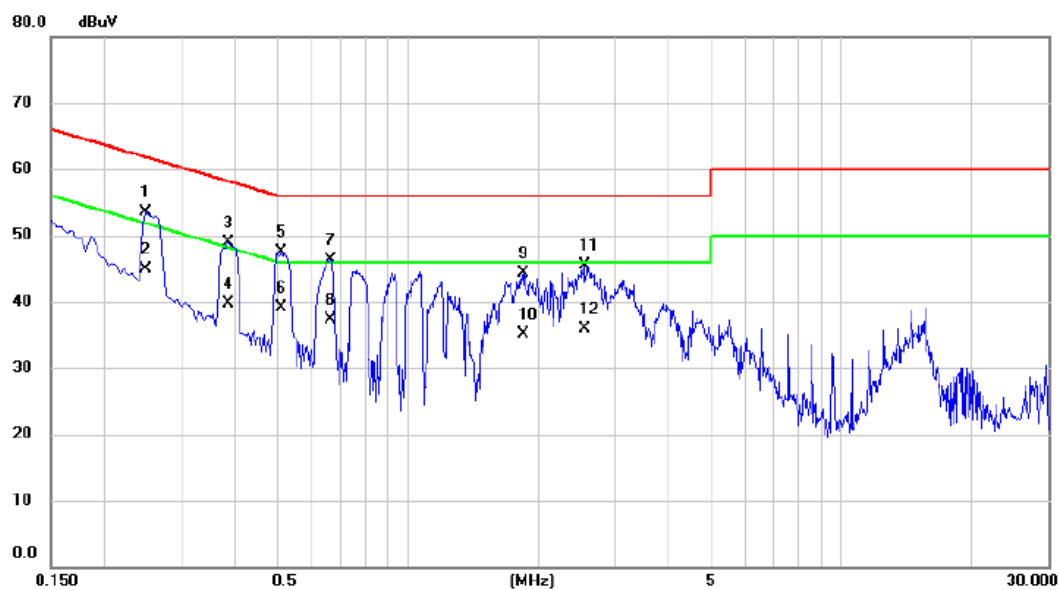


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2490	43.92	9.62	53.54	61.79	-8.25	QP	
2	0.2490	35.20	9.62	44.82	51.79	-6.97	AVG	
3	0.3840	39.32	9.65	48.97	58.19	-9.22	QP	
4	0.3840	30.10	9.65	39.75	48.19	-8.44	AVG	
5	0.5100	37.86	9.66	47.52	56.00	-8.48	QP	
6 *	0.5100	29.50	9.66	39.16	46.00	-6.84	AVG	
7	0.6630	36.59	9.69	46.28	56.00	-9.72	QP	
8	0.6630	27.60	9.69	37.29	46.00	-8.71	AVG	
9	1.8510	34.54	9.76	44.30	56.00	-11.70	QP	
10	1.8510	25.40	9.76	35.16	46.00	-10.84	AVG	
11	2.5530	35.66	9.80	45.46	56.00	-10.54	QP	
12	2.5530	26.10	9.80	35.90	46.00	-10.10	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 1		

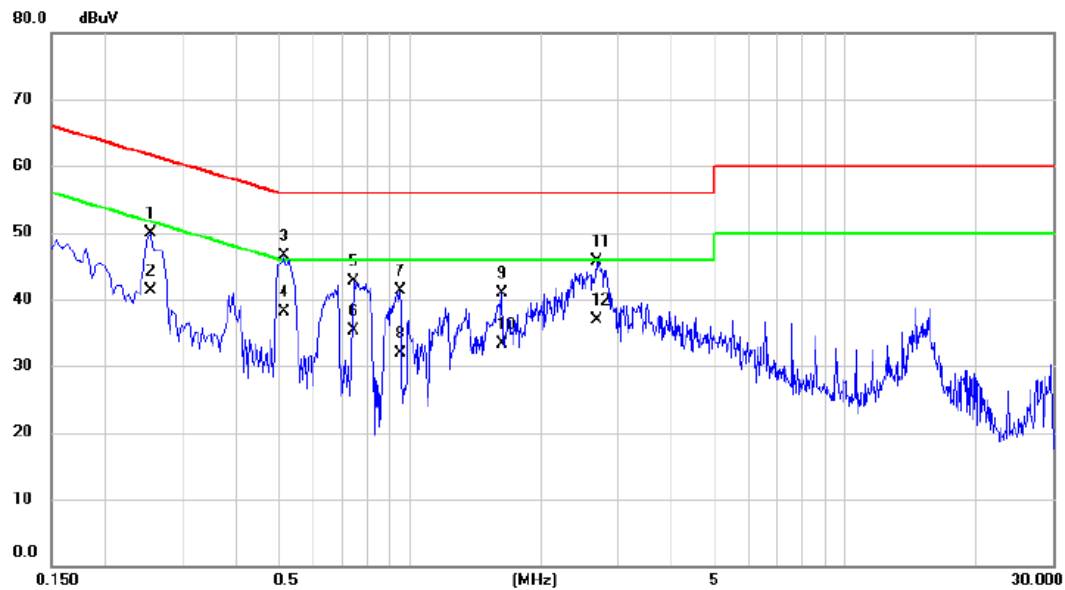

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2535	40.17	9.76	49.93	61.64	-11.71	QP	
2	0.2535	31.60	9.76	41.36	51.64	-10.28	AVG	
3	0.5144	36.72	9.80	46.52	56.00	-9.48	QP	
4 *	0.5144	28.30	9.80	38.10	46.00	-7.90	AVG	
5	0.7440	32.84	9.83	42.67	56.00	-13.33	QP	
6	0.7440	25.40	9.83	35.23	46.00	-10.77	AVG	
7	0.9510	31.44	9.85	41.29	56.00	-14.71	QP	
8	0.9510	22.10	9.85	31.95	46.00	-14.05	AVG	
9	1.6305	31.00	9.89	40.89	56.00	-15.11	QP	
10	1.6305	23.50	9.89	33.39	46.00	-12.61	AVG	
11	2.6880	35.83	9.95	45.78	56.00	-10.22	QP	
12	2.6880	26.90	9.95	36.85	46.00	-9.15	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 1		

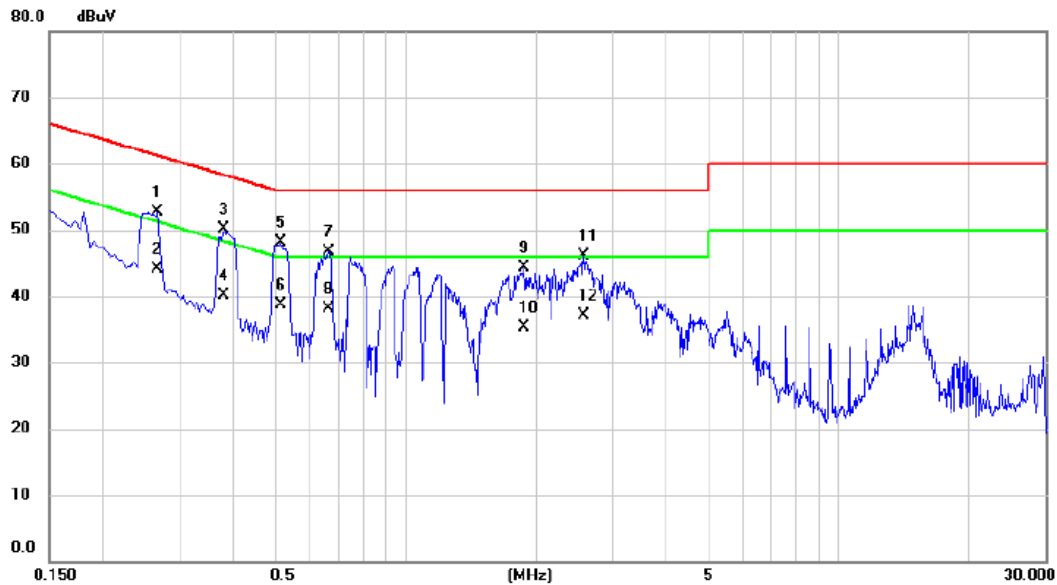

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2671	43.09	9.62	52.71	61.21	-8.50	QP	
2	*	0.2671	34.50	9.62	44.12	51.21	-7.09	AVG	
3		0.3795	40.43	9.65	50.08	58.29	-8.21	QP	
4		0.3795	30.50	9.65	40.15	48.29	-8.14	AVG	
5		0.5144	38.49	9.66	48.15	56.00	-7.85	QP	
6		0.5144	29.10	9.66	38.76	46.00	-7.24	AVG	
7		0.6630	36.94	9.69	46.63	56.00	-9.37	QP	
8		0.6630	28.40	9.69	38.09	46.00	-7.91	AVG	
9		1.8733	34.57	9.76	44.33	56.00	-11.67	QP	
10		1.8733	25.60	9.76	35.36	46.00	-10.64	AVG	
11		2.5754	36.40	9.80	46.20	56.00	-9.80	QP	
12		2.5754	27.40	9.80	37.20	46.00	-8.80	AVG	

4.4 HARMONIC CURRENT EMISSIONS TEST

4.4.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

4.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 01, 2025
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 01, 2025
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


4.4.3 TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- The classification of EUT is according to of EN 61000-3-2. The EUT is classified as Class D.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation


4.4.5 TEST SETUP

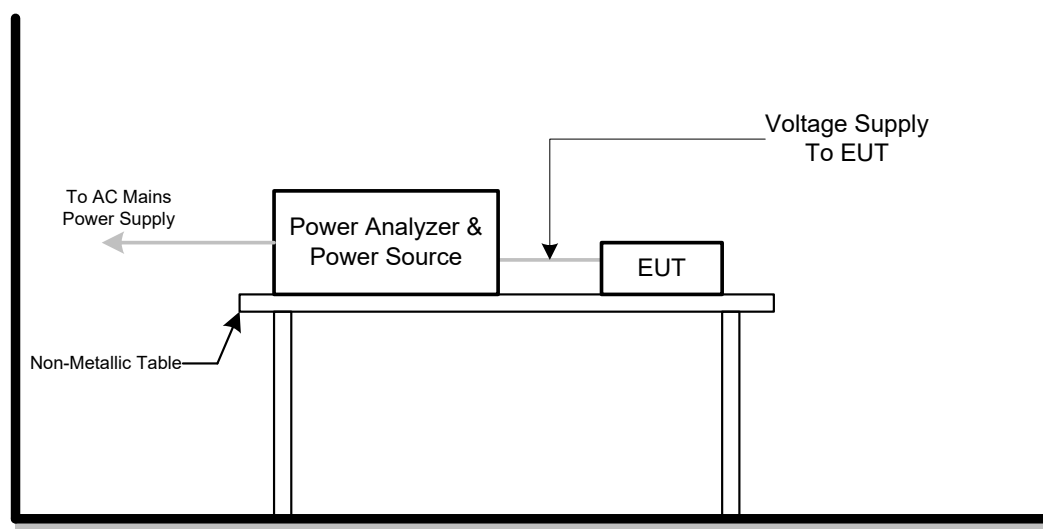

4.4.6 TEST RESULTS


Harmonics – Class-D	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Current & voltage waveforms

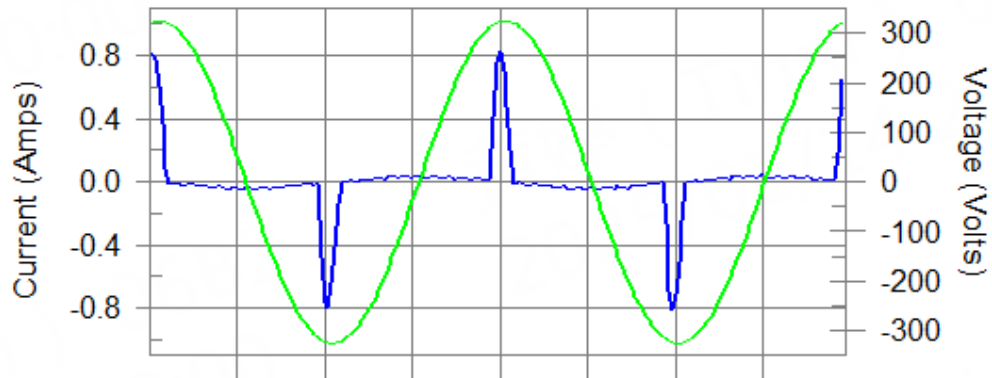

Harmonics and Class D limit line

European Limits

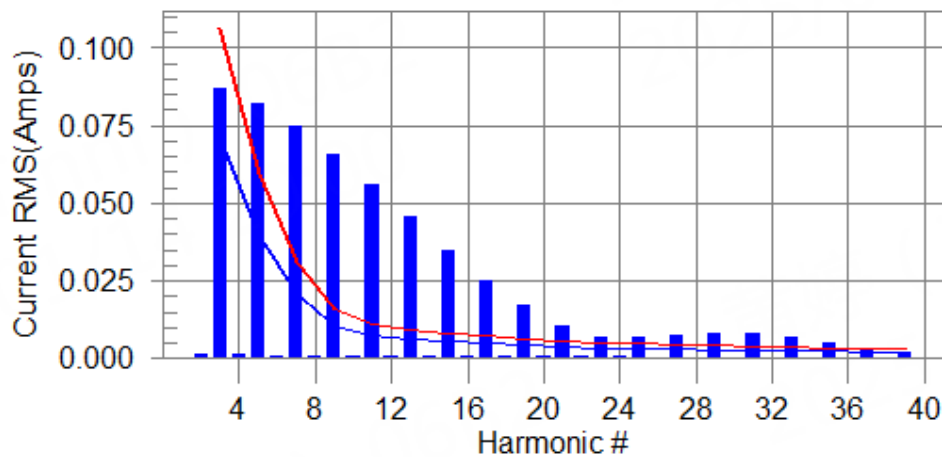

Test result: N/L Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

Current Test Result Summary (Run time)

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Highest parameter values during test:

V_RMS (Volts):	229.89	Frequency(Hz):	50.00
I_Peak (Amps):	0.840	I_RMS (Amps):	0.206
I_Fund (Amps):	0.097	Crest Factor:	4.102
Power (Watts):	20.9	Power Factor:	0.446

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	0.000	N/A	0.002	0.000	N/A	N/L
3	0.087	0.071	N/A	0.090	0.106	N/A	N/L
4	0.001	0.000	N/A	0.002	0.000	N/A	N/L
5	0.082	0.040	N/A	0.083	0.059	N/A	N/L
6	0.001	0.000	N/A	0.001	0.000	N/A	N/L
7	0.075	0.021	N/A	0.076	0.031	N/A	N/L
8	0.001	0.000	N/A	0.001	0.000	N/A	N/L
9	0.066	0.010	N/A	0.067	0.016	N/A	N/L
10	0.001	0.000	N/A	0.001	0.000	N/A	N/L
11	0.056	0.007	N/A	0.057	0.011	N/A	N/L
12	0.001	0.000	N/A	0.001	0.000	N/A	N/L
13	0.045	0.006	N/A	0.046	0.009	N/A	N/L
14	0.000	0.000	N/A	0.001	0.000	N/A	N/L
15	0.035	0.005	N/A	0.036	0.008	N/A	N/L
16	0.001	0.000	N/A	0.001	0.000	N/A	N/L
17	0.025	0.005	N/A	0.026	0.007	N/A	N/L
18	0.000	0.000	N/A	0.001	0.000	N/A	N/L
19	0.017	0.004	N/A	0.017	0.006	N/A	N/L
20	0.001	0.000	N/A	0.001	0.000	N/A	N/L
21	0.010	0.004	N/A	0.011	0.006	N/A	N/L
22	0.001	0.000	N/A	0.001	0.000	N/A	N/L
23	0.007	0.003	N/A	0.007	0.005	N/A	N/L
24	0.000	0.000	N/A	0.001	0.000	N/A	N/L
25	0.007	0.003	N/A	0.007	0.005	N/A	N/L
26	0.000	0.000	N/A	0.000	0.000	N/A	N/L
27	0.008	0.003	N/A	0.008	0.004	N/A	N/L
28	0.000	0.000	N/A	0.001	0.000	N/A	N/L
29	0.008	0.003	N/A	0.008	0.004	N/A	N/L
30	0.000	0.000	N/A	0.000	0.000	N/A	N/L
31	0.008	0.003	N/A	0.008	0.004	N/A	N/L
32	0.000	0.000	N/A	0.000	0.000	N/A	N/L
33	0.007	0.002	N/A	0.007	0.004	N/A	N/L
34	0.000	0.000	N/A	0.000	0.000	N/A	N/L
35	0.005	0.002	N/A	0.005	0.003	N/A	N/L
36	0.000	0.000	N/A	0.000	0.000	N/A	N/L
37	0.003	0.002	N/A	0.004	0.003	N/A	N/L
38	0.000	0.000	N/A	0.000	0.000	N/A	N/L
39	0.002	0.002	N/A	0.002	0.003	N/A	N/L
40	0.000	0.000	N/A	0.000	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Highest parameter values during test:

Voltage (Vrms):	229.89	Frequency(Hz):	50.00
I_Peak (Amps):	0.840	I_RMS (Amps):	0.206
I_Fund (Amps):	0.097	Crest Factor:	4.102
Power (Watts):	20.9	Power Factor:	0.446

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.111	0.460	24.19	OK
3	0.538	2.068	26.03	OK
4	0.067	0.460	14.48	OK
5	0.050	0.919	5.42	OK
6	0.040	0.460	8.69	OK
7	0.065	0.690	9.42	OK
8	0.026	0.460	5.76	OK
9	0.037	0.460	8.07	OK
10	0.018	0.460	3.83	OK
11	0.042	0.230	18.19	OK
12	0.016	0.230	6.81	OK
13	0.028	0.230	12.21	OK
14	0.017	0.230	7.45	OK
15	0.033	0.230	14.31	OK
16	0.019	0.230	8.48	OK
17	0.016	0.230	7.16	OK
18	0.013	0.230	5.83	OK
19	0.022	0.230	9.40	OK
20	0.016	0.230	7.17	OK
21	0.006	0.230	2.77	OK
22	0.012	0.230	5.31	OK
23	0.010	0.230	4.42	OK
24	0.006	0.230	2.42	OK
25	0.011	0.230	4.73	OK
26	0.007	0.230	3.25	OK
27	0.008	0.230	3.68	OK
28	0.007	0.230	3.16	OK
29	0.015	0.230	6.39	OK
30	0.006	0.230	2.41	OK
31	0.010	0.230	4.43	OK
32	0.005	0.230	2.35	OK
33	0.015	0.230	6.52	OK
34	0.003	0.230	1.27	OK
35	0.008	0.230	3.45	OK
36	0.004	0.230	1.55	OK
37	0.007	0.230	2.98	OK
38	0.003	0.230	1.34	OK
39	0.004	0.230	1.92	OK
40	0.006	0.230	2.74	OK

4.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST

4.5.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	≤ 1.0 , $T_p = 10$ min.	Short Term Flicker Indicator
Plt	≤ 0.65 , $T_p = 2$ hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Change
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	≤ 500 ms	Relative V-change characteristic

4.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 01, 2025
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 01, 2025
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


4.5.3 TEST PROCEDURE

- Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

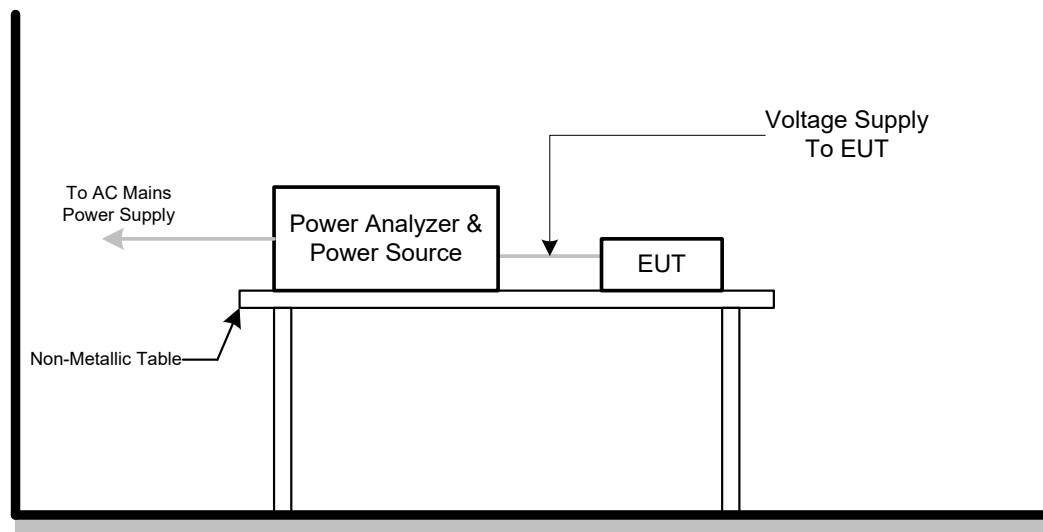


4.5.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1

Pst and limit line

European Limits

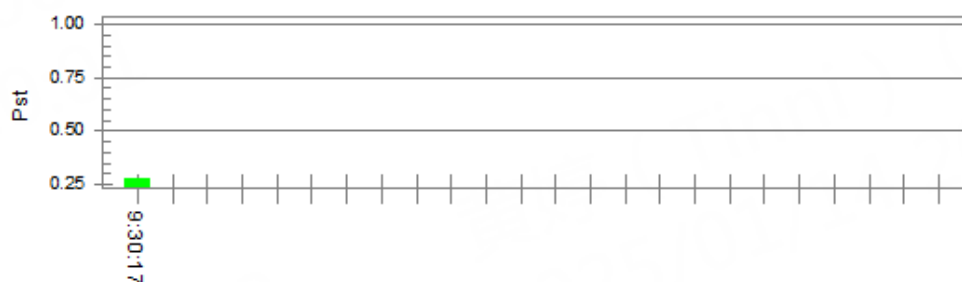

Plt and limit line

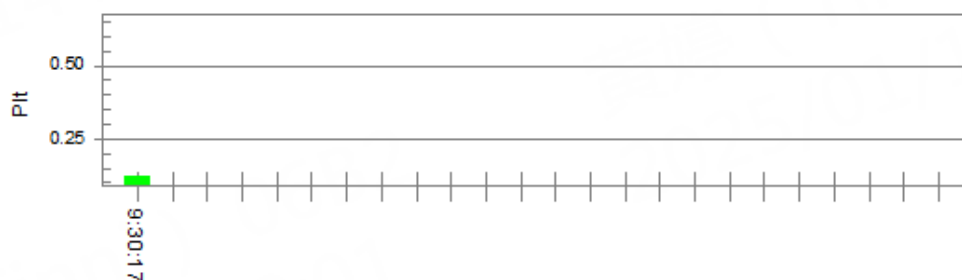

Parameter values recorded during the test:

Vrms at the end of test (Volt): 229.82

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.273

Highest Plt (2 hr. period): 0.119

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass

5. EMC IMMUNITY TEST

5.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports (NOTE 2)	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports (NOTE 2)	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	Port Type: unshielded symmetrical			
	Apply: lines to ground			
	Primary protection is Intended ±1 kV and ±4 kV 10/700(5/320)Tr/Th μs	Analogue/digital data ports (NOTE 1) & (NOTE 2)	C	
	Primary protection is not Intended ±1 kV 10/700(5/320) Tr/Th μs		C	
	Port type: coaxial or shielded			
	Apply: shield to ground			
	±0.5 kV 1.2/50(8/20) Tr/Th μs	Analogue/digital data ports (NOTE 1) & (NOTE 2)	B	
	line to reference ground for each individual line: ±0.5 kV(peak) 1.2/50(8/20) Tr/Th μs	DC network power ports (NOTE 2)	B	
	±1 kV(peak) 1.2/50(8/20) Tr/Th μs (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th μs (line to earth or ground)	AC mains power ports	B	
	Continuous induced RF disturbances IEC 61000-4-6 (CS)	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Analogue/digital data ports (NOTE 2)	A
		0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC network power ports (NOTE 2)	A
		0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage<5% 0.5 cycle Residual voltage<70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage<5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances,repitive (BIN-R)	0.15 MHz to 0.5 MHz 107 dBuV 0.5 MHz to 10 MHz 107 dBuV to 36 dBuV 10 MHz to 30 MHz 36 dBuV to 30 dBuV	Analogue/digital data ports (Applicable only to CPE xDSL ports)	A
	0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports (Apply period based on the AC mains frequency)	A
Broadband impulse noise disturbances,isolated (BIN-I)	0.15 MHz to 30 MHz 110 dBuV	Analogue/digital data ports (Applicable only to CPE xDSL ports)	B
	0.24 ms 10 ms 300 ms	Analogue/digital data ports (Apply all burst durations)	B

Note.

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

5.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standards, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

5.3 ANNEX D (NORMATIVE) - DISPLAY AND DISPLAY OUTPUT FUNCTION

5.3.1 PERFORMANCE CRITERIA

Performance criterion A

for continuous radiated and conducted disturbances tests:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA. Additionally, an increase in any degradation greater than just perceptible by observation of the image shall not occur as a consequence of the application of the test. Examples of such degradations are:

- superimposed patterning;
- positional disturbances due to synchronisation errors;
- geometric distortion;
- change of contrast or brightness;
- picture artefacts;
- freezing or disturbance of motion;
- image loss;
- video data or decoding errors.

Performance criterion A

for the power frequency magnetic field tests:

Alternative 1: A continuous magnetic field of 1 A/m:

The jitter (in mm) shall not exceed the value
$$\frac{(\text{character height in mm} + 0,3) \times 2,5}{33,3}$$

Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA.

Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

5.4 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION

5.4.1 PERFORMANCE CRITERIA

Performance criterion A:

For devices that support telephony functions the limits of Table G.3 shall apply.

With respect to Table G.3:

- the interference ratio (electrical or acoustic) shall meet the limits in column 3; or,
- the acoustic level of the demodulated audio shall be less than the limits in column 4; or,
- the digitally coded level of demodulated audio shall be less than limits in column 5; or,
- the analogue level of the demodulated audio shall be less than the limits in column 6.

Table G.3 – Performance criterion A – Limits for devices supporting telephony

Type of immunity test	Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
			dB (SPL)	Digital dBm0	Analogue dBm
Conducted	0,15 to 30	-20 dB	55	-50	-50
	30 to 80	-10 dB	65	-40	-40
Radiated	80 to 1000	0 dB	75	-30	-30

For terminals connected to digital wired network ports (such as Ethernet, ISDN), measurements of the demodulated 1 kHz may be performed on a remote AE, ideally of the same design.

For all other devices:

The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

Performance criterion B:

Use the general performance criterion B. See GENERAL PERFORMANCE CRITERIA.

Performance criterion C:

Use the general performance criterion C. See GENERAL PERFORMANCE CRITERIA.

5.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

5.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ Contact Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

5.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ	NSG 437	1726	Sep. 24, 2025

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

5.5.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- b. For TABLE-TOP equipment:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP

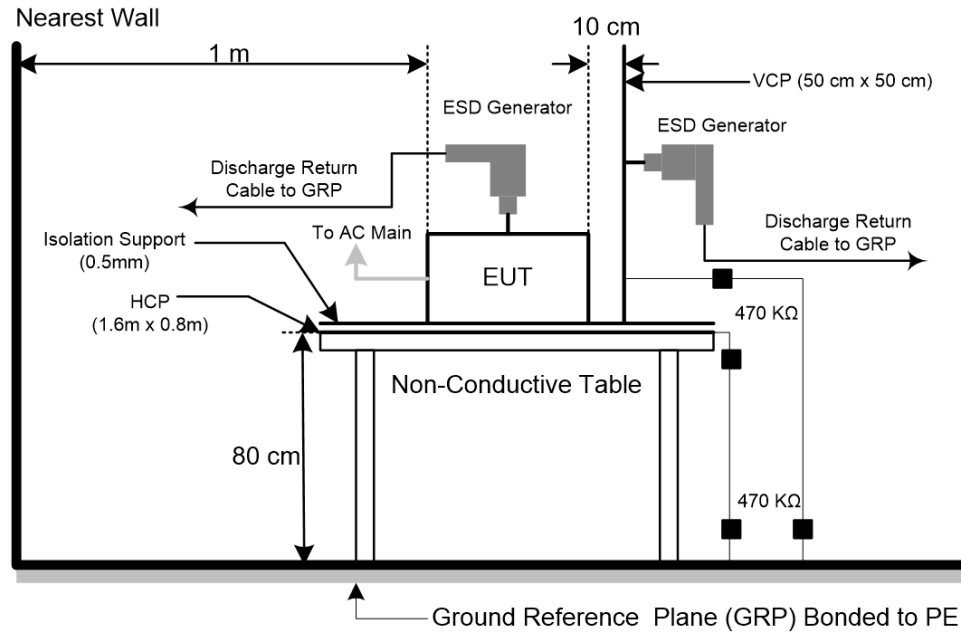

5.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, 8-13



Mode	Air Discharge								Contact Discharge					
Test Level	2kV		4kV		8kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	B	B	-	-	A	A	A	A	-	-
2	A	A	A	A	B	B	-	-	-	-	-	-	-	-
3	A	A	A	A	B	B	-	-	-	-	-	-	-	-
4	A	A	A	A	B	B	-	-	-	-	-	-	-	-
5	A	A	A	A	B	B	-	-	-	-	-	-	-	-
Criteria	B						-		B				-	
Result	B						-		A				-	


Mode	HCP Contact Discharge						VCP Contact Discharge					
Test Level	2kV		4kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
Left side	A	A	A	A	-	-	A	A	A	A	-	-
Right side	A	A	A	A	-	-	A	A	A	A	-	-
Front side	A	A	A	A	-	-	A	A	A	A	-	-
Rear side	A	A	A	A	-	-	A	A	A	A	-	-
Criteria	B				-		B				-	
Result	A				-		A				-	

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

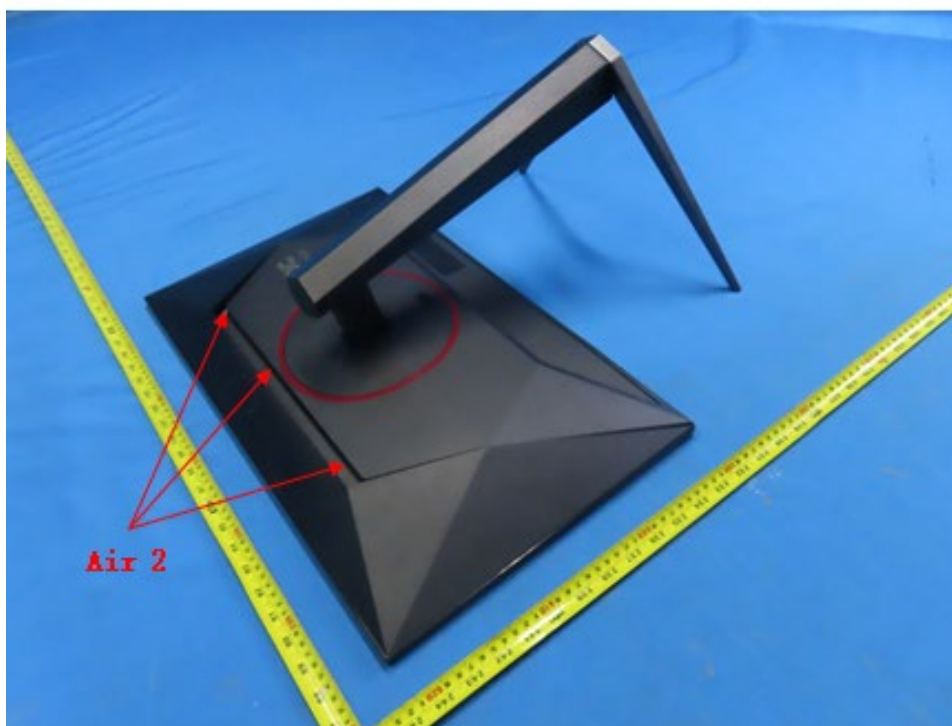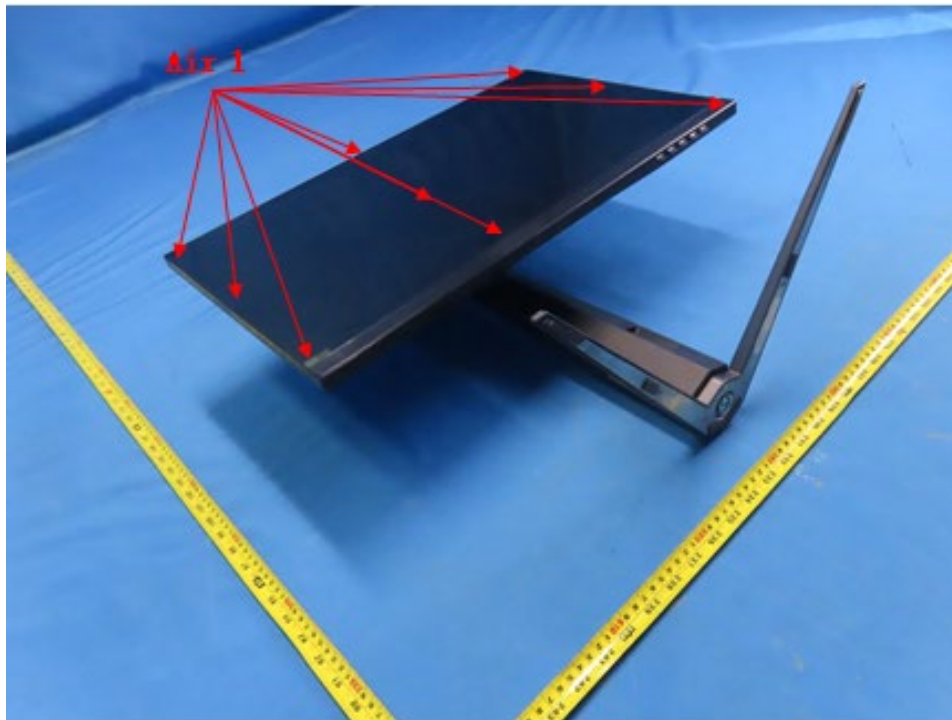

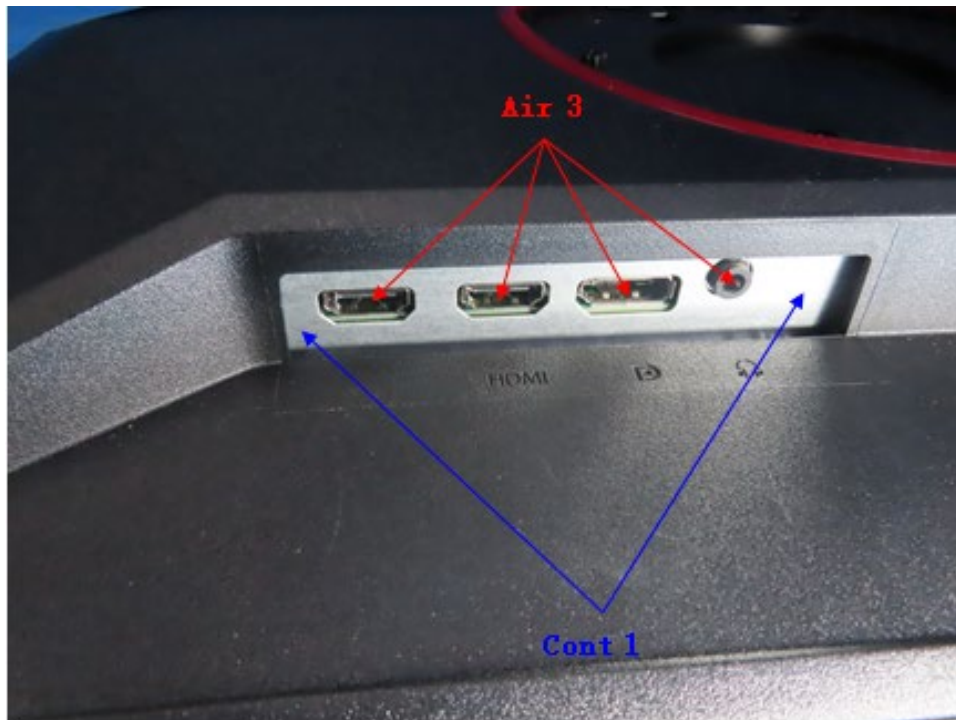



5.6 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

5.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz ($\pm 1\%$)
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of the preceding frequency.
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

5.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Stacked Double Log.-Per.Antenna	Schwarzbeck	STLP 9129	00210	N/A
2	Power amplifier	RFLIGHT	NTWPA-00810300	21113246	Jan. 19, 2025
3	Power amplifier	RFLIGHT	NTWPA-1060100P	21123268	Jan. 19, 2025
4	MXG Vector Signal Generator	Keysight	N5181A	MY50144565	Jun. 28, 2025
5	Measurement Software	Tonscend	TS+	N/A	N/A
6	UPV Audio Analyzer	R&S	UPV	101941	Jun. 28, 2025
7	Free-field 1/2"Microphone	B&K	4190-L-001	3230388	Oct. 24, 2025
8	Conditioning Amplifier	B&K	-2690--0F2-	3313664	Oct. 27, 2025

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

5.6.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

- The field strength level was 3 V/m(unmodulated, r.m.s).
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. Where the frequency range is swept incrementally, the step size was 1% of the preceding frequency.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

For Display and display output functions:

- The display quality evaluated by direct observation.
- For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output. the diagonal screen size shall be at least 0,50 m.
- The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.

For Acoustic measurements:


- Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of L_0 .
(BTL lab uses the software to take L_0 as the reference value and make it return to zero.)
- Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of L_1 .
- Ensure that non-linear processing does not impact the measurements.
- Calculate the acoustic interference ratio using the following formula:
Acoustic interference ratio = $L_1 - L_0$.
(For step e-f, BTL lab proceeds the test with software and calculate Acoustic interference ratio = $L_1 - L_0$).

5.6.4 DEVIATION FROM TEST STANDARD

No deviation


5.6.5 TEST SETUP

a) For Continuous induced RF disturbances

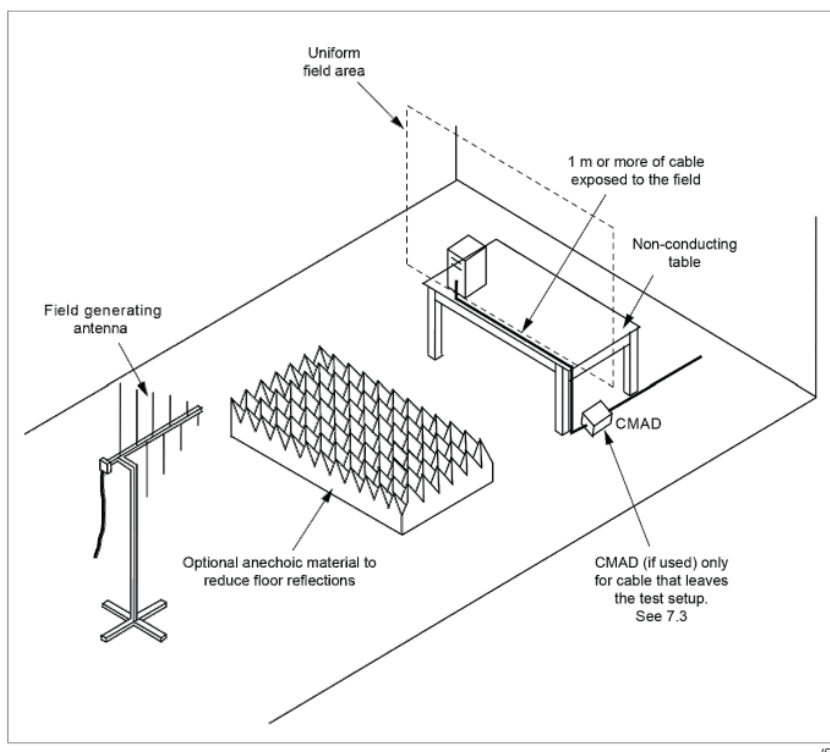


For Audio output function

(1) Audio output port

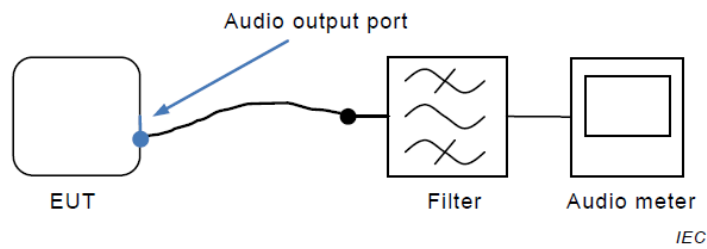


The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

(2) Loudspeaker

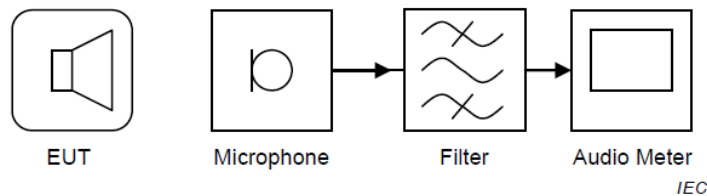

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

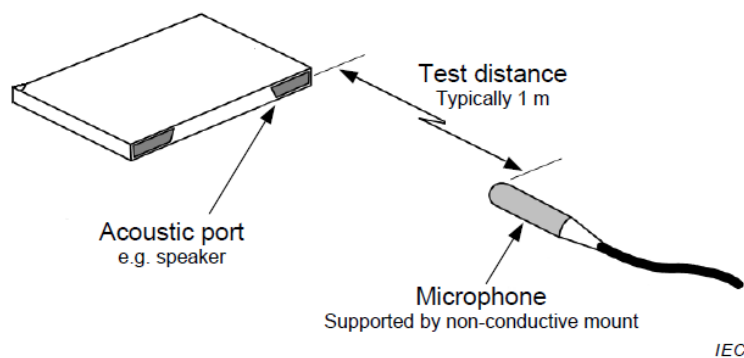

The microphone is connected via the cable to a suitable amplifier. Ensure that there is minimal acoustic loss between EUT and microphone.

5.6.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, 8-13

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		


For Audio output function

(1) Audio output port

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Vertical_Front

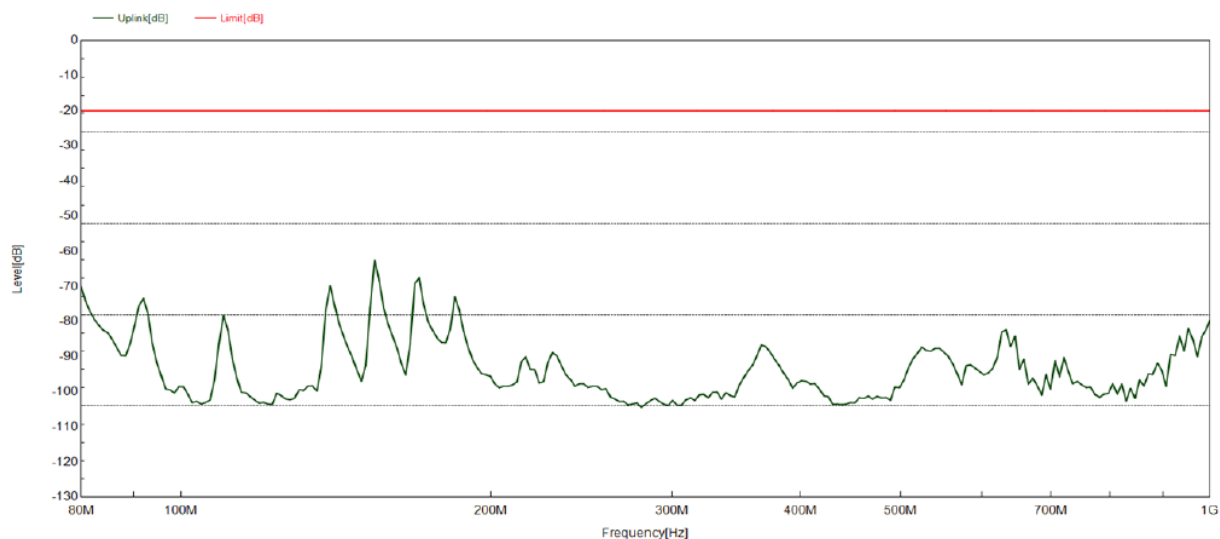


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Horizontal_Front

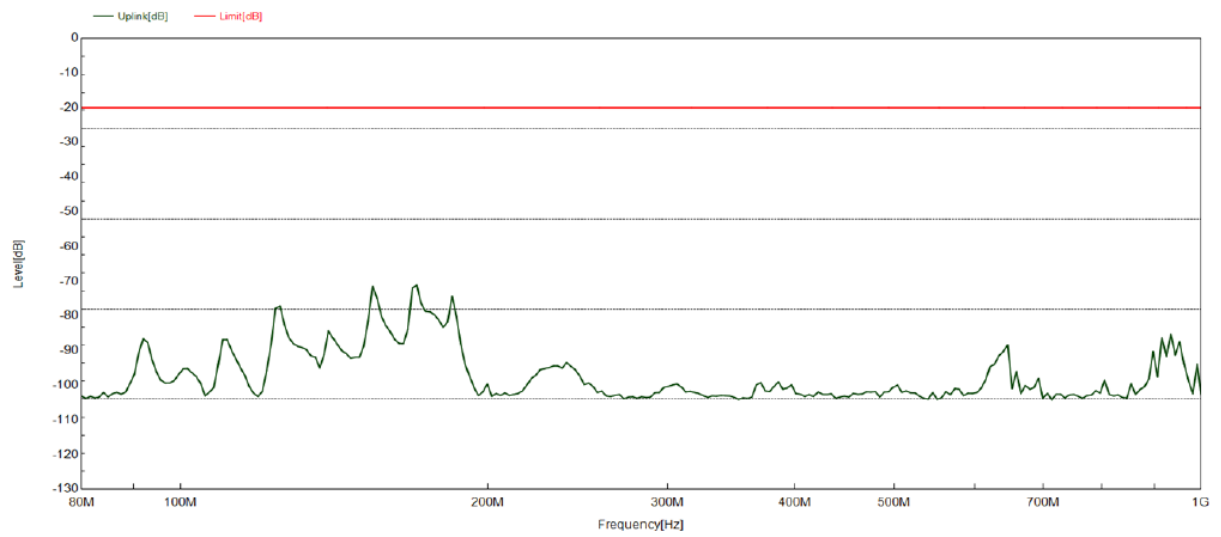


(2) Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Vertical_Front

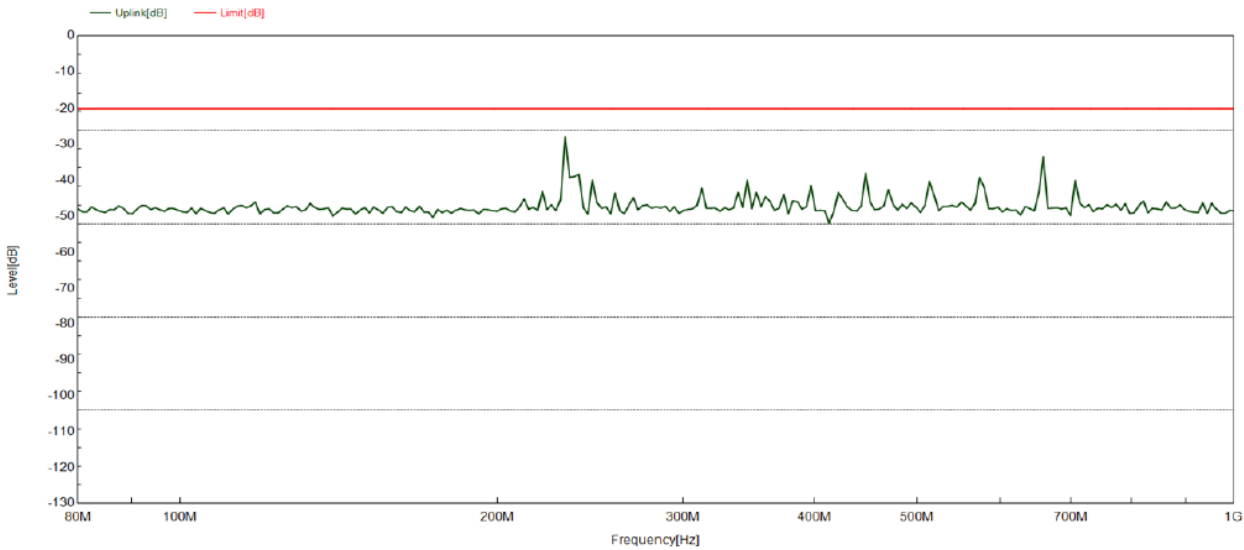

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_Horizontal_Front

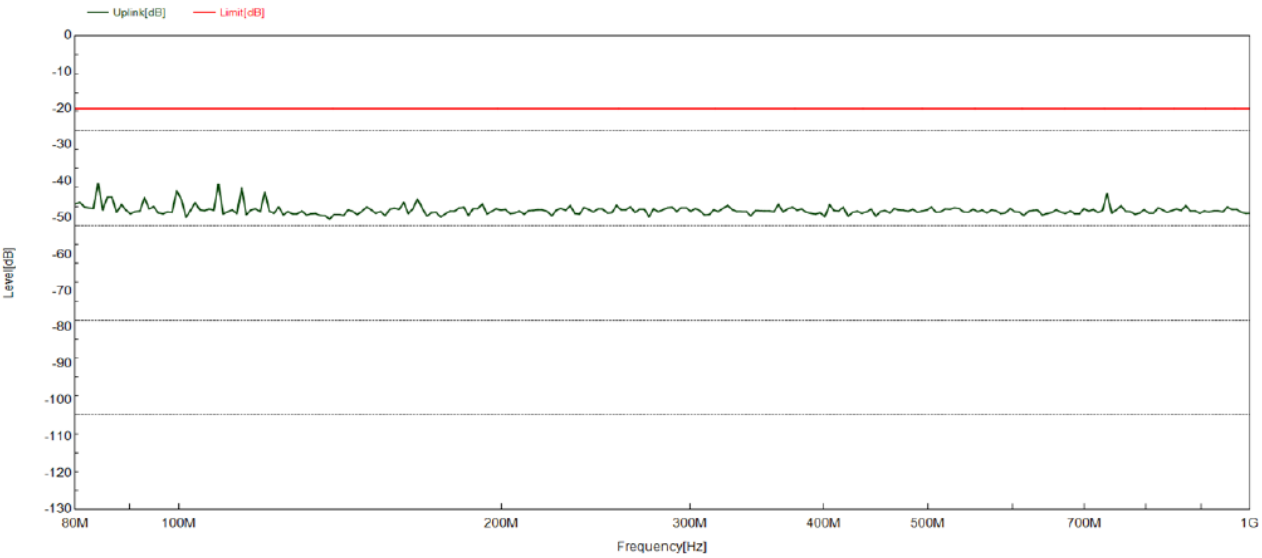

5.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

5.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC mains power ports: ± 1 kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

5.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	May 31, 2025
2	Measurement Software	Prima	EFT_Series V1 .0.0.0.20180710	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

5.7.3 TEST PROCEDURE

For TABLE-TOP equipment:


The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m \pm 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute.

5.7.4 DEVIATION FROM TEST STANDARD

No deviation

5.7.5 TEST SETUP

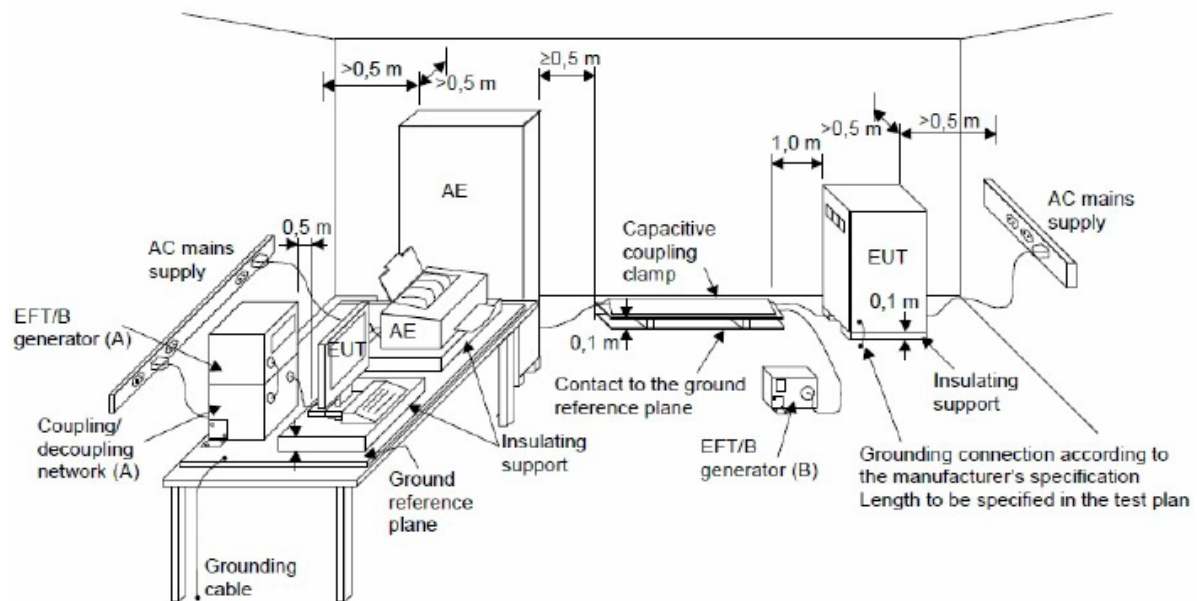

5.7.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, 8-13

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result
				1kV		
AC Power Port	Line (L)	+	5 kHz	A	B	A
		-	5 kHz	A		
	Neutral (N)	+	5 kHz	A	B	A
		-	5 kHz	A		
	Ground (PE)	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+N	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+PE	+	5 kHz	A	B	A
		-	5 kHz	A		
	N+PE	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+N+PE	+	5 kHz	A	B	A
		-	5 kHz	A		

5.8 SURGE IMMUNITY TEST (SURGE)

5.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B(AC mains power ports)
Wave-Shape	1.2/50(8/20) Tr/Th μ s combination wave
Test Voltage	AC mains power ports: ± 0.5 kV, ± 1 kV, ± 2 kV
Generator Source Impedance	2 Ω of the low-voltage power supply network. 12 Ω (10 Ω +2 Ω) of the low-voltage power supply network and ground.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90°phase Five negative pulses line-to-neutral at 270°phase Five positive pulses line-to-earth at 90°phase Five negative pulses line-to-earth at 270°phase Five negative pulses neutral-to-earth at 90°phase Five positive pulses neutral-to-earth at 270°phase
Pulse Repetition Rate	1 time / min

5.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	May 31, 2025
2	Measurement Software	Prima	SUG_Series V1.0. 0.7.20190827	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

5.8.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

5.8.4 DEVIATION FROM TEST STANDARD

No deviation

5.8.5 TEST SETUP

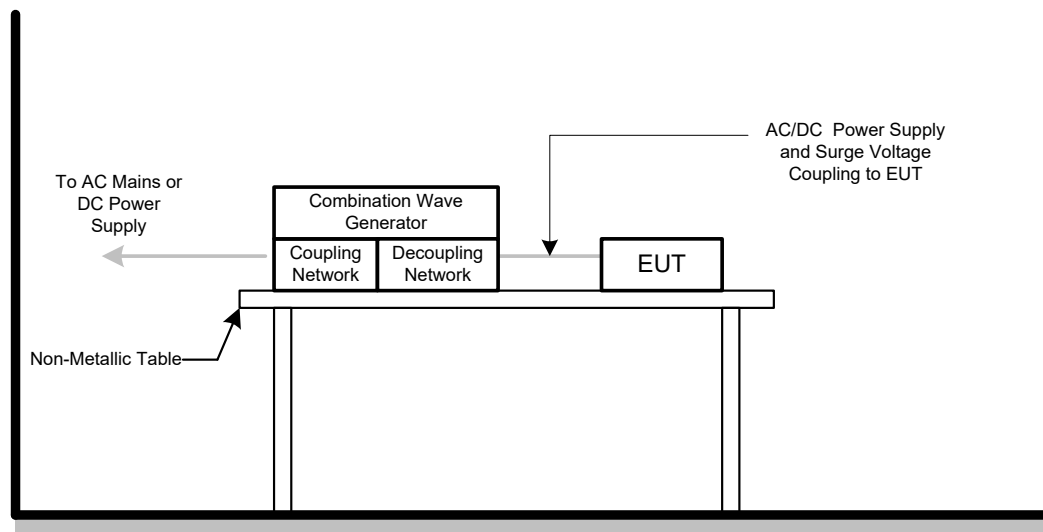

5.8.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, 8-13

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thµs						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	-- kV	-- kV		
AC	L – N	+	90°	A	A	-	-	B	A
		-	270°	A	A	-	-		

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thµs						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	2kV	-- kV		
AC	L – PE	+	90°	A	A	A	-	B	A
		-	270°	A	A	A	-		
	N – PE	-	90°	A	A	A	-	B	A
		+	270°	A	A	A	-		

5.9 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

5.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of the preceding frequency value
Dwell Time	3 seconds
The size of the EUT	See product appearance photos.

Remark:

The testing frequency range meets the requirements of the product standards listed in this report and is not affected by the size or expansion of the EUT.

5.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test system for conducted immunity	TESEQ	NSG4070	61322	Jun. 28, 2025
2	Measurement Software	Farad	EZ-CS (Ver:B-3.1)	N/A	N/A
3	Coupling Decoupling Network	TESEQ	CDN M016	61183	Jun. 28, 2025
4	UPV Audio Analyzer	R&S	UPV	101941	Jun. 28, 2025
5	Free-field 1/2"Microphone	B&K	4190-L-001	3230388	Oct. 24, 2025
6	Conditioning Amplifier	B&K	-2690--0F2-	3313664	Oct. 27, 2025

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

5.9.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- The field strength level was 3 V (unmodulated, r.m.s.)
- The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sinewave. Where the frequency range is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

For Display and display output functions:

- The display quality evaluated by direct observation.
- For display output function evaluation, a suitable display device shall be connected. This device shall meet the immunity requirements for displays specified in this document. The screen size shall be typical for the display output.the diagonal screen size shall be at least 0,50 m.
- The display shall be observed under normal viewing conditions including viewing distance using a reduced ambient light level preferably in the range 15 lx to 20 lx. The viewing distance or settings of the video camera monitoring system shall be sufficient to provide visibility of the whole display. In the case of direct observation the selected viewing distance shall be recorded in the test report.


For Acoustic measurements:

- Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of L_0 .
(BTL lab uses the software to take L_0 as the reference value and make it return to zero.)
- Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of L_1 .
- Ensure that non-linear processing does not impact the measurements.
- Calculate the acoustic interference ratio using the following formula:
Acoustic interference ratio = $L_1 - L_0$.
(For step e-f, BTL lab proceeds the test with software and calculate Acoustic interference ratio = $L_1 - L_0$).

5.9.4 DEVIATION FROM TEST STANDARD


No deviation

5.9.5 TEST SETUP

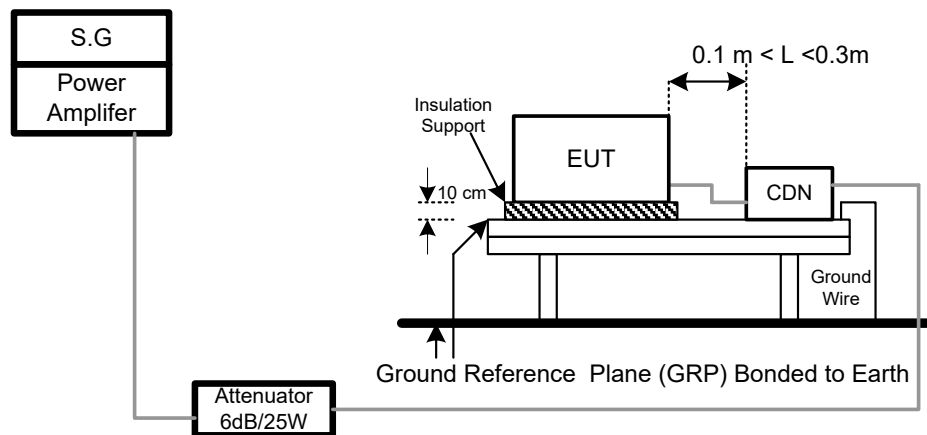


For Audio output function

(1) Audio output port

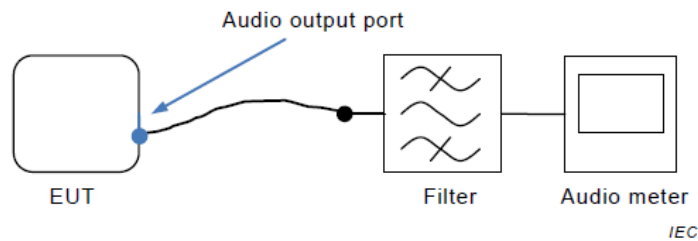


The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

(2) Loudspeaker

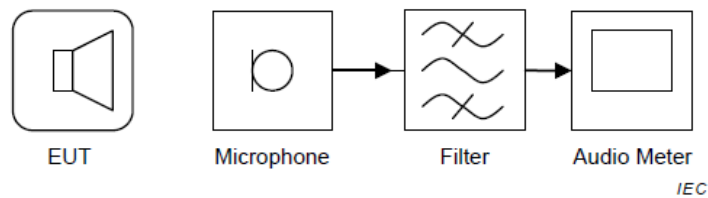

The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement.

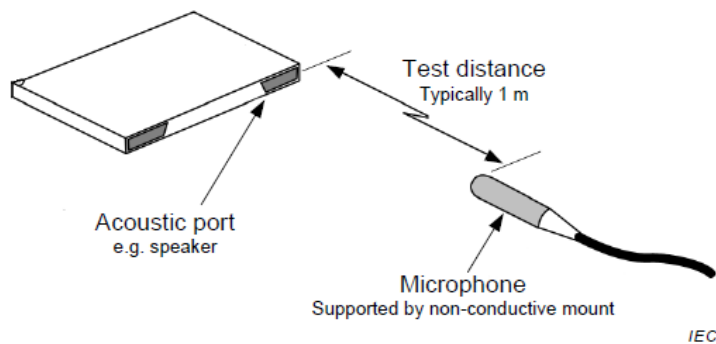

The microphone is connected via the cable to a suitable amplifier. Ensure that there is minimal acoustic loss between EUT and microphone.

5.9.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, 8-13

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			

For Audio output function


(1) Audio output port:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CDN M3

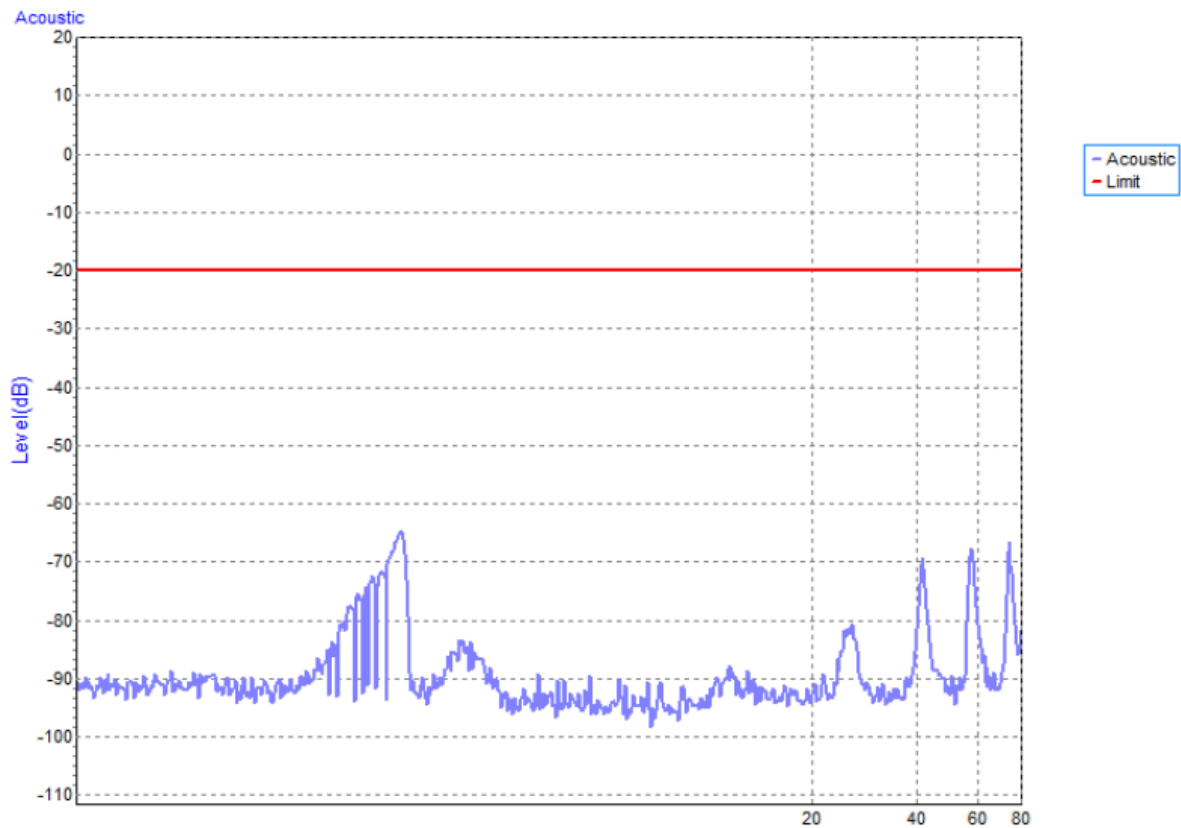

(2) Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1_CDN M3

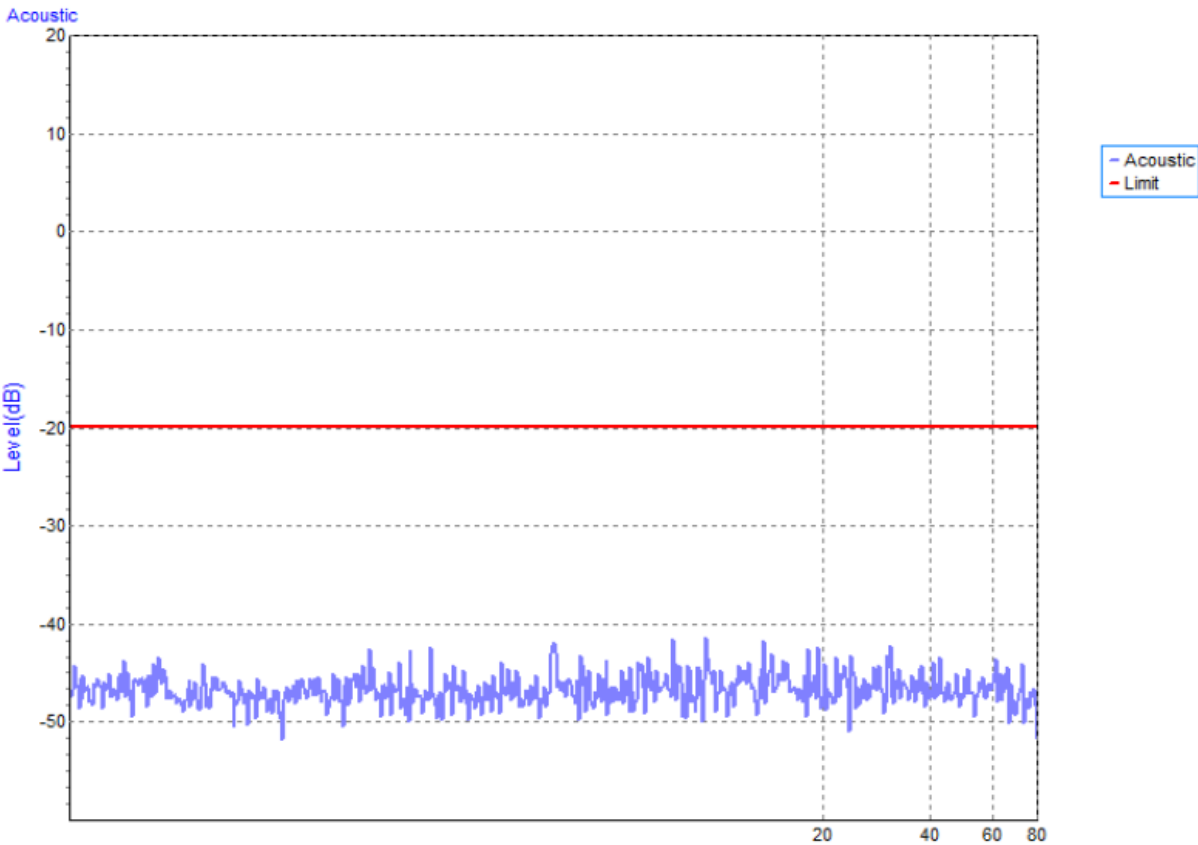

5.10 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

5.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

5.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	04032	Dec. 22, 2024
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	04024	Dec. 22, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

5.10.3 TEST PROCEDURE

For TABLE-TOP equipment:

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.


The other condition as following manner:

- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

5.10.4 DEVIATION FROM TEST STANDARD

No deviation

5.10.5 TEST SETUP

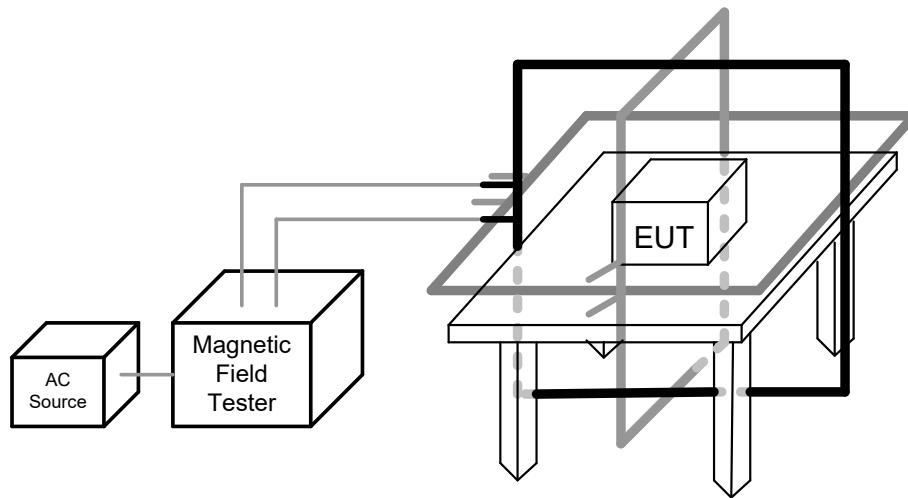

5.10.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-5, 8-13

50Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

60Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

5.11 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

5.11.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

5.11.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR21076614	Jun. 28, 2025

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


5.11.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

5.11.4 DEVIATION FROM TEST STANDARD

No deviation

5.11.5 TEST SETUP

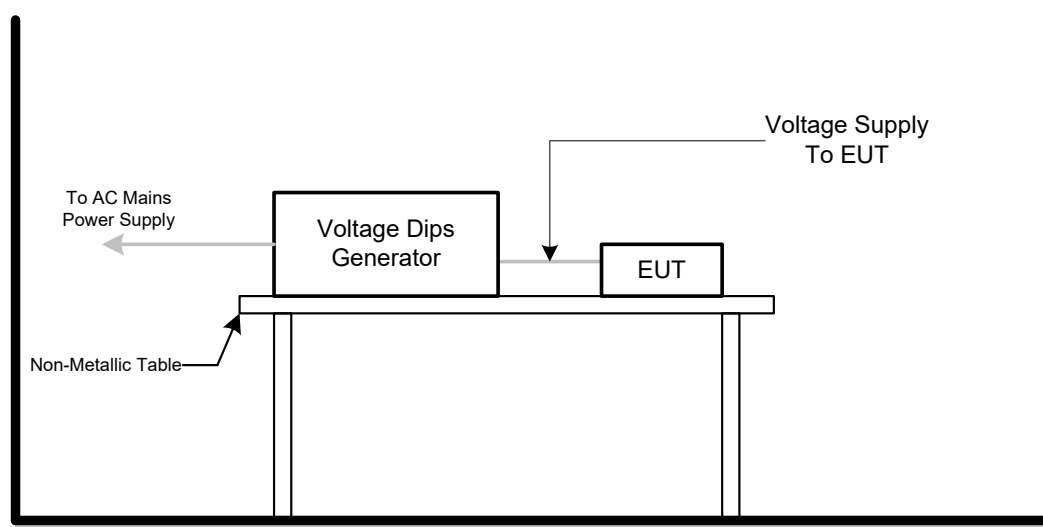

5.11.6 TEST RESULTS

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 230V/50Hz
Test Mode	Mode 1-5, 8-13

AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



6. EUT TEST PHOTO

EN 55032:2015

Radiated emissions up to 1 GHz

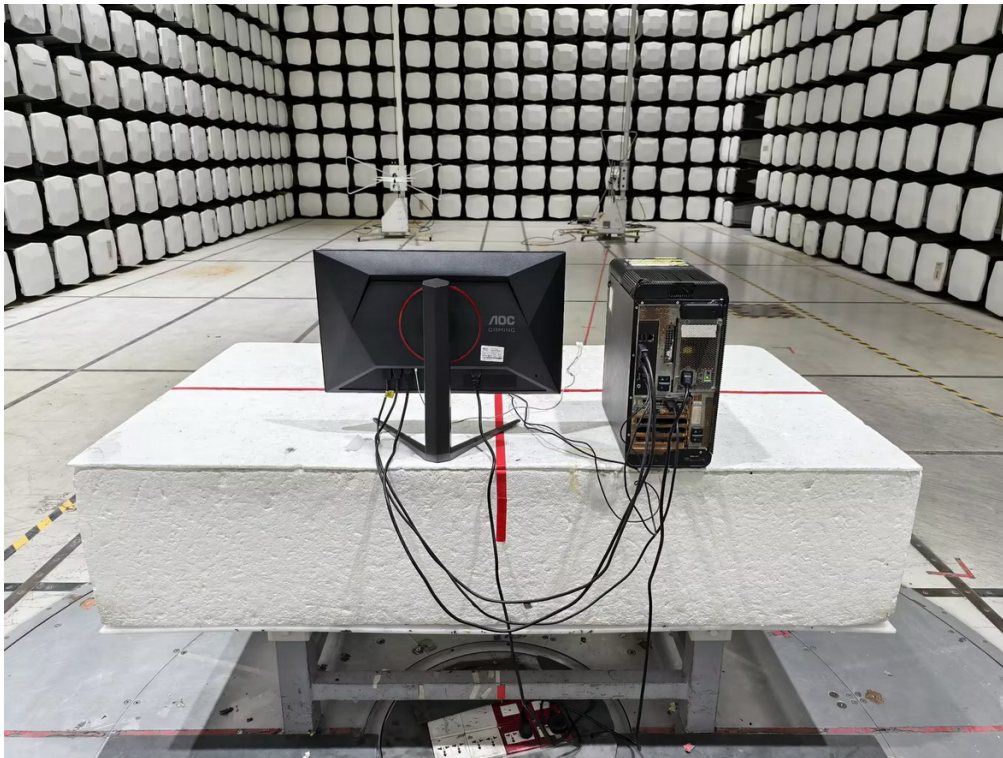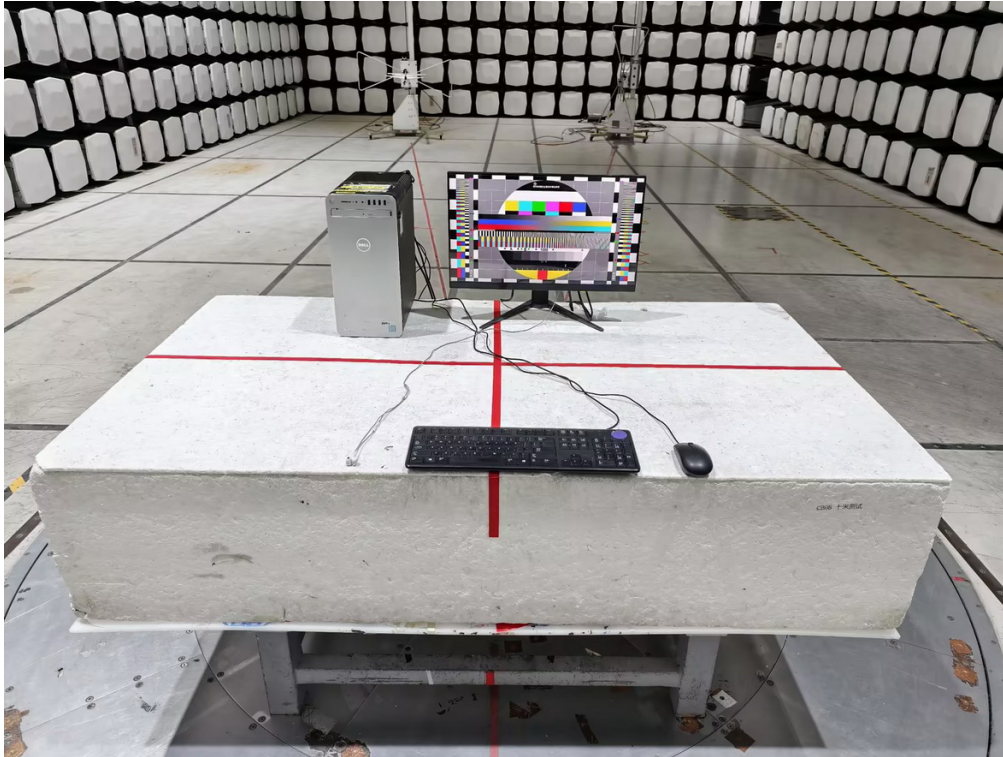

Radiated emissions above 1 GHz

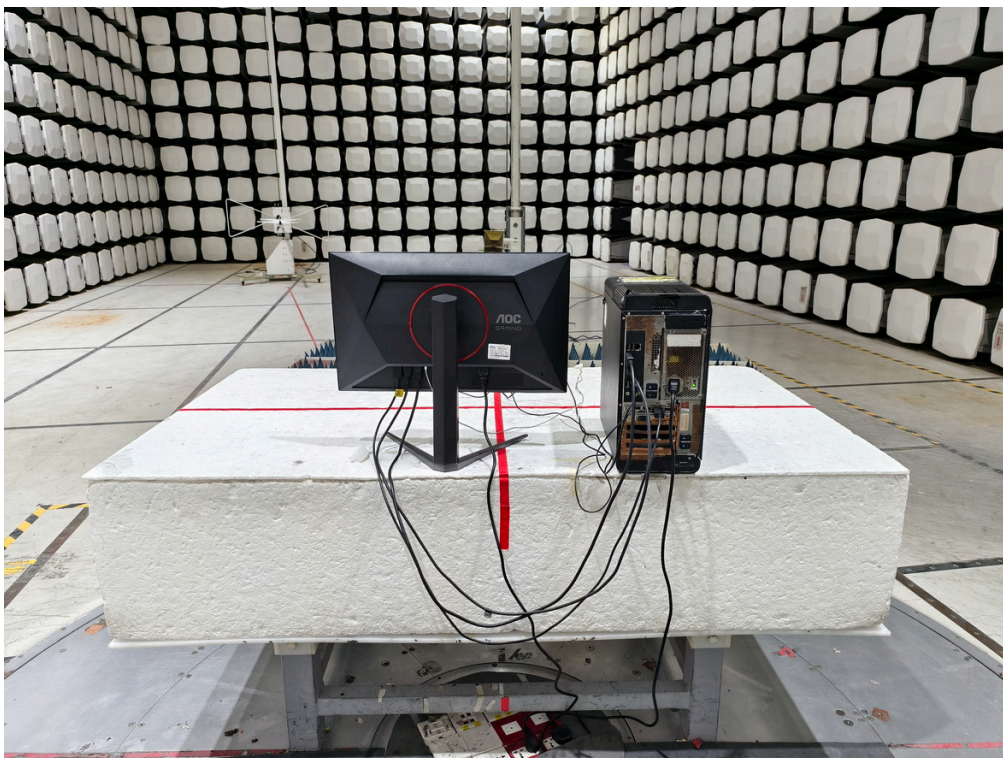
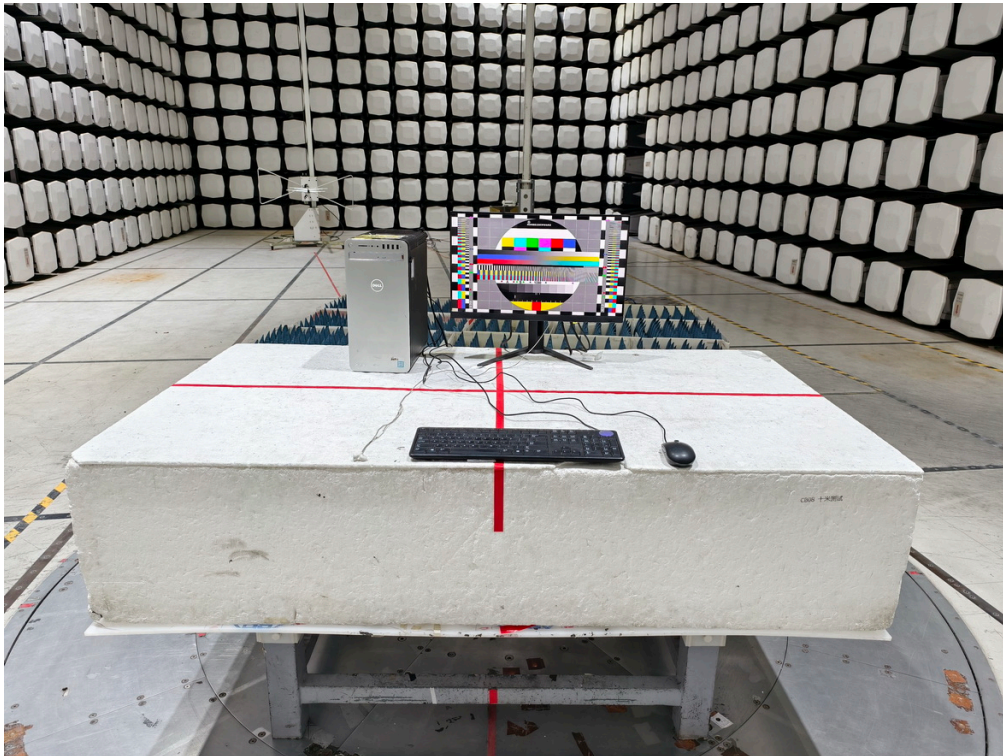


Conducted emissions AC mains power port





EN 55032:2015+A11:2020


Radiated emissions up to 1 GHz

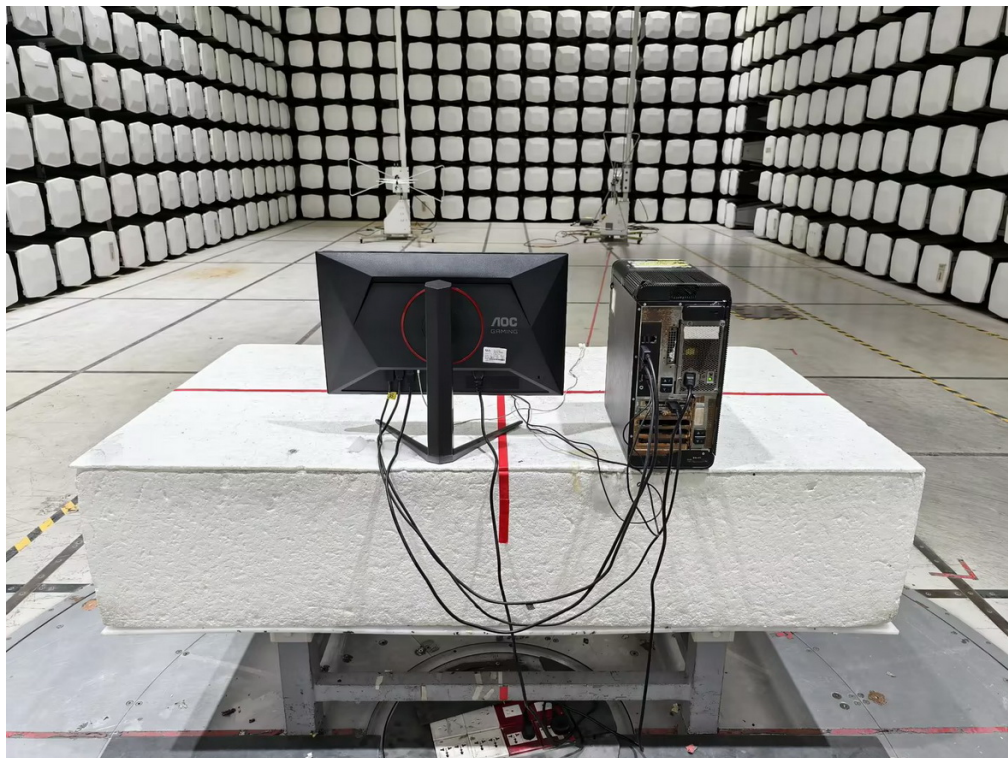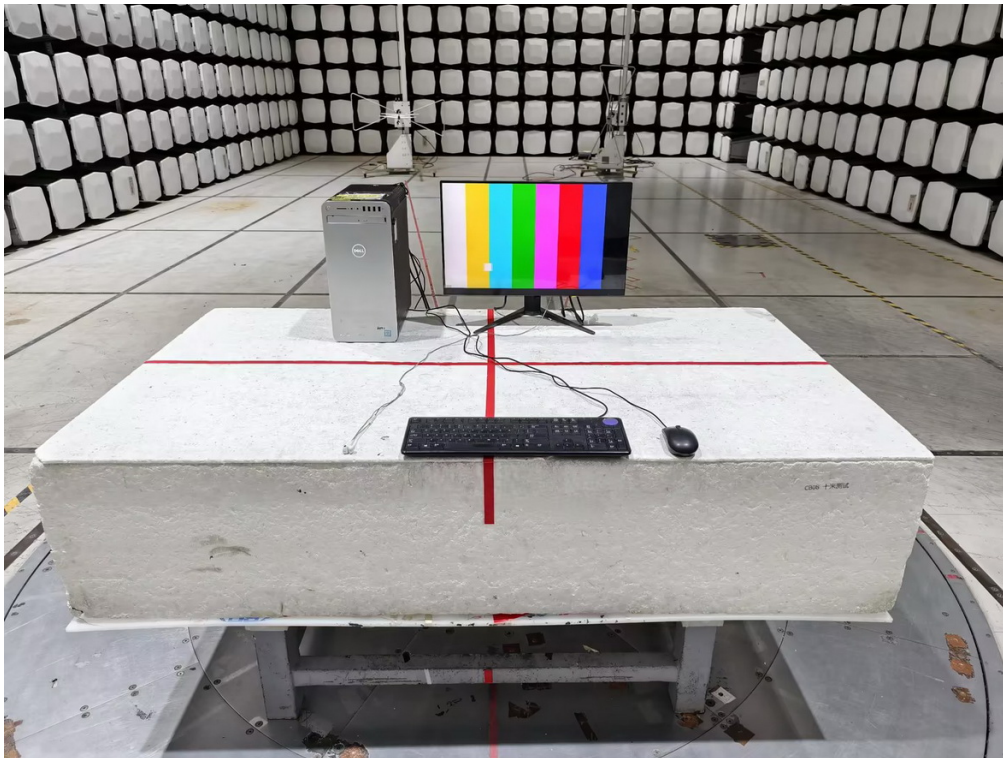

Radiated emissions above 1 GHz

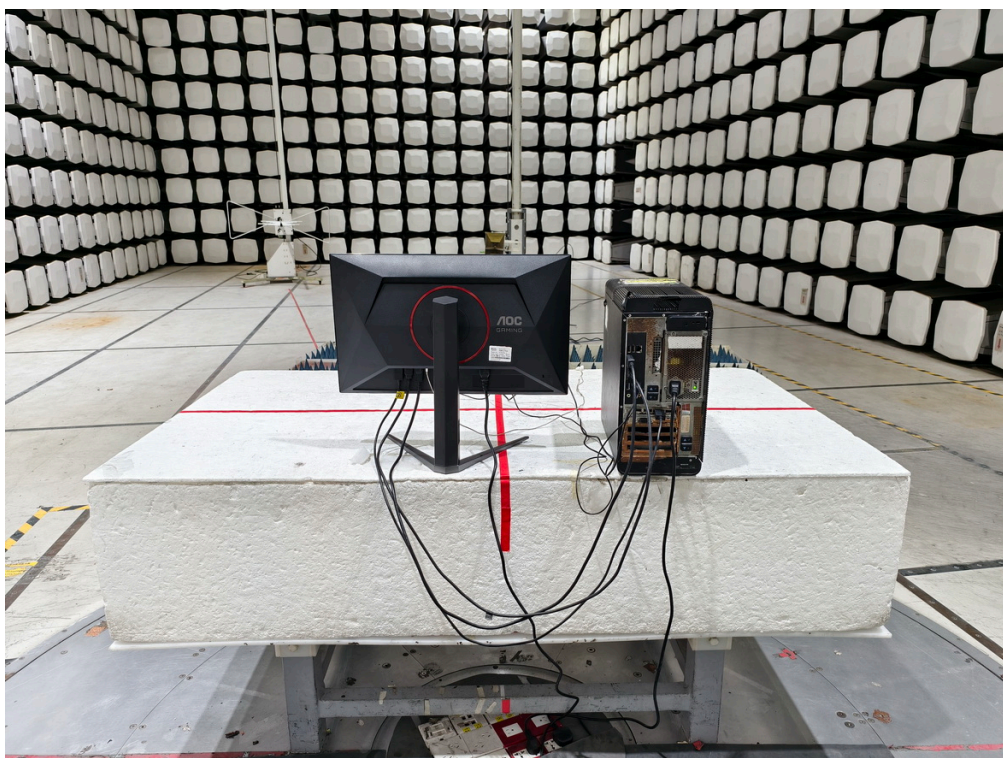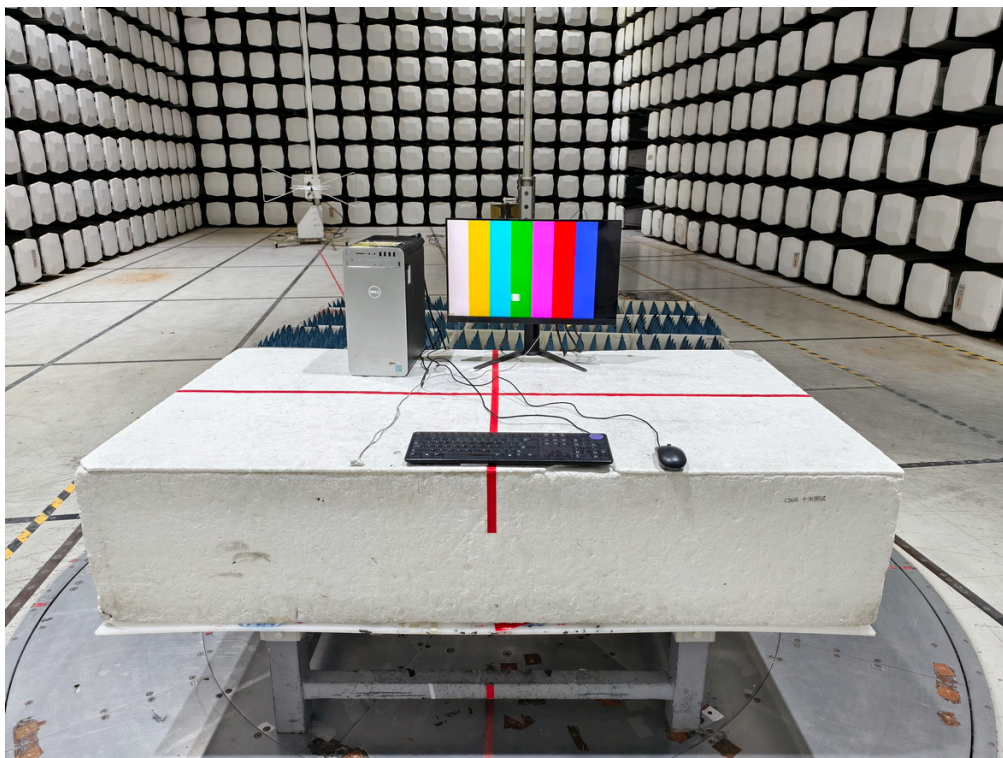

Conducted emissions AC mains power port

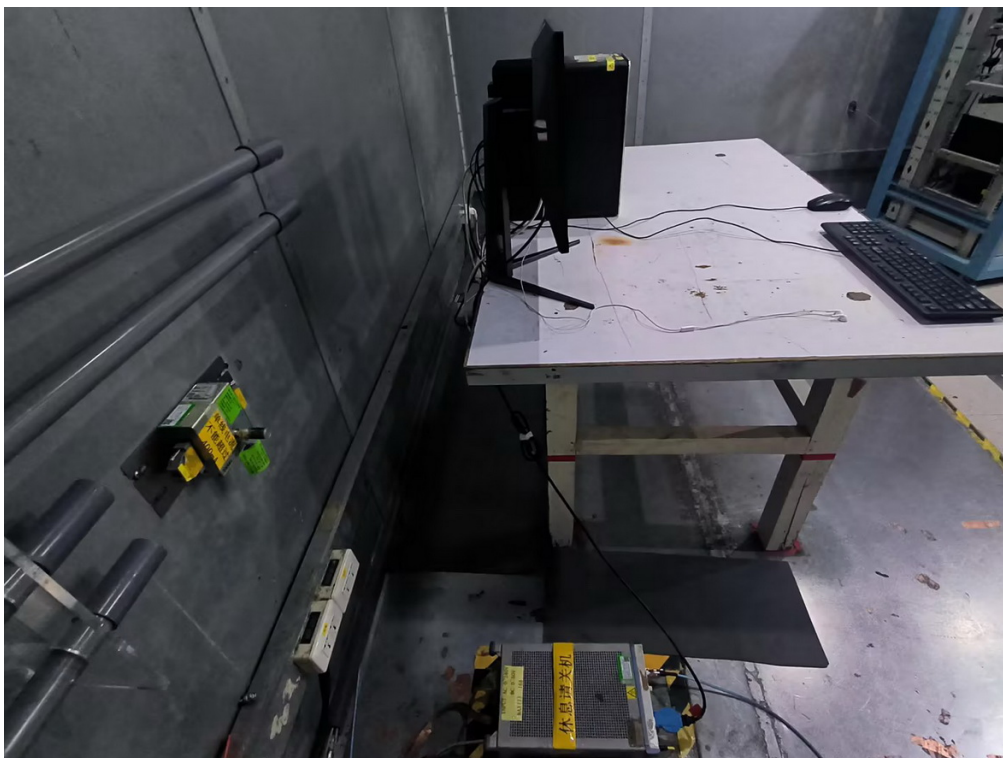

Harmonic current



Voltage fluctuations (Flicker)



Electrostatic discharge immunity




Radiated, radio-frequency, electromagnetic field immunity – Up to 1GHz



Radiated, radio-frequency, electromagnetic field immunity – Above 1GHz



Electrical fast transient/burst immunity - AC

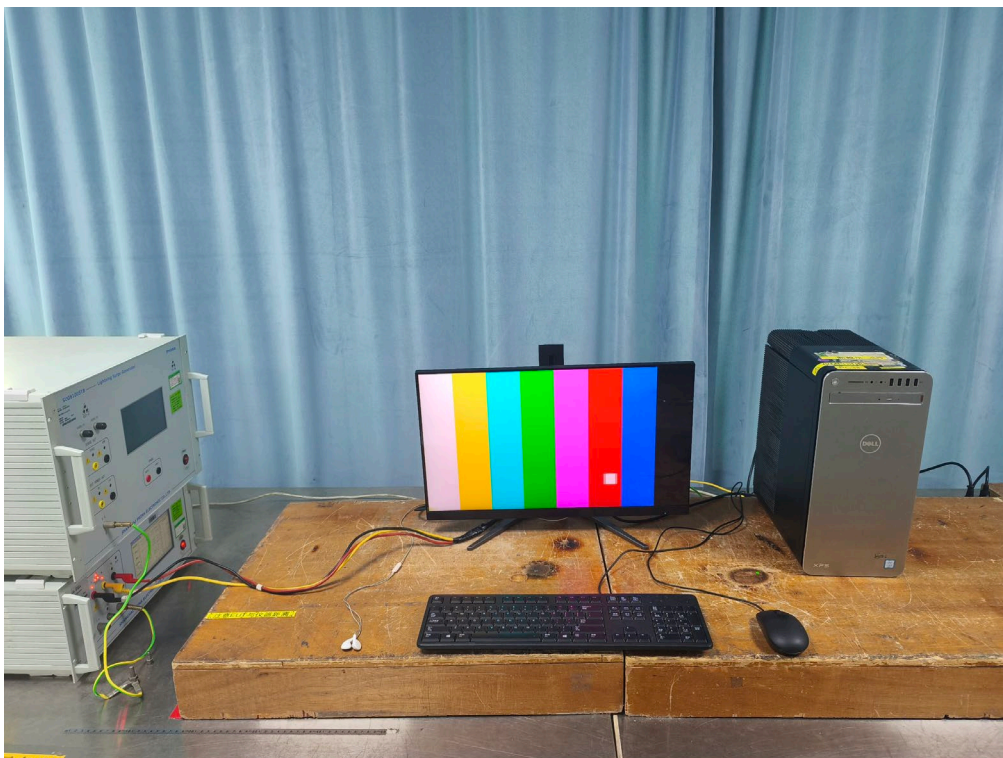


Surge immunity - AC




Immunity to conducted disturbances, induced by radio-frequency fields - AC



Power frequency magnetic field immunity

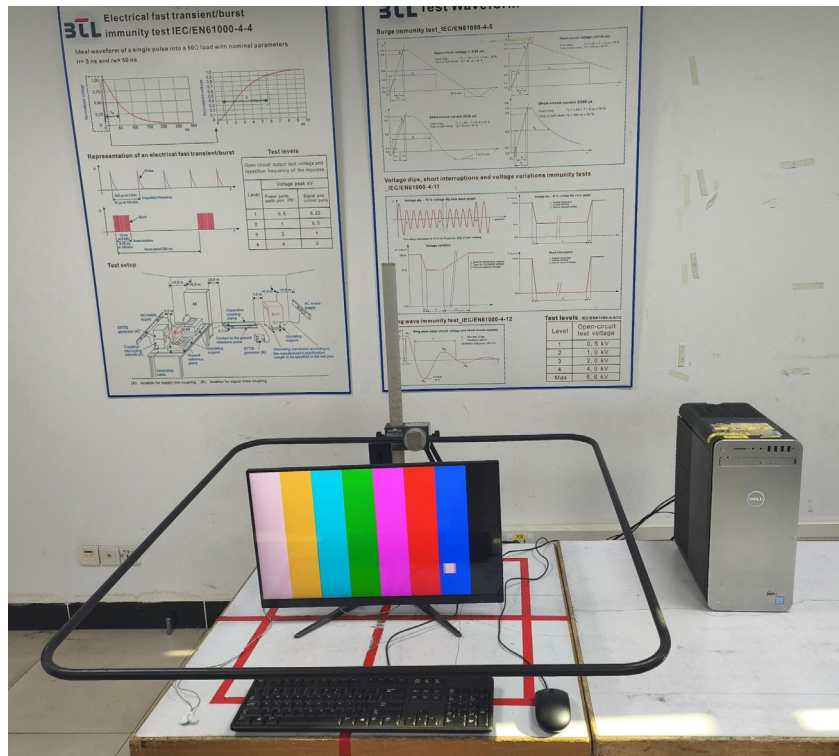

Voltage dips, short interruptions and voltage variations immunity

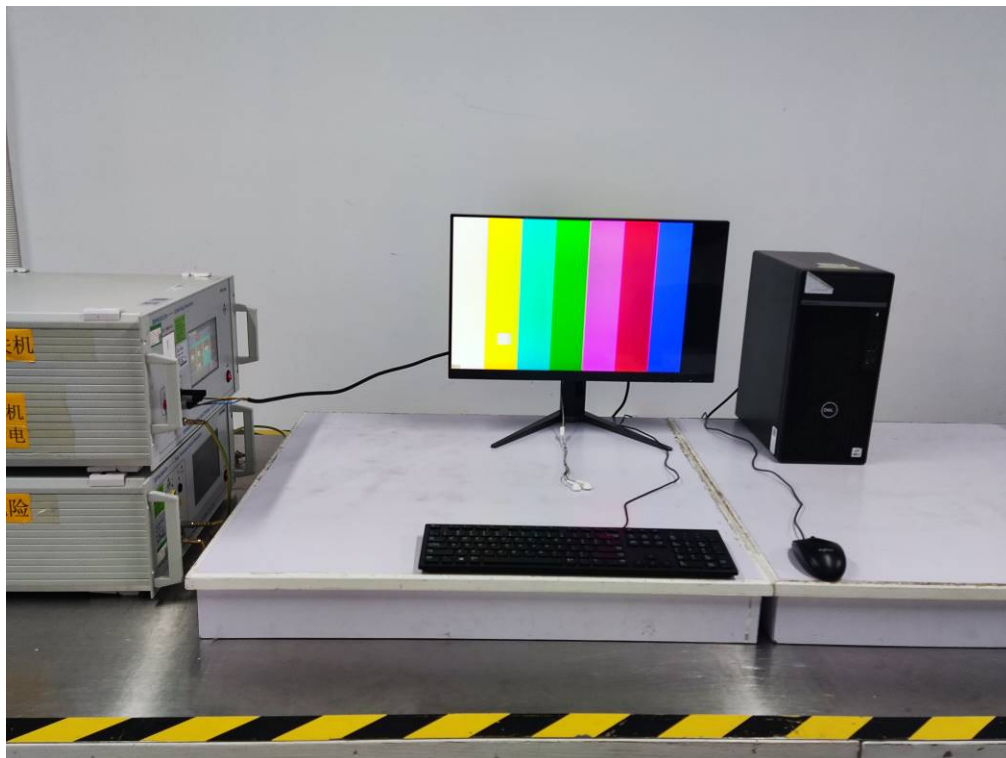

End of Test Report